






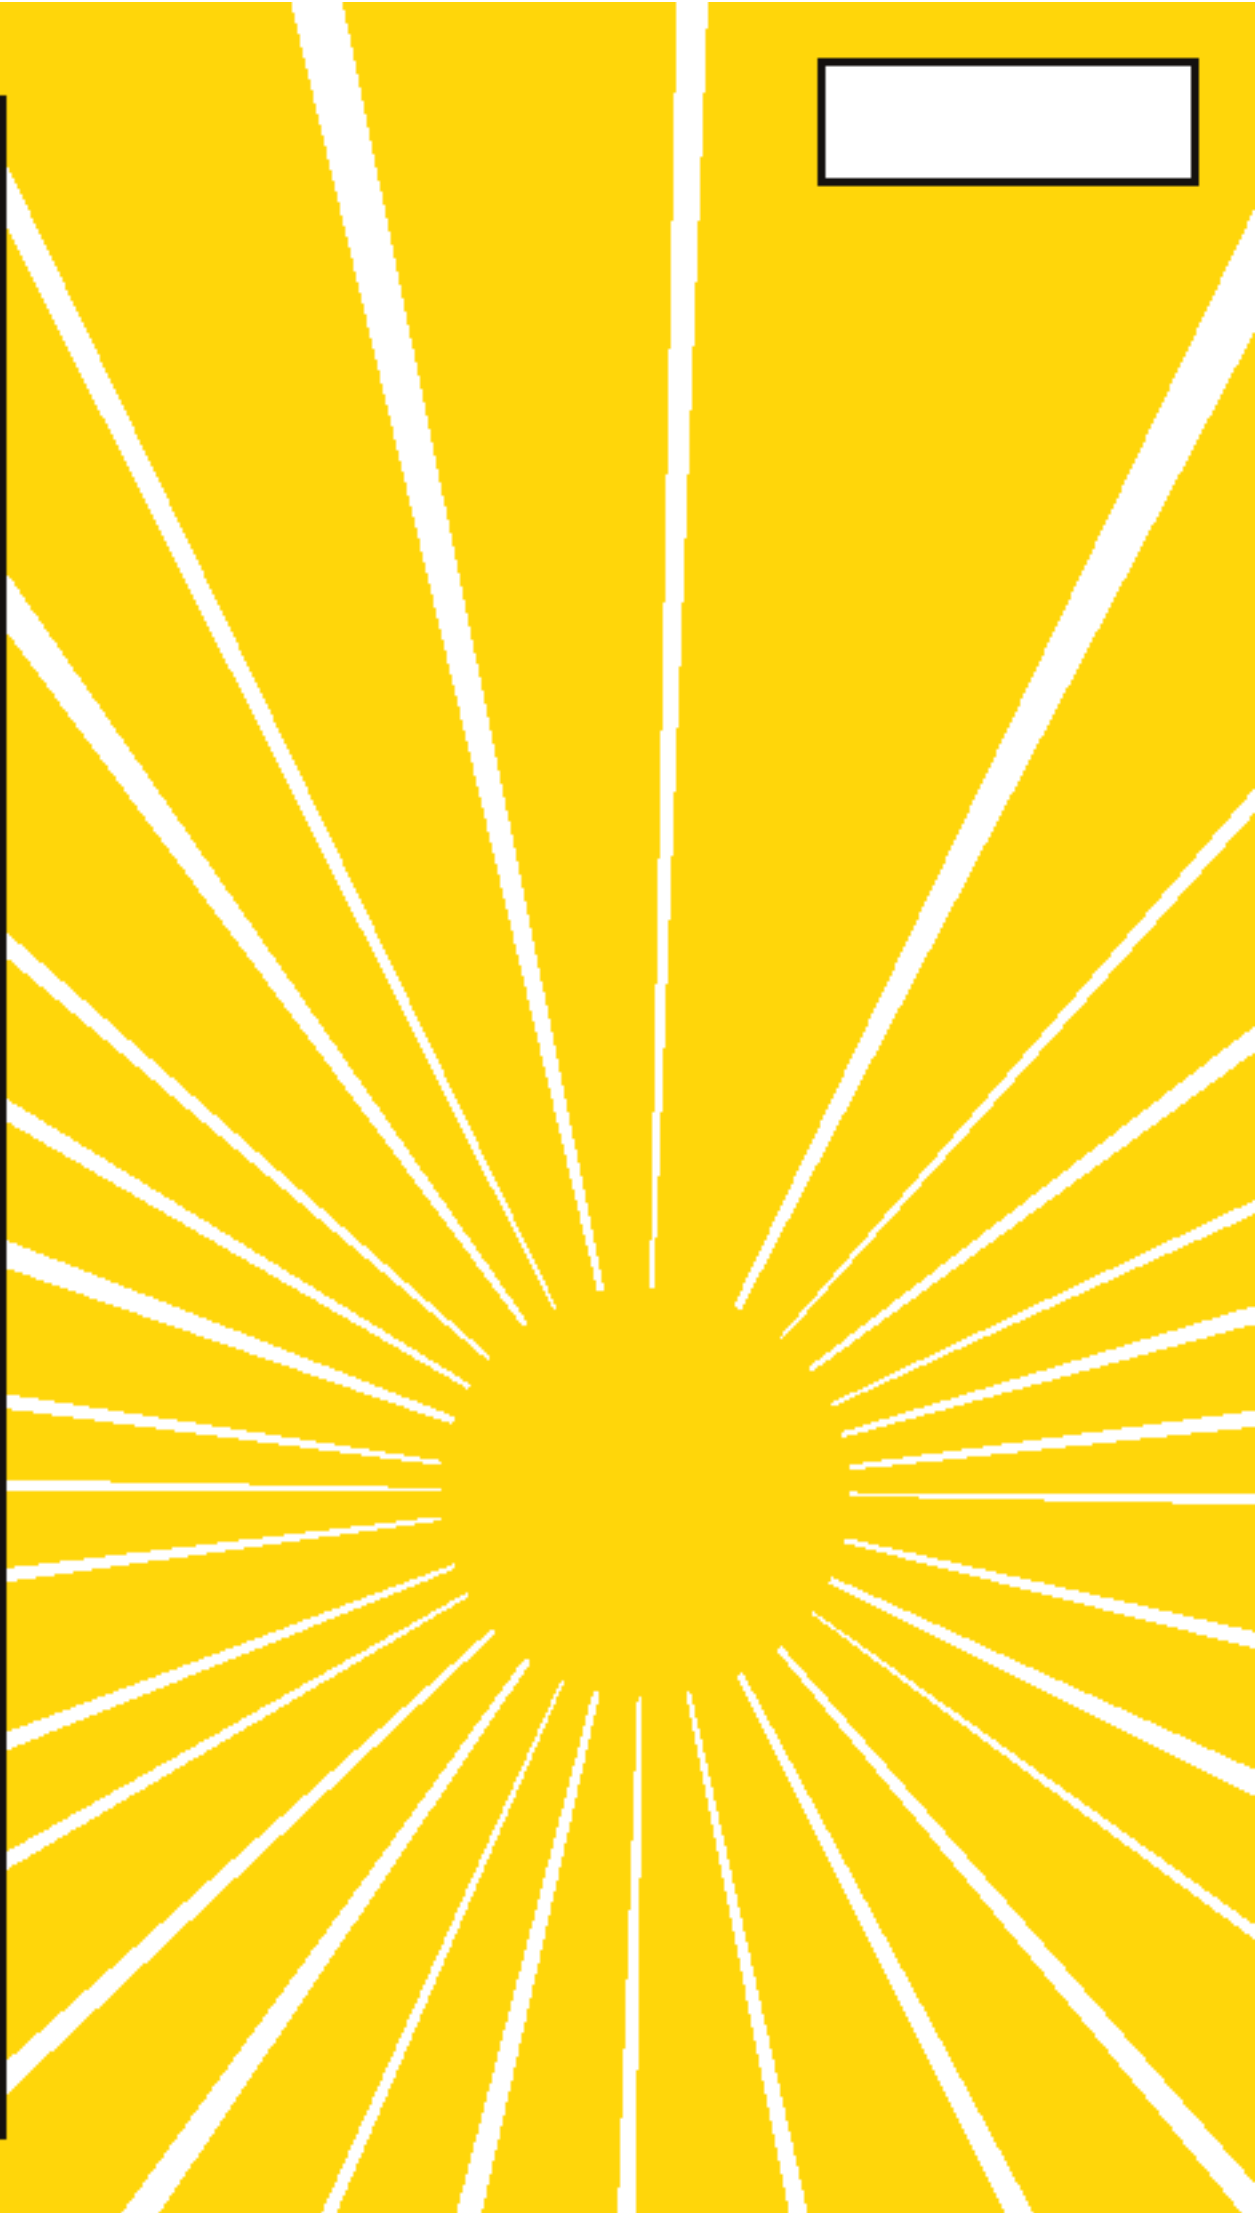

12/love.py

```
src = '''
```

```
@evolve
```

```
def attack():
```

```
    ...
```

```
'''
```

```
fn = ast.parse(src).body[0]
```

```
decorators = [ast.unparse(d) for d in fn.decorator_list]
```

```
print(type(fn).__name__, fn.name, decorators)
```

FunctionDef attack ['evolve']

ВСПЕДНО СЕРИИ

SELO




dcs.pythong/3/library/ast.html#ast.FunctionDef





17_evolve.py
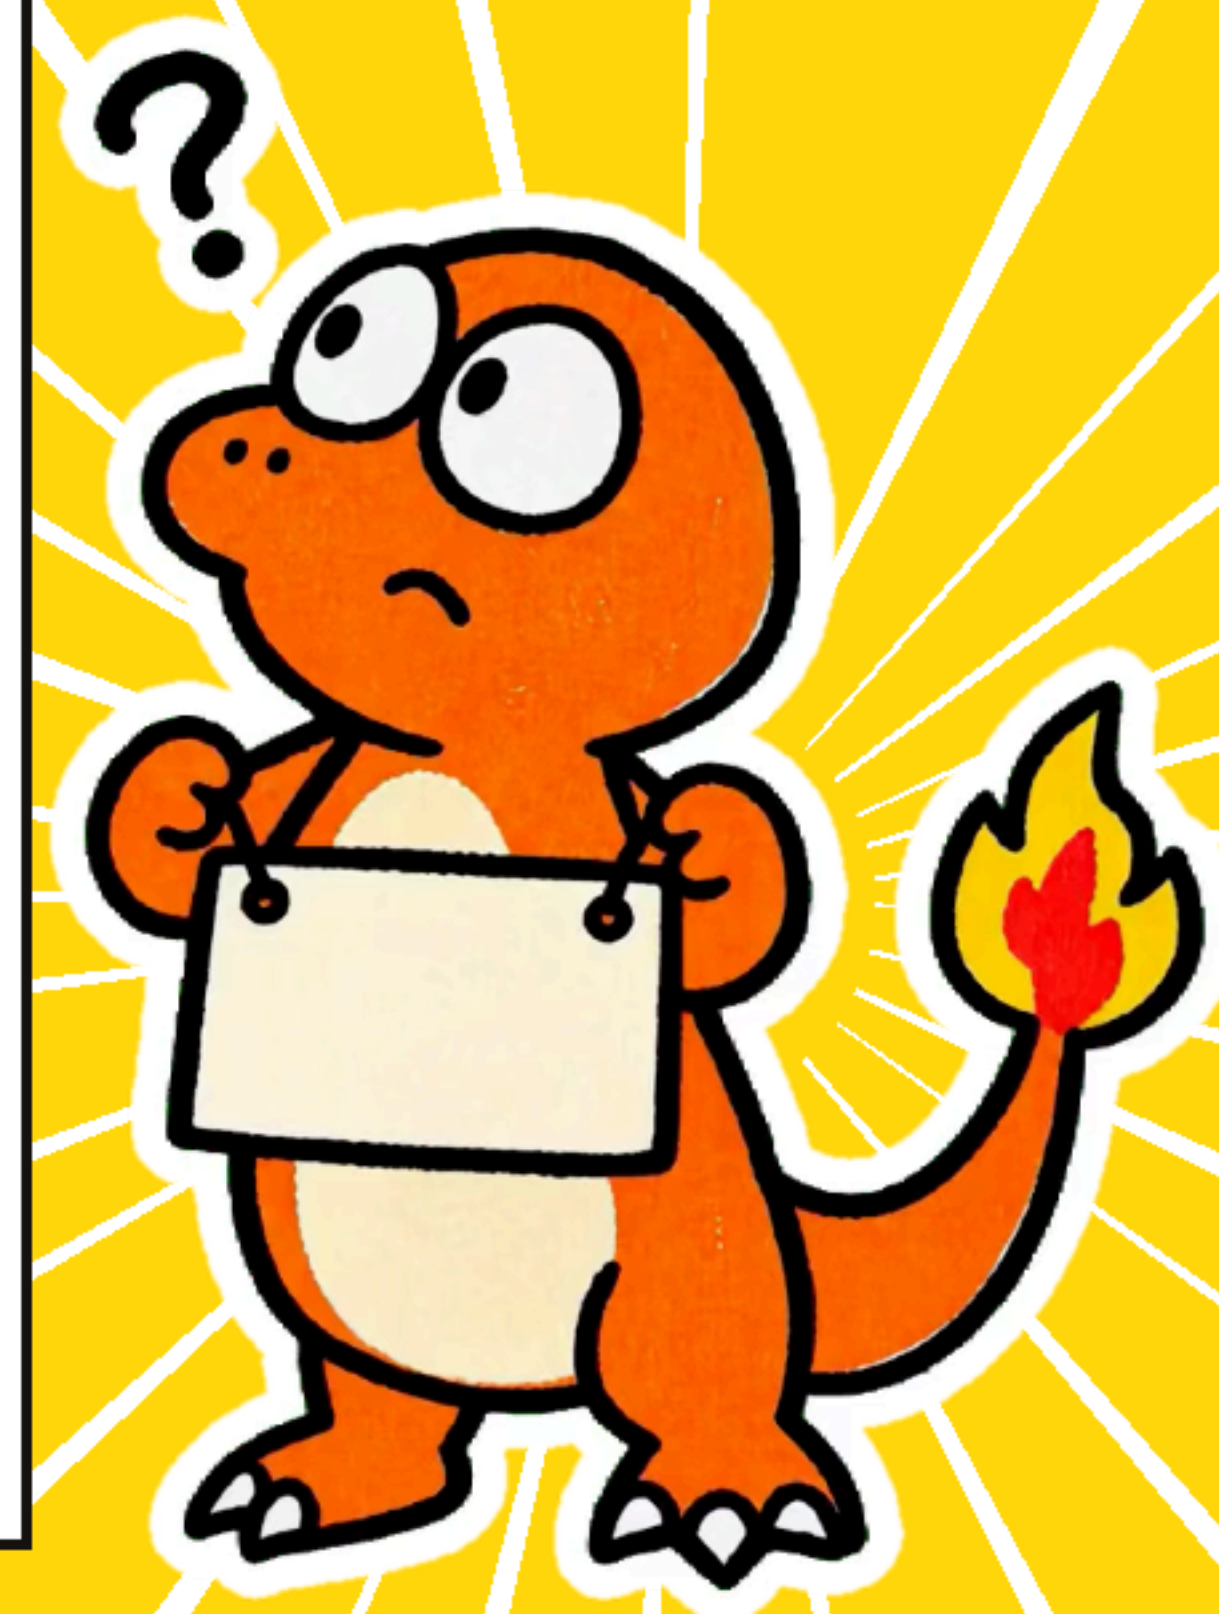
`src = '''``@evolve``def attack():``...``'''``fn = ast.parse(src).body[0]``decorators = [ast.unparse(d) for d in fn.decorator_list]``print(type(fn).__name__, fn.name, decorators)``FunctionDef attack ['evolve']`

To be continued: карточка эволюционирует

Три вопроса на выход

- 1** Где лежит значение свободной переменной?
- 2** Когда вычисляется значение по умолчанию?
- 3** Что ловит `*targets`, а что — `**effects`?

Ответы — письменно, одной строкой