

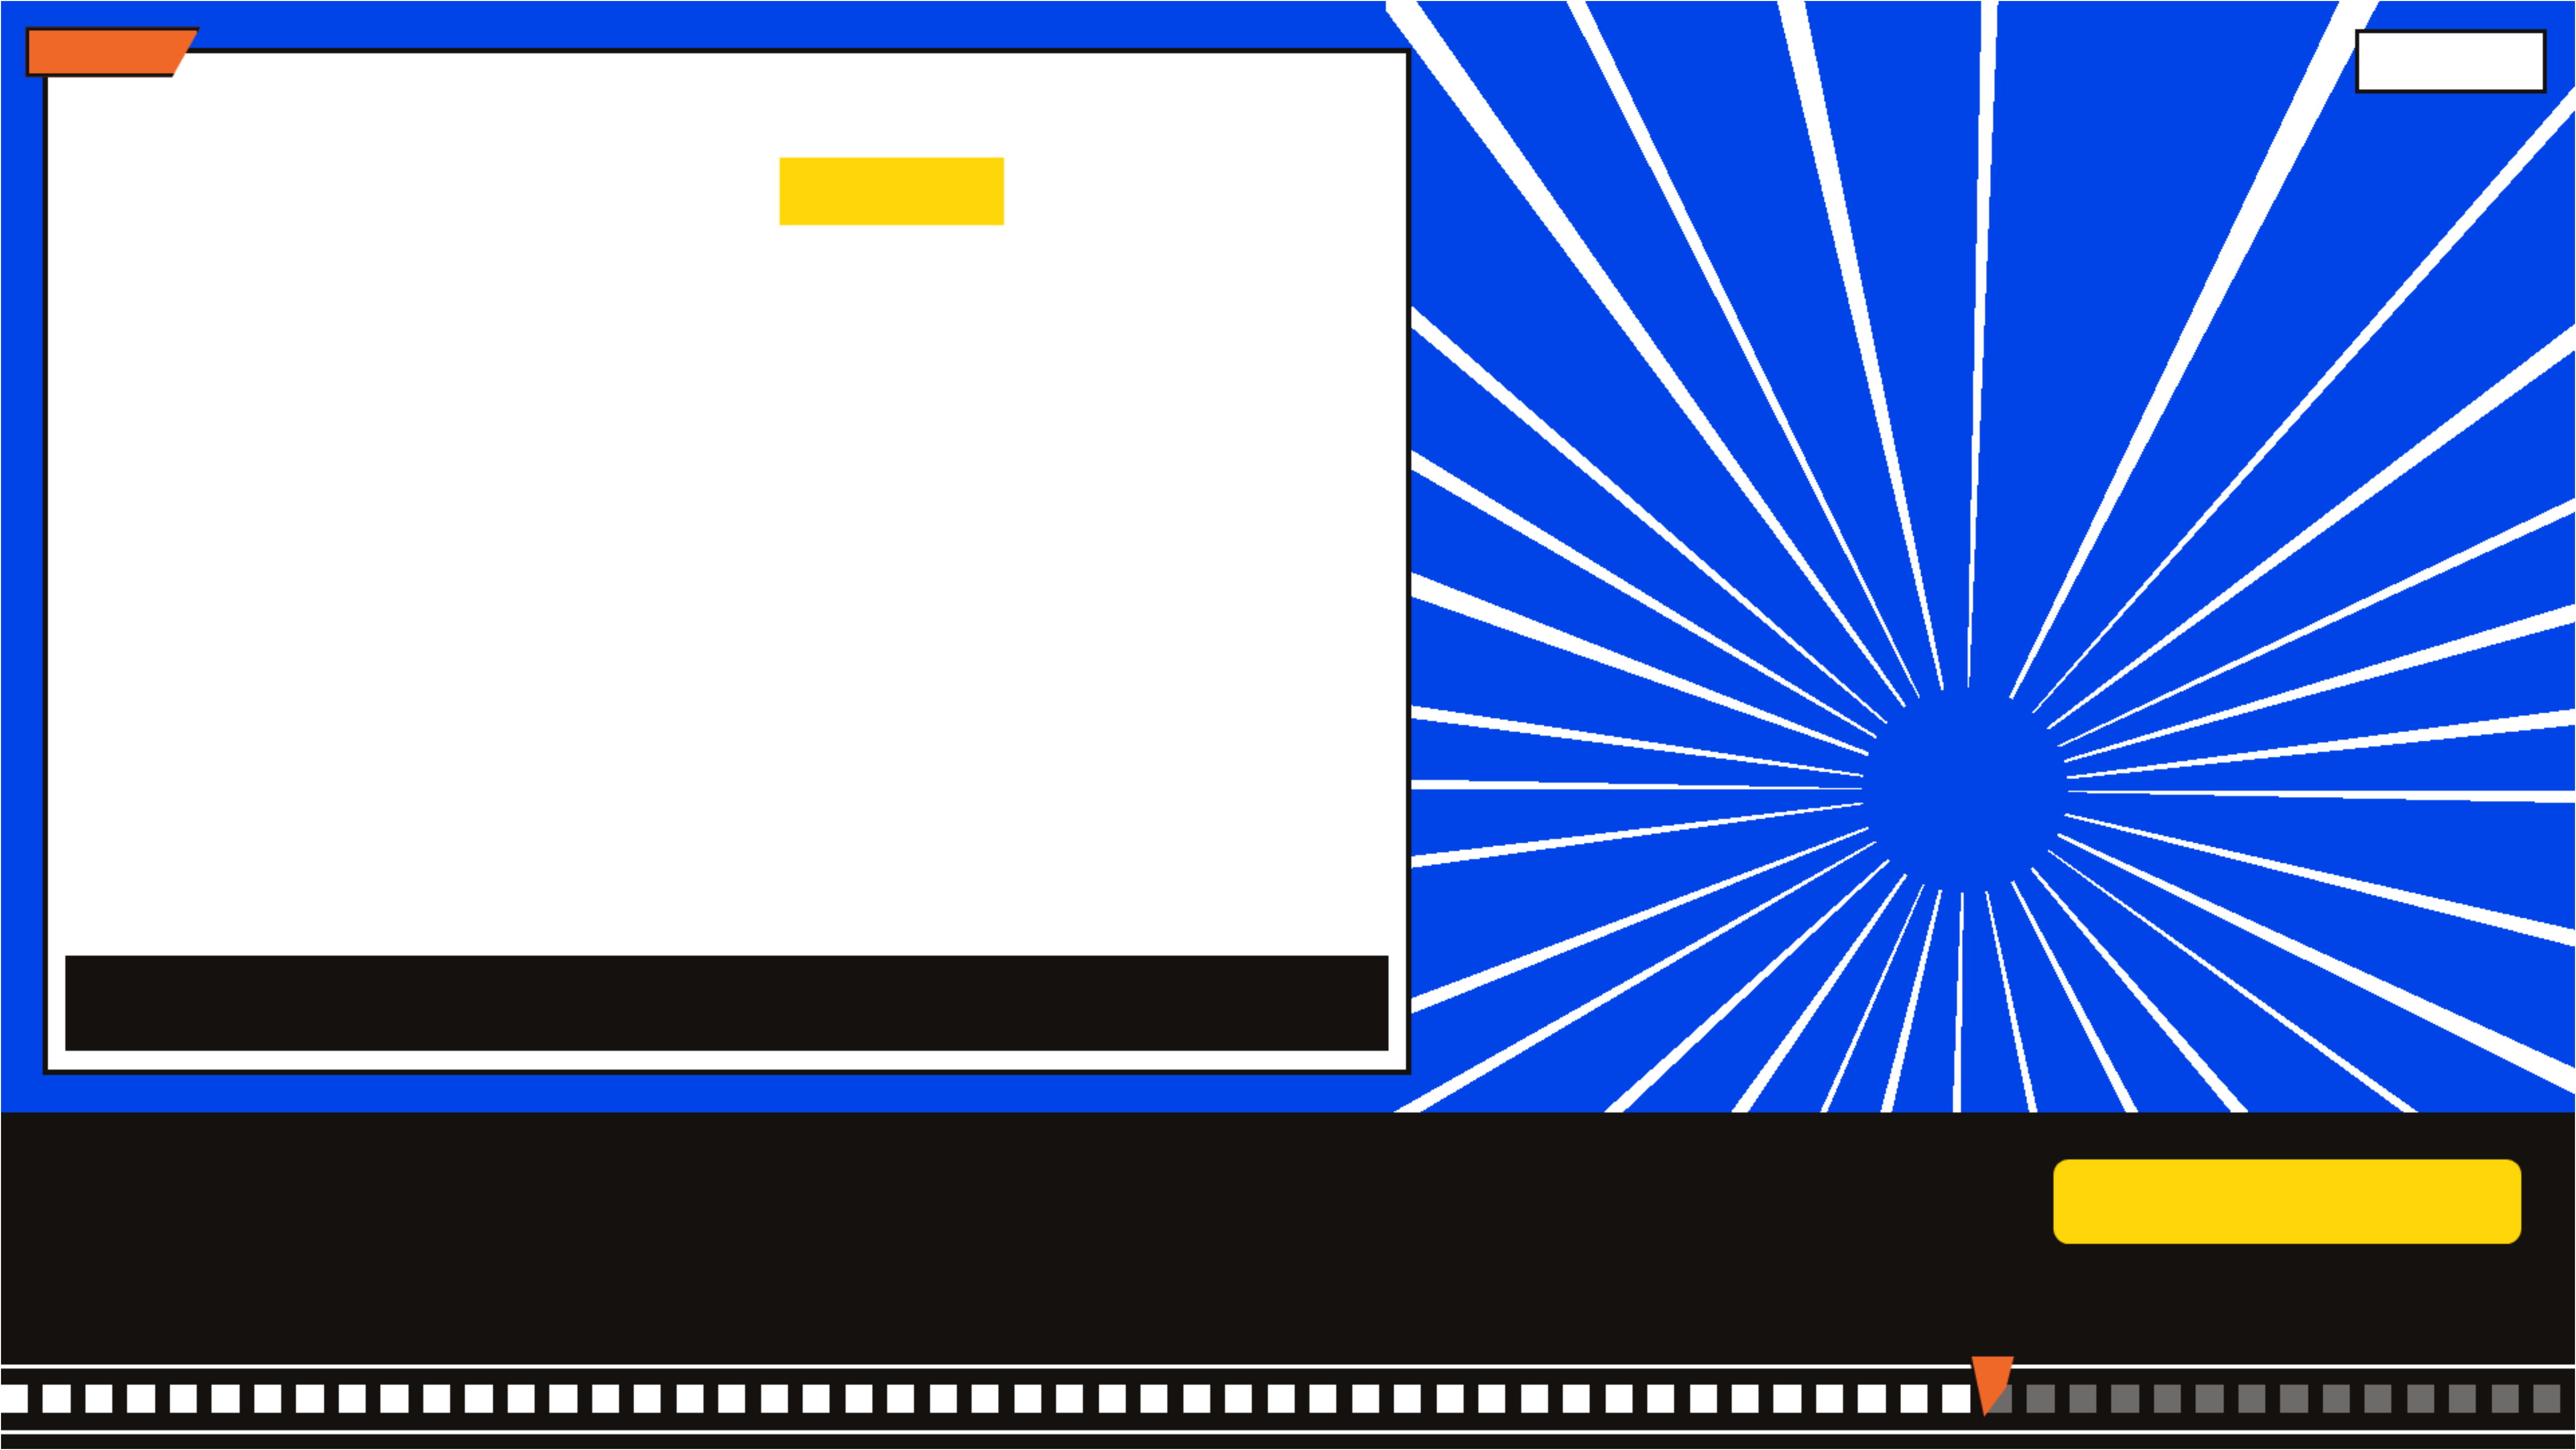


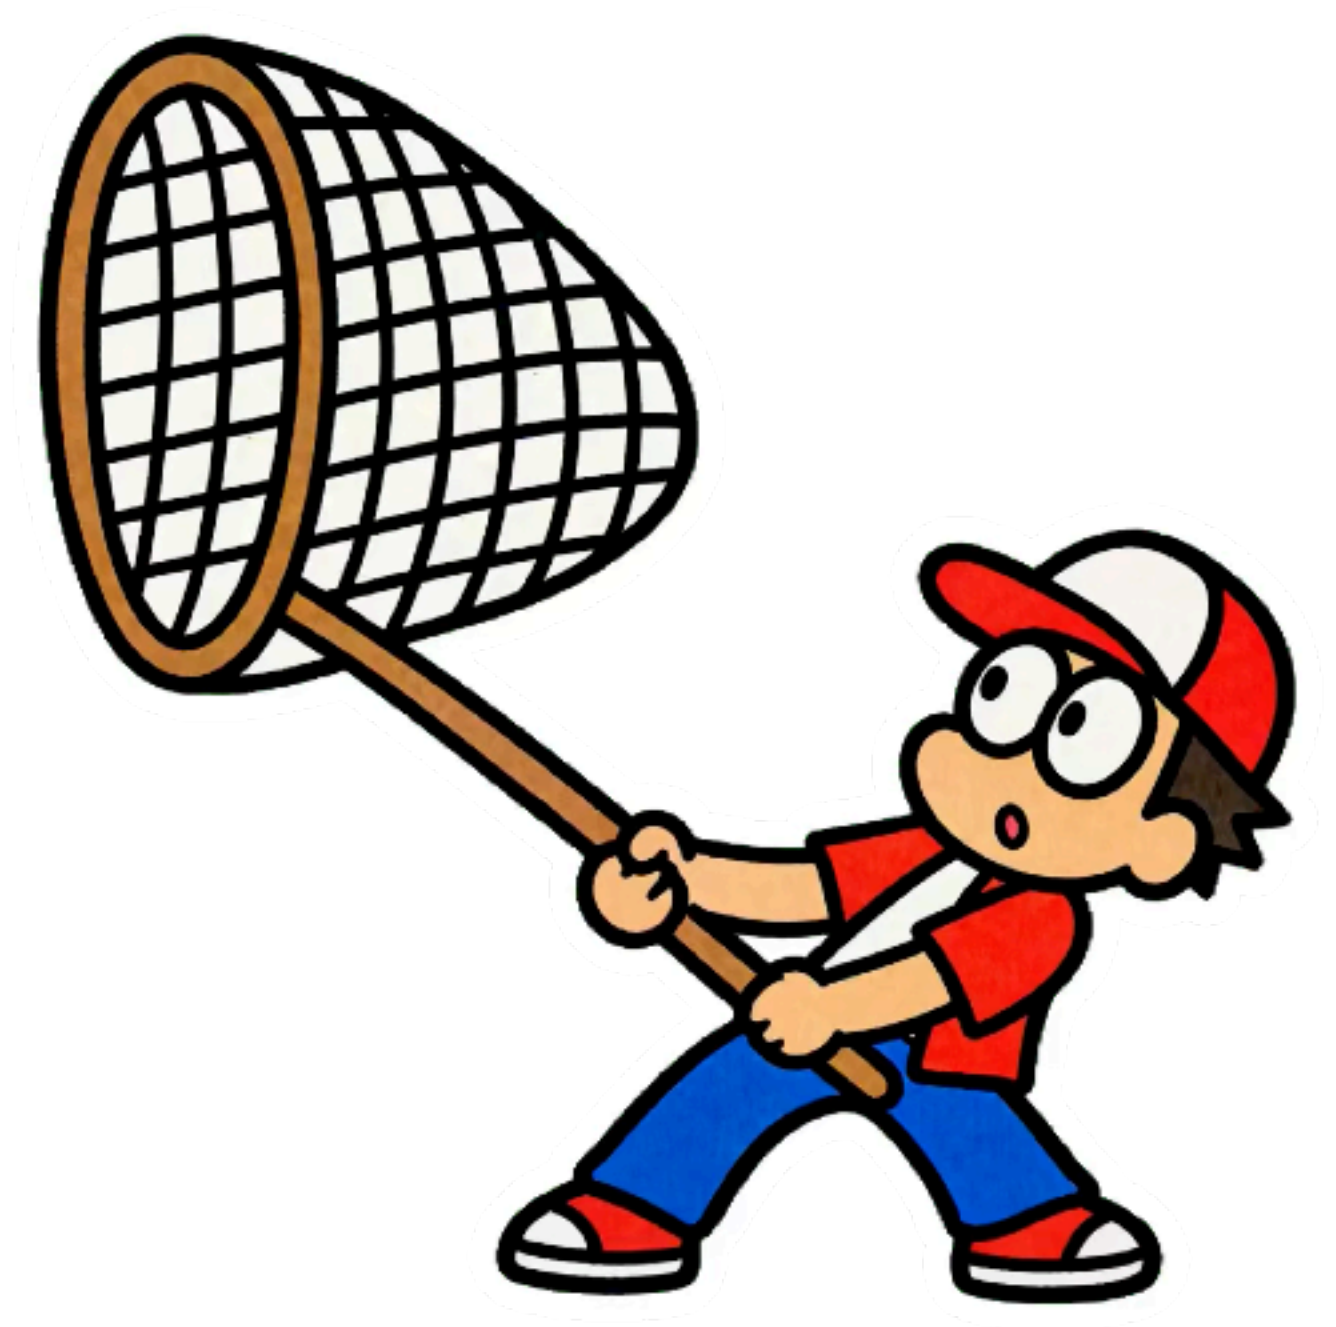

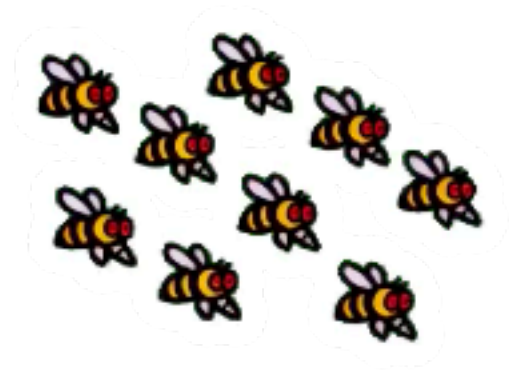

12b-swarm.py

```
def attack(pokemon, move, *targets, crit=False):  
    return targets
```

```
print(len(caught), type(caught).__name__)
```

12 tuples



OTRIBEST



SELO

BOBBERBOBBA



docs.python.org/3/tutorial/controlflow.html#arbitrary-argument-lists

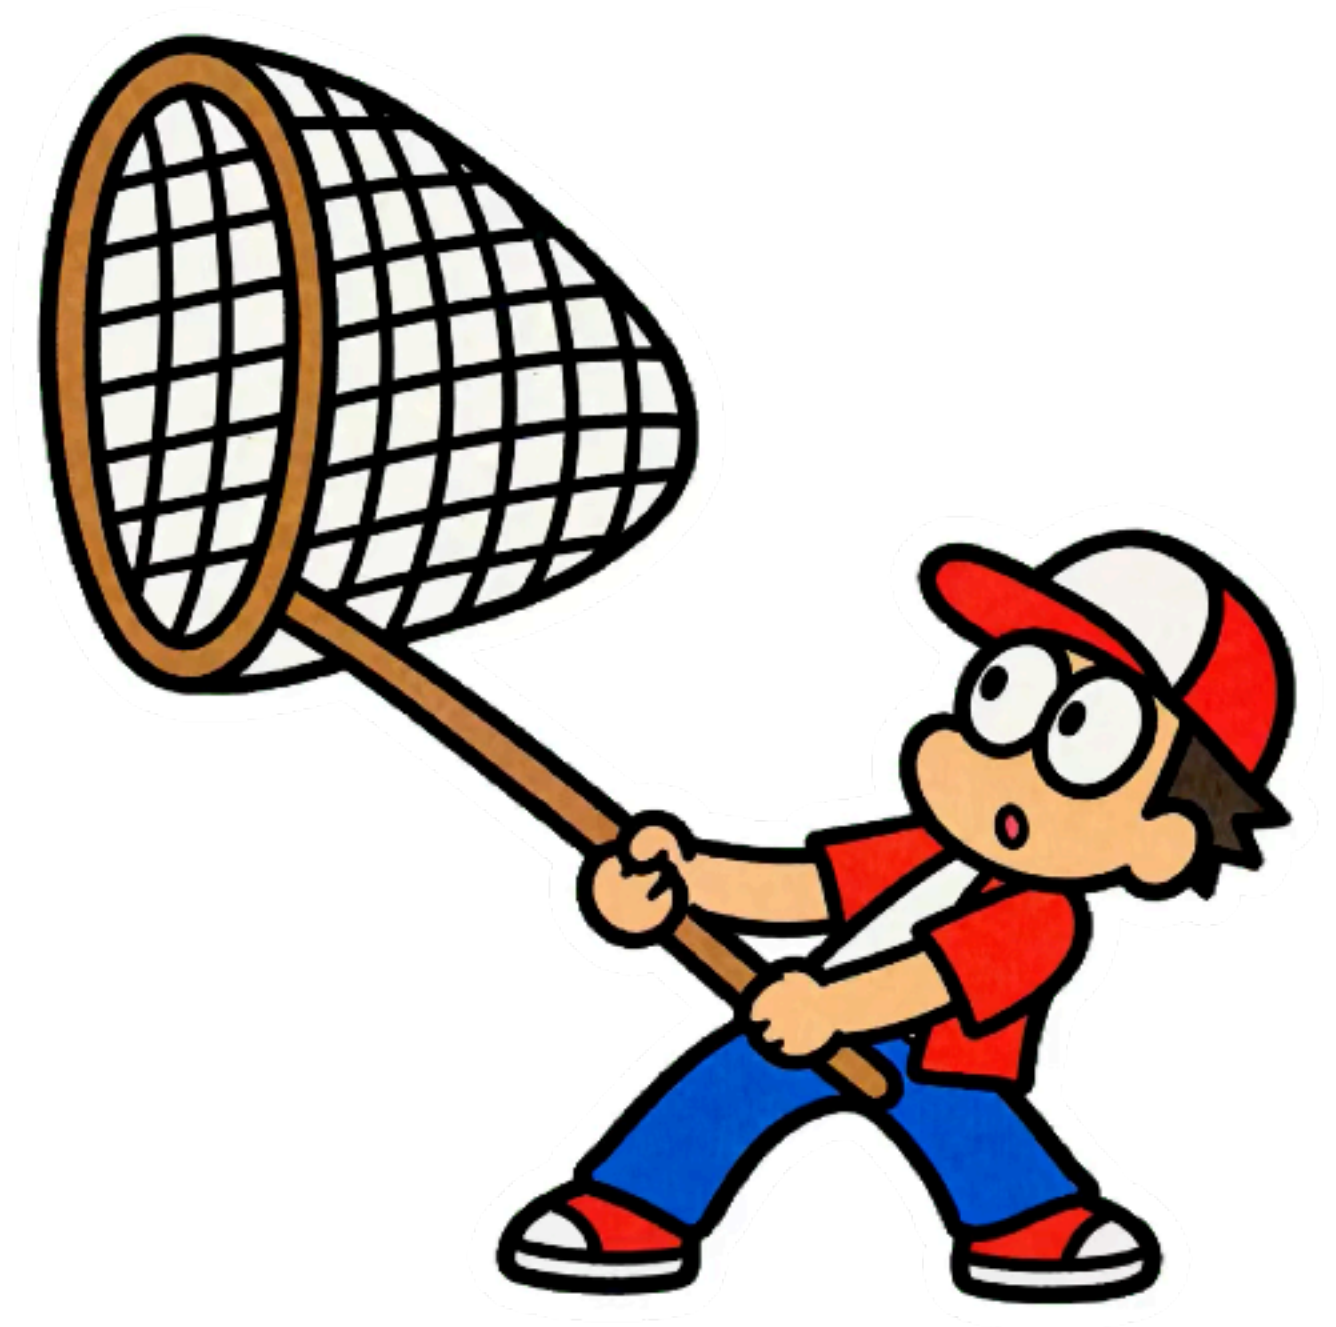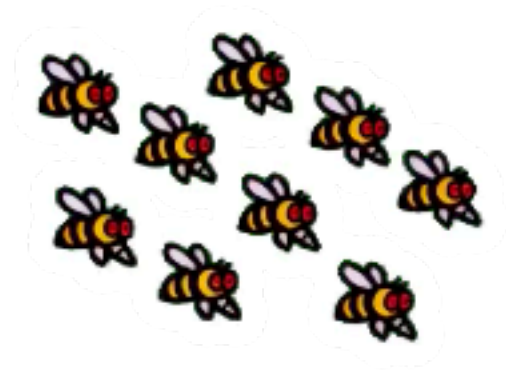

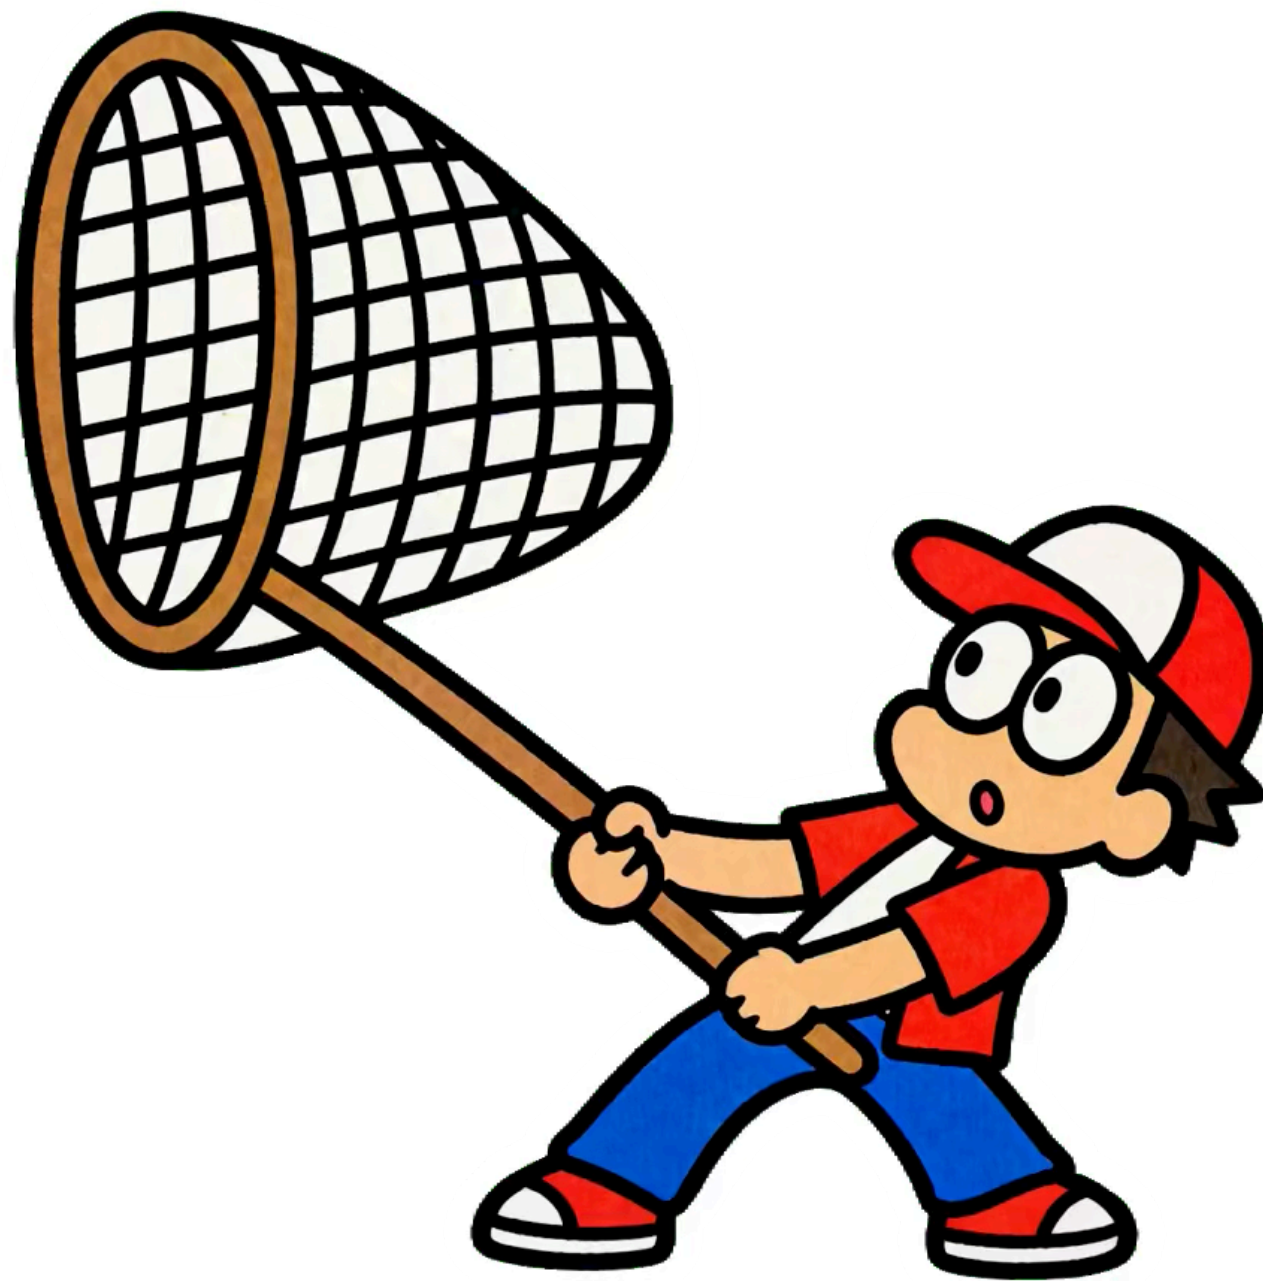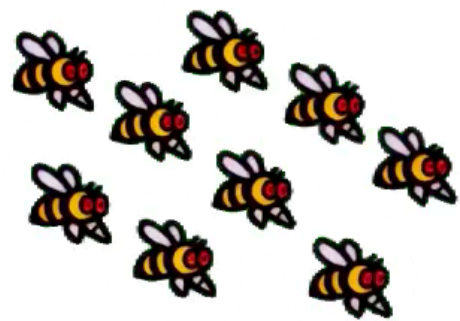

12b_swarm.py

```
def attack(pokemon, move, *targets, crit=False):  
    return targets
```

```
print(len(caught), type(caught).__name__)
```

12 tuple



***targets ловит всех — в один кортеж**

ВО ВРЕМЯ ВЫЗОВА

13_swallowed.py

```
def attack(pokemon, move, *targets, crit=False):  
    return targets, crit  
  
print(attack("Pikachu", "Thunderbolt", "Onix", True))
```

Хотели крит. Что в crit?

A | True**B** | False**C** | TypeError