

parallel programs
preserve the identifier

PHP

if (\$arr[\$i] % 2)

oddCount

++;

JavaScript

if (arr[i] % 2)


oddCount

++;

Python

if arr [i] % 2 : oddCount += 1

residual stream
one equal-width
column per token

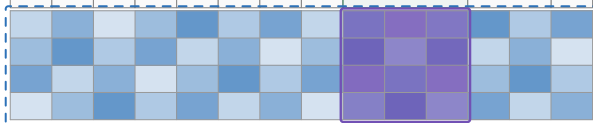

context pooling ± 16 mean over
neighbours, occurrence dropped

span pooling mean over
the occurrence columns



linear probe
 $\mathbf{w}^T \mathbf{x} + b$

-0.060
[-0.088, -0.030]

excludes zero; $\approx$ untrained
network, same readout -0.064



linear probe
 $\mathbf{w}^T \mathbf{x} + b$

-0.012
[-0.034, 0.020]

covers zero, so the flat boundary
is not distinguishable from none