
> ⚠️ `commit` `push`
>
> `status` `diff` `log`

-
-
-
- `git status` `git diff` `git log`
- `git add` `git commit`
- `git push` `git pull` `git fetch`

-
-
-
- `.gitignore` `.env`
-
- `git restore` `git reset`
-



		`git log`
		`git diff`
		`git log`


```
30d45e7
3de6e62
9156f15
4d2469a
43d02de
e414b68
2816d8d
b5495cc
```


`30d45e7`

`9156f15`

> `https://github.com/nomura-shokki/hozen-kosu-React.git`

-
-

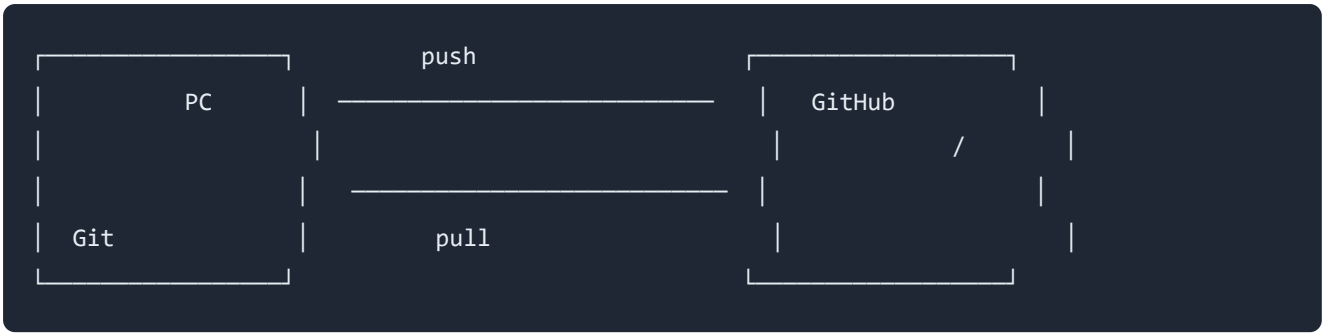
PC
Git
push
pull
GitHub

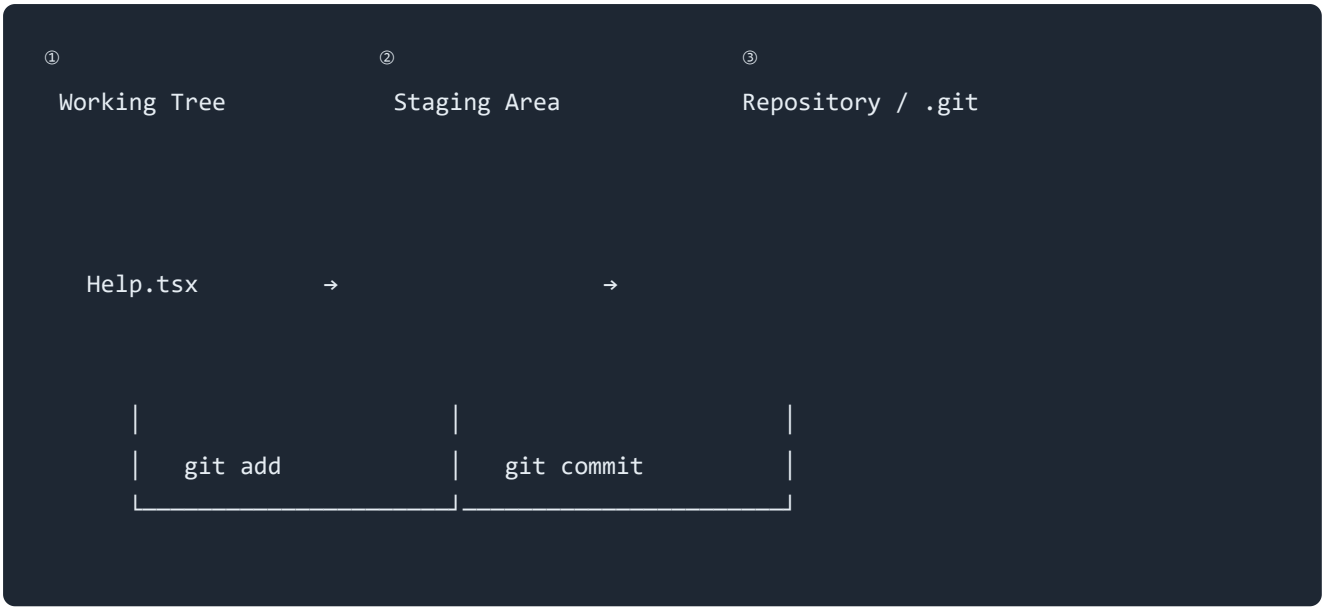


> `frontend/src/MainPage/Help.tsx`

> `git add`

`.git` `git commit`

`30d45e7`

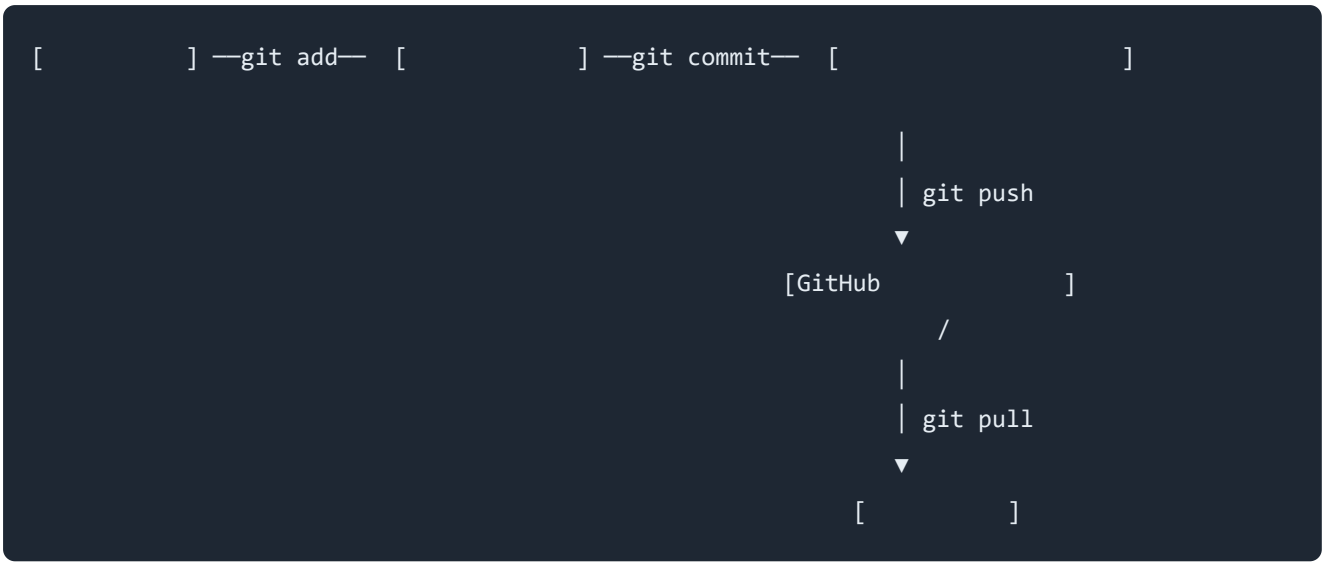

`git add`		
`git commit`		
`git push`		
`git pull`		
`git status`		
`git diff`		

> `01`
>
> `hozen-kosu-React`

`.git`

`git status`

```
#                                                Git
git status
```

```
On branch master
...
```

`On branch master`

⚠️ `fatal: not a git repository`

`hozen-kosu-React`

`-v`

```
# remote=                    -v=URL
git remote -v
```

```
origin  https://github.com/nomura-shokki/hozen-kosu-React.git (fetch)
origin  https://github.com/nomura-shokki/hozen-kosu-React.git (push)
```

- `origin`
  `origin` `origin`
- `https://github.com/nomura-shokki/hozen-kosu-React.git`
  `nomura-shokki` `hozen-kosu-React`
- `(fetch)` `(push)`

`-a`

```
# branch=          -a=
git branch -a
```

```
* master
  remotes/origin/HEAD -> origin/master
  remotes/origin/master
```

- `* master` `*`
  `master`
- `remotes/origin/master` `master`
- `remotes/origin/HEAD -> origin/master` `master`

> `master`
>
> `main`
>
> `master` `master`
>
> `main`

`git status`

`git status`

>

```
# status=          3
git status
```

`git status`

>

```
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   frontend/src/MainPage/Help.tsx
        modified:   hozen_another/settings.py

no changes added to commit (use "git add" and/or "git commit -a")
```

- `On branch master` `master`
- `Changes not staged for commit:`

- `(use "git add <file>..." to update ...)` `git add`
- `(use "git restore <file>..." to discard ...)` `git restore` `restore`
- `modified: frontend/src/MainPage/Help.tsx` `Help.tsx`

- `modified: hozen_another/settings.py` `settings.py`
- `no changes added to commit`

`modified`		
`new file`		
`deleted`		
`Untracked files`		

`Changes to be committed`		
`Changes not staged for commit`		

-
- `git add` `git commit`

`git status`

`-s`

```
# -s=short
git status -s
```

```
 M frontend/src/MainPage/Help.tsx
 M hozen_another/settings.py
 M frontend/.env.production
?? newfile.txt
```

> `M` `A` `D` `??`

`git status`

`git diff`

> #
> git diff

```
diff --git a/frontend/src/MainPage/Help.tsx b/frontend/src/MainPage/Help.tsx
index 1a2b3c4..5d6e7f8 100644
--- a/frontend/src/MainPage/Help.tsx
+++ b/frontend/src/MainPage/Help.tsx
@@ -42,7 +42,7 @@
          <h2>      </h2>
-         <p>                                    </p>
+         <p>                                                  </p>
          <ul>
```

- `diff --git a/... b/...` `a` `b`

- `index 1a2b3c4..5d6e7f8 100644`
- `--- a/frontend/src/MainPage/Help.tsx` `---`
- `+++ b/frontend/src/MainPage/Help.tsx` `+++`
- `@@ -42,7 +42,7 @@`



```
#
git diff frontend/src/MainPage/Help.tsx
```

`git diff` `git log`

`(END)` `:`

> ⚠️ **`(END)`** `:` `q`
> `Ctrl+C`

`add` `commit` `push`

> ⚠️ `git add`
> `commit` `push`

```
#
git add frontend/src/MainPage/Help.tsx
```

`git status`

`git status`

```
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   frontend/src/MainPage/Help.tsx
```

`Changes not staged for commit` `Changes to be committed`

`.`

```
# 2
git add frontend/src/MainPage/Help.tsx hozen_another/settings.py
#
git add .
```

⚠️ **`git add .`**

`git add .` **`git status`**

`frontend/build/`

```
#
git restore --staged frontend/src/MainPage/Help.tsx
```

`--staged` `git restore` `--staged` `--staged`

`git commit`

⚠️

`-m`

```
# -m=                ""
git commit -m "                                  "
```

- `git commit`
- `-m` `m` `"..."`
- `"                                  "`

```
[master 30d45e7]
 2 files changed, 14 insertions(+), 3 deletions(-)
```

- `[master 30d45e7]` `master` `30d45e7`
- `2 files changed, 14 insertions(+), 3 deletions(-)`

⚠️ `-m`

`Esc` `:q!` `Enter`

`-m "          "`

```
←
←
←
←
```

⚠️

```
                ←
aaa             ←
                ←
                ← Git
```

`git log`

`9156f15`

`git log`

```
#
git log
```

```
commit 30d45e7c... (HEAD -> master, origin/master)
Author: yuya <oltotlo81@gmail.com>
Date:   Sat May 30 ...



commit 3de6e62...
Author: yuya <oltotlo81@gmail.com>
Date:   ...
```

- `commit 30d45e7c...` `30d45e7`
- `(HEAD -> master, origin/master)` `HEAD` `master` `origin/master`
- `Author: yuya <oltotlo81@gmail.com>`
- `Date:`
-

`git log`

```
# oneline=1        ID
git log --oneline
```

```
30d45e7
3de6e62
9156f15
4d2469a
43d02de
e414b68
```

```
#     5
git log --oneline -5
#
git log --oneline --graph --all
```

`--graph` `*` `|` `/` `\`

```
# ID 9156f15
git show 9156f15
```

`git show 9156f15`

⚠️ `push` `pull` `fetch`

`origin` `master`

```
# origin  GitHub     master
git push origin master
```

```
Enumerating objects: 9, done.
...
To https://github.com/nomura-shokki/hozen-kosu-React.git
   3de6e62..30d45e7  master -> master
```

`3de6e62..30d45e7 master -> master`

⚠️

```
# GitHub    master
git pull origin master
```

```
Updating 3de6e62..30d45e7
Fast-forward
 frontend/src/MainPage/Help.tsx | 5 +++--
 1 file changed, 3 insertions(+), 2 deletions(-)
```

`Fast-forward`

⚠️ `git pull`

```
#
git fetch origin
```

`git fetch`			
`git pull`			

`git pull` `git fetch` `git merge` `fetch` `git log` `origin/master` `git merge`

`master`

`master`

`master`

```
master:   A ── B ── C ──────────────── F   ←
                    \                /
feature:             D ── E ──────────     ←                          C         F
```

`master`

`master`

`help-fix`

`-c` `switch`

```
# -c=create  help-fix
git switch -c help-fix
```

```
Switched to a new branch 'help-fix'
```

`master`

`help-fix` `master`

>

>

```
```

`master`

`master` `help-fix`
`master`

```
# ①
git switch master
# ② help-fix          master
git merge help-fix
```

```
Updating 3de6e62..a1b2c3d
Fast-forward
 frontend/src/MainPage/Help.tsx | 8 ++++----
 1 file changed, 4 insertions(+), 4 deletions(-)
```

`master`
`master`

`master`

```
Merge made by the 'ort' strategy.
 frontend/src/MainPage/Help.tsx | 6 +++---
 1 file changed, 3 insertions(+), 3 deletions(-)
```

`Merge made by the 'ort' strategy`

`help-fix`

`-d`

```
# -d=delete  merge
git branch -d help-fix
```

⚠️ `-d` `-D`

`-d`

`git merge` `git pull`

```
Auto-merging frontend/src/MainPage/Help.tsx
CONFLICT (content): Merge conflict in frontend/src/MainPage/Help.tsx
Automatic merge failed; fix conflicts and then commit the result.
```

- `CONFLICT (content): Merge conflict in ...Help.tsx` `Help.tsx`
- `Automatic merge failed; fix conflicts and then commit the result.`


```
#   both modified:
git status
```

```
Unmerged paths:
  (use "git add <file>..." to mark resolution)
        both modified:   frontend/src/MainPage/Help.tsx
```

`both modified:`

▼ コンフリクト中の Help.tsx の中身（※形式を示すための説明用の例）：

```
<p>                                    </p>
```

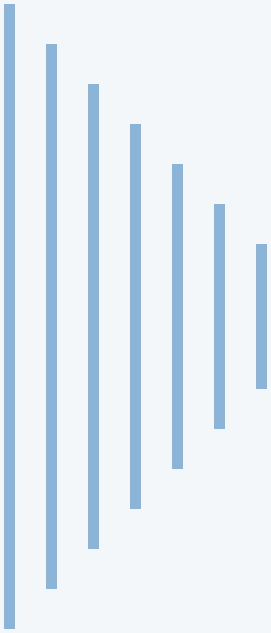

```

```

- `<<<<<<< HEAD`

- `<p>                                    </p>`
- `=======`
- `<p>                                    </p>`
- `>>>>>>> help-fix`

```
<h2>      </h2>
        <p>                                  </p>
        <ul>
```

```
<h2>      </h2>
        <p>                                    </p>
        <ul>
```

```
<h2>      </h2>
        <p>                                          </p>
        <ul>
```

> ⚠️ `<<<<<<<` `=======` `>>>>>>>`
>
> `git diff`

>

`add`

`commit`

```
# ①
git add frontend/src/MainPage/Help.tsx
# ② Unmerged
git status
# ③
git commit
```

`git status`

```
All conflicts fixed but you are still merging.
  (use "git commit" to conclude merge)
```

`git commit`

`git merge --abort`

`--abort`

`master`

`git merge`

```
①                 git switch -c add-kosu-total
②                       commit
③ git push origin add-kosu-total    GitHub
④ GitHub           Pull Request          add-kosu-total → master
⑤                                           Approve
⑥   Merge            master
⑦           GitHub    Delete branch
⑧        git switch master && git pull
```

> ⚠️ `push`

>

>

>

```
##

##
          1

##
1.
2.
3.
```

`e414b68`

> **`.gitignore`**
>
> `git status` `git add .`

`.tsx` `.py`	`node_modules/`

	`.env`
`.md`	`__pycache__/`

`.gitignore`

`/.gitignore`

> `.env`
> `node_modules`

```
.env                    # ①           DB

**/__pycache__/         # ② Python

*.py[cod]               # ③               Python  .pyc/.pyo/.pyd

*$py.class              # ④ Jython         .class
.vscode/                # ⑤ VS Code
.claude                 # ⑥ Claude  AI

node_modules/           # ⑦ npm
frontend/node_modules/  # ⑧ frontend
```

- **`.env`**
  `CLAUDE.md` `.env` `SECRET_KEY` `DB_PASSWORD`
  `DB_HOST`
- **`**/__pycache__/`** `**`
- **`*.py[cod]`** `*` `[cod]`
  `.pyc` `.pyo` `.pyd`
- **`.vscode/`**

- **`node_modules/`** `npm install` `package.json`

`.gitignore`

`frontend/.gitignore`

>

```
# dependencies          #
/node_modules           # ①                    node_modules
# testing               #
/coverage               # ②

# misc                  #
.DS_Store               # ③ macOS
npm-debug.log*          # ④ npm
yarn-debug.log*         # ⑤ yarn
yarn-error.log*         # ⑥ yarn

.env.production         # ⑦

# npm install           #
# npm run build         #
```

- `#`
- `.env.production`
  `git status` `M frontend/.env.production`
  `.env`

  ⚠️ **`.env`**

> ⚠️ ⚠️ ⚠️ `.env`
> `SECRET_KEY`

`git push` `git pull`

> `git push`

```
① GitHub
②              → Settings
③                  → Developer settings
④ Personal access tokens → Tokens (classic) → Generate new token
⑤ Note          :     kosu-react
⑥ Expiration            :    90 days
⑦ Select scopes        : repo
⑧ Generate token
⑨             ghp_xxxxxxxx...
```

> ⚠️

`git push`

```
Username:         GitHub
Password:
```

>

>

```
# Windows
git config --global credential.helper manager
```

> **`--global`** `--global` `--global`

> ⚠️


```
#
git restore frontend/src/MainPage/Help.tsx
```

⚠️

`git diff`

`add`

```
# add
git restore --staged Help.tsx
```

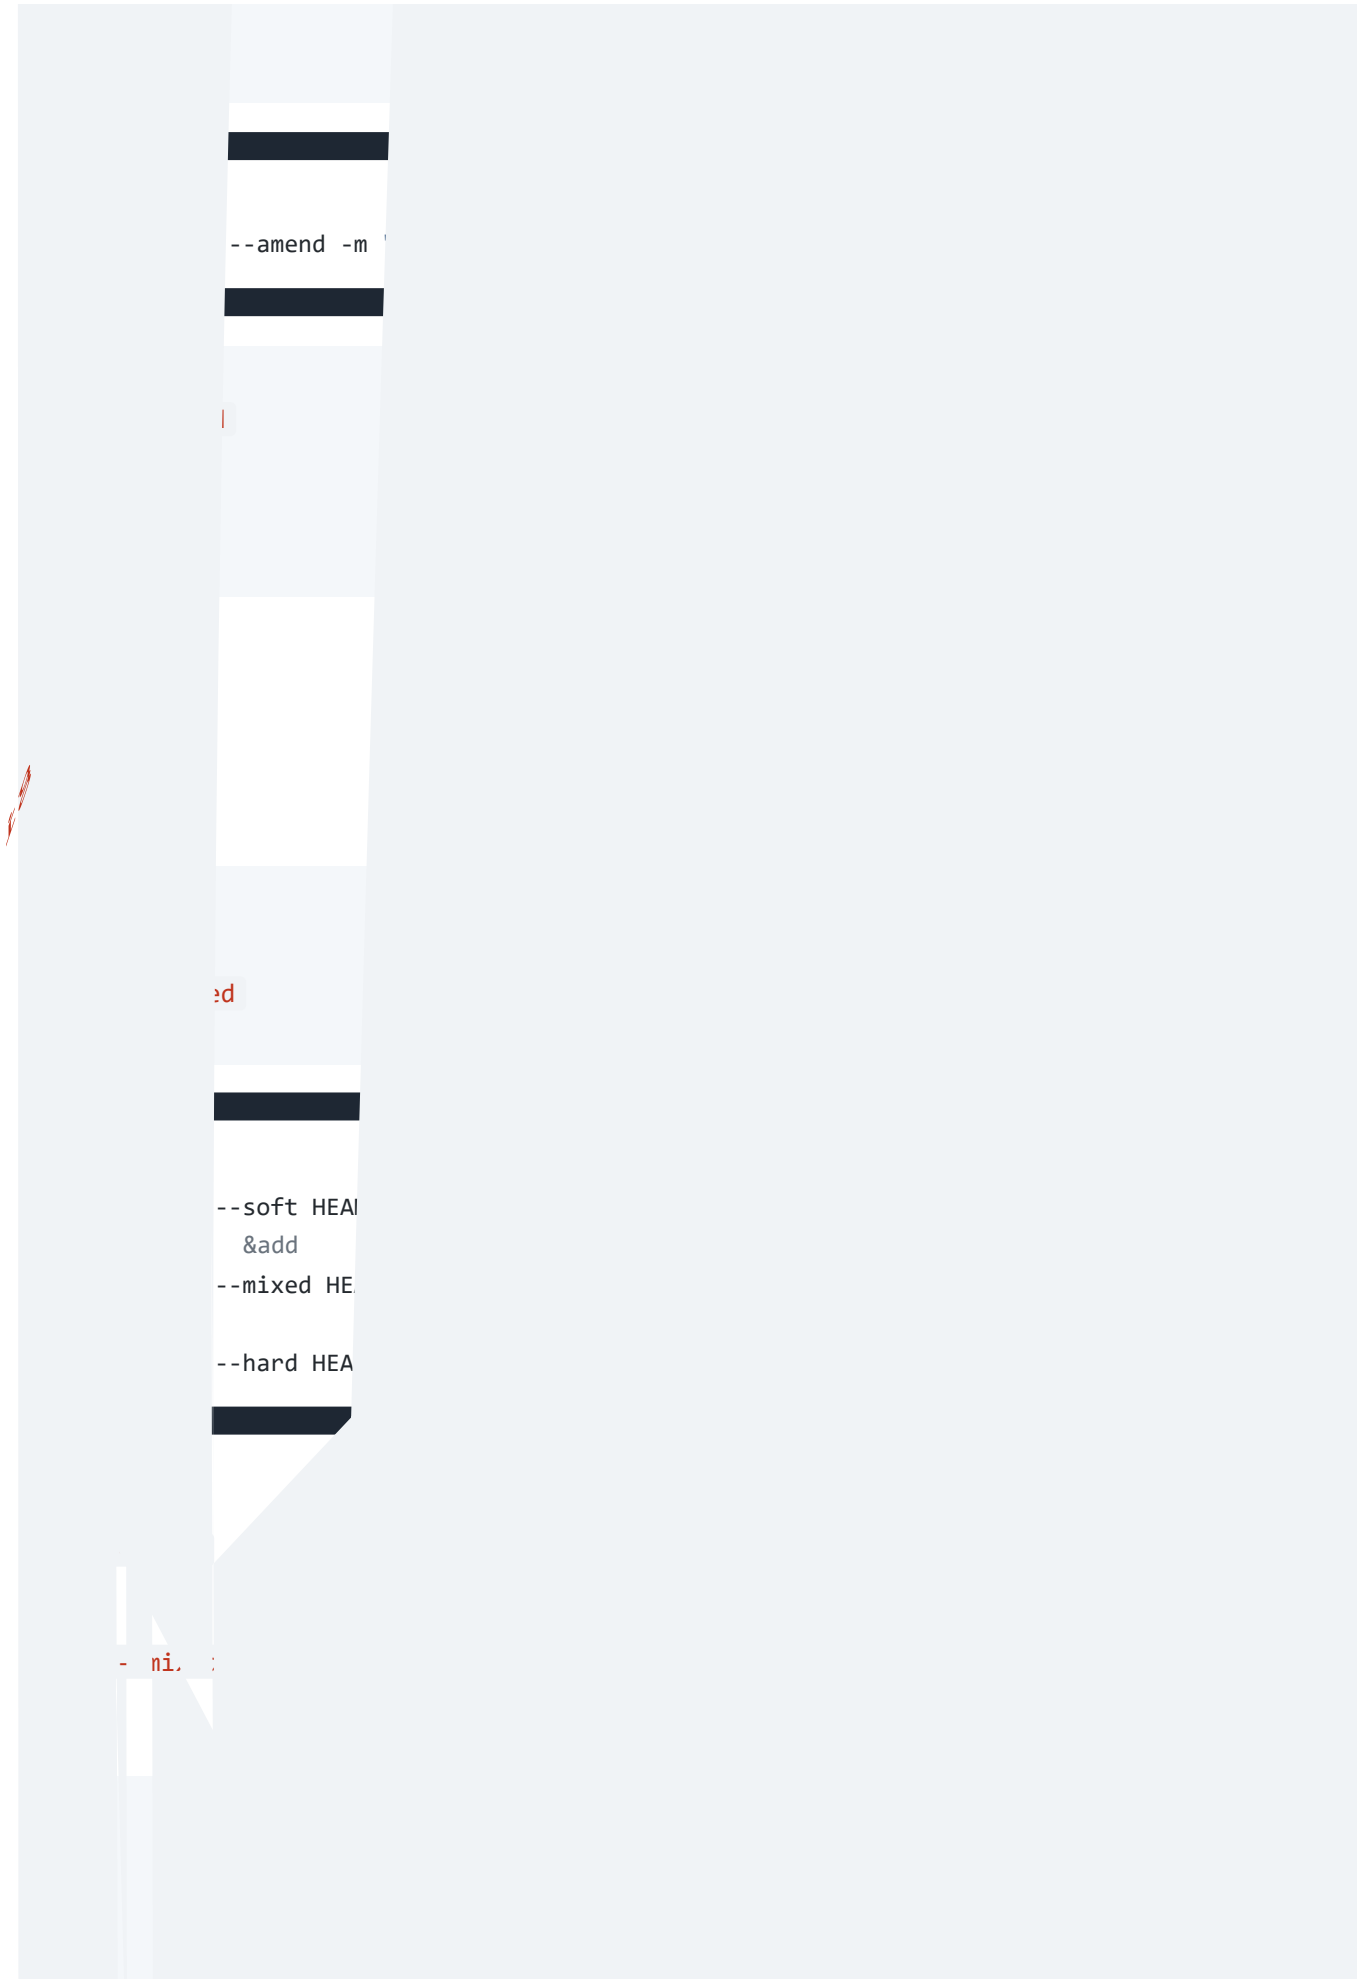
--amend -m
--soft HEA
&add
--mixed HE
--hard HEA

`--hard`

`git reflog`

`git reflog`

`git reset --hard ID`

`git reflog`

```
# HEAD                                    ID
git reflog
```

⚠️

⚠️ **`commit`** **`push`**

`master`

`.env`

`git status` `git diff` `git log` `git branch` `git switch` `git commit` `git push` `git reset --hard` `git rm`

```
# ①
git switch master
# ②
git status
# ③ GitHub
git pull origin master
# ④
git log --oneline -5
```

> **pull**

```
#
git status
#
git diff
```

> `git status` `git diff`

```
#
git status
#
git diff
#             add/commit/push
# git add <                    >
# git commit -m "                              "
# git push origin <        >
```

⚠️ `#` `status` `diff`

`git status` `git status`

`git status`

`fatal: not a git repository`		`hozen-kosu-React`
`git diff` `(END)`		`q`
`git commit`	`-m`	`Esc` `:q!` `Enter` `-m "..."`

`CONFLICT`	© –	@! `git merge --`
	`<<<<<<<`	
`git switch`		`git switch`
`.env`	`git add .`	`git restore --staged .env`
`git reset --hard`		

`Help.tsx` `git diff` `-` `+` `git restore frontend/src/MainPage/Help.tsx`

`git switch -c practice-branch` `git branch` `* practice-branch` `git switch master` `git branch -d practice-branch`

`/.gitignore` `.env` `.env`

`git log --oneline` `9156f15` `git show`

- `9156f15`
- `origin = https://github.com/nomura-shokki/hozen-kosu-React.git` `master`
- `git add` `git commit` `git push`
- `git status` `git diff` `-` `+` `git log --oneline` **`git status`**
- `<<<<<<< / ======= / >>>>>>>` `add` `commit` `git merge --abort`
- **`.gitignore`** `node_modules` `__pycache__` **`.env`** `.env`
- **`git reflog`** `git reset --hard`

- ⚠️ `commit` `push`

- `pull` `status` `diff`
  `status` `diff`