



HTML

AN INTRODUCTION TO WEB PAGE DEVELOPMENT

USMAN AHMAD.



INTRODUCTION TO HTML

- With HTML you can create your own Web site.
- HTML stands for **Hyper Text Markup Language**.
- HTML is not a programming language, it is a **Markup Language**.
- A markup language is a set of **markup tags**.
- HTML uses **markup tags** to describe web pages.
- HTML is **not case sensitive** language.
- HTML documents **contain HTML tags** and plain text.



Purpose of HTML

- ➡ **Purpose of HTML Language is to create static web sites.**



HTML Elements and Tags

- A tag is always enclosed in angle bracket `<>` like `<HTML>`
- HTML tags normally **come in pairs** like `<HTML>` and `</HTML>` i.e.
- **Start tag:** `<HTML>`
- **End tag:** `</HTML>`
- Start and end tags are also called **opening tags** and **closing tags**



Structure of HTML Document

- **Header section**

- `<head></head>`

- Contains info about web page

- **Body section**

- `<body></body>`

- Contains main content of web page

- **Footer section**

- `<footer></footer>`

- Contains footer content of web page



HTML Text Editor

- ➡ **HTML text editor is used to write HTML code and save that HTML file.**
- ➡ **There are different editors are available to write HTML code**



Recommended Text Editors (Windows)

- **Notepad**
- Notepad++
- Macromedia Dream Wear
- GNU Emacs
- Crimson Editor
- ConTEXT
- SciTE
- Komodo Edit
- jEdit



HOW TO START

- Write html code in notepad.
- Save the file with (.Html) OR (.Htm) extension.
- View the page in any web browser.
Internet EXPLORER, Google Chrome, Firefox etc.
- The purpose of a web browser (like internet explorer or Firefox) is to read html documents and display them as web pages.



Code With HTML

```
<HTML>  
  <HEAD>  
    <TITLE>  
      MY FIRST PAGE  
    </TITLE>  
  </HEAD>  
  <BODY>  
    GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.  
  </BODY>  
</HTML>
```



Explain these tags

- **<HTML>** - Describe HTML web page that is to be viewed by a web browser.
- **<HEAD>** - This defines the header section of the page.
- **<TITLE>** - This shows a caption in the title bar of the page.
- **<BODY>** - This tag show contents of the web page will be displayed



Types of HTML Tags

There are two different types of tags:

- **Container Element:**

- Container Tags contains **start tag & end tag** i.e.
`<HTML>... </HTML>`

- **Empty Element:**

- Empty Tags contains **start tag** i.e.
`<BR>`




Text Formatting Tags

- **Heading Element:**
- There are six heading elements (`<H1>`, `<H2>`, `<H3>`, `<H4>`, `<H5>`, `<H6>`).
- All the six heading elements are container tag and requires a closing tag.
- `<h1>` will print the **largest heading**
- `<h6>` will print the **smallest heading**



Heading Tag Code

```
<html>
<head><title>heading</title></head>
<body>
<h1> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h1>
<h2> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h2>
<h3> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h3>
<h4> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h4>
<h5> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h5>
<h6> GOVT. POSTGRADUATE ISLAMIA COLLEGE, GRW.</h6>
</body>
</html>
```

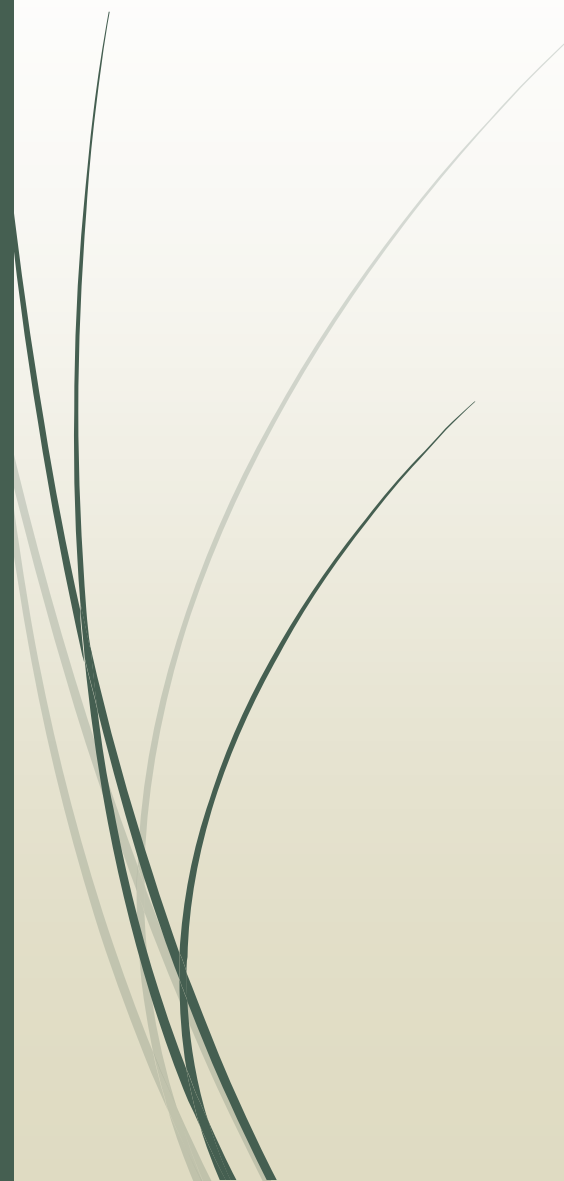


HTML Paragraph Tag

- HTML documents are divided into paragraphs.
- Paragraphs are defined with the `<p>` tag i.e.
- `<p>This is a paragraph</p>`
- `<p>This is another paragraph</p>`
- `<pre>This text is preformatted</pre>`



Line Break & Horizontal Line Tag

- If we want a line break or a new line without starting a new
- paragraph Use the `<br>` tag.
- Defines a horizontal line use `<hr>` tag.
- `<br>` `<hr>` element are empty HTML element i.e. Global
- Information Channel `<hr>`
- Global Information `<br>` Channel

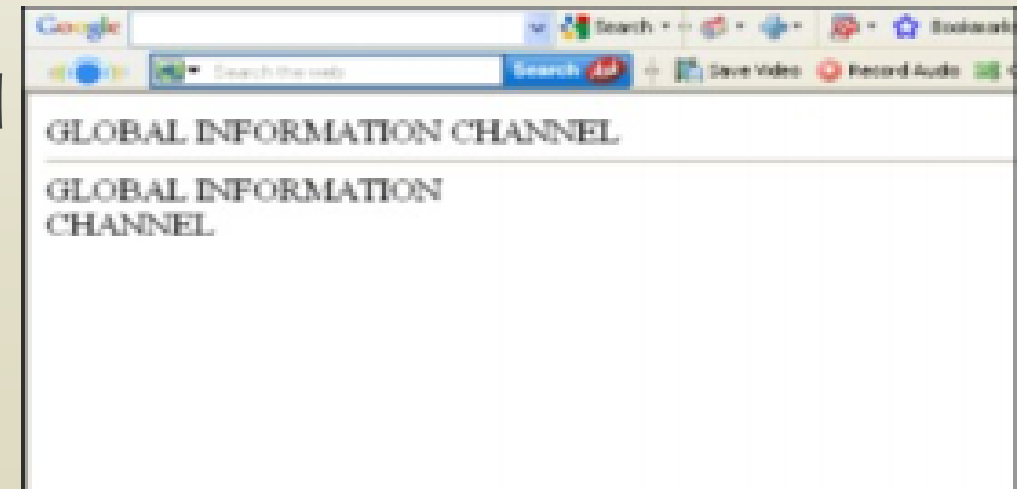



Font Tag

- This element is used to format the **size**, **typeface** and **color** of the enclosed text.
- The commonly used fonts for web pages are Arial, Comic Sans MS , Lucida Sans Unicode, Arial Black, Courier New, Times New Roman, Arial Narrow, Impact, Verdana.
- The size attribute in font tag takes values from **1 to 7**.



Font tag (Text)

The text that you are going to use on your web page is controlled by the font tag,

SYNTAX: ...

The tag attributes are:

face="font name" **size**="number" **value**=1
smallest to 7 largest **color**="name or Hex
number"



Font tag

<Html>

<head>

<title>Font Tag Example</title>

</head>

<body>

 Webpage
Development

</body>

</html>

save this file under filename : body.htm

HTML color value

- HTML colors can be defined as a hexadecimal notation for the combination of Red, Green, and Blue color values (RGB).
- The lowest value that can be given to one light source is 0 (hex #00) and the highest value is 255 (hex #FF).
- The table below shows the result of combining Red, Green, and Blue light sources:

Color	Color HEX	Color RGB
	#000000	rgb(0,0,0)
	#FF0000	rgb(255,0,0)
	#00FF00	rgb(0,255,0)
	#0000FF	rgb(0,0,255)
	#FFFF00	rgb(255,255,0)
	#00FFFF	rgb(0,255,255)
	#FF00FF	rgb(255,0,255)
	#C0C0C0	rgb(192,192,192)
	#FFFFFF	rgb(255,255,255)



https://www.w3schools.com/colors/colors_rgb.asp

Font Tag Code

```
<html>
<head><title> fonts</title></head>
<body>
<br><font color="green" size="7" face="Arial"> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
<br><font color="green" size="6" face="Comic Sans MS "> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
<br><font color="green" size="5" face="Lucida Sans Unicode"> GOVT. P/G ISLAMIA COLLEGE, GRW. </font>
<br><font color="green" size="4" face="Courier New"> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
<br><font color="green" size="3" face="Times New Roman"> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
<br><font color="green" size="2" face="Arial Black"> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
<br><font color=rgb(0,255,0) size="1" face="Impact"> GOVT. P/G ISLAMIA COLLEGE, GRW.</font>
</body>
</html>
```





Body tag

The <body> tag is a container where you put text and images you want to appear on your web page.

SYNTAX: <body>... </body>

The <body> tag attributes are:

background="image.gif"

bgproperties="fixed" **bgcolor**="color name or Hex number" **text**="color name or Hex number"

Background & Text Color Tag

- The attribute bgcolor is used for changing the back ground color of the page.
`<body bgcolor="Green" >`
- Text is use to change the color of the enclosed text.
`<body text="White">`



Text Alignment Tag

- It is use to alignment of the text.
- Left alignment `<p align="left">`
- Right alignment `<p align="center">`
- Center alignment `<p align="right">`



The HTML Style Attribute

- `<body style="background-color: powderblue;">`
- `<body style="background-repeat: no-repeat; background-position: center center;">`
- `<BODY background="penguins.jpg" bgproperties="fixed" style="background-repeat: no-repeat; background-position: center center;" bgcolor="pink" text="blue">`
- `<h1 style="background-color: powderblue;">This is a heading</h1>`
- `<p style="background-color: tomato;">This is a paragraph.</p>`
- `<h1 style="color: blue;">This is a heading</h1>`

The HTML Style Attribute

- `<p style="color: red;">This is a paragraph.</p>`
- `<h1 style="font-family: verdana;">This is a heading</h1>`
- `<p style="font-family: courier;">This is a paragraph.</p>`
- `<h1 style="font-size: 300%;">This is a heading</h1>`
- `<p style="font-size: 160%;">This is a paragraph.</p>`
- `<h1 style="text-align: center;">Centered Heading</h1>`
- `<p style="text-align: center;">Centered paragraph.</p>`




Text Formatting Tags

<code></code>	Defines bold text
<code><big></code>	Defines big text
<code></code>	Defines emphasized text
<code><i></code>	Defines italic text
<code><small></code>	Defines small text
<code></code>	Defines strong text
<code><sub></code>	Defines subscripted text
<code><sup></code>	Defines superscripted text
<code><ins></code>	Defines inserted text
<code></code>	Defines deleted text
<code><tt></code>	Defines teletype text
<code><u></code>	Defines underline text
<code><strike></code>	Defines strike text

Text Formatting Code

```
<html>
<head></head>
<body>
<b>This text is Bold</b>
<br><em>This text is Emphasized</em>
<br><i>This text is Italic</i>
<br><small>This text is Small</small>
<br>This is<sub> Subscript</sub> and
<sup>Superscript</sup>
<br><strong>This text is Strong</strong>
<br><big>This text is Big</big>
<br><u>This text is Underline</u>
<br><strike>This text is Strike</strike>
<br><tt>This text is Teletype</tt>
</body>
</html>
```

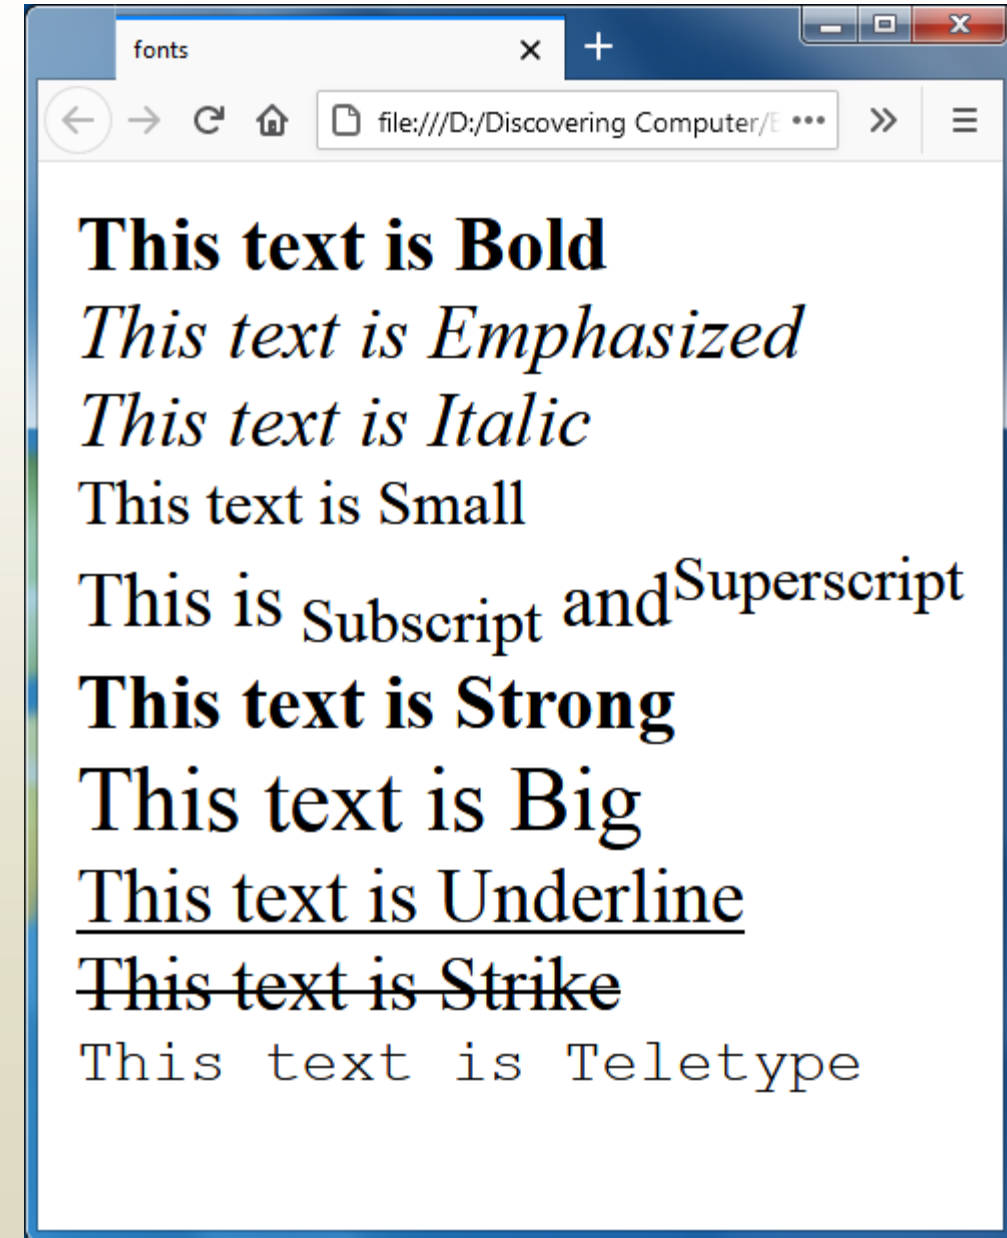

HTML Comment Tags

- You can add comments to your HTML source by using the following syntax:
- `<!-- Write your comments here -->`
- Browser will skip these lines and did not show in browser's window.



Hyperlink Tag

- A hyperlink is a reference (an address) to a resource on the web.
- Hyperlinks can point to any resource on the web:
 - an HTML page,
 - an image, a sound file,
 - a movie, etc.



Hyperlink Tag



- The HTML anchor element `<a>`, is used to define both hyperlinks and anchors.

`<a href="url">Link text</a>`

- The **href attribute** defines the link address.

`
Visit Google Website`

Result of Hyperlink Code

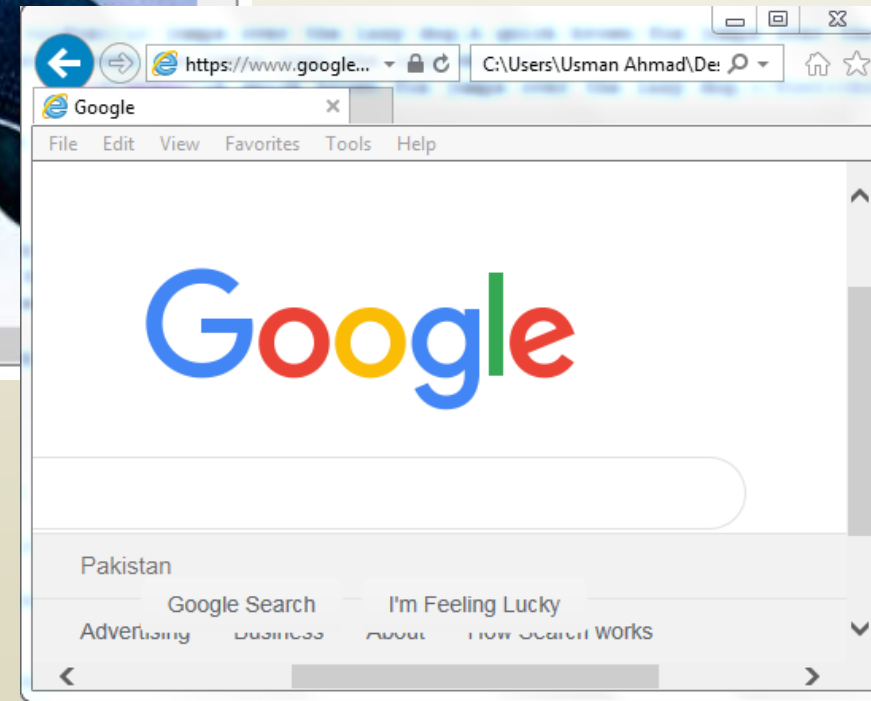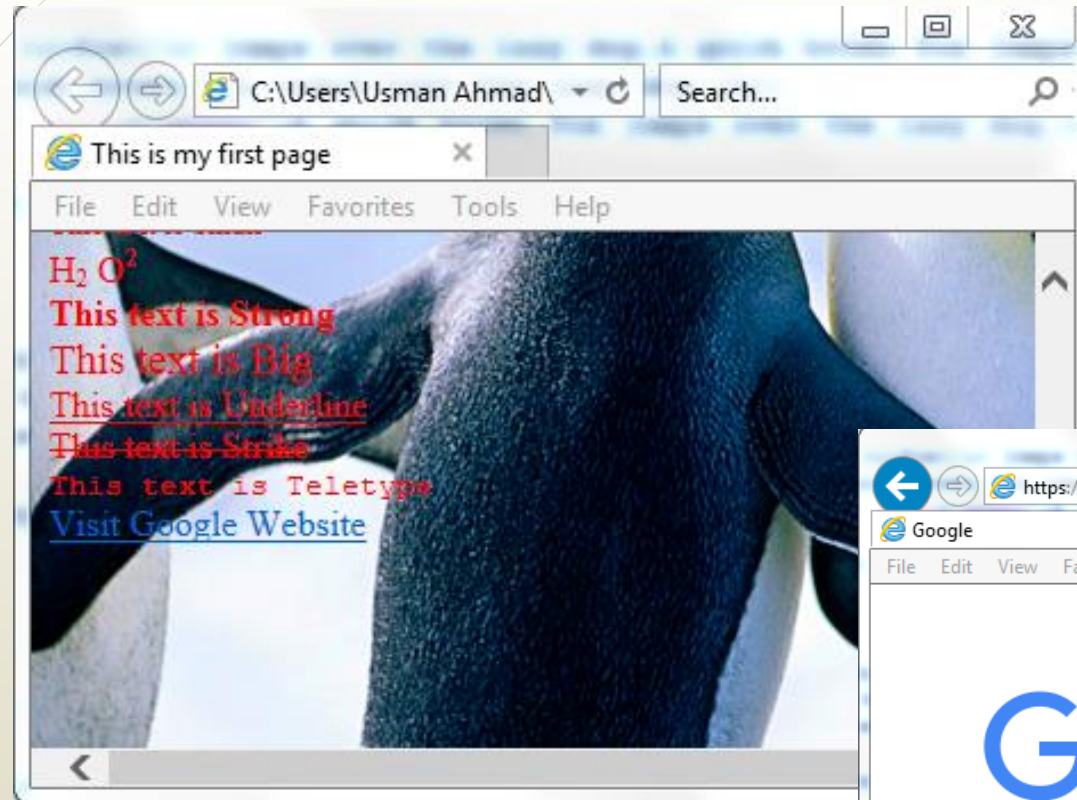



HTML Links - The target Attribute

- By default, the linked page will be displayed in the current browser window. To change this, you must specify another target for the link.
- The target attribute specifies where to open the linked document.
- The target attribute can have one of the following values:



HTML Links - The target Attribute

- `_self` - Default. Opens the document in the same window/tab as it was clicked
- `_blank` - Opens the document in a new window or tab
- `_parent` - Opens the document in the parent frame
- `_top` - Opens the document in the full body of the window



Example

- Use target="_blank" to open the linked document in a new browser window or tab:
- `<a href="https://www.google.com" target="_blank"> Visit Google Website</a>`

HTML Links - Use an Image as a Link

```
<a href="http://www.google.com">  
  
</a>
```



Link to an Email Address

- ➡ Use mailto: inside the href attribute to create a link that opens the user's email program (to let them send a new email):



Example



```
<a href="mailto:someone@example.com">Send email</a>
```



Hyperlink Summary

- Use the `<a>` element to define a link
- Use the `href` attribute to define the link address
- Use the `target` attribute to define where to open the linked document
- Use the `<img>` element (inside `<a>`) to use an image as a link
- Use the `mailto:` scheme inside the `href` attribute to create a link that opens the user's email program



Create a Bookmark in HTML

- Bookmarks can be useful if a web page is very long.
- To create a bookmark - first create the bookmark, then add a link to it.
- When the link is clicked, the page will scroll down or up to the location with the bookmark.



Example

- First, use the id attribute to create a bookmark:
- `<h2 id="C4">Chapter 4</h2>`
- `<a href="#C4">Jump to Chapter 4</a>`

Image Tag

- To display an image on a page, you need to use the src attribute.
- src stands for "source". The value of the src attribute is the URL of the image you want to display on your page.
- It is a empty tag.
`<IMG SRC ="url">`
`<IMG SRC="picture.gif">`
`<IMG SRC="picture.gif" HEIGHT="30" WIDTH="50">`

Image attributes - tag

	Defines an image
<Src>	display an image on a page, Src stands for “source”.
<Alt>	Define "alternate text" for an image
<Width>	Defines the width of the image
<Height>	Defines the height of the image
<Border>	Defines border of the image
<Hspace>	Horizontal space of the image
<Vspace>	Vertical space of the image
<Align>	Align an image within the text
<background>	Add a background image to an HTML page

Examples

- ``
- ``



Table Tag

<Table>

<Tr>

<Td>

<Th>

<Caption>

<Cellspacing>

<Cellpadding>

<Colspan>

<Rowspan>

<Border>

used to create table

table is divided into rows

each row is divided into data cells

Headings in a table

caption to the table

amount of space between table cells.

space around the edges of each cell

No of column working with will span

No of rows working with will span

attribute takes a number



Table Attributes

- This enumerated attribute indicates how the table must be aligned inside the containing document. It may have the following values:
 - Align:
 - left: the table is displayed on the left side of the document;
 - center: the table is displayed in the center of the document;
 - right: the table is displayed on the right side of the document.



Table Attributes

- The background color of the table.
- It is a 6-digit hexadecimal RGB code, prefixed by a '#'.
 - bgcolor="#cc66ff"
- One of the predefined color keywords can also be used.
 - bgcolor="red"



Border

- ➡ This integer attribute defines, in pixels, the size of the frame surrounding the table.
- ➡ If set to 0, the frame attribute is set to void.



Cellpadding

- This attribute defines the space between the content of a cell and its border, displayed or not.
- If the cellpadding's length is defined in pixels, this pixel-sized space will be applied to all four sides of the cell's content.
- If the length is defined using a percentage value, the content will be centered and the total vertical space (top and bottom) will represent this value.
- The same is true for the total horizontal space (left and right).



Cellspacing

- This attribute defines the size of the space between two cells in a percentage value or pixels.
- The attribute is applied both horizontally and vertically, to the space between the top of the table and the cells of the first row,
- the left of the table and the first column, the right of the table and the last column and the bottom of the table and the last row.

Table Example

```
<table border = "1">
  <tr>
    <th>Team</th>
    <th>Ranking</th>
  </tr>
  <tr>
    <td>Pakistan</td>
    <td>1</td>
  </tr>
  <tr>
    <td>South Africa</td>
    <td>2</td>
  </tr>
  <tr>
    <td>Australia</td>
    <td>3</td>
  </tr>
</table>
```

Team	Ranking
Pakistan	1
South Africa	2
Australia	3

```
<table border = "4" cellspacing="10" cellpadding="10" bgcolor="#cc66ff">
```

```
<tr>
```

```
<th>Team</th>
```

```
<th>Ranking</th>
```

```
</tr>
```

```
<tr>
```

```
<td>Pakistan</td>
```

```
<td>1</td>
```

```
</tr>
```

```
<tr>
```

```
<td>South Africa</td>
```

```
<td>2</td>
```

```
</tr>
```

```
<tr>
```

```
<td>Australia</td>
```

```
<td>3</td>
```

```
</tr>
```

```
</table>
```

Table Example

Team	Ranking
Pakistan	1
South Africa	2
Australia	3

```
<table border = "4" cellspacing="10" cellpadding="10" background="penguins.jpg">
```

```
<tr>
```

```
<th>Team</th>
```

```
<th>Ranking</th>
```

```
</tr>
```

```
<tr>
```

```
<td>Pakistan</td>
```

```
<td>1</td>
```

```
</tr>
```

```
<tr>
```

```
<td>South Africa</td>
```

```
<td>2</td>
```

```
</tr>
```

```
<tr>
```


```
<td>Australia</td>
```

```
<td>3</td>
```

```
</tr>
```

```
</table>
```

Table Example

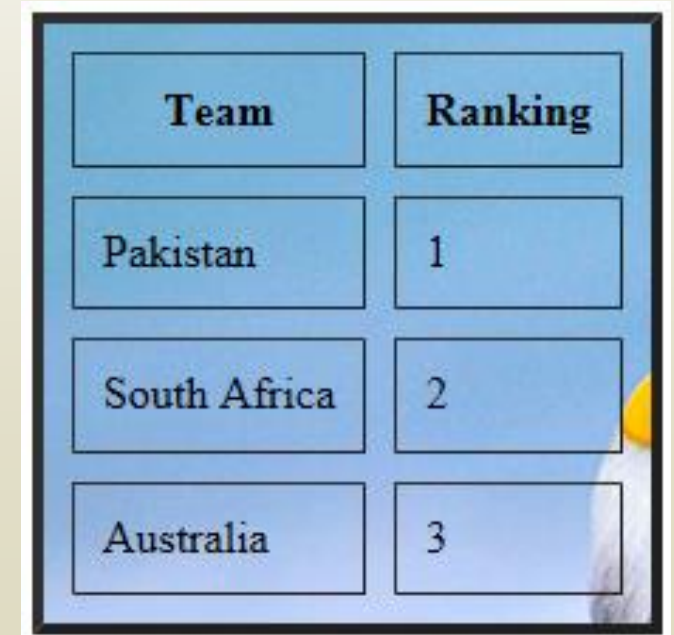

Team	Ranking
Pakistan	1
South Africa	2
Australia	3

Table Example : Colspan

```
<table>
  <thead>
    <tr>
      <th colspan="2">The table header</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>The table body</td>
      <td>with two columns</td>
    </tr>
  </tbody>
</table>
```

The table header	
The table body	with two columns

Table Example : Colspan

```
<table>
  <tr>
    <th>Month</th>
    <th>Savings</th>
  </tr>
  <tr>
    <td>January</td>
    <td>$100</td>
  </tr>
  <tr>
    <td>February</td>
    <td>$80</td>
  </tr>
  <tr>
    <td colspan="2">Sum: $180</td>
  </tr>
</table>
```

Month	Savings
January	\$100
February	\$80
Sum: \$180	

Table Example : Rowspan

```
<table>
<tr>
  <th>Month</th>
  <th>Savings</th>
  <th>Savings for holiday!</th>
</tr>
<tr>
  <td>January</td>
  <td>$100</td>
  <td rowspan="2">$50</td>
</tr>
<tr>
  <td>February</td>
  <td>$80</td>
</tr>
</table>
```

Month	Savings	Savings for holiday!
January	\$100	\$50
February	\$80	

HTML <marquee> tag

```
<marquee  
behavior=" "  
bgcolor=" "  
direction=" "  
height=" "  
hspace=" "  
loop=" "  
scrolldelay=" "  
scrollamount=" "  
width=" "  
vspace=" "> Text </marquee>
```

Marquee Attributes

Attribute	Value	Description
behavior	scroll slide alternate	Defines the type of scrolling.
bgcolor	rgb(x,x,x) #xxxxxx colorname	<i>Deprecated</i> – Defines the direction of scrolling the content.
direction	up down left right	Defines the direction of scrolling the content.
height	pixels or %	Defines the height of marquee.
hspace	pixels	Specifies horizontal space around the marquee.
loop	number	Specifies how many times to loop. The default value is INFINITE, which means that the marquee loops endlessly.
scrolldelay	seconds	Defines how long to delay between each jump.
scrollamount	number	Defines how how far to jump.
width	pixels or %	Defines the width of marquee.
vspace	pixels	Specifies vertical space around the marquee.

HTML <marquee> tag

```
<marquee behavior=" " bgcolor=" " direction=" "  
height=" " hspace=" " loop=" " scrolldelay=" "  
scrollamount=" " width=" " vspace=" "> Text  
</marquee>
```

```
<marquee bgcolor="yellow" direction="left"  
height="100" hspace="10" loop="10" scrolldelay="10"  
scrollamount="20" width="1200" vspace="10">This is  
basic example of marquee</marquee>
```



HTML List Tags



Tag	Description
<u></u>	Defines an unordered list
<u></u>	Defines an ordered list
<u></u>	Defines a list item
<u><dl></u>	Defines a description list
<u><dt></u>	Defines a term in a description list
<u><dd></u>	Describes the term in a description list



Unordered HTML List

- An unordered list starts with the `<ul>` tag. Each list item starts with the `<li>` tag.
- The list items will be marked with bullets (small black circles) by default:

Unordered HTML List

```
<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>
```

An unordered HTML list

- Coffee
- Tea
- Milk



Ordered HTML List

- An ordered list starts with the `<ol>` tag. Each list item starts with the `<li>` tag.
- The list items will be marked with numbers by default:



Ordered HTML List

```
<ol>  
  <li>Coffee</li>  
  <li>Tea</li>  
  <li>Milk</li>  
</ol>
```

An ordered HTML list

1. Coffee
2. Tea
3. Milk



HTML Description Lists

- HTML also supports description lists.
- A description list is a list of terms, with a description of each term.
- The `<dl>` tag defines the description list, the `<dt>` tag defines the term (name), and the `<dd>` tag describes each term:

HTML Description Lists

```
<dl>
```

```
  <dt>Coffee</dt>
```

```
  <dd>- black hot drink</dd>
```

```
  <dt>Milk</dt>
```

```
  <dd>- white cold drink</dd>
```

```
</dl>
```

A Description List

Coffee

- black hot drink

Milk

- white cold drink



Body Margin

- margin-top
- margin-right
- margin-bottom
- margin-left



Body Margin

```
<BODY style="
margin-top: 10%;
margin-bottom:10%;
margin-left:10%;
margin-right:10%;">
```



HTML Forms

- HTML Forms are required when you want to collect some data from the site visitor.
- For example during user registration you would like to collect information such as name, email address, credit card, etc.
- A form will take input from the site visitor and then will post it to a back-end application such as CGI, ASP Script or PHP script etc.
- The back-end application will perform required processing on the passed data based on defined business logic inside the application.



HTML Forms

There are various form elements available like:

- Text fields
- Textarea fields
- Drop-down menus
- Radio buttons
- Checkboxes etc.



Syntax

- The HTML <form> tag is used to create an HTML form and it has following syntax:
`<form action="Script URL"
method="GET|POST">
form elements like input, textarea etc.
</form>`



Form Controls

There are different types of form controls that you can use to collect data using HTML form:

- Text Input Controls
- Checkboxes Controls
- Radio Box Controls
- Select Box Controls
- File Select boxes
- Hidden Controls Click-able Buttons
- Submit and Reset Button



Text Input Controls


There are three types of text input used on forms:

- **Single-line text input controls** - This control is used for items that require only one line of user input, such as search boxes or names. They are created using HTML `<input>` tag.
- **Password input controls** - This is also a single-line text input but it masks the character as soon as a user enters it. They are also created using HTML `<input>` tag.
- **Multi-line text input controls** - This is used when the user is required to give details that may be longer than a single sentence. Multi-line input controls are created using HTML `<textarea>` tag

Single-line text input controls

- This control is used for items that require only one line of user input, such as search boxes or names. They are created using HTML `<input>` tag.

```
<html>
<head>
<title>Text Input Control</title>
</head>
<body>
<form >
First name: <input type="text" name="first_name" />
<br>
Last name: <input type="text" name="last_name" />
</form>
</body>
</html>
```

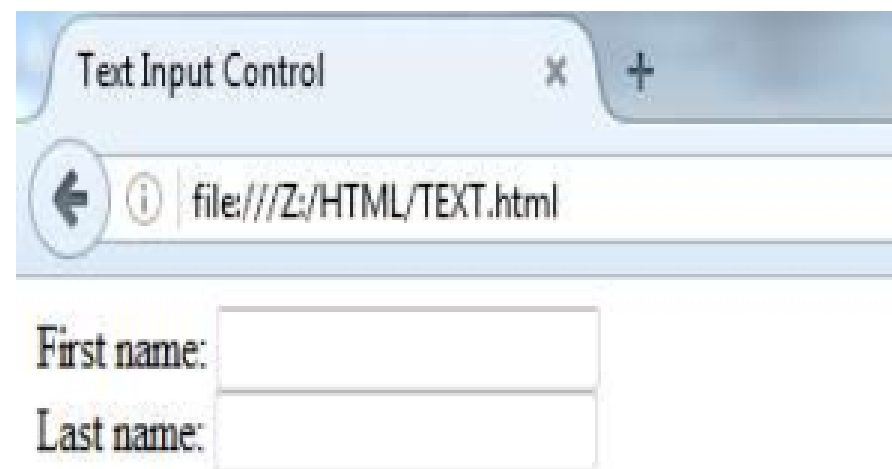A screenshot of a web browser window. The title bar shows 'Text Input Control' with a close button (x) and a plus sign (+). The address bar shows a file path: 'file:///Z:/HTML/TEXT.html'. Below the address bar, there are two single-line text input fields. The first field is preceded by the label 'First name:' and the second field is preceded by the label 'Last name:'. Both fields are empty.

Attributes for text

Attribute	Description
type	Indicates the type of input control and for text input control it will be set to text .
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
value	This can be used to provide an initial value inside the control.
size	Allows to specify the width of the text-input control in terms of characters.
maxlength	Allows to specify the maximum number of characters a user can enter into the text box.

Password input controls

- This is also a single-line text input but it masks the character as soon as a user enters it.
- They are also created using HTML `<input>` tag but type attribute is set to password.

```
<html>
<head>
<title>Password Input Control</title>
</head>
<body>
<form >
User ID : <input type="text" name="user_id" />
<br>
Password: <input type="password" name="passwor
</form>
</body>
</html>
```



A screenshot of a web browser window titled "Password Input Control". The address bar shows the file path "file:///Z:/HTML/pass.html". Below the address bar, there is a form with two input fields. The first field is labeled "User ID:" and contains the text "user123". The second field is labeled "Password:" and is filled with ten black dots, indicating that the password is masked.




Multiple-Line Text Input Controls

- This is used when the user is required to give details that may be longer than a single sentence.
- Multi-line input controls are created using HTML `<textarea>` tag

Example

```
<html>
<head>
<title>Multiple-Line Input Control</title>
</head><body>
<form>
Description : <br />
<textarea rows="5" cols="50" name="description">
Enter description here...
</textarea>
</form>
</body>
</html>
```

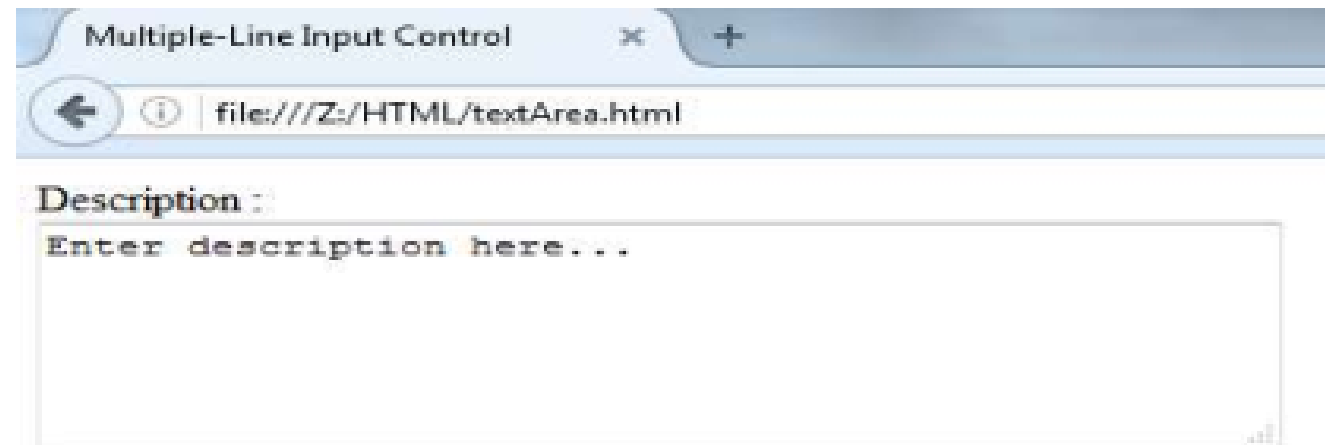

Attributes of textarea

- Following is the list of attributes for `<textarea>` tag.

Attribute	Description
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
rows	Indicates the number of rows of text area box.
cols	Indicates the number of columns of text area box

Checkbox Control

- Checkboxes are used when more than one option is required to be selected.
- They are also created using HTML `<input>` tag but type attribute is set to checkbox.
- Attributes of `<checkbox>` tag:

type	Indicates the type of input control and for checkbox input control it will be set to checkbox .
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
value	The value that will be used if the checkbox is selected.
checked	Set to <i>checked</i> if you want to select it by default.

Example

```
<html>
<head>
<title>Checkbox Control</title>
</head>
<body>
<form>
<input type="checkbox" name="maths" value="on"> Maths
<input type="checkbox" name="physics" value="on"> Physics
</form>
</body>
</html>
```





Radio Button Control

- Radio buttons are used when out of many options, just one option is required to be selected.
 - They are also created using HTML `<input>` tag but type attribute is set to radio.
- 

Example

```
<html>
<head>
<title>Radio Box Control</title>
</head>
<body>
<form>
<input type="radio" name="subject" value="maths"> Maths
<input type="radio" name="subject" value="physics"> Physics
</form>
</body>
</html>
```



Attributes

- Following is the list of attributes for radio

Attribute	Description
type	Indicates the type of input control and for checkbox input control it will be set to radio .
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
value	The value that will be used if the radio box is selected.
checked	Set to <i>checked</i> if you want to select it by default.

Select Box Control

- A select box, also called drop down box which provides option to list down various options in the form of drop down list, from where a user can select one or more options.

```
<html>
<head>
<title>Select Box Control</title>
</head>
<body>
<form>
<select name="dropdown">
<option value="Maths" selected>Maths</option>
<option value="Physics">Physics</option>
</select>
</form>
</body>
</html>
```



Attributes of select




Attribute	Description
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
size	This can be used to present a scrolling list box.
multiple	If set to "multiple" then allows a user to select multiple items from the menu.

Following is the list of important attributes of <option> tag:

Attribute	Description
value	The value that will be used if an option in the select box box is selected.
selected	Specifies that this option should be the initially selected value when the page loads.
label	An alternative way of labeling options



File Upload Box

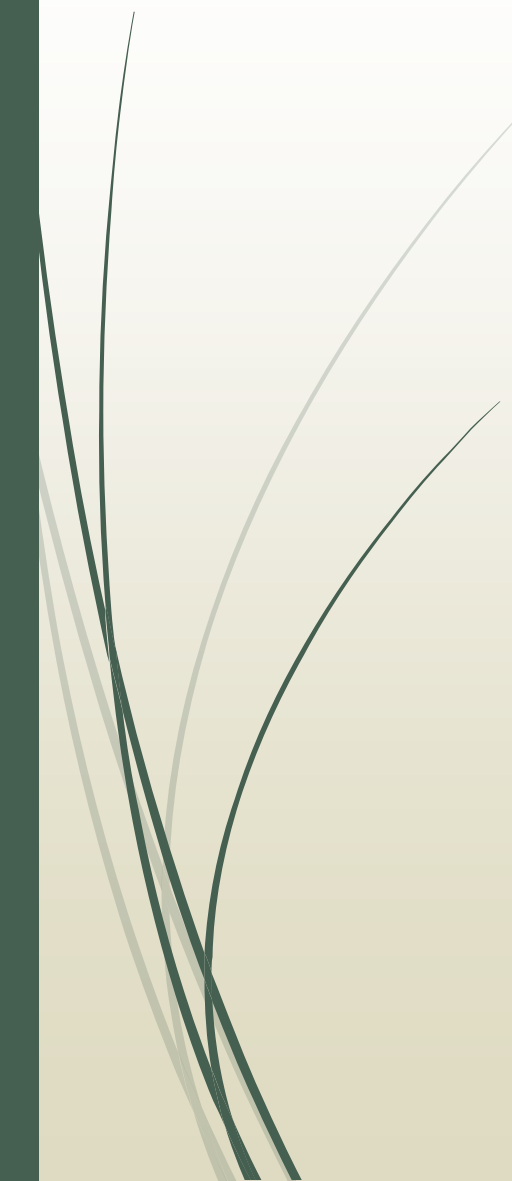- If you want to allow a user to upload a file to your web site, you will need to use a file upload box, also known as a file select box.
 - This is also created using the `<input>` element but type attribute is set to file.
- 

Example

```
<html>
```

```
<head>
```

```
<title>File Upload Box</title>
```

```
</head>
```

```
<body><form>
```


Select file:

```
<input type="file" name="fileupload" accept="image/*" />
```

```
</form>
```

```
</body>
```

```
</html>
```

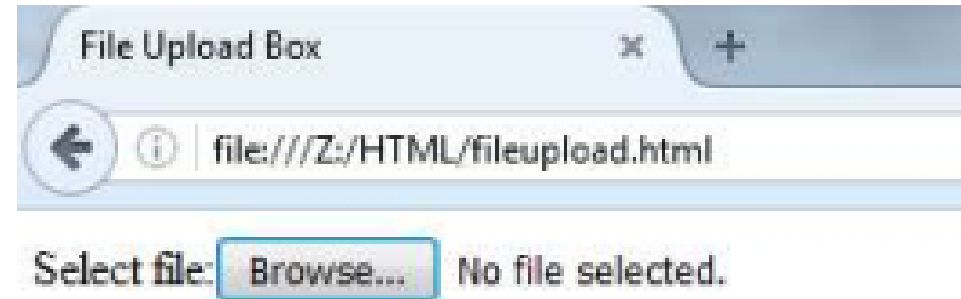

Attributes of file upload

Attribute	Description
name	Used to give a name to the control which is sent to the server to be recognized and get the value.
accept	Specifies the types of files that the server accepts.



Button Controls

- There are various ways in HTML to create clickable buttons.
- You can also create a clickable button using `<input>` tag by setting its type attribute to button.
- The type attribute can take the following
- values:

Values

Type	Description
submit	This creates a button that automatically submits a form.
reset	This creates a button that automatically resets form controls to their initial values.
button	This creates a button that is used to trigger a client-side script when the user clicks that button.
image	This creates a clickable button but we can use an image as background of the button.

Example

```
<html>
<head>
<title>Buttons</title>
</head>
<body>
<form>
<input type="submit" name="submit" value="Submit" />
<input type="reset" name="reset" value="Reset" />
<input type="button" name="ok" value="OK" />
<input type="image" name="imagebutton" src="images/logo.jpg" />
</form>
</body>
</html>
```





Hidden Form Controls

- Hidden form controls are used to hide data inside the page which later on can be pushed to the server.
- This control hides inside the code and does not appear on the actual page.

Example

```
<html>
<head>
<title>File Upload Box</title>
</head>
<body>
<form>
<p>This is page 10</p>
<input type="hidden" name="pagename" value="10" />
<input type="submit" name="submit" value="Submit" />
<input type="reset" name="reset" value="Reset" />
</form>
</body>
</html>
```



This is page 10



<frameset>

- Function: define a collection of frames
- Main Attributes: Cols, rows
- Other Attributes: border, bordercolor, class, id, style, title, frameborder, framespacing,
- Javascript Attributes: onblur, onfocus, onload, onunload



Rows, cols

- By pixel: rows="100,200,100"
 - With variable: rows="20,*,20"
- By percentage:
rows="25%,50%,25%"
 - With variable: rows="20%,10%,*"



<frame>

- Function: define a single frame in a <frameset>
- Main Attributes: src, id
 - src: the url for the page to display
 - id: a name for the frame for later reference
 - scrolling = yes or no

