

Customer places an order - Assignment 2

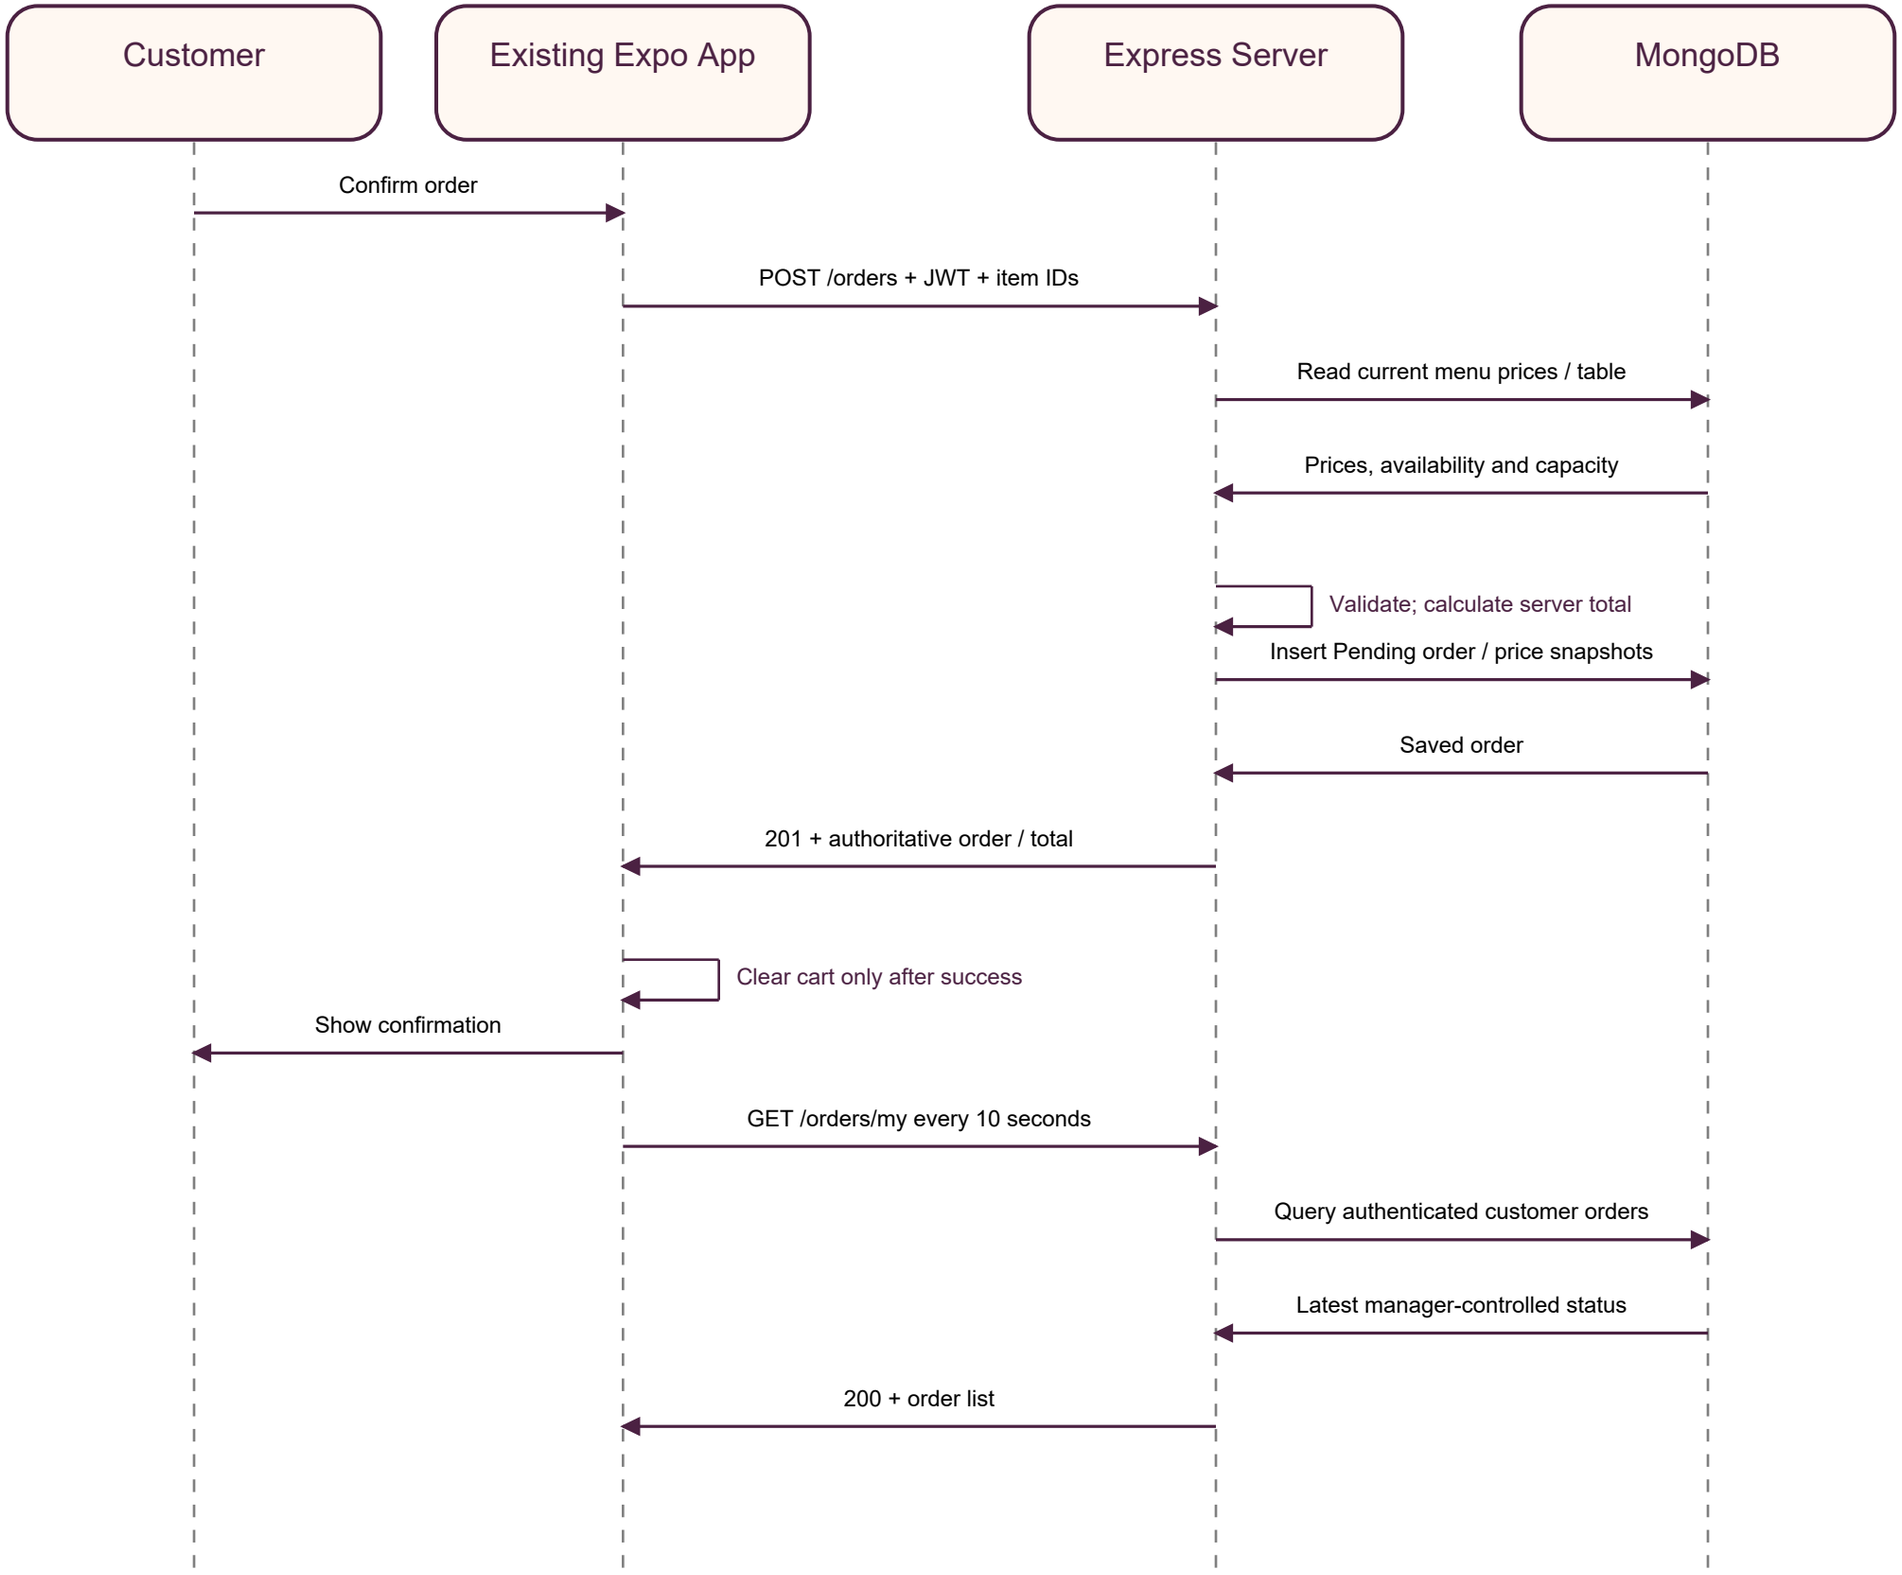

Failed POST retains cart. Statuses never advance from local demo timers.

Deployment - Phone, Laptop and MongoDB Atlas

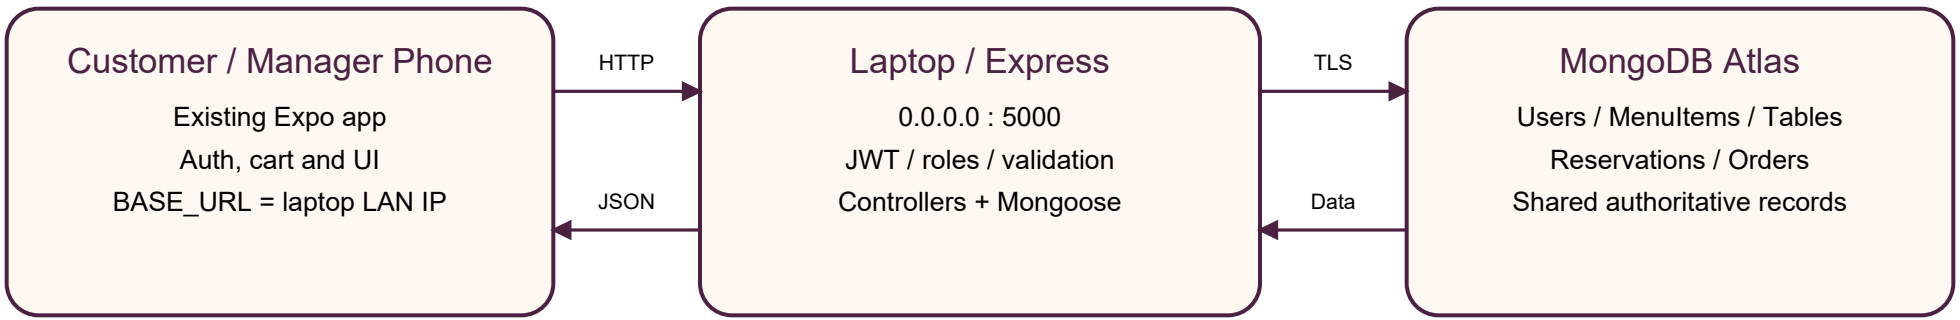

Phone -> Laptop: JSON REST requests + Bearer token; same Wi-Fi / permitted firewall port.

Laptop -> Atlas: private MONGO_URI stays in ignored server/.env; never bundled in the app.

Orders poll every exactly 10 seconds. Atlas / physical-device verification remains manual.