SHINTA BELLA NURROHMAH
242410101040
PWEB A

AKTIVITAS MANDIRI 1 - Instalasi & Setup Proyek Laravel

1. Instal XAMPP terbaru, pastikan PHP 8.2+ tersedia (cek: php --version di terminal)

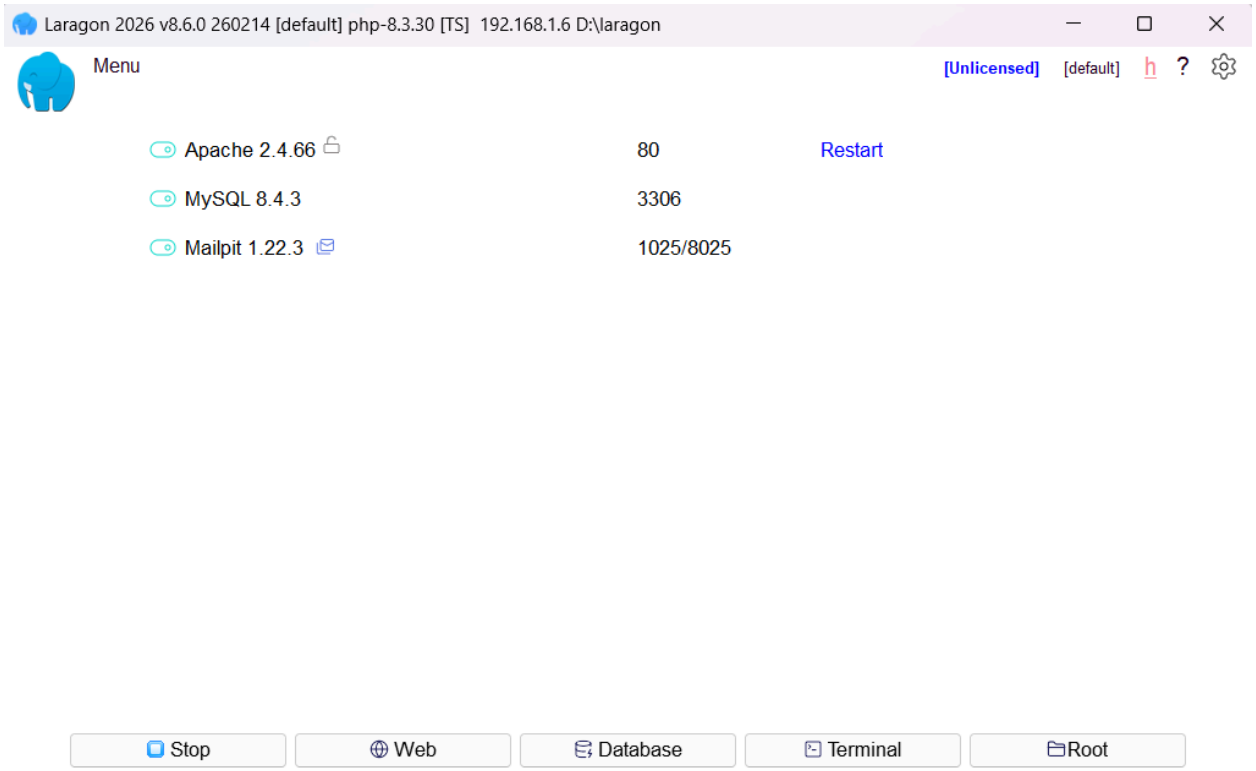

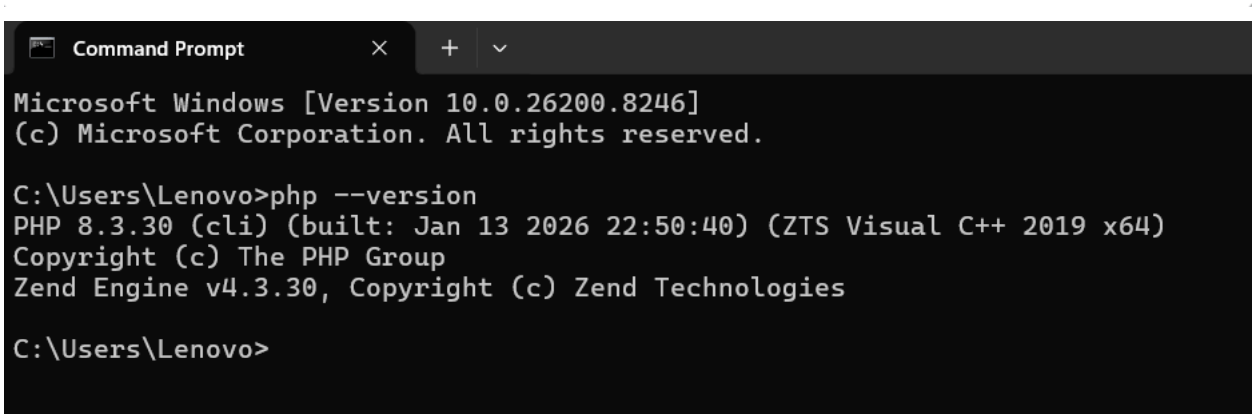

2. Instal Composer dari getcomposer.org, verifikasi dengan: composer --version

```
C:\Users\Lenovo> composer --version
Composer version 2.9.4 2026-01-22 14:08:50
PHP version 8.3.30 (D:\laragon\bin\php\php-8.3.30-Win32-vs16-x64\php.exe)
Run the "diagnose" command to get more detailed diagnostics output.

C:\Users\Lenovo>
```

3. Buat proyek Laravel baru: composer create-project laravel/laravel siak-app

```
PS D:\Pwebsem4.html\bellabouquetwebsite> composer create-project laravel/laravel bella-bouquet
Creating a "laravel/laravel" project at "./bella-bouquet"
Installing laravel/laravel (v13.3.0)
  - Installing laravel/laravel (v13.3.0): Extracting archive
Created project in D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 107 installs, 0 updates, 0 removals
  - Locking brick/math (0.14.8)
  - Locking carbonphp/carbon-doctrine-types (3.2.0)
  - Locking dflydev/dot-access-data (v3.0.3)
  - Locking doctrine/inflector (2.1.0)
  - Locking doctrine/lexer (3.0.1)
  - Locking dragonmantank/cron-expression (v3.6.0)
  - Locking egulias/email-validator (4.0.4)
  - Locking fakerphp/faker (v1.24.1)
  - Locking filp/whoops (2.18.4)
  - Locking fruitcake/php-cors (v1.4.0)
  - Locking graham-campbell/result-type (v1.1.4)
  - Locking guzzlehttp/guzzle (7.10.0)
  - Locking guzzlehttp/promises (2.3.0)
  - Locking guzzlehttp/psr7 (2.9.0)
```

```
  laravel/tinker ..................................................... DONE
  nesbot/carbon ...................................................... DONE
  nunomaduro/collision ............................................... DONE
  nunomaduro/termwind ................................................ DONE

78 packages you are using are looking for funding.
Use the `composer fund` command to find out more!
> @php artisan vendor:publish --tag=laravel-assets --ansi --force

   INFO  No publishable resources for tag [laravel-assets].

No security vulnerability advisories found.
> @php artisan key:generate --ansi

   INFO  Application key set successfully.

> @php -r "file_exists('database/database.sqlite') || touch('database/database.sqlite');"
> @php artisan migrate --graceful --ansi

   INFO  Preparing database.

   Creating migration table ........................................ 15.98ms DONE

   INFO  Running migrations.

   0001_01_01_000000_create_users_table ........................... 33.23ms DONE
   0001_01_01_000001_create_cache_table ........................... 20.16ms DONE
   0001_01_01_000002_create_jobs_table ............................ 34.93ms DONE

PS D:\Pwebsem4.html\bellabouquetwebsite>
```

4. Buat database baru 'siak_db' di phpMyAdmin

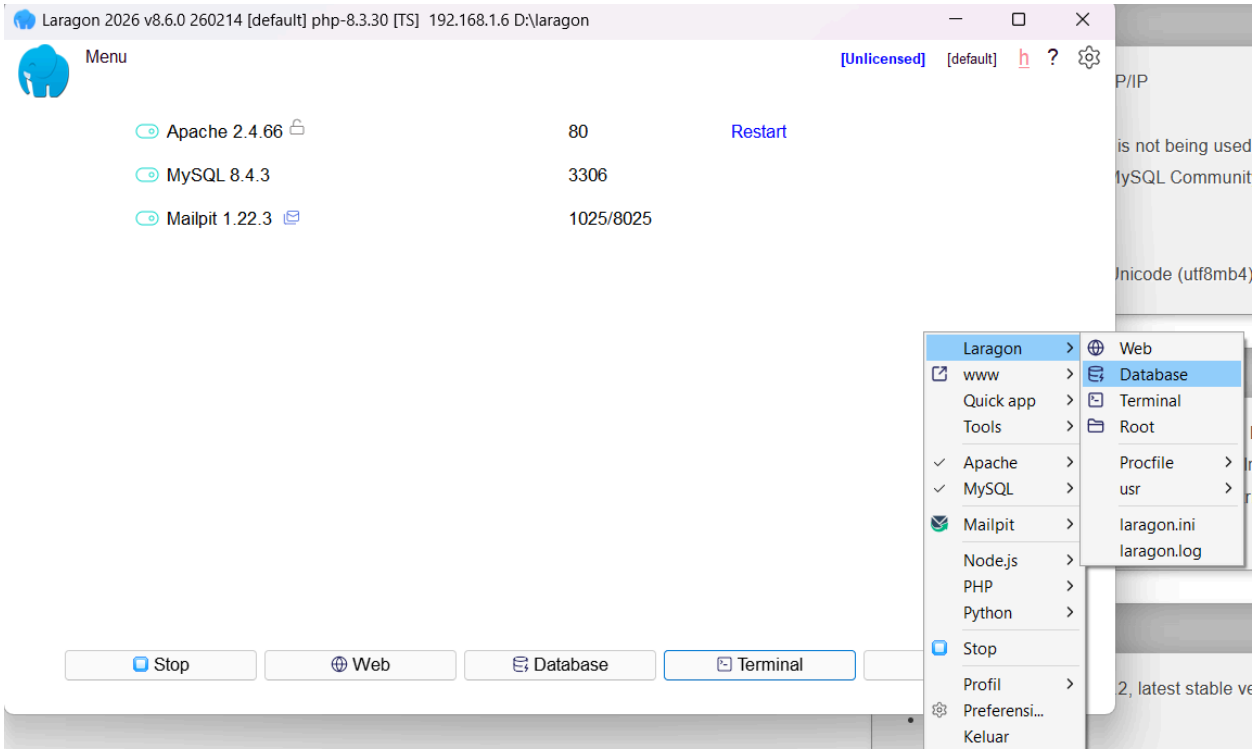

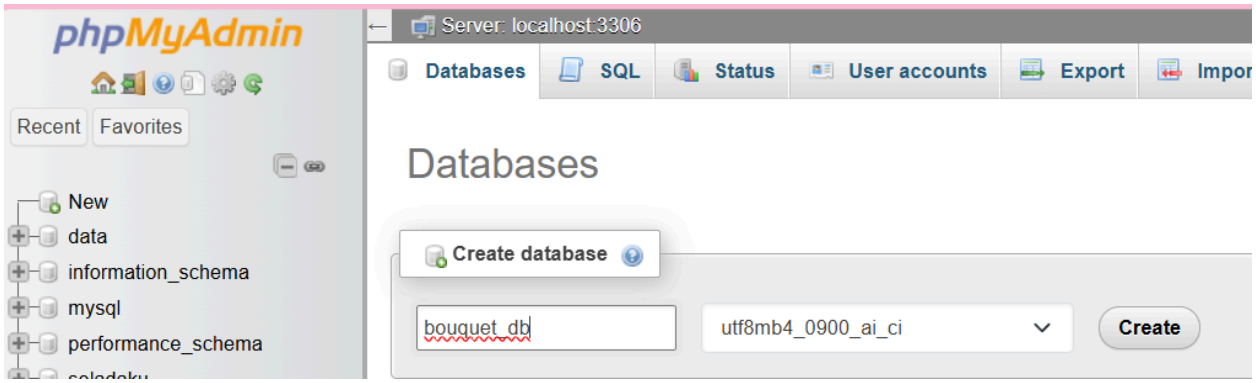

5. Konfigurasi file .env: isi DB_DATABASE, DB_USERNAME, DB_PASSWORD sesuai lokal

```
22
23  DB_CONNECTION=mysql
24  DB_HOST=127.0.0.1
25  DB_PORT=3306
26  DB_DATABASE=bouquet_db
27  DB_USERNAME=root
28  DB_PASSWORD=
```

6. Jalankan: php artisan key:generate

```
PROBLEMS    OUTPUT    DEBUG CONSOLE    TERMINAL    PORTS    GITLENS

PS D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet> php artisan key:generate

  INFO  Application key set successfully.

PS D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet>
```

7. Jalankan server: php artisan serve - buka http://127.0.0.1:8000 di browser

```
PS D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet> php artisan serve

  INFO  Server running on [http://127.0.0.1:8000].

  Press Ctrl+C to stop the server
```

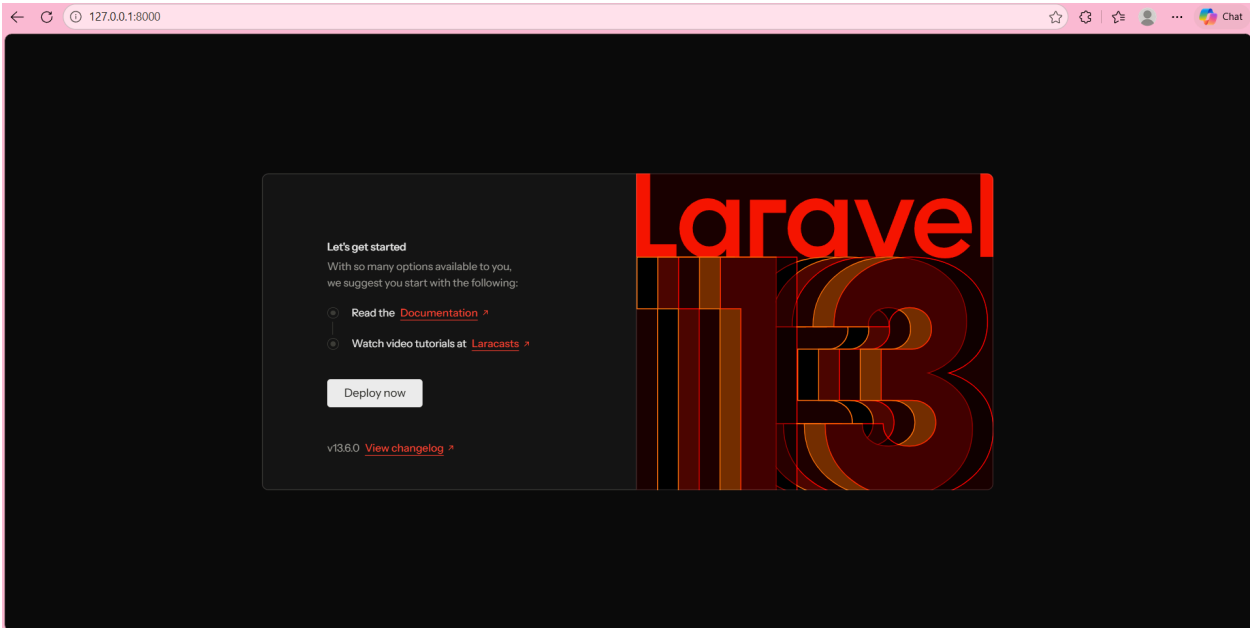

8. Eksplorasi struktur folder, buka setiap folder dan pahami fungsinya

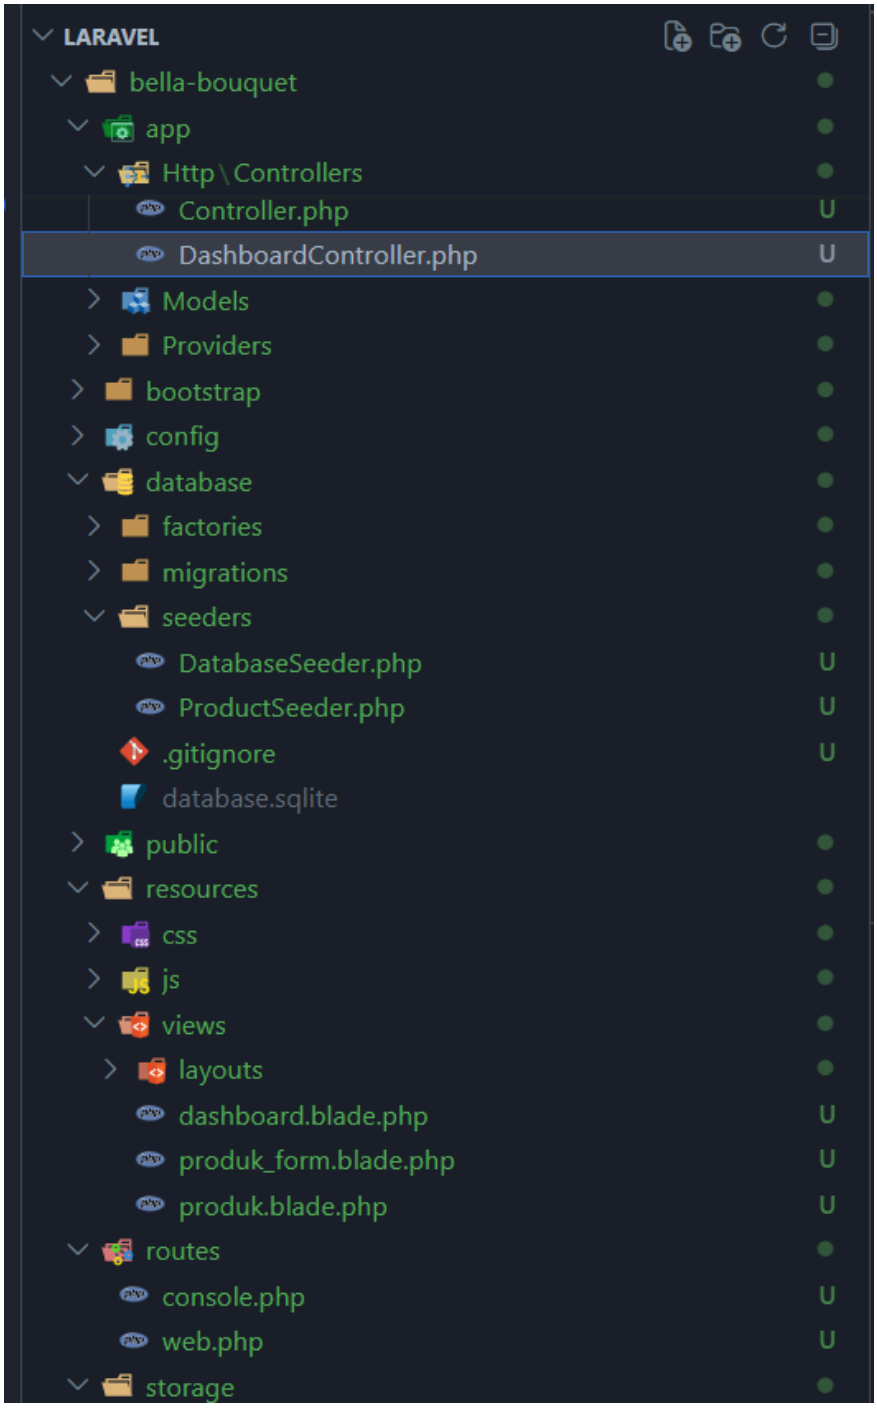

9. Jalankan php artisan route:list dan catat route apa saja yang sudah terdaftar
Tips: Gunakan Laragon (laragon.net) sebagai alternatif XAMPP - lebih ringan dan mendukung Laravel secara native dengan virtual host otomatis.

```
PS D:\Pwebsem4.html\bellabouquetwebsite\Laravel\bella-bouquet>  php artisan route:list

  GET|HEAD  / ..................................................................... routes/web.php:6
  GET|HEAD  dashboard ........................................... dashboard › DashboardController@index
  GET|HEAD  produk ............................................... produk › DashboardController@produk
  GET|HEAD  produk/edit/{id} ................................... produk.edit › DashboardController@edit
  DELETE    produk/hapus/{id} ............................... produk.destroy › DashboardController@destroy
  POST      produk/simpan ................................... produk.store › DashboardController@store
  GET|HEAD  produk/tambah ................................... produk.create › DashboardController@create
  PUT       produk/update/{id} ............................... produk.update › DashboardController@update
  GET|HEAD  storage/{path} storage.local › vendor/laravel/framework/src/Illuminate/Filesystem/FilesystemServiceProv…
  PUT       storage/{path} storage.local.upload › vendor/laravel/framework/src/Illuminate/Filesystem/FilesystemServ…
  GET|HEAD  up ......... vendor/laravel/framework/src/Illuminate/Foundation/Configuration/ApplicationBuilder.php:223

                                                                                    Showing [11] routes

PS D:\Pwebsem4.html\bellabouquetwebsite\Laravel\bella-bouquet>
```

AKTIVITAS MANDIRI 2 - Membuat Routing & Controller Dashboard

1. Buat Controller DashboardController: php artisan make:controller DashboardController

```
PS D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet> php artisan make:controller DashboardController

  INFO  Controller [D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet\app\Http\Controllers\DashboardController.php] created successfull
y.

PS D:\Pwebsem4.html\bellabouquetwebsite\bella-bouquet>
```

DashboardController.php U

bella-bouquet > app > Http > Controllers > DashboardController.php

```php
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Models\Product;

class DashboardController extends Controller
{
    public function index()
    {
        $products = Product::all();
        $totalProduk = $products->count();
        $totalInventaris = $products->sum(function($product) { return $product->harga * $product->stok; });
        $stokMenipis = $products->where('stok', '<', 5)->count();
        $terjual = 124;

        $stats = [
            ['label' => 'Total Produk', 'value' => $totalProduk, 'icon' => 'package'],
            ['label' => 'Total Nilai Inventaris', 'value' => 'Rp ' . number_format($totalInventaris, 0, ',', '
            ['label' => 'Stok Menipis (< 5)', 'value' => $stokMenipis, 'icon' => 'alert-circle', 'alert' => tr
            ['label' => 'Terjual (Bulan Ini)', 'value' => $terjual, 'icon' => 'trending-up'],
        ];

        $recentProducts = Product::latest()->take(3)->get();
        return view('dashboard', compact('stats', 'recentProducts'));
    }

public function produk(Request $request)
    {
```

2. Tambahkan method index() yang mengembalikan view('dashboard') di DashboardController

DashboardController.php U

bella-bouquet > app > Http > Controllers > DashboardController.php

```php
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Models\Product;

class DashboardController extends Controller
{
    public function index()
    {
        $products = Product::all();
        $totalProduk = $products->count();
        $totalInventaris = $products->sum(function($product) { return $product->harga * $product->stok; });
        $stokMenipis = $products->where('stok', '<', 5)->count();
        $terjual = 124;

        $stats = [
            ['label' => 'Total Produk', 'value' => $totalProduk, 'icon' => 'package'],
            ['label' => 'Total Nilai Inventaris', 'value' => 'Rp ' . number_format($totalInventaris, 0, ',', '
            ['label' => 'Stok Menipis (< 5)', 'value' => $stokMenipis, 'icon' => 'alert-circle', 'alert' => tr
            ['label' => 'Terjual (Bulan Ini)', 'value' => $terjual, 'icon' => 'trending-up'],
        ];

        $recentProducts = Product::latest()->take(3)->get();
        return view('dashboard', compact('stats', 'recentProducts'));
    }

public function produk(Request $request)
    {
```

3. Daftarkan route di routes/web.php: Route::get('/dashboard', [DashboardController::class, 'index'])->name('dashboard')

DashboardController.php U | web.php U

bella-bouquet > routes > web.php

```php
<?php

use Illuminate\Support\Facades\Route;
use App\Http\Controllers\DashboardController;

Route::get('/', function () {
    return redirect()->route('dashboard');
});

Route::get('/dashboard', [DashboardController::class, 'index'])->name('dashboard');

// CRUD Produk
Route::get('/produk', [DashboardController::class, 'produk'])->name('produk');
Route::get('/produk/tambah', [DashboardController::class, 'create'])->name('produk.create');
Route::post('/produk/simpan', [DashboardController::class, 'store'])->name('produk.store');
Route::get('/produk/edit/{id}', [DashboardController::class, 'edit'])->name('produk.edit');
Route::put('/produk/update/{id}', [DashboardController::class, 'update'])->name('produk.update');
Route::delete('/produk/hapus/{id}', [DashboardController::class, 'destroy'])->name('produk.destroy');
```

4. Buat file view sementara resources/views/dashboard.blade.php berisi '<h1>Dashboard SIAK</h1>'

DashboardController.php U | dashboard.blade.php U

bella-bouquet > resources > views > dashboard.blade.php

```php
@extends('layouts.app')

@section('content')
<div class="page-header">
    <div>
        <h1 class="page-title">Overview</h1>
        <p class="page-subtitle">Pantau performa bisnis buket Anda hari ini.</p>
    </div>
    <div class="date-badge">
        {{ now()->translatedFormat('l, d F Y') }}
    </div>
</div>

<div class="stats-grid">
    @foreach($stats as $stat)
    <div class="stat-card">
        <div class="stat-header">
            <div class="stat-icon {{ isset($stat['alert']) ? 'alert' : '' }}">
                <i data-lucide="{{ $stat['icon'] }}"></i>
            </div>
            <p class="stat-label">{{ $stat['label'] }}</p>
        </div>
        <h3 class="stat-value">{{ $stat['value'] }}</h3>
    </div>
    @endforeach
</div>

<div class="section-box">
    <div class="section-header">
        <h2 class="section-title">
            <div class="section-indicator"></div>
            Produk Terbaru
        </h2>
```

DashboardController.php U | produk_form.blade.php U

bella-bouquet > resources > views > produk_form.blade.php

```php
@extends('layouts.app')

@section('content')
<style>
    .form-container {
        background: var(--white); padding: 40px; border-radius: 32px;
        border: 1px solid var(--slate-100); box-shadow: var(--shadow-sm);
        max-width: 800px; margin: 0 auto;
    }
    .grid-2 { display: grid; grid-template-columns: 1fr; gap: 24px; }
    @media (min-width: 640px) { .grid-2 { grid-template-columns: repeat(2, 1fr); } }
    .input-control {
        width: 100%; padding: 14px 16px; background: var(--slate-50);
        border: 1px solid var(--slate-200); border-radius: 16px;
        font-size: 0.875rem; font-weight: 500; outline: none; transition: all 0.3s ease;
    }
    .input-control:focus {
        background: var(--white); border-color: #fca5a5; box-shadow: 0 0 0 4px var(--primary-light);
    }
    .btn-secondary {
        background-color: var(--slate-100); color: var(--slate-700); padding: 14px 24px;
        border-radius: 16px; font-weight: 700; font-size: 0.875rem; transition: all 0.3s ease;
    }
    .btn-secondary:hover { background-color: var(--slate-200); }
    .form-actions { display: flex; justify-content: flex-end; gap: 16px; margin-top: 32px; padding-top: 32px;
</style>

<div class="page-header" style="max-width: 800px; margin: 0 auto 32px auto;">
    <div>
        <h1 class="page-title">{{ isset($product) ? 'Edit Produk' : 'Tambah Produk Baru' }}</h1>
        <p class="page-subtitle">Isi data produk buket Anda dengan lengkap.</p>
    </div>
</div>

<div class="form-container">
    <form action="{{ isset($product) ? route('produk.update', $product->id) : route('produk.store') }}" method="
        @csrf
```

```php
@extends('layouts.app')

@section('content')
<div class="page-header">
    <div>
        <h1 class="page-title">Katalog Produk</h1>
        <p class="page-subtitle">Kelola inventaris dan variasi buket Anda.</p>
    </div>
    <a href="{{ route('produk.create') }}" class="btn-primary">
    <i data-lucide="plus" style="width: 20px; height: 20px;"></i> Tambah Produk Baru
</a>
</div>

<div class="layout-wrapper">
    <!-- @if(session('success'))
    <div style="background: var(--success); color: white; padding: 16px 24px; border-radius: 16px; margin-bott
        <i data-lucide="check-circle" style="width: 20px; height: 20px;"></i>
        {{ session('success') }}
    </div>
    @endif -->

    <aside class="sidebar">
        <div class="filter-box">
            <div class="filter-header">
                <h3 class="filter-title">Filter Data</h3>
                <a href="{{ route('produk') }}" class="btn-reset" style="text-decoration: none;">Reset</a>
            </div>

            <form action="{{ route('produk') }}" method="GET">
                <div class="form-group">
                    <label class="form-label">Pencarian</label>
                    <div class="input-wrapper">
                        <i data-lucide="search"></i>
                        <input type="text" name="cari" value="{{ request('cari') }}" placeholder="Ketik nama / kode..." cl
                    </div>
                </div>
```

5. Akses http://127.0.0.1:8000/dashboard di browser pastikan tampil

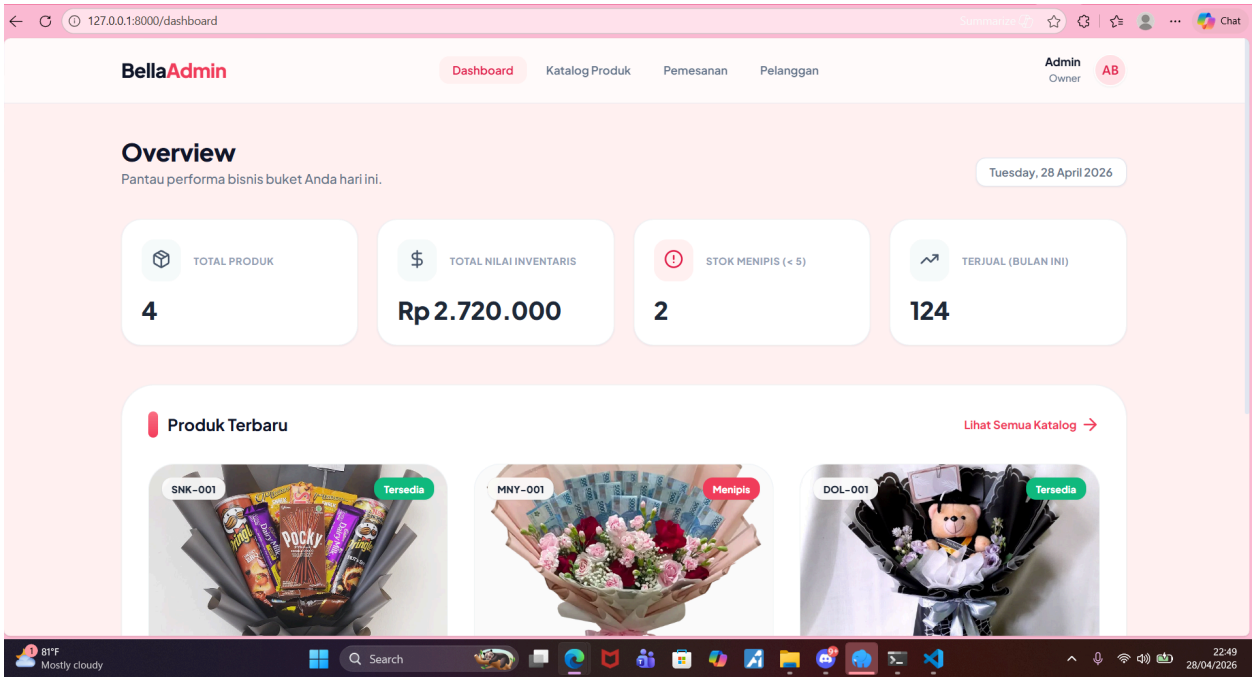

6. Buat route /tentang dengan Route::view('/tentang', 'tentang') dan buat view-nya

DashboardController.php U | web.php U | tentang.blade.php U | produk.blade.php U

bella-bouquet > routes > web.php

```php
<?php

use Illuminate\Support\Facades\Route;
use App\Http\Controllers\DashboardController;

Route::get('/', function () {
    return redirect()->route('dashboard');
});

Route::get('/dashboard', [DashboardController::class, 'index'])->name('dashboard');

// CRUD Produk
Route::get('/produk', [DashboardController::class, 'produk'])->name('produk');
Route::get('/produk/tambah', [DashboardController::class, 'create'])->name('produk.create');
Route::post('/produk/simpan', [DashboardController::class, 'store'])->name('produk.store');
Route::get('/produk/edit/{id}', [DashboardController::class, 'edit'])->name('produk.edit');
Route::put('/produk/update/{id}', [DashboardController::class, 'update'])->name('produk.update');
Route::delete('/produk/hapus/{id}', [DashboardController::class, 'destroy'])->name('produk.destroy');
Route::get('/tentang', [DashboardController::class, 'tentang'])->name('tentang');

```

DashboardController.php U | web.php U | tentang.blade.php U | produk.blade.php U

bella-bouquet > resources > views > tentang.blade.php

```php
<h1>tentang bella bouquet</h1>
```

DashboardController.php U | web.php U | tentang.blade.php U | produk.blade.php U

bella-bouquet > app > Http > Controllers > DashboardController.php

```php
public function update(Request $request, $id)

    // 5. Menghapus Data
    public function destroy($id)
    {
        Product::destroy($id);
        return redirect()->route('produk')->with('success', 'Produk berhasil dihapus!');
    }

    public function tentang()
    {
        return view('tentang');
    }
}
```

7. Jalankan php artisan route:list amati semua route yang terdaftar

```
PROBLEMS   OUTPUT   DEBUG CONSOLE   TERMINAL   PORTS   GITLENS                                   powershell

  GET|HEAD  dashboard ..................................................... dashboard › DashboardController@index
  GET|HEAD  produk ........................................................ produk › DashboardController@produk
  GET|HEAD  produk/edit/{id} ............................................ produk.edit › DashboardController@edit
  DELETE    produk/hapus/{id} ........................................... produk.destroy › DashboardController@destroy
  POST      produk/simpan ............................................... produk.store › DashboardController@store
  GET|HEAD  produk/tambah ............................................ produk.create › DashboardController@create
  PUT       produk/update/{id} ........................................ produk.update › DashboardController@update
  GET|HEAD  storage/{path} ....... storage.local › vendor/laravel/framework/src/Illuminate/Filesystem/FilesystemServiceProvider.php:111
  PUT       storage/{path} storage.local.upload › vendor/laravel/framework/src/Illuminate/Filesystem/FilesystemServiceProvider.php:119
  GET|HEAD  tentang ....................................................... tentang › DashboardController@tentang
  GET|HEAD  up ........................... vendor/laravel/framework/src/Illuminate/Foundation/Configuration/ApplicationBuilder.php:223

                                                                                          Showing [12] routes

PS D:\Pwebsem4_html\bellabouquetwebsite\Laravel\bella-bouquet>
```

8. Coba buat Route::get('/hitung/{a}/{b}', fn($a, $b) => $a + $b) dan akses /hitung/10/25

```
DashboardController.php U   web.php U ×   tentang.blade.php U   produk.blade.php U
bella-bouquet > routes > web.php
20
21  Route::get('/hitung/{a}/{b}', fn($a, $b) => $a + $b);
22
```

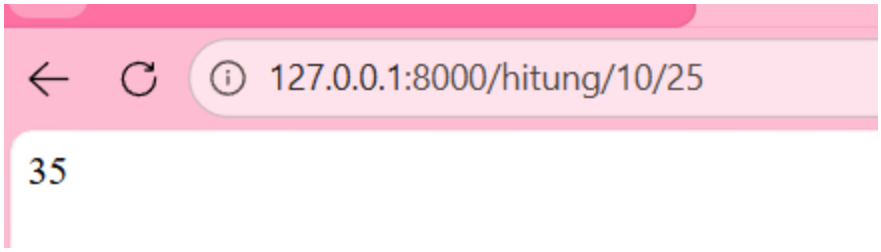

Tips: Route::view() adalah shortcut untuk route yang hanya menampilkan view tanpa logika. Sangat berguna untuk halaman statis seperti 'Tentang Kami'.