We used the same LLM model to create embeddings for each essay, and then measured cosine distances between all essays within the same group. We can see a more 'rippled' effect in LLM written essays showing bigger similarity, See Figure 19 below.

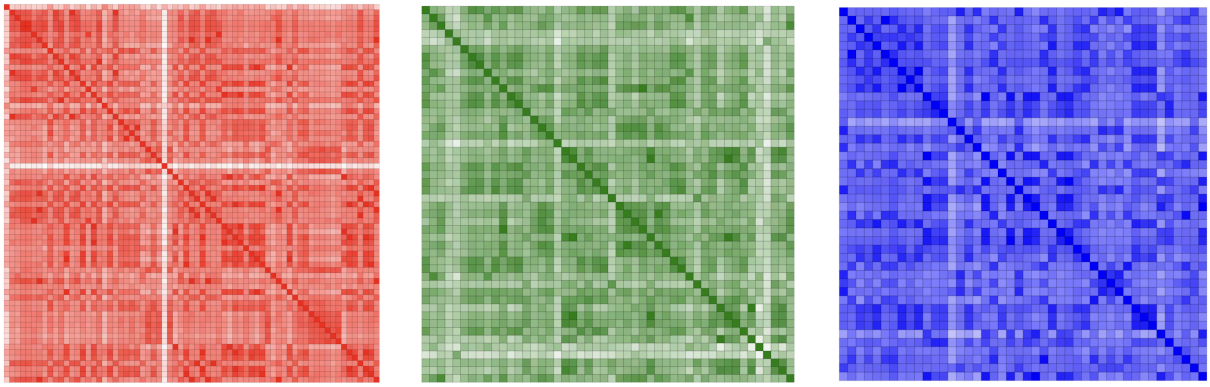

Figure 19. Cosine Similarities in Each Group. This figure presents a heatmap of cosine similarities between the embeddings of essays generated by all participants within each group. Brain-only Group (blue), Search Engine (green), LLM (red). The heatmap visualizes the pairwise cosine similarities between the embeddings of the essays, where each cell represents the similarity between a pair of essays. Higher values (darker, closer to 1) indicate higher similarity, while lower values (lighter, closer to 0) suggest less similarity between the essays.

We analyzed essays' divergence within each topic per group using Kullback-Leibler relative entropy:

$$D_{KL}(P||Q) = \sum_{x \in \chi} P(x) log(\frac{P(x)}{Q(x)}) \quad (2)$$

Where $P(x_i)$ is the probability of event x_i in the distribution P, $Q(x_i)$ is the probability of event x_i in the estimated distribution Q.

We found that some topics (like CHOICES topic Figure 19 below) show higher divergence between the Brain-only group and others, meaning those participants that did not use any tools during writing the essay wrote essays that were distinguishable from the other ones written by the participants in the other groups with the help of LLM or Search Engine, see Figure 19. At the same time other topics showed moderate convergence across all groups, but higher divergence for other topics. In the topics like LOYALTY and HAPPINESS in Figure 20 below, we can see the Search Engine group diverged the most from other LLM and Brain-only groups, while those two groups did not show much difference in between.