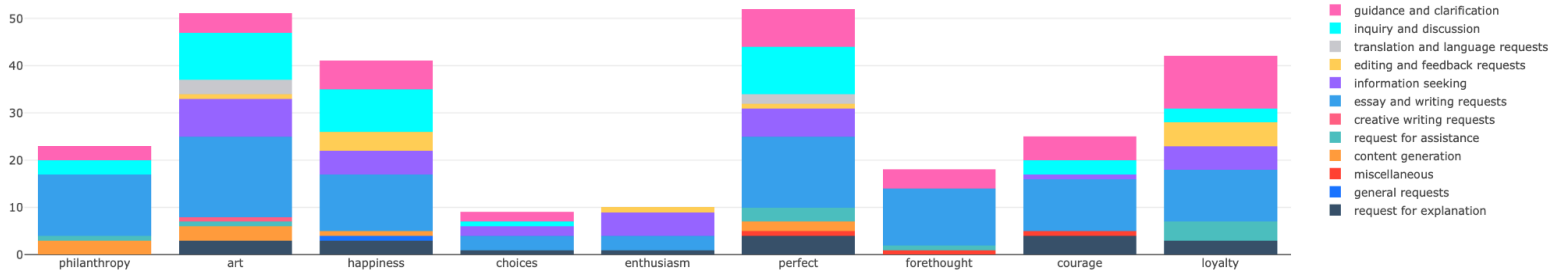

Figure 33. Stacked Classification Distribution of ChatGPT Prompts per Topic and Intent. This figure represents a stacked bar chart illustrating the classification of ChatGPT prompts per topic and their associated intents. The X-axis is grouped by topic, and the Y-axis represents the count of prompts within each topic.

We also used local LLM (llama4:17b-scout-16e-instruct-q4_K_M) to create ontology graphs for each essay and we manually checked that each ontology looks accurate and is relevant to each essay. For which we created a simple agent (see Figure 34 below) [66].

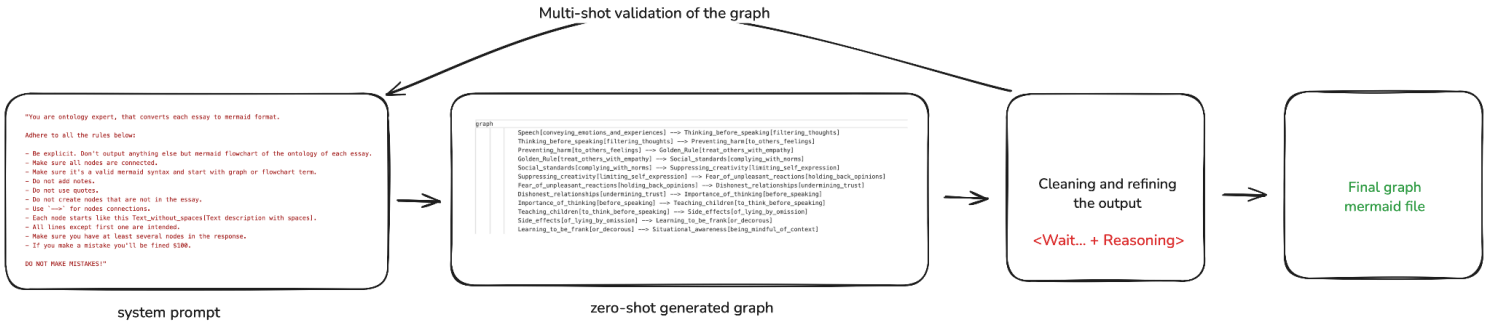

Figure 34. Prompt structure of Ontology Reasoning agent based on llama4:17b-scout-16e-instruct-q4_K_M model. A simple agent was built to refine the structure and output the ontology of the input essay, including a simple feedback loop and fine system that forced LLM to produce results that can be parsed.

See Figure 35 and Figure 36 below with examples of how such ontology graphs look.