

Python Crash Course



Dr. Sirasit Lochanachit

Outline



- Python Overview
- Objects in Python
- Operators and Precedence
- Control Flow
- Iteration
- Individual Assignments (IA)

Python Overview





Python is formally an interpreted language.

Commands are executed through a piece of software known as the Python interpreter.

- The interpreter receives a command -> evaluate -> reports the result

Programmer typically defines a series of commands in advance and saves those commands in a plain text file known as source code or a script.

For Python, source code is conventionally stored in a file named with the **.py** suffix (e.g., demo.py).

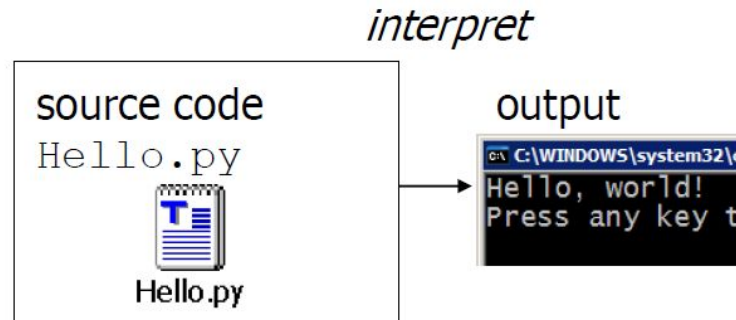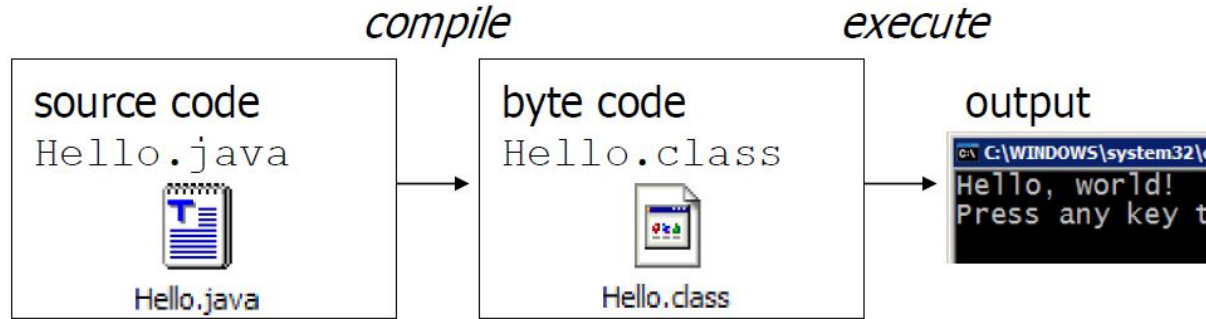

Objects in Python



Python is an **object-oriented** language and **classes** form the basis for all data types.

Python's built-in classes:

- **int** class for integers,
- **float** class for floating-point values,
- **str** class for character strings.

Assignment Statement



In Python, a variable can store any type of value/data without the need to declare a data type in advance.

- name = "Jane"
- age = 25

temperature = 35.6

(identifier/variable) (object)

Identifiers / Variables



Variables in Python are case-sensitive.

Variables can be composed of almost any combination of letters, numerals, and underscore characters.

- A variable cannot begin with a numeral

There are 33 specially reserved words that cannot be used as variables.

Reserved Words

False	class	finally	is	return
None	continue	for	lambda	try
True	def	from	nonlocal	while
and	del	global	not	with
as	elif	if	or	yield
assert	else	import	pass	
break	except	in	raise	

Dynamically Typed



temperature = 35.6

(identifier/variable) (object)



- Each identifier is implicitly associated with the memory address of the object to which it refers.
- No advance declaration associating a variable with a particular data type.
- A variable can be associated with any type of object, and it can later be reassigned to another object of the same (or different) type.

Dynamically Typed




temperature = 35.6


(identifier/variable) (object)



original = temperature



temperature = temperature + 5

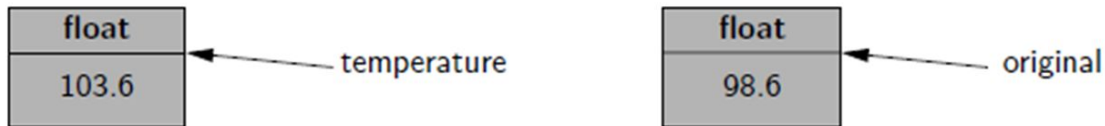

- A programmer can establish an alias by assigning a second identifier to an existing object.

Built-in Python Data Types



Text Type: `str`

Numeric Types: `int`, `float`, `complex`

Sequence Types: `list`, `tuple`, `range`

Mapping Type: `dict`

Set Types: `set`, `frozenset`

Boolean Type: `bool`

Binary Types: `bytes`, `bytearray`, `memoryview`

None Type: `NoneType`

Operators and Precedence



- Logical Operators

not	unary negation
and	conditional and
or	conditional or

- Equality Operators

is	same identity
is not	different identity
==	equivalent
!=	not equivalent

Operators and Precedence



- Comparison Operators

<	less than
<=	less than or equal to
>	greater than
>=	greater than or equal to

- Arithmetic Operators

+	addition
-	subtraction
*	multiplication
/	true division
//	integer division
%	the modulo operator

Operators and Precedence



- Bitwise Operators

<code>~</code>	bitwise complement (prefix unary operator)
<code>&</code>	bitwise and
<code> </code>	bitwise or
<code>^</code>	bitwise exclusive-or
<code><<</code>	shift bits left, filling in with zeros
<code>>></code>	shift bits right, filling in with sign bit

- Sequence Operators

<code>s[j]</code>	element at index j
<code>s[start:stop]</code>	slice including indices $[start, stop)$
<code>s[start:stop:step]</code>	slice including indices $start, start + step, start + 2*step, \dots$, up to but not equalling or stop
<code>s + t</code>	concatenation of sequences
<code>k * s</code>	shorthand for $s + s + s + \dots$ (k times)
<code>val in s</code>	containment check
<code>val not in s</code>	non-containment check

Operators and Precedence



- Dictionary Operators

<code>d[key]</code>	value associated with given key
<code>d[key] = value</code>	set (or reset) the value associated with given key
<code>del d[key]</code>	remove key and its associated value from dictionary
<code>key in d</code>	containment check
<code>key not in d</code>	non-containment check
<code>d1 == d2</code>	d1 is equivalent to d2
<code>d1 != d2</code>	d1 is not equivalent to d2

Operators and Precedence



- Operator Precedence

Ordered from highest to lowest

Operator Precedence		
	Type	Symbols
1	member access	expr.member
2	function/method calls container subscripts/slices	expr(...) expr[...]
3	exponentiation	**
4	unary operators	+expr, -expr, ~expr
5	multiplication, division	*, /, //, %
6	addition, subtraction	+, -
7	bitwise shifting	<<, >>
8	bitwise-and	&
9	bitwise-xor	^
10	bitwise-or	
11	comparisons containment	is, is not, ==, !=, <, <=, >, >=
12	logical-not	not expr
13	logical-and	and
14	logical-or	or
15	conditional	val1 if cond else val2
16	assignments	=, +=, -=, *=, etc.

Exercise 1



Write a program to calculate an age based on a birth year (AD)

- Example input: 2001
- Expected output:
 - Your age is 22


Exercise 2




Write a program to calculate an area of a triangle by accepting a height and a width (base) of a triangle.

- Example input: `triangle(10, 12)`
- Expected output:
 - A triangular area is 60


Control Flow

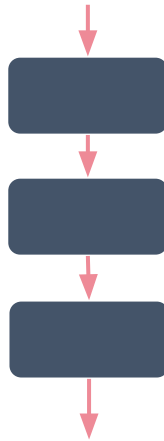

Sequence

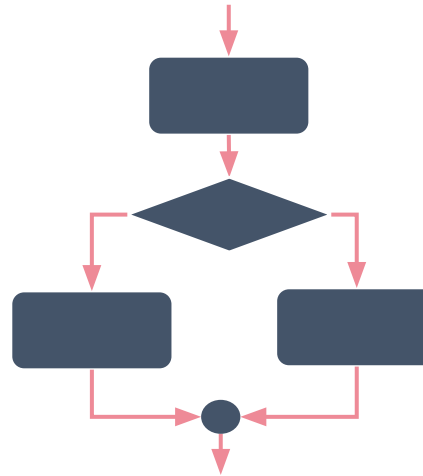


Selection

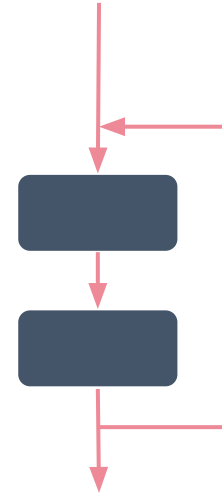

Iteration

Sequential Structure

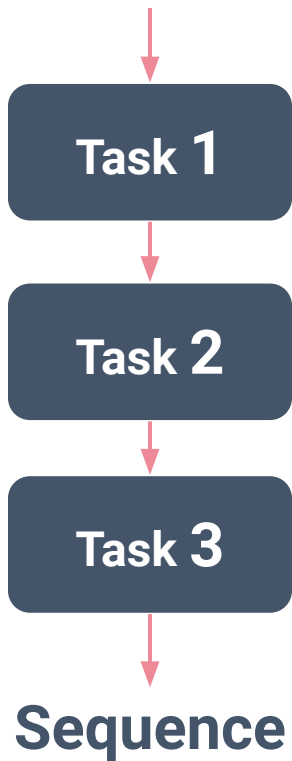

Selection Structure



```
if <condition>:  
    <statements>
```


```
x = 10
```

```
if x < 15:
```


```
    print("x is less than 15")
```

```
    print("OK")
```


```
print("Thank you")
```

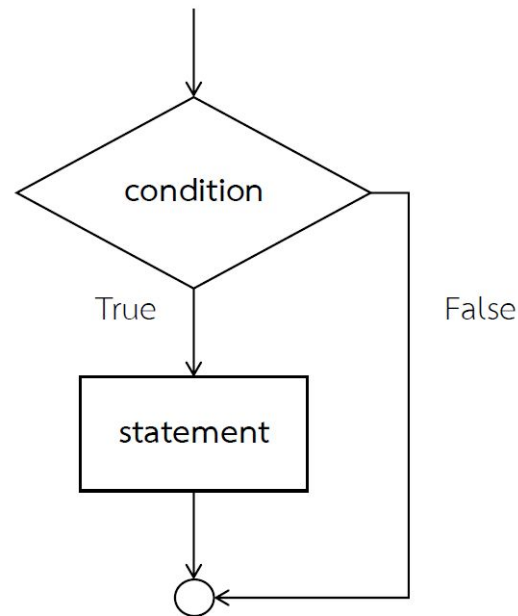


Selection Structure

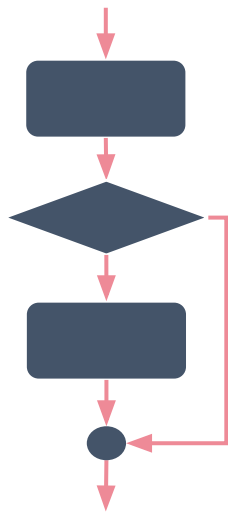

Single Selection

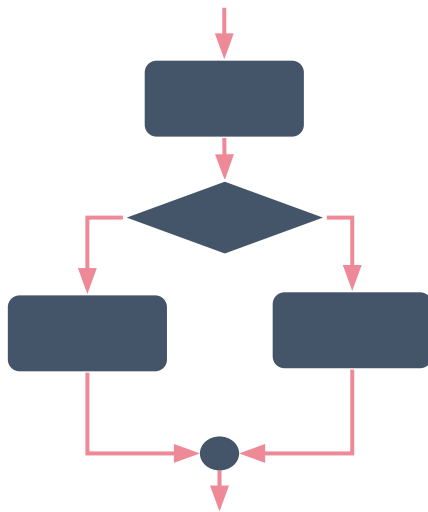

Double Selection

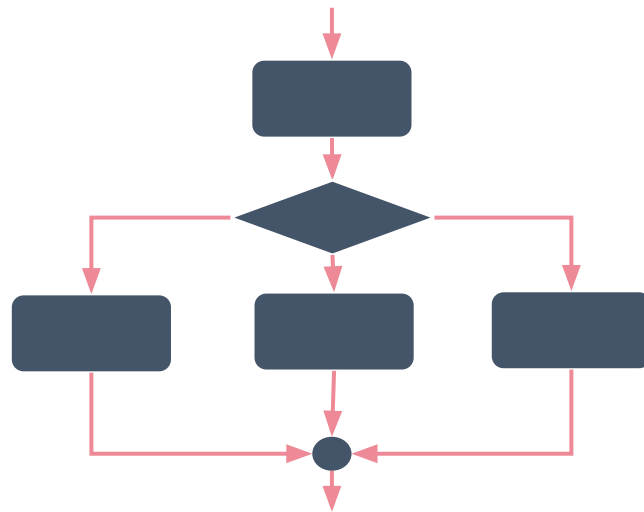

Multiple Selection

If/Else Statement




if <condition>:

<if_statements>

else:

<else_statements>

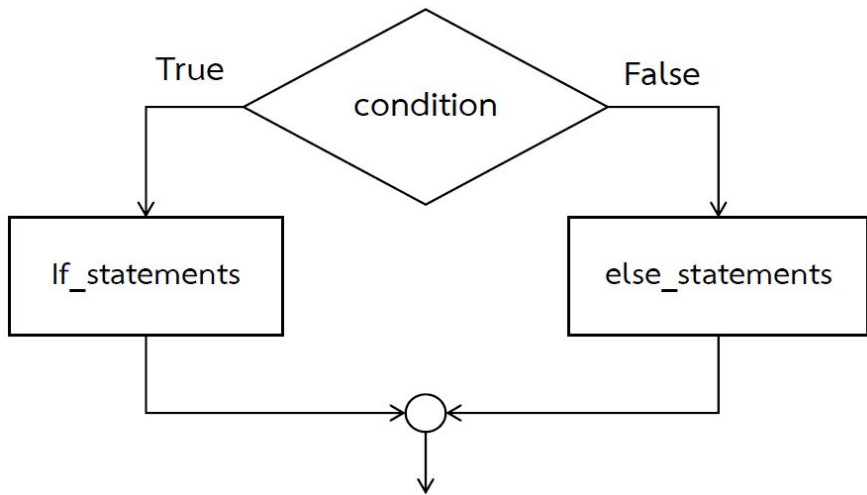

If/Else Statement



```
money = 300
```


```
if money >= 350:
```

```
    print('You can buy this item')
```

```
else:
```

```
    print('You don\'t have sufficient money to buy this bag')
```


Selection: Even or Odd

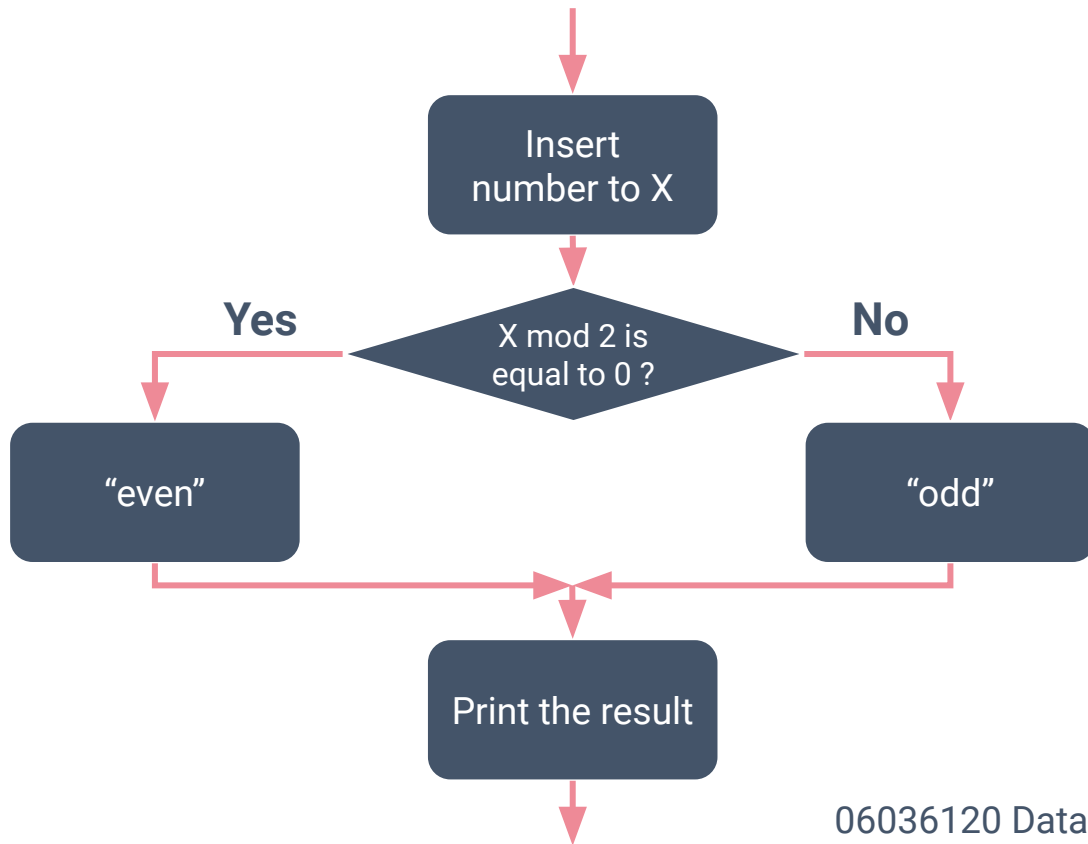

$$75 \div 4 = 18 \text{ R } 3$$

A long division problem showing 75 divided by 4. The divisor is 4, and the dividend is 75. The quotient is 18, and the remainder is 3. Red arrows point to the divisor, dividend, quotient, and remainder.

divisor	4			
		1	8	quotient
		<hr/>		
		7	5	
		-	4	dividend
		<hr/>		
		3	5	
		-	3	
		<hr/>		
			3	remainder

Exercise 3



Write a program to calculate an area of a triangle by accepting a height and a width (base) of a triangle.

A program will have to verify that accepted inputs are positive numbers.

Otherwise, it should display “Height and width should be positive numbers”

- Example input: `triangle(10, 12)`
- Expected output:
 - A triangular area is 60

Example input: `triangle(-5, 20)`


Expected output:

Height and width should be positive numbers

If-Elif Statement



```
if <condition1>:  
    <statement_1>  
elif <condition2>:  
    <statement_2>  
...  
else:  
    <statement_n>
```

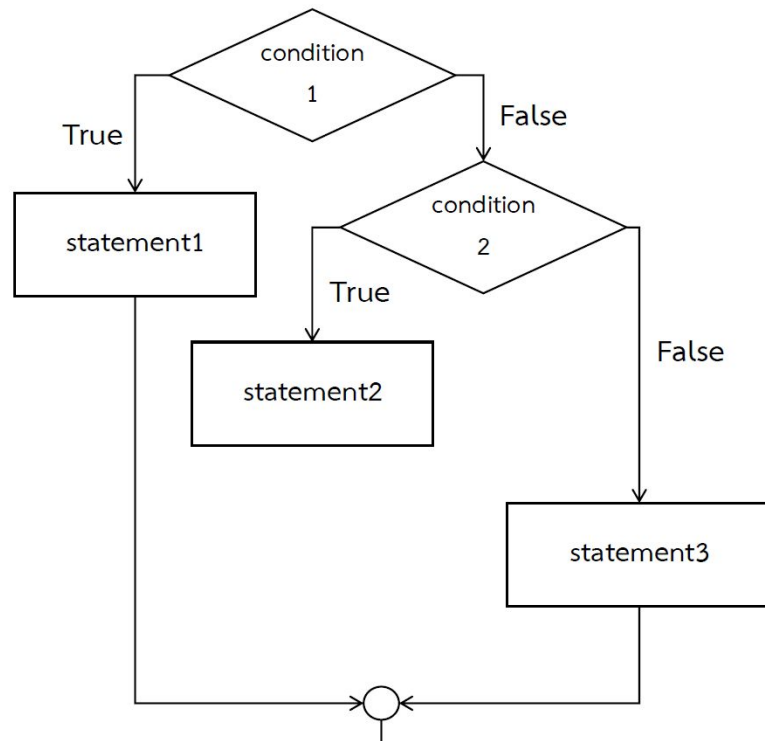


Exercise 4: Grading





Write a program to return an appropriate grade given a score according to the table below.

Grade	Score
A	80-100
B	70-79
F	0-69
Not in range	Outside 0-100

Iteration

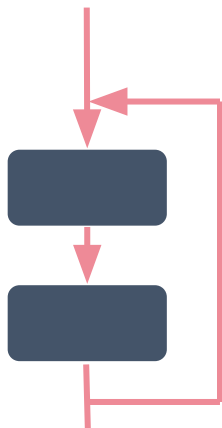

Infinite Loop

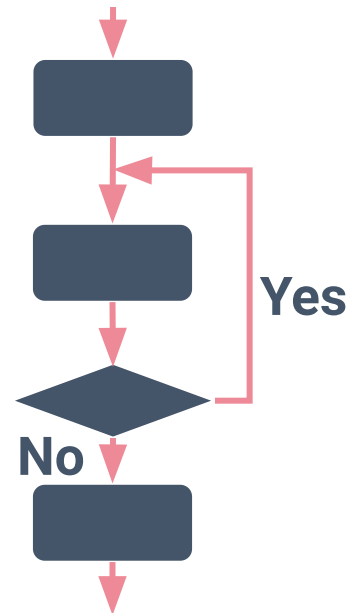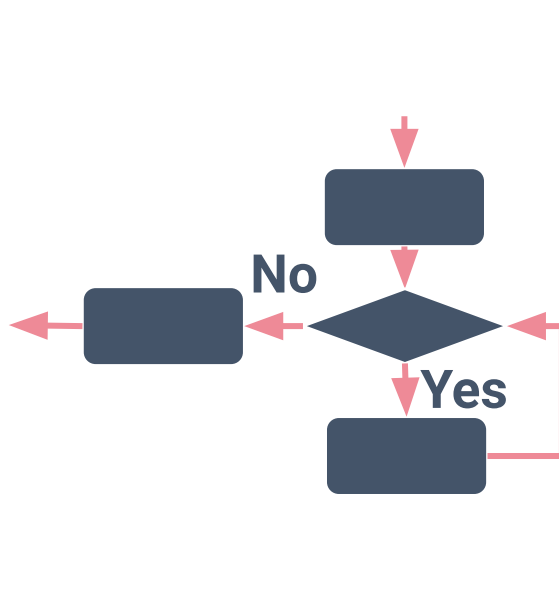

Finite Loop

Repetition Structure



while loop

for loop


While Statement



```
while <condition>:  
    <statements>
```

```
i = 1
```

```
while i <= 10:  
    print(i, end = ', ')  
    i = i + 1
```

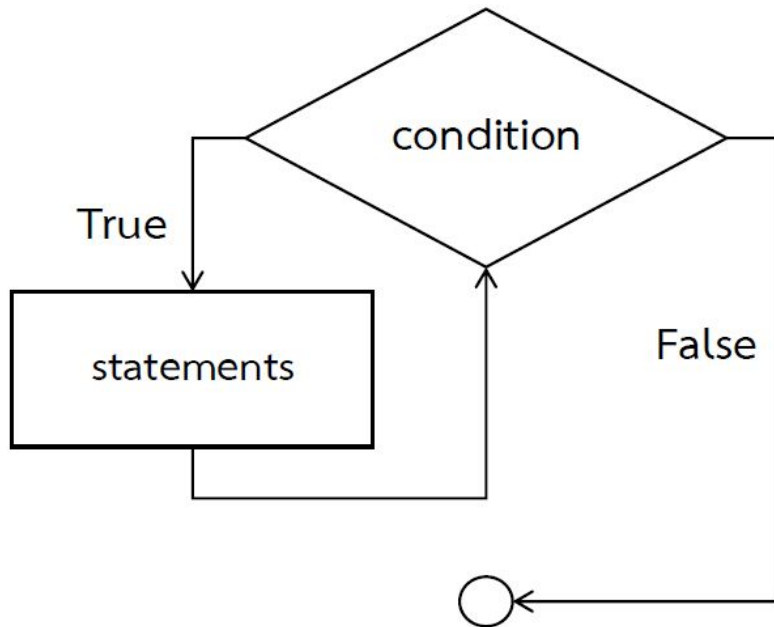

Iteration: Input Range



A program that accepts input between 1 and 100 only.

Exercise 5: Grading



Modify the program in Exercise 4 so that it should iterate the input until -1 is given to stop the program and print “Thank you” message.

Grade	Score
A	80-100
B	70-79
F	0-69
Not in range	Outside 0-100

For Statement



```
for variableName in groupOfValues:
```

```
    <statements>
```

```
for x in range(1, 6):
```

```
    print(x, 'squared is', x*x)
```

range()



`range(start, end, step)`

`list(range(10))`

`list(range(1, 11))`

`list(range(0, 30, 5))`

`list(range(0, -10, -1))`

For Statement



```
for i in range(10, 0, -1):  
    print(i, end= ', ')
```

```
names = ['Jane', 'John', 'Eric', 'Elon']  
  
for i in range(len(names):  
    print(names[i], end = ', ')
```

Exercise 6: Control Flow



Write a flowchart describing the logic of factorial function which accepting a number as an input.

- Example
 - Enter factorial number: 6
 - The result is 720

*Hint: The factorial $n!$, is the product of all positive integers less than or equal to n .
For example: $5! = 5 * 4 * 3 * 2 * 1 = 120$*

Exercise 6: Control Flow



Function



```
def function_name(args...):  
    <statements>
```

```
def function_name(args...):  
    <statements>  
    return value
```

Function



```
def hello(name):  
    print("Hello", name)
```

```
def area(width, height):  
    c = width * height  
    return c
```


IA 1-1



Write a Python function **is_multiple(*n*, *m*)** that accepts two integer values (*n* and *m*) and returns a result as *True* or *False*.

- Return True if *n* is a multiple of *m*, that is, $n = m * i$ for some integer *i*
- Return False otherwise

Example

- `is_multiple(10, 3)` -> False

IA 1-2



Write a Python function **is_even(k)** that accepts an integer value (k) and returns a result as *True* or *False*.

- Return True if k is even
- Return False otherwise
- Multiplication, modulo, or division operators are not allowed.

Example

- `is_even(20)` -> True

IA 1-3



Write a Python function **minmax(data)** that accepts a sequence of one or more numbers, and returns the smallest and largest numbers, in the form of a tuple of length two.

- Built-in functions `min()` or `max()` are not allowed

Example

- `minmax([10, 50, 9, 5, 120, 18]) -> (5, 120)`