

General

1. Get your own API key and Secret key from(Login is needed)
<https://www.binance.com/en/my/settings/api-management>
2. Give the API key a label

API Management

Creating an API private key provides access to markets and real-time trading services on Binance via a third-party site or application.

Give the API key a label

SAPI Test

Create API

[View API documentation](#)

3. Get API Key and Secret Key

SAPI Test

Edit restrictionsDelete

Scan to get address

API Key

Copy

Secret Key

API restrictions

☒ Enable Reading

☒ Enable Spot & Margin Trading

☐ Enable Withdrawals

☐ Enable Margin

☐ Permits Universal Transfer

☐ Enable Vanilla Options


IP access restrictions:

☒ Unrestricted (Less Secure) This API key allows access from any IP address. This is not recommended.


☐ Restrict access to trusted IP addresses (Recommended)

Test Setup for Postman

1. Setup environment variables

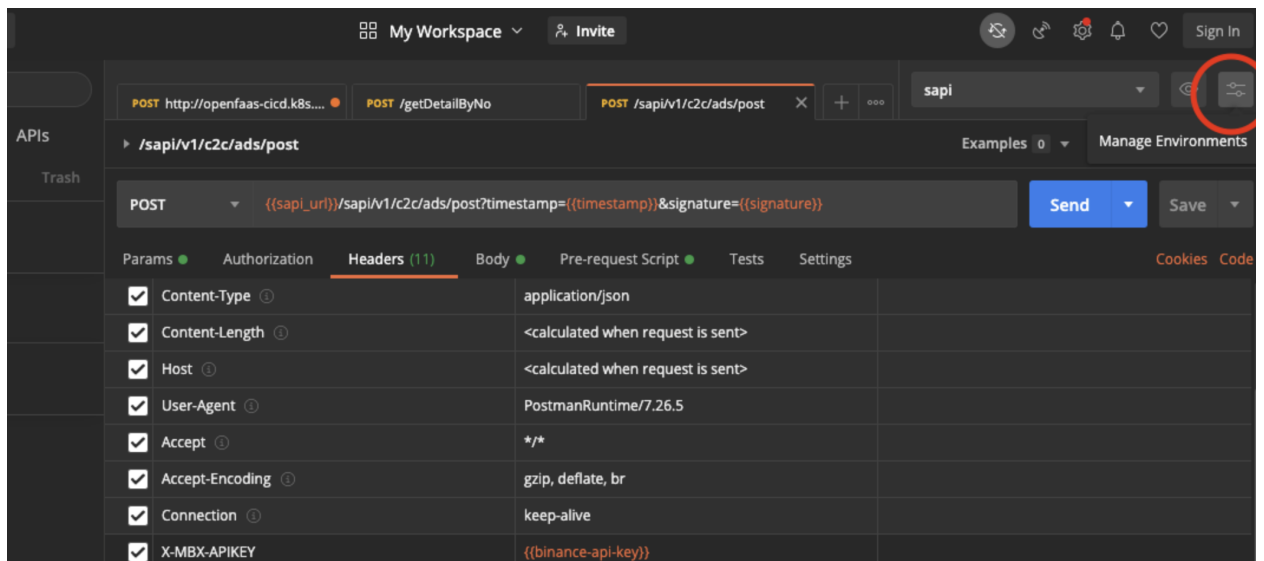

2. Input your own API Key and Secret Key and SAPI_URL

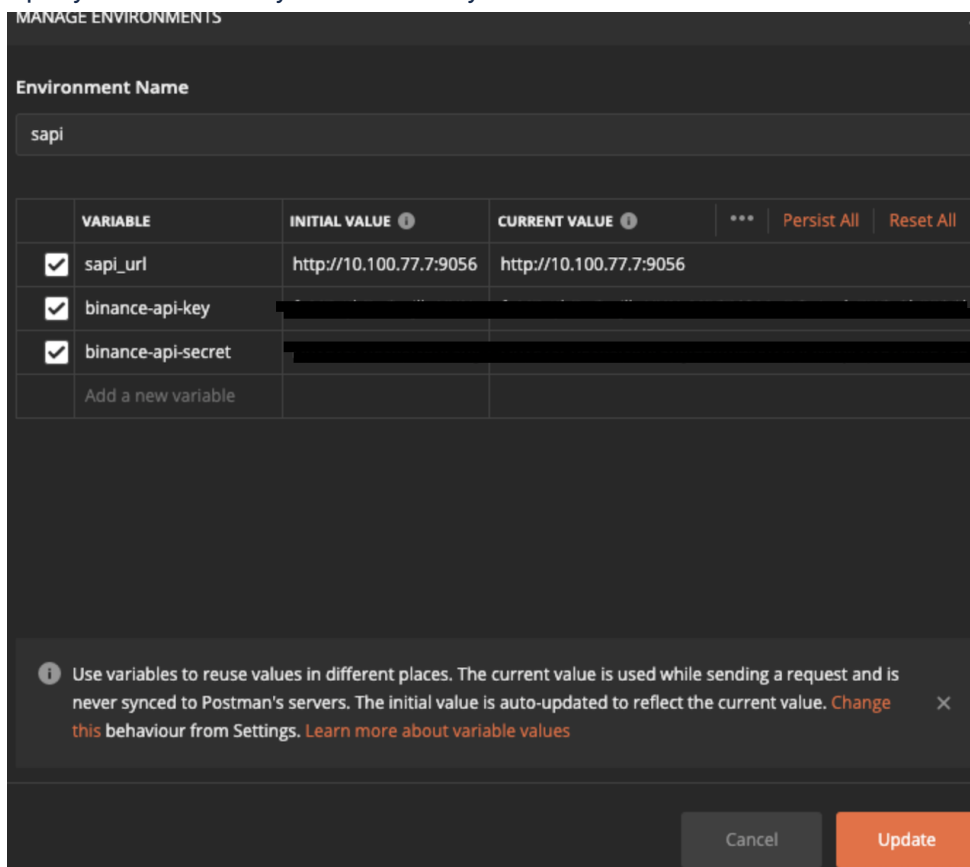

3. Setup Pre-request Script
Please refer to the Postman json
4. Setup headers

Params ● Authorization Headers (11) Body ● Pre-request Script ● Tests Settings Cookies			
Headers Hide auto-generated headers			
	KEY	VALUE	DESCRIPTION *** Bulk Edit Preset
<input checked="" type="checkbox"/>	Cache-Control ⓘ	no-cache	
<input checked="" type="checkbox"/>	Postman-Token ⓘ	<calculated when request is sent>	
<input checked="" type="checkbox"/>	Content-Type ⓘ	application/json	
<input checked="" type="checkbox"/>	Content-Length ⓘ	<calculated when request is sent>	
<input checked="" type="checkbox"/>	Host ⓘ	<calculated when request is sent>	
<input checked="" type="checkbox"/>	User-Agent ⓘ	PostmanRuntime/7.26.5	
<input checked="" type="checkbox"/>	Accept ⓘ	*/*	
<input checked="" type="checkbox"/>	Accept-Encoding ⓘ	gzip, deflate, br	
<input checked="" type="checkbox"/>	Connection ⓘ	keep-alive	
<input checked="" type="checkbox"/>	X-MBX-APIKEY	{{binance-api-key}}	

5. Configure your endpoint, **Signature must be the last query params in the request**

POST

{{sapi_url}}/sapi/v1/c2c/ads/post?timestamp={{timestamp}}&signature={{signature}}

Send

Save

Error code

Error: Could not get any response

You haven't imported the environment file, or you've imported it but haven't selected it from the dropdown. Please follow the the steps above to import and select the environment in Postman.

Error: API-key format invalid.

Likely causes:

- Your API key is not set.
- Your API key is not correct.
- You have not selected X-MBX-APIKEY in your Postman Headers.

Error: Signature for this request is not valid.

Likely causes:

- You haven't set your secret key.
- You've selected parameters for which no value was passed. If you aren't using a parameter, uncheck it.

Error: Mandatory parameter 'xxxx' was not sent, was empty/null, or malformed.

Your request is missing a parameter that the API requires. Please refer to the API documentation, and pass all mandatory parameters in your requests.