

JS & HTML

What is the DOM?

DOM (Document Object Model)

Programming interface that helps us to create, change or remove elements from a document. It allows to add events.

The DOM views an HTML document as a tree of nodes. A node represents an HTML element.



DOM tree structure

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<meta http-equiv="X-UA-Compatible" content="ie=edge">
```

```
<title>DOM tree structure</title>
```

```
</head>
```


```
<body>
```

```
<h1>DOM tree structure</h1>
```

```
<h2>Learn about the DOM</h2>
```

```
</body>
```

```
</html>
```

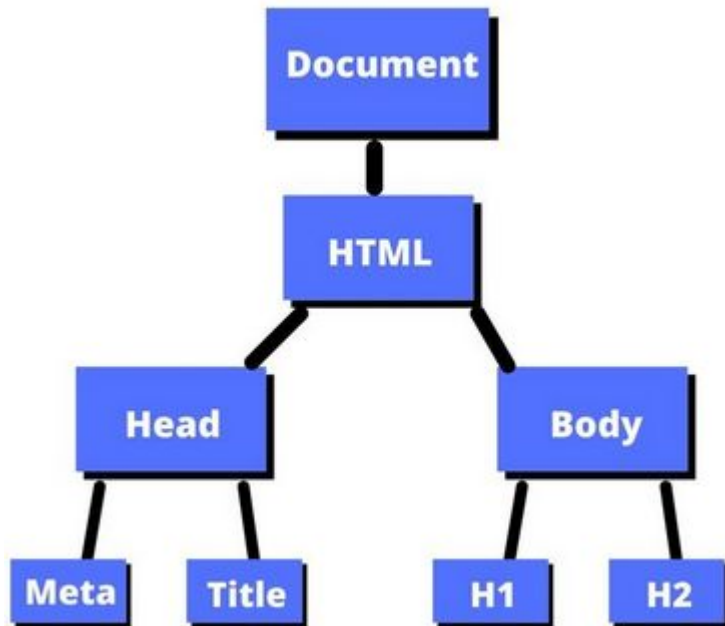

Select Elements in the Document - getElementById()

getElementById(): returns an Element object representing the element whose id property matches the specified string.

```
<p id="p1">First paragraph.</p>
```

```
<p id="p2">Second paragraph.</p>
```

In JavaScript, we can grab an HTML tag by referencing the id name.

```
document.getElementById("id_here")
```

```
const paragraph1 = document.getElementById("p1");
```

```
console.log(paragraph1); => <p id="p1">First paragraph.</p>
```

Read the content of the paragraph:

```
const paragraph1 = document.getElementById("p1");
```

```
console.log(paragraph1.textContent); => "First paragraph."
```



Select Elements in the Document - `querySelector()`

`querySelector()`: returns the first Element within the document that matches the specified selector. If no matches are found, null is returned.

Find and print to the console the h1 element:

```
const h1Element = document.querySelector("h1");
```

With a class, use `.list` inside the `querySelector()` to target a `class="list"`:

```
const list = document.querySelector(".list");
```



Select Elements in the Document - `querySelectorAll()`

`querySelectorAll()`: Returns a `NodeList` representing a list of the document's elements that match the specified group of selectors.

To obtain a `NodeList` of all of the `<p>` elements in the document:

```
const matches = document.querySelectorAll("p");
```



DOM AND JS

The browser implements all the properties and methods that the DOM will need, and with your JS code you will be able to use them and modify the web page.




Let's add some JS code to our movies webpage

In your movies.html:

```
<body>
  <h1>Movie Theater</h1>
  <input type="text" class="seat_selector" maxlength="3" size="3" />
  ....
  .....
</body>
```

In the console

```
// Save seat input in a variable
seat_input = document.querySelector('.seat_selector')
// Apply this function
seat_input.getBoundingClientRect() => A DOMRect describes the size and position of a rectangle.
Seat_input.value => get the value of the element
seat_input.value = "345" => Modify the element
```



Events

With javascript we can create events. With an event, javascript knows it has to monitor an action, and when this action occurs, we can tell javascript to run a function.

Let's add a button in our html page.

```
<input
  type="text"
  class="seat_selector"
  maxlength="3"
  size="3"
/><br /><br />
<button type="button" class="button_check">Button</button>
```

In the JS file (movies.js):

```
"use strict"
document.querySelector(".button_check").addEventListener("click", function () {
  console.log("The button has been click");
});
```

If you click multiple times, the browser will display the message once, but there will be a number displayed on the right or left side (depending on the browser) of your console. The number tells how many consecutive times this message has been displayed.

Let's create another button.

```
<button type="button" class="button_check">Button</button><br /><br />  
<button type="button" class="button_css">My Second Button</button><br /><br />
```

In the javascript file, we are going to change the background color of the input element into red

```
document.querySelector(".button_css").addEventListener("click", function () {  
  document.querySelector(".seat_selector").style.backgroundColor = "red";  
});
```

So when we click on the button, the background color is going to be red.




Exercise

Let's do an exercise. Let's alternate the background color, one time red, one time clear.

Solution:

```
document.querySelector(".button_css").addEventListener("click", function () {  
  let input_element_style = document.querySelector(".seat_selector").style;  
  if (input_element_style.backgroundColor === "red") {  
    input_element_style.backgroundColor = "";  
  } else if (input_element_style.backgroundColor === "") {  
    input_element_style.backgroundColor = "red";  
  }  
});
```

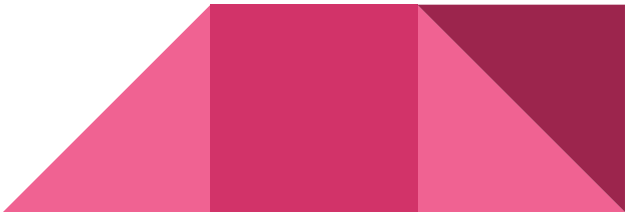


We can also create a variable to store how many times we change the background.

```
<button type="button" class="button_css">  
    Change input background color</button><br /><br />  
<span class="bg_info">How many times have we changed the background? 0</span>
```



Then let's add some lines to the event:

```
let bg_change_times = 0; // Initialize a variable
document.querySelector(".button_css").addEventListener("click", function () {
  let input_element_style = document.querySelector(".seat_selector").style;
  if (input_element_style.backgroundColor === "red") {
    input_element_style.backgroundColor = "";
  } else if (input_element_style.backgroundColor === "") {
    input_element_style.backgroundColor = "red";
  }
  bg_change_times++;
  document.querySelector(
    ".bg_info"
  ).textContent = `How many times have we changed the background? ${bg_change_times}`;
});
```



Events using a class

Let's create a css:

```
<link rel="stylesheet" href="main.css" />
```

And inside the css:

```
.hidden {  
  display: none;  
}
```

In the html:

```
<button type="button" class="button_class">Change element class</button><br /><br />  
<span class="hidden boo">I was hidden. Boooo!!!! Now you see me</span>
```

And in the javascript:

```
document.querySelector(".button_class").addEventListener("click", function () {  
  document.querySelector(".boo").classList.remove("hidden");  
});
```

We have removed the class "hidden" from the list of classes of the element.



Events using a class - Exercise

Use the previous code and modify it to alternate show and hide.

Hint: Your solution will probably use a list and you will need to check if a certain element is in the list, use `your_list.contains(item)`




Events using a class - Exercise - Solution

Use the previous code and modify it to alternate show and hide.

Hint: Your solution will probably use a list and you will need to check if a certain element is in the list, use **`your_list.contains(item)`**

Solution:

```
document.querySelector(".button_class").addEventListener("click", function () {  
  let boo_class_list = document.querySelector(".boo").classList;  
  if (boo_class_list.contains("hidden")) {  
    boo_class_list.remove("hidden");  
  } else {  
    boo_class_list.add("hidden");  
  }  
});
```

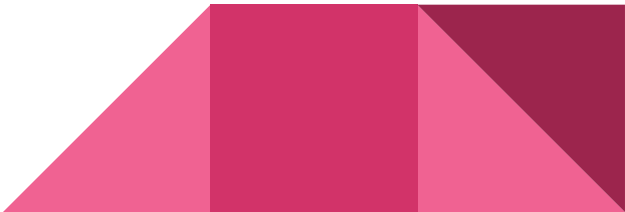

Key Event

Keyboard event is a global event, because it cannot be assigned to an element. There is an event that listens to any keyboard key that has been pressed down.

```
document.addEventListener('keydown')
```

So let's try:

```
document.addEventListener('keydown', function () {  
    console.log('A key was pressed down')  
})
```

Even when you write in the input field, it is going to catch the event.




Key Event

Let's see if we can avoid logging into the console when the text input field is active.

In the javascript:

```
const seat_selector = document.querySelector(".seat_selector")
document.addEventListener('keydown', function () {
    if (document.activeElement !== seat_selector){
        console.log('A key was pressed down')
    }
})
```

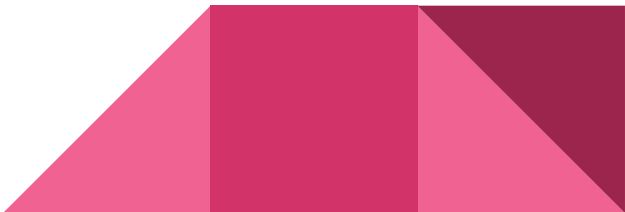

Key Event

Let's filter which key can log into the console.

We can specify a variable to the function inside the event listener of 'keydown', which will match the event (https://developer.mozilla.org/en-US/docs/Web/API/Element/keydown_event)

```
document.addEventListener("keydown", function (event) {  
  if (document.activeElement !== seat_selector) {  
    if (event.key == "r") {  
      console.log("A key was press", `${event.key}`);  
    }  
  }  
});
```

What is that code doing?



Create DOM Elements with JS

Add some code to your movies.html

```
<div>
  <span>Movie list</span>
  <ul class="movie_list">
    <li>Matrix</li>
    <li>Titanic</li>
  </ul>
</div>
```



Create DOM Elements with JS

In your js file, create an array with movies

```
let movie_list = [{ 'name': 'Forrest Gump'}, { 'name': 'The Fast and the Furious'}, { 'name': 'Frozen'}]
```

Create a const variable that selects the class "movie_list".

```
const containerMovieList = document.querySelector('.movie_list')
```

Create a function addMovieList() that is going to insert a bullet point in the html. The function will receive an argument movie. This function will help us to use the function insertAdjacentHTML

<https://developer.mozilla.org/en-US/docs/Web/API/Element/insertAdjacentHTML>

See beforebegin, afterbegin, beforeend...

<https://developer.mozilla.org/en-US/docs/Web/API/Element/insertAdjacentHTML#description>




Create DOM Elements with JS

Code to insert new bullet points with movie names in array:

```
let movieList = [{name: 'Forrest Gump'}, {name: 'The Fast and the Furious'}, {name: 'Frozen'}]  
const containerMovieList = document.querySelector('.movie_list')
```

```
const addMovieList = function (movie) {  
  const html = `- ${movie.name}</li>`  
  // write your code here to insert the values to the list  
  // use insertAdjacentHTML('afterbegin', html)  
}  
for (const movie of movie_list) {  
  addMovieList(movie)  
}

```



Solution

```
let movieList = [{ 'name': 'Forrest Gump'}, { 'name': 'The Fast and the Furious'}, { 'name': 'Frozen'}]
const containerMovieList = document.querySelector('.movie_list')
const addMovieList = function (movie) {
  const html = `- ${movie.name}</li>`
  containerMovieList.insertAdjacentHTML('afterbegin', html)
}
for (const movie of movieList) {
  addMovieList(movie)
}

```

With 'afterbegin', an element will be inserted before the first child.

Let's test it 'beforeend', it is going to insert it at the end, this is better. You can also test with the 2 other options, and you will see it is going to insert the html before and after the ``

Do not forget to use the ` for the string to replace HTML

If we want to remove what we had in the `` container, we do this,
`containerMovieList.innerHTML = "`
before doing the loop.

Select, create and delete an Element

Select: You know this already `document.querySelector`

This will select the first element that match the specified selector

If you want to select all the element, you are going to use:

`document.querySelectorAll`

There are a lot of other function:

`document.getElementById` (no need to put the #)

`document.getElementsByTagName`

`document.getElementsByClassName` (no need to put the .)

See the MDN document for more information (<https://developer.mozilla.org/en-US/docs/Web/JavaScript>)



Select, create and delete an Element

Create: we can create the element as a javascript object

Let's delete the coder from your movies.html and add the following code:

```
<div class="movie_list_container">  
  <span>Movie list</span>  
</div>
```

Add this code to you js file:

```
const containerMovieList = document.createElement('ul')  
containerMovieList.classList.add('movie_list')
```



Exercise - Insert movie name

```
let movieList = [{ 'name': 'Forrest Gump'}, { 'name': 'The Fast and the Furious'}, { 'name': 'Frozen'}]
const containerParentMovieList = document.querySelector('.movie_list_container')

const addMovieList = function (listElement, movie) {
  const li_element = document.createElement('li')
  // insert the movie name inside the li_element
  // then add li_element inside the listElement
}

const containerMovieList = document.createElement('ul')
containerMovieList.classList.add('movie_list')
for (const movie of movieList) {
  addMovieList(containerMovieList, movie)
}

containerParentMovieList.insertAdjacentElement('beforeend', containerMovieList)
```

Select, create and delete an Element


Delete: We can delete elements executing JS code.

Let's create a button to delete the ul list.

```
<button type="button" class="remove_ul_list">Delete ul list</button>
```

```
document.querySelector(".remove_ul_list").addEventListener("click", function () {  
    containerMovieList.remove()  
})
```

As the object containerMovieList is in the JS, we can use this object to use one of its base functions, which is remove, to delete it, and then it will not exist anymore in the DOM.



Styles, attributes and classes

Having a javascript object, you can edit the css inline with the property of the object.

For example:

```
containerParentMovieList.style.backgroundColor = 'lightgray'
```

If you want to see all the styling that is applying on an element, you can this:

```
getComputedStyle(containerParentMovieList)
```



Styles, attributes and classes

For example, in the css, we can use a root variable this way

```
:root {  
  --primary-color: #65d5ff;  
}  
  
.remove_ul_list {  
  background-color: var(--primary-color);  
}
```



Styles, attributes and classes

In the css, you can write variables that you will reuse all along (color, size font,).

Some we can edit the style attribute in our element, you can do the same thing for other attributes, for example the src attribute in an image

For the class, you can get the property `classList` or `className`. If you have multiple classes, `className` is going to give you the string with all the classes that the element belongs to.

You can also use the method `getAttribute` to get the value of an attribute if you have the attribute in a variable.



addEventListener shortcut

Here is a list of all the events: <https://developer.mozilla.org/en-US/docs/Web/Events>

We already see that you can trigger an event using the method `addEventListener`

```
containerMovieList.addEventListener('mouseenter', function (event) {  
  console.log("mouse passed over the div of the movie list")  
})
```

You can use a shortcut:

```
containerMovieList.onmouseenter = function (event) {  
  console.log("mouse clicked on the movie list dev")  
}
```

You may often see this keyword `on` + the name of the event.



Remove eventListener

You can also remove the event listener.

Let's create a function first for the event listener.

```
const eventFunc = function (event) {  
    console.log('mouse passed over the div of the movie list')  
    containerMovieList.removeEventListener('mouseenter', eventFunc)  
}
```

```
containerMovieList.addEventListener('mouseenter', eventFunc)
```

Test it, you will see the log only once. When the event is triggered, it is going to remove it also. It is a one time event.



Remove eventListener

You can remove the event listener with a timer.

```
const eventFunc = function (event) {  
  console.log('mouse passed over the div of the movie list')  
}
```

```
containerMovieList.addEventListener('mouseenter', eventFunc)  
  setTimeout(() => containerMovieList.removeEventListener('mouseenter', eventFunc), 10000  
)
```

After 10 second, the event is not going to be triggered

