


Phase 2C — component attribution in the handoff interval (gate 2C: MLP arm pass, attention arm null)

(a) MLP arm — per-layer top neuron vs matched controls



(b) Attention arm — 80 heads, entity→final edge zeroing

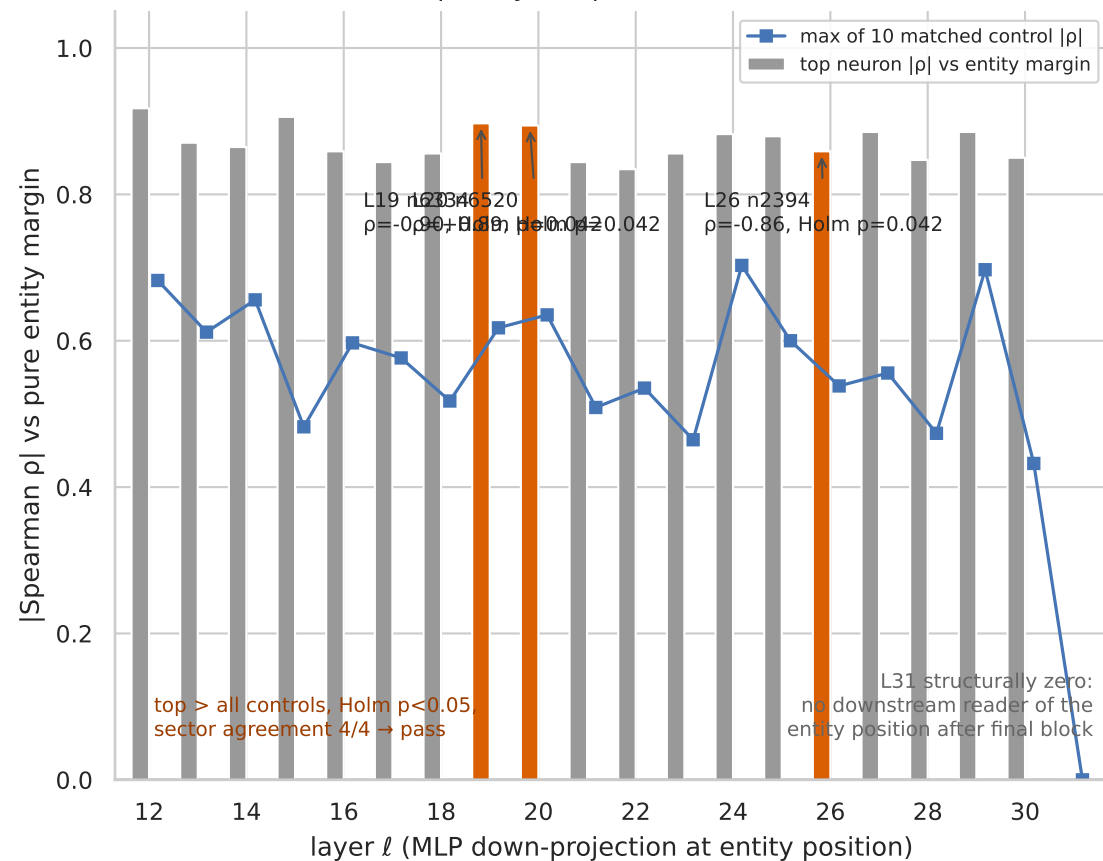