



An End-to-End Agent Auditing Engine

Haoning Wang* Mingxun Zhang* Chenyue Yu* Yingjun Shang* Xia Hu Guanchu Wang† Na Zou†


Shanghai Artificial Intelligence Laboratory

*Equal contribution. †Corresponding authors: wangguanchu@pjlab.org.cn, zouna@pjlab.org.cn.


<https://github.com/datamllab/A2E>

Abstract

With the rapid advancement of large language models (LLMs), harnesses have become essential infrastructure for deploying agents across a wide range of domains. The fast-evolving harness ecosystem has also made rigorous capability evaluation increasingly important. However, efficiently building an end-to-end, systematic, and comprehensive evaluation pipeline remains a significant challenge. To address this challenge, we introduce A²E (Agent Auditing Engine), an end-to-end evaluation engine designed for agent harnesses. A²E leverages our newly proposed Agent Task Protocol (ATP) to enable the rapid integration of evaluation tasks with different harnesses. Through an automatically instrumented Monitor, it captures and generates standardized execution traces during experiments. In the Evaluation stage, A²E systematically assesses harness capabilities using a suite of multidimensional metrics. Compared with correctness alone, these metrics provide a more fine-grained characterization of differences among harnesses in execution efficiency, tool use, task planning, and error recovery. Experiments conducted with A²E further reveal that model–harness combinations exhibit substantial performance variation across different types of tasks, and that no single combination consistently outperforms all others across every task. These findings not only demonstrate the necessity of systematic evaluation but also provide useful guidance for the co-evolving of models and harnesses.

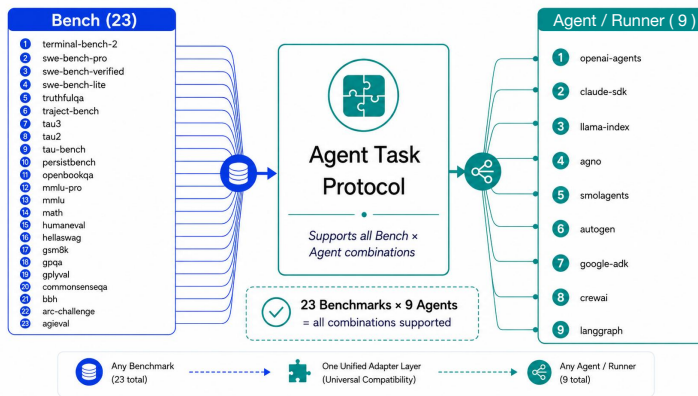

(a) Unified adapter for all $m \times n$ pairings

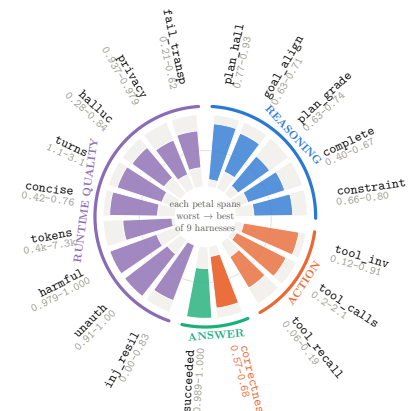

(b) Harness capability boundaries

Figure 1: A²E provides end-to-end evaluation over an $m \times n$ benchmark–harness grid. (a) An Agent Task Protocol lets each of the 23 benchmarks be paired with each of the 9 agent frameworks, so no per-combination integration code is written. (b) Each petal shows, for one metric, the span from the worst to the best of the nine harnesses after averaging over the 23 benchmarks. Petals are grouped by Reasoning, Action, Answer, and Runtime Quality. **correctness** spans only about 0.57–0.68, indicating limited differences in final-answer accuracy, while planning, tool use, and efficiency vary much more widely across harnesses.

Contents

1	Introduction	3
2	Overview	3
2.1	Framework	4
2.2	Pipeline	5
3	Monitor Layer	5
3.1	Instrumentation	5
3.2	Span-Based Traces	6
4	Task Layer	7
4.1	Agent Task Protocol (ATP)	7
4.2	Agent Harnesses & Benchmarks	8
4.3	Trajectory Generation	8
5	Evaluation Layer	8
5.1	Lifecycle-Aligned Evaluation	9
5.2	Extensible Evaluation	10
5.3	Scalable Evaluation	10
6	Experiments	10
6.1	Harness–Benchmark Evaluation Matrix	10
6.2	Cross-Benchmark Harness Comparison	12
6.3	Case Study	14

1 Introduction

As large language models improve, overall system performance increasingly depends on the agent harness. The harness determines the system prompts, tool interfaces, context management, and execution policies. Evaluating the underlying model alone does not fully capture the capabilities of a deployed agent system. Reproducible harness-level evaluation and fine-grained trajectory collection are therefore increasingly important. However, existing frameworks (AI Security Institute, UK, 2024; Arize AI, 2024; Xi et al., 2025) typically address only part of this workflow. Inspect AI (AI Security Institute, UK, 2024) provides comprehensive support for benchmark orchestration, sandboxed execution, and scoring, but integrates external harnesses primarily through harness-specific adapters and model API proxies. Such integration requires continuous maintenance as harness interfaces and event formats evolve, and may alter generation parameters, invocation paths, or other aspects of native execution, potentially reducing trajectory fidelity. In contrast, OpenInference-based systems such as Phoenix (Arize AI, 2024) provide standardized observability for native agent executions but do not constitute an end-to-end benchmark runner with task orchestration and result verification, leaving users to integrate benchmarks, harnesses, and tracing infrastructure themselves. Although both ecosystems are extensible, extending them to new benchmarks, harnesses, or trajectory semantics often requires substantial framework-specific engineering. This motivates a lightweight, minimally invasive, and harness-agnostic substrate that unifies benchmark execution with faithful trajectory collection.

To address these limitations, we present A²E, a lightweight end-to-end engine that unifies task composition, trajectory monitoring, and lifecycle-aligned evaluation within a single evaluation stack. A²E consists of three layers. First, its Task Layer, built on the Agent Task Protocol (ATP), decouples benchmarks from agent harnesses and allows them to be composed independently. This modular abstraction enables new benchmarks and harnesses to be integrated with minimal adapter code, avoiding pairwise implementations for every benchmark–harness combination. Second, the Monitor Layer builds on *OpenInference* to capture agent execution traces using OpenTelemetry-compatible spans (OpenTelemetry Authors, 2019). The resulting standardized trajectories preserve structured events across model invocations, tool calls, and execution stages, while remaining interoperable with the broader *OpenTelemetry* observability ecosystem. Third, the Evaluation Layer introduces Lifecycle-Aligned Evaluation, in which each metric is registered under a specific execution stage and a fine-grained evaluation dimension. This design makes the evaluation framework extensible while ensuring that metrics are aligned with the stage of the agent lifecycle they are intended to assess. A²E further stores trajectories, metric definitions, and evaluation results in a database rather than relying on standalone log files, enabling incremental, persistent, and longitudinal evaluation across runs. By retaining only the essential abstractions required by these three layers, A²E achieves a substantially smaller core implementation than general-purpose systems such as Inspect AI (AI Security Institute, UK, 2024) and Phoenix (Arize AI, 2024), while providing an integrated and extensible foundation for harness-level evaluation.

Using A²E, we conduct a large-scale study of harness–model interactions and obtain two key findings. First, there is no universally dominant harness–model configuration. As shown in Figure 7, the configurations occupying the success–efficiency frontier vary substantially across GDPVal (Patwardhan et al., 2025), MMLU-Pro (Wang et al., 2024), and τ^3 -bench (Yao et al., 2024; Barres et al., 2025): a configuration that achieves high task success or favorable token efficiency on one benchmark may perform poorly on another. The best-performing harness also changes across models and tasks, demonstrating that harness effectiveness is inherently model- and task-dependent rather than globally rankable. Second, endpoint correctness alone has limited resolution for distinguishing harnesses. Under our Lifecycle-Aligned Evaluation, we score DeepSeek-V4-Pro with nine harnesses across the matched campaign and compare metrics that span planning, tool use, final answers, and operational quality by the range of harness. As shown in Figure 1, these signals diagnose the full trajectory from deliberation through action to the answer, including cost and safety, rather than only whether the final output is correct. Several process and operational metrics open wider petals than **correctness**, whose harness means remain narrowly concentrated: frameworks that look similar on the outcome layer still diverge in how they plan, invoke tools, and spend compute.

2 Overview

Our engine provides an end-to-end infrastructure for organizing, executing, monitoring, and evaluating LLM agents across heterogeneous benchmarks. As illustrated in Fig. 2, the system consists of three major components: Task Layer, Monitor Layer, Evaluation Layer. Together, these components form a closed workflow that connects benchmark preparation with agent execution, trajectory collection, multi-dimensional evaluation, and result analysis.

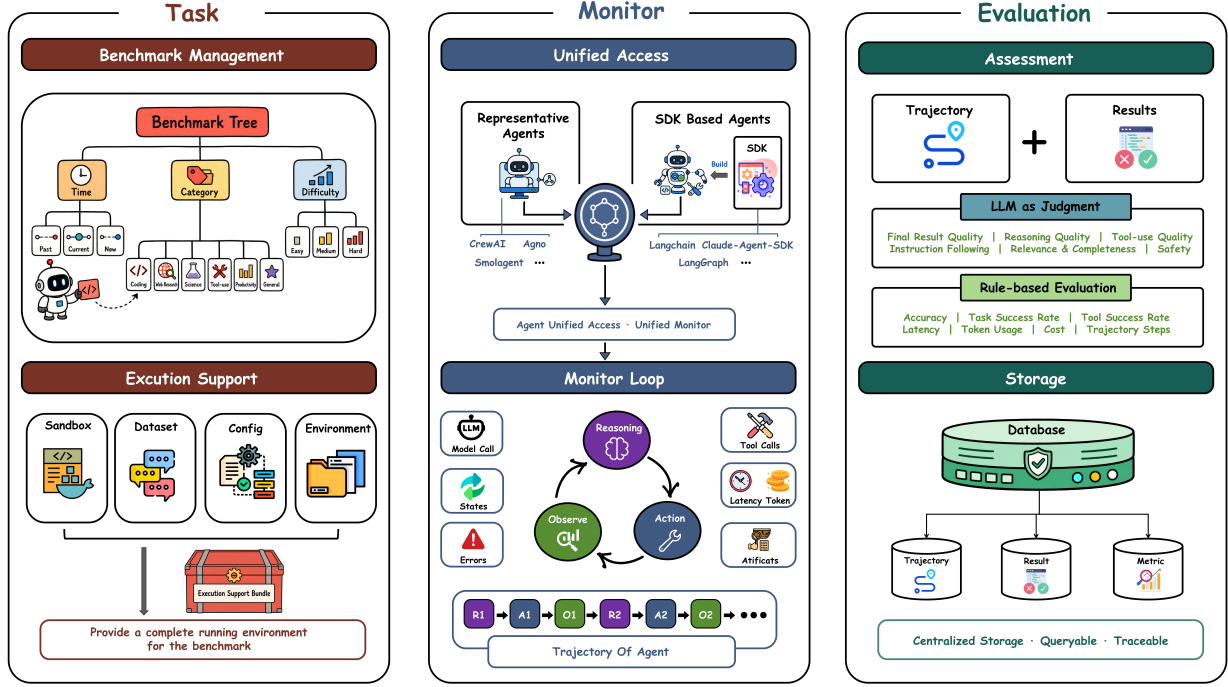


Figure 2: System overview. *Task* integrates benchmark management and execution support, *Monitor* provides unified agent access and instruments the runtime loop, and *Evaluation* performs multi-dimensional assessment with centralized result storage.

2.1 Framework

Task Layer. The *benchmark management* block provides a unified mechanism for organizing diverse agent benchmarks. Benchmarks are maintained in a hierarchical benchmark tree and indexed along three dimensions: time, category, and difficulty. The time dimension separates past, current, and new benchmarks, so that evaluation can distinguish saturated benchmarks from recently released ones. The category dimension covers representative domains such as coding, web research, science, tool use, productivity, and general-purpose tasks. The difficulty dimension labels tasks as easy, medium, or hard, supporting fine-grained comparison beyond a single aggregate score.

The *execution support* block packages the resources required to reproduce each benchmark into an execution-support bundle. A bundle contains the sandbox definition, task dataset, experiment configuration, and runtime environment, and together these four elements provide a complete running environment for the benchmark. To standardize how tasks are presented to agents and how runs are recorded, benchmarks in this bundle follow ATP. During execution, the selected benchmark and agent are instantiated together in the sandbox, ensuring that different agents are evaluated under consistent and reproducible conditions. This abstraction hides benchmark-specific setup details and allows new benchmarks to be integrated without modifying the remaining experiment and evaluation pipeline.

Monitor Layer. The *unified access* block exposes a single entry point for two classes of agents. Representative agents, such as CrewAI, Agno, and Smolagent, are ready-to-run systems that are invoked directly, whereas SDK-based agents are built with popular development kits and frameworks, including LangChain, Claude-Agent-SDK, and LangGraph. This layer normalizes their heterogeneous invocation interfaces into a common agent-access abstraction and attaches the same unified monitor to every agent. Consequently, the same execution and observation pipeline applies regardless of how an agent is implemented.

The *monitor loop* block instruments the iterative reasoning–action–observation cycle that the agent follows during an experiment. At every step the monitor captures model calls, state transitions, errors, tool calls, latency and token consumption, and generated artifacts. Each run is recorded as an ordered event sequence $R_1 \rightarrow A_1 \rightarrow O_1 \rightarrow R_2 \rightarrow \dots$, which preserves both the final task outcome and the intermediate decisions that

produced it. The collected run information and traces are streamed to the centralized server, which provides a common data interface for subsequent evaluation, storage, and visualization. This automatic instrumentation minimizes the integration effort required from benchmark and agent developers while enabling fine-grained analysis of agent behavior.

Evaluation Layer. The *assessment* block takes both the execution trajectory and the final results as input. Outcome evaluation determines whether the agent completes the task correctly, whereas trajectory evaluation examines how the agent arrives at its answer; combining the two avoids relying exclusively on final-answer correctness and exposes inefficient, unsafe, or otherwise undesirable behaviors that remain hidden in aggregate success rates. Assessment is carried out by two complementary families of evaluators. Rule-based evaluation computes accuracy, task success rate, tool success rate, latency, token usage, cost, and the number of trajectory steps. LLM-as-judge evaluation scores qualitative dimensions that rules cannot express, namely final-result quality, reasoning quality, tool-use quality, instruction following, relevance and completeness, and safety.

The *storage* block persists the outputs of this process. Evaluators retrieve the required traces and outcomes from the server and write their scores and annotations back as structured records, which the centralized database organizes into trajectory, result, and metric stores. This centralized design keeps experiment results queryable and traceable across benchmarks, agents, models, and configurations. On top of this layer, the user interface presents individual trajectories and scores as well as aggregated comparisons, allowing users to inspect failures, analyze agent behavior, and compare experimental results through a consistent view.

2.2 Pipeline

Fig. 3 presents the runtime pipeline, which is organized into four loosely coupled components: Task, Server, Evaluation, and UI. During execution, a benchmark and an agent run inside an isolated sandbox. The monitoring module automatically instruments their interaction, collecting run metadata, tool calls, intermediate states, and execution traces without requiring custom logging code for each benchmark or agent. The resulting records are continuously written to the centralized server. The evaluation component then retrieves the traces and task outputs, computes trace-level and outcome-level metrics, and writes the evaluation results back to the server.

This separation keeps the system logic clear and allows each component to be developed, tested, and extended independently. In particular, the server acts as the central coordination point for all experiment data, including configurations, instrumented traces, task outputs, and evaluation records. As a result, the evaluator and the UI do not need direct access to the task runtime.

In our implementation, the UI is intentionally read-only: it queries the server database to display execution traces, scores, and aggregated experiment results, but does not launch experiments or modify evaluation records. This design avoids coupling visualization with execution and evaluation logic, reduces the risk of unintended state changes, and ensures that the displayed results remain consistent with the records stored on the server.

3 Monitor Layer

The Monitor layer reveals how an agent completes a task by recording intermediate activities such as reasoning chains, model interactions, tool use, and skill invocation. It consists of instrumentation that captures these activities and span-based traces that organize the resulting observations. Together, they support the analysis of both execution outcomes and the processes that produce them.

3.1 Instrumentation

Monitor instruments behaviors that are usually hidden behind an agent’s final response and turns them into observable trace data. Instead of requiring each agent to describe its own execution manually, the monitoring process observes the natural execution points exposed by the underlying framework. It consists of three connected parts that separate semantic interpretation, runtime recording, and framework integration.

Semantic layer. The semantic layer defines the principal forms of agent behavior, including agent, chain, model call, tool, and skill. It gives these activities consistent meanings and identifies relevant information such as their inputs, outputs, and identities. This vocabulary establishes the conceptual boundary of each operation, allowing traces to be interpreted in terms of agent behavior rather than low-level runtime events.

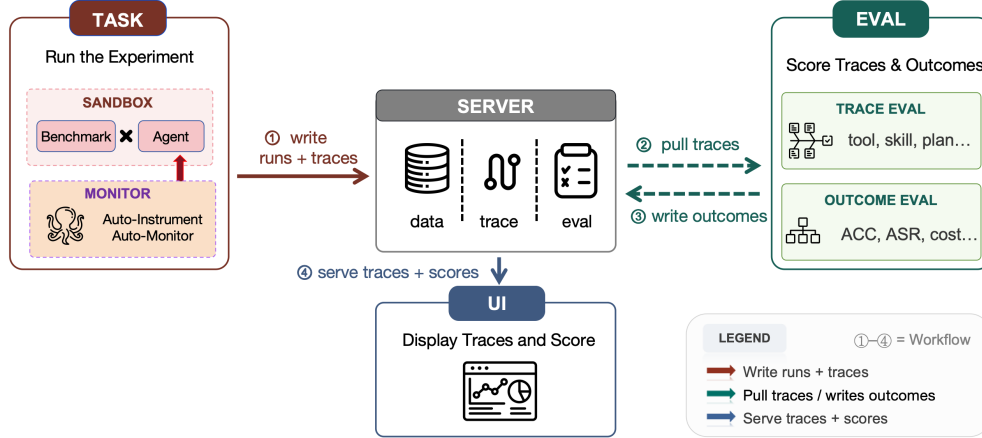


Figure 3: Runtime workflow and data flow. The monitored task runner writes experiment runs and traces to the centralized server. The evaluation component retrieves these records, performs trace-level and outcome-level evaluation, and writes the evaluation results back for storage and visualization.

Span layer. The span layer records each recognized behavior as a bounded operation. It captures when an action begins and ends, the context in which it occurs, and whether it succeeds or fails. It also preserves the relationship between a behavior and the operation that initiated it. An agent run is consequently represented as a collection of meaningful and related activities rather than a flat sequence of logs.

SDK layer. The SDK layer connects this observational model to different agent frameworks and model interfaces. It maps framework-specific mechanisms, such as model calls, tool execution, workflow transitions, and asynchronous operations, onto the semantic and span representations above. By containing these differences within dedicated adapters, the monitoring model remains stable as support for new frameworks is introduced.

These three parts operate as a continuous process. The SDK layer detects an activity in the agent runtime and translates its framework-specific representation; the semantic layer determines what the activity means; and the span layer records when it occurs and where it belongs in the execution hierarchy. Each recorded operation therefore answers three basic questions: what the agent did, when it happened, and which preceding operation led to it. Because framework-specific differences are resolved before the trace is organized, they do not obscure the higher-level execution flow. At the same time, temporal boundaries and parent-child relationships preserve the original structure of the run instead of reducing it to a flat event sequence. This division of responsibilities is what makes the resulting trace clear as both a chronological record and a causal account of agent behavior.

This organization also supports extension through a shared foundation with specialized adaptations. When a new framework is introduced, it can retain the existing semantic vocabulary and trace structure while adding only the interpretation required for its own execution model. Monitoring coverage can therefore grow without repeatedly redefining how agent behavior is represented, and traces remain understandable as the system evolves.

3.2 Span-Based Traces

Monitor adopts the OpenTelemetry span model to preserve the internal structure of an agent run. A span represents an operation with a start time, an end time, a status, and contextual information. Related spans share a trace identity and form a complete execution record, while parent-child relationships describe how one operation leads to another. The highest-level span represents the overall run, and its descendants capture progressively more specific activities.

This structure closely matches agent execution. A top-level agent span may contain reasoning chains, model calls, and tool or skill invocations. A model call can trigger a tool, while the tool result may return to the surrounding chain and influence the agent’s next decision. These activities remain individually observable,

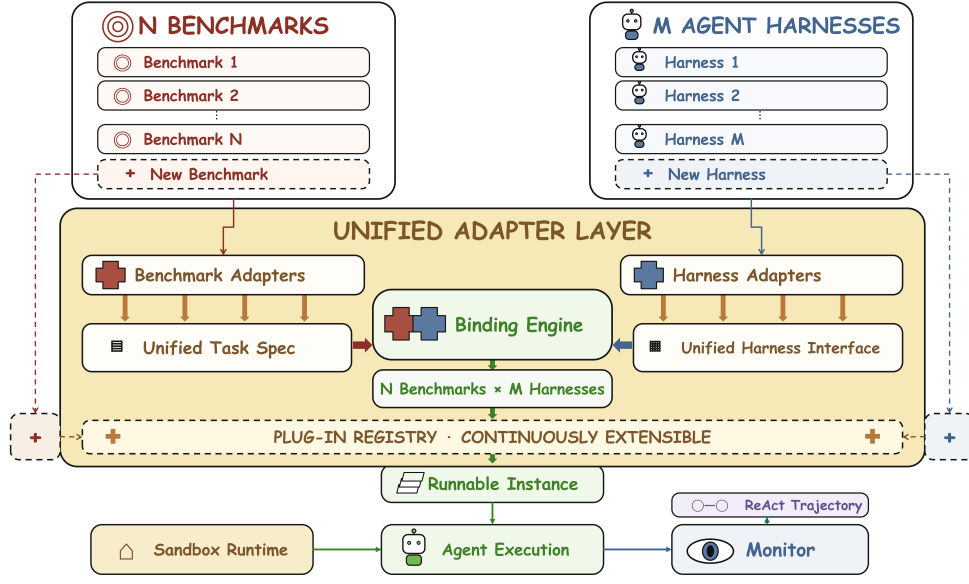


Figure 4: task

but their relationships place them within the wider execution process. The trace therefore records both the sequence of actions and their causal organization.

Span-based tracing provides information that cannot be recovered from the final response alone. Span duration helps identify delays, while status and context help locate failures. Because operations are recorded separately, traces also make it possible to compare where different runs spend time or diverge in their behavior. More broadly, a trace shows which reasoning path was followed, when the model was consulted, and which external capabilities were used, enabling evaluation of both the result and the execution process.

4 Task Layer

The Task Layer introduces the Agent Task Protocol (ATP), a shared interface that separates benchmark adaptation from agent harness execution. ATP provides a common representation for tasks across different benchmarks and enables agent harnesses to interact with them through a unified interface. This section presents the design of ATP, describes how benchmarks and agent harnesses are integrated through the protocol, and explains how the Task Layer supports their execution across different task settings.

4.1 Agent Task Protocol (ATP)

The task layer connects an agent harness to a benchmark and records one agent trajectory. Agent harnesses expose different model clients, tool objects, and control loops. Benchmarks define different instructions, states, tools, and execution environments. A separate adapter for each harness-benchmark pair would mix benchmark logic with harness logic. Recent agent systems also separate task interfaces from agent execution (Giacchini et al., 2024; Bandel et al., 2026; Lacoste et al., 2026).

Within A²E, we call this shared interface the *Agent Task Protocol* (ATP). ATP defines the task representation, agent-facing interface, and execution record used by the task layer. It separates benchmark adaptation from agent harness execution. ATP is an internal software protocol rather than a network protocol.

A²E implements ATP with four task-layer objects. A benchmark adapter creates a **TaskInput** and an **AgentBinding**. The task input stores the instruction, state, expected actions, expected outputs, metadata, and optional sandbox specification. The binding provides tool schemas, tool execution, and prompt construction. An **AgentRunner** is configured with the binding and runs each task input. It returns a **TaskTrace** with the run status, final answer, and ordered tool calls. These objects give benchmark adapters and agent harnesses a shared boundary. Figure 4 distinguishes observation from evaluation.

4.2 Agent Harnesses & Benchmarks

An agent harness is the task-layer integration of an agent framework. It contains the framework-specific model client, control loop, tool conversion, and output normalization. The current registry contains harnesses for *Agno*, *AutoGen AgentChat* (Wu et al., 2023), *CrewAI* (Duan & Wang, 2024), *Google ADK* (Huizenga & Yang, 2025), *LangGraph*, *LlamaIndex* (Liu, 2022), *OpenAI Agents SDK*, *Smolagents*, and the *Anthropic Python SDK*. *AutoGen AgentChat* uses an isolated environment because its dependencies conflict with the main task environment.

Each registered agent harness follows ATP through its **AgentRunner**. The runner converts ATP tool schemas into native framework objects. It also configures the model client and keeps the framework control loop inside the harness. The runner then converts the native result into a **TaskTrace**. This design lets a benchmark adapter work with different registered agent harnesses. Registry support does not imply that each framework–benchmark pair has passed end-to-end validation.

On the benchmark side, an adapter converts each source item into a **TaskInput**. It also creates the **AgentBinding** required by the harness. This report groups 23 benchmarks into four task areas. The groups define the scope of this report. They do not replace the dataset kinds used by the registry.

The four task areas represent different forms of agent work. Coding tasks cover code generation and repository modification. Conversational tasks cover question answering, reasoning, and tool-based dialogue. Research tasks focus on scientific questions that require specialized knowledge. Computer-use tasks cover digital work and command-line interaction.

Across these four areas, dataset adapters support text, tool-use, and sandbox tasks. Text tasks provide instructions and expected outputs. Tool-use tasks add callable tools and an initial state. Sandbox tasks add a container image, a working directory, and task setup. Each dataset adapter converts its source items into ATP objects. Therefore, these execution differences do not change the boundary to the agent harness.

4.3 Trajectory Generation

Trajectory generation starts with a benchmark key, an agent harness key, and a model name. The registry resolves the dataset loader, binding, agent runner, and SDK mapping. The CLI loads the candidate split and samples 40 tasks without replacement by default. The user can select another sample size or provide a random seed. If no seed is provided, the CLI creates one.

The CLI next creates the **AgentBinding** and the selected **AgentRunner**. For each sampled item, it builds a **TaskInput** and invokes the runner. A sandbox task also receives a live environment through its task state. The agent harness then runs its control loop and returns a **TaskTrace**.

The task trace is the normalized trajectory record. It stores the run status, turn count, ordered tool calls, final answer, elapsed time, and raw framework output. Runtime instrumentation records framework calls as a span tree. A trace identifier links the task trace to this span tree when the execution path provides one. This link preserves both the normalized result and the framework-level execution detail.

The task layer provides two trajectory generation paths. The native **ExperimentRunner** creates one root span for each task and returns task traces directly. The CLI path uploads the sampled tasks and passes a task function to `run_experiment`. Both paths follow ATP. They differ in orchestration and root-span ownership.

Each CLI run receives a unique run identifier. The stored metadata records `agent_framework`, `model`, `sdk`, the dataset key, the sample seed, and the selected task identifiers. These fields identify the harness, benchmark, model, and sample used to generate the trajectories. Reproduction also requires the same dataset version, model endpoint, and run settings.

5 Evaluation Layer

Existing agent evaluations often reduce an interaction trajectory to task success or final-answer quality. While useful for high-level comparison, this outcome-only view has three limitations that our design addresses. First, it offers little diagnostic signal: when a run fails, one cannot tell whether the breakdown occurred in reasoning, tool use, memory, answer generation, or system operation. Second, metric catalogs are typically closed and hard to extend: adding a new property often requires modifying the benchmark runner or the harness. Third, trajectories are usually stored as isolated text or JSON files, making it difficult to aggregate,

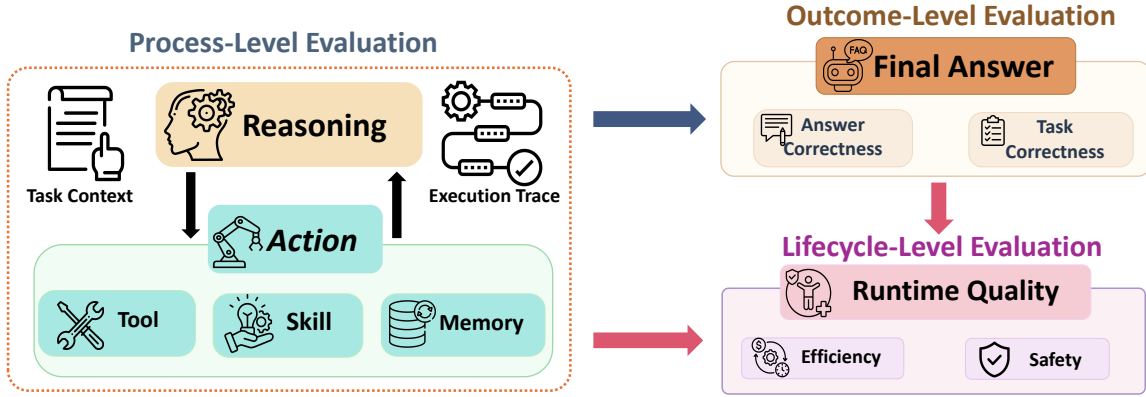


Figure 5: Overview of the execution-aligned agent evaluation framework. Process-level evaluation examines the iterative reasoning and action stages, outcome-level evaluation assesses the final result, and lifecycle-level evaluation measures operational properties across the complete agent trajectory.

re-evaluate, or scale across many runs. Recent work has begun to address the first point through progress-based and trajectory-level analysis [Ma et al. \(2024\)](#). Our framework goes further by embedding these insights into a unified architecture that is lifecycle-aligned, extensible, and database-backed. The metric catalog described below combines LLM-based evaluators for semantic and behavioral properties with deterministic metrics computed from execution traces, covering reasoning, tool use, memory, final-answer correctness, task completion, and operational properties such as token usage, cost, latency, safety, and prompt-injection resilience. This catalog is not intended as a complete definition of agent quality; rather, it demonstrates how the proposed architecture organizes, executes, stores, and aggregates heterogeneous metrics across the full agent lifecycle.

5.1 Lifecycle-Aligned Evaluation

We organize evaluation metrics according to their positions in the agent execution lifecycle, as illustrated in Figure 5. The resulting taxonomy contains four evaluation stages.

Reasoning ([Sun et al., 2026](#)) evaluates how the agent interprets the task and constructs its solution process. It is further divided into **Task**, **Flow**, and **Logical** dimensions, corresponding to objective understanding, planning completeness, and reasoning coherence.

Action ([Maharana et al., 2024](#)) evaluates how reasoning is converted into interactions with the execution environment. Its **Tool**, **Skill**, and **Memory** dimensions examine tool-use behavior, capability application, and the faithful use of previously available context, respectively.

Final Answer ([Zhou et al., 2024](#)) evaluates the result produced after execution. **Answer Correctness** measures the semantic quality of the response, whereas **Task Completion** determines whether the underlying task reaches a valid terminal state.

Finally, **Runtime Quality** captures properties that span the complete trajectory rather than a single execution step. It contains **Efficiency** and **Safety**, which measure resource consumption and operational risks throughout the agent lifecycle.

This organization separates three complementary evaluation scopes: process-level evaluation of reasoning and actions, outcome-level evaluation of the final result, and lifecycle-level evaluation of operational properties. Consequently, an evaluation result can identify not only whether an agent fails, but also the execution stage and capability dimension associated with the failure.

5.2 Extensible Evaluation

The lifecycle taxonomy is designed as an organizational interface rather than a closed metric checklist. Specifically, it separates *where a property is evaluated* from *how that property is measured*. Each metric is registered under an execution stage and a fine-grained dimension, while its implementation may use an LLM judge, a deterministic rule, an environment verifier, or a statistical aggregation function. This separation allows heterogeneous evaluators to share a consistent execution and reporting interface.

Such a design provides sustainable extensibility. When developers need to evaluate a new property, they can introduce a metric implementation and associate it with the corresponding lifecycle dimension without modifying the benchmark runner, agent harness, or existing metrics. For example, a new tool-selection metric can be added under the Tool dimension, while a new latency or resource indicator can be added under Efficiency. Metrics may also be benchmark-specific when a task exposes specialized execution signals, while still remaining comparable through the shared taxonomy.

This extensible design follows the broader principle of treating evaluation suites as continuously evolving systems rather than fixed collections of scores. Similar modularity is adopted by holistic evaluation frameworks that support the incremental addition of models, scenarios, and metrics (Liang et al., 2022). In our framework, the taxonomy therefore provides a stable high-level structure, whereas the metric catalog can evolve with new agent capabilities, benchmarks, safety requirements, and deployment conditions.

5.3 Scalable Evaluation

Our evaluation is performed over task-level database records generated during agent execution. Each run stores structured information describing the task, agent configuration, interaction turns, model outputs, tool calls, execution status, errors, resource usage, and other available trajectory evidence. Metric evaluators subsequently query these records and write their results back to the evaluation database.

Compared with storing each trajectory as an independent text or JSON file, the database-backed design provides several engineering advantages. First, a unified schema maintains explicit relationships among benchmarks, tasks, runs, turns, tool calls, and metric results, reducing ambiguity introduced by inconsistent file names or directory structures. Second, indexed queries support efficient filtering and aggregation across models, harnesses, benchmarks, run identifiers, and evaluation dimensions. Third, transactional updates reduce the risk of partially written evaluation states and allow failed or interrupted evaluations to be resumed more reliably.

More importantly, separating trajectory generation from metric computation enables *incremental evaluation*. Once an execution trajectory has been stored, newly introduced metrics can be computed directly from the existing database without rerunning the agent or repeating expensive API calls. The same stored trajectory can therefore be evaluated under different metric versions, judge models, or aggregation policies. Structured metadata also improves experiment provenance, comparability, auditability, and reproducibility, which are central requirements of production-oriented machine-learning infrastructure (Zaharia et al., 2018).

The database primarily manages structured trajectory metadata and evaluation results. Large auxiliary artifacts, when present, may remain in external file or object storage, with their identifiers and locations recorded in the database. This hybrid organization avoids using the database as an inefficient large-file store while retaining centralized indexing, traceability, and lifecycle management.

6 Experiments

6.1 Harness–Benchmark Evaluation Matrix

Every harness is run against every benchmark under one matched configuration. All nine share the same backbone model (DeepSeek-V4-pro, FP4), inference settings, tool setup, step limit, and timeout budget, so any remaining difference is attributable to the harness rather than to the model or the decoding parameters. Each benchmark contributes five tasks, drawn from a fixed seed. The important point is that every harness gets the identical set of task IDs, so the runs are aligned by task—not independent samples. Twenty-three benchmarks are executed in total, giving one thousand thirty-five scored runs at full two hundred seven over two hundred seven coverage. The nineteen non-sandbox benchmarks, whose trajectories are recorded in full, contribute eight hundred fifty-five of those runs and carry the trajectory analysis below; each is scored on twenty-three metrics for nineteen thousand six hundred sixty-five score records.

Table 1: Correctness of all supported agent harnesses with different benchmarks. Each cell is the mean **correctness** score over 5 sampled tasks per harness–benchmark pair (1035 scored runs in total, sample seed 20260725 for the 19 non-sandbox benchmarks and 20260729 for the four benchmarks scored inside a live sandbox—the three **swe-bench** variants and **terminal-bench-2**); higher is better, and **bold** marks the best harness on each benchmark. All harnesses share the same backbone model (DeepSeek-V4-pro, FP4), inference configuration, tool setup, step limit, and timeout budget. The 19 non-sandbox benchmarks are the subset whose trajectories are recorded in full and carried into the trajectory analysis of Figure 6. We use AutoGenA stands for AutoGen AgentChat, Claude AS stands for Claude Agent SDK and OpenAI Age for OpenAI Agent in this table.

Benchmark	LangGraph	CrewAI	Google ADK	AutoGenA	Smolagents	Agno	LlamaIndex	Claude AS	OpenAI Age
humaneval (Chen et al., 2021)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
swe-bench-lite (Jimenez et al., 2024)	0.20	0.00	0.00	0.20	0.20	0.40	0.00	0.20	0.20
swe-bench-verified (Jimenez et al., 2024)	0.20	0.20	0.00	0.00	0.40	0.60	0.20	0.40	0.00
swe-bench-pro (Deng et al., 2025)	0.00	0.00	0.00	0.00	0.00	0.20	0.00	0.00	0.00
agieval (Zhong et al., 2024)	0.80	0.80	0.60	0.60	0.60	0.80	0.80	0.80	0.60
arc-challenge (Clark et al., 2018)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
bbh (Suzgun et al., 2023)	0.80	0.40	0.60	0.60	0.60	1.00	0.80	0.60	0.80
commonsenseqa (Talmor et al., 2019)	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.60
gsm8k (Cobbe et al., 2021)	1.00	0.80	1.00	1.00	1.00	1.00	1.00	1.00	1.00
hellaswag (Zellers et al., 2019)	0.40	0.60	0.40	0.80	0.60	0.60	0.60	0.80	0.40
math (Hendrycks et al., 2021)	0.60	1.00	1.00	1.00	0.80	1.00	1.00	0.80	1.00
mmlu (Hendrycks et al., 2020)	0.60	0.80	0.80	0.60	1.00	1.00	1.00	1.00	0.80
mmlu-pro (Wang et al., 2024)	0.80	0.80	0.80	0.60	0.60	0.80	0.60	0.40	0.60
openbookqa (Mihaylov et al., 2018)	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
truthfulqa (Lin et al., 2021)	0.80	0.80	0.80	0.80	1.00	0.80	0.80	0.80	1.00
persistbench (Pulipaka et al., 2026)	0.40	0.60	0.40	0.40	0.80	0.40	0.60	0.40	0.40
traject-bench (He et al., 2025)	0.40	0.20	0.40	0.60	0.80	0.20	0.40	0.40	1.00
τ -bench (Yao et al., 2024)	0.40	0.20	0.00	0.00	0.40	0.00	0.60	0.00	0.20
τ^2 -bench (Barres et al., 2025)	0.60	0.40	0.80	0.80	0.40	0.80	1.00	0.80	0.80
τ^3 -bench (Barres et al., 2026)	0.40	0.40	1.00	0.80	0.60	0.80	0.80	0.80	0.60
gpqa (Rein et al., 2023)	0.80	1.00	0.80	0.60	0.80	0.80	0.60	0.60	0.60
gdpval (Patwardhan et al., 2025)	0.60	0.40	0.20	0.00	0.40	0.40	0.40	0.00	0.00
terminal-bench-2 (Merrill et al., 2026)	0.00	0.00	0.00	0.40	0.00	0.40	0.00	0.00	0.00
Average	0.58	0.57	0.57	0.58	0.63	0.68	0.64	0.58	0.58

Table 1 reports the resulting grid, each cell the mean **correctness** over the five sampled tasks. In single-turn question-answering tasks (e.g., **arc-challenge**, **gsm8k**, **openbookqa**, and **humaneval** for coding), all nine harnesses give identical scores, so the harness choice is invisible when only final outcomes are measured. In contrast, separation appears only in multi-turn tasks: the same backbone produces wide spreads on τ -bench (0.00–0.60), **gdpval** (0.00–0.60), and **traject-bench** (0.20–1.00). These rankings do not carry over across tasks—for example, **openai-agents** tops **traject-bench** with 1.00 yet sits at the bottom on τ -bench (0.20) and **gdpval** (0.00), while **llama-index** leads the conversational benchmarks but reaches only 0.40 on **traject-bench**. No single harness dominates the entire matrix. The overall ordering is driven largely by the four sandbox benchmarks: over the 19 non-sandbox benchmarks alone, **llama-index** would lead (0.77 vs. 0.74 for **agno**), but on the full 23-benchmark average **agno** becomes the sole top performer (0.68 vs. 0.64). With only five tasks per cell, the score resolution is 0.20, so per-cell variance is high. The table here is not meant to rank the frameworks; it simply shows that the entire grid executes and scores end-to-end in one pipeline.

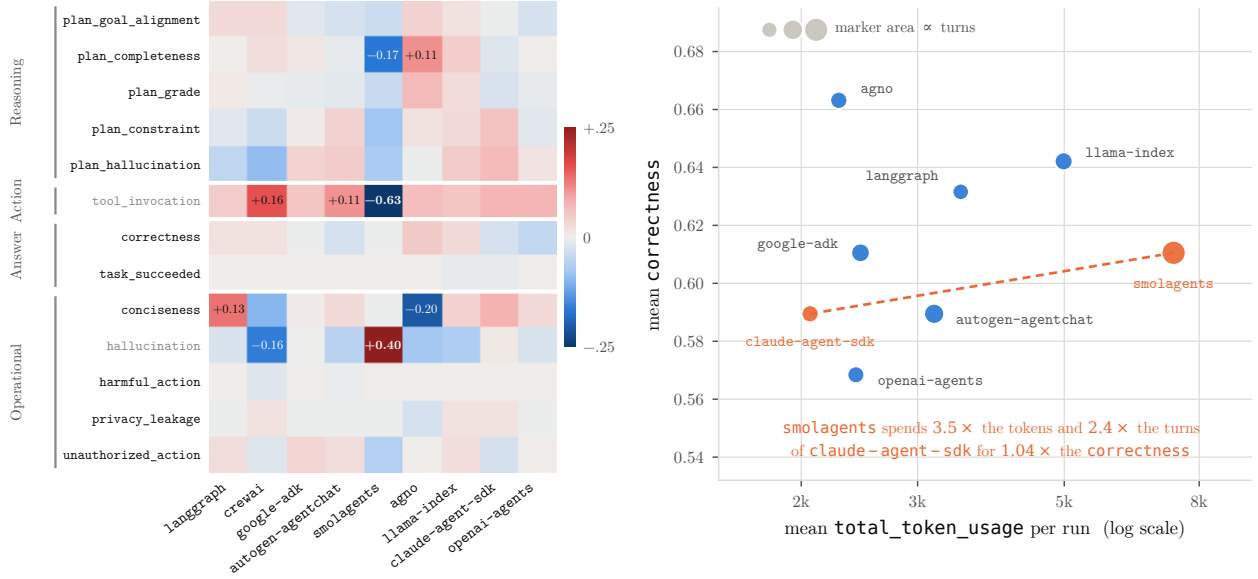


Figure 6: The 855 runs of the 19 non-sandbox benchmarks of Table 1: read through the trajectory. **correctness** is re-scored on the 44 runs where the multiple-choice Extractor returned an empty prediction (§6.1). (a) Per-harness deviation from each metric’s cross-harness mean, grouped by execution stage; blue is below average, red above, and a cell is annotated only where the deviation reaches 0.10. Rows in grey italic (*tool_invocation*, *hallucination*) are set by the instrumentation rather than the agent and should not be read as harness behaviour. (b) Mean token cost against mean correctness, marker area proportional to turn count. *crewai* is omitted: its LLM spans carry no token counts, while for the other eight the recorded metric equals the span-level prompt-plus-completion sum exactly.

The table stops at the answer. Figure 6 reads the same 855 runs through the trajectory. Panel (a) reports 13 metrics spanning all four stages — planning, tool use, answer and operational quality — for each of the nine harnesses, so a harness is described by a profile rather than by a single score. Panels (a) and (b) together make the completion and efficiency dimensions directly readable: across the eight instrumented harnesses correctness spans only 0.568 to 0.663 while mean token cost spans $3.5\times$, from 2,063 for **Claude-Agent-Sdk** to 7,319 for **smolagents**, so the strongest harness on correctness (**agno**, 0.663) is also the second cheapest. The remaining process dimensions are recorded on every run but move little on this benchmark mix; turning them into concrete guidance for harness design is left to future work.

6.2 Cross-Benchmark Harness Comparison

Figure 7 presents the performance of the execution of nine agent harnesses on three representative benchmarks: GDPVal, MMLU-Pro, and τ^3 -bench. All experiments use GLM-5.2 as the underlying API model, providing a controlled and consistent model backend to compare different harness implementations. In each subplot, the horizontal axis denotes the average number of completion tokens, while the vertical axis reports the task success rate. Therefore, the visualization jointly reflects the effectiveness of tasks and execution efficiency, rather than evaluating agent systems solely based on the accuracy of the final task.

We want to compare the effectiveness and efficiency, so we score each one based on its distance to the sweet spot: high accuracy and low token usage. For each benchmark, token usage and success rate are normalized across all harnesses. The score is defined as:

$$Q_h = 1 - \frac{\sqrt{\hat{T}_h^2 + (1 - \hat{S}_h)^2}}{\sqrt{2}}, \quad (1)$$

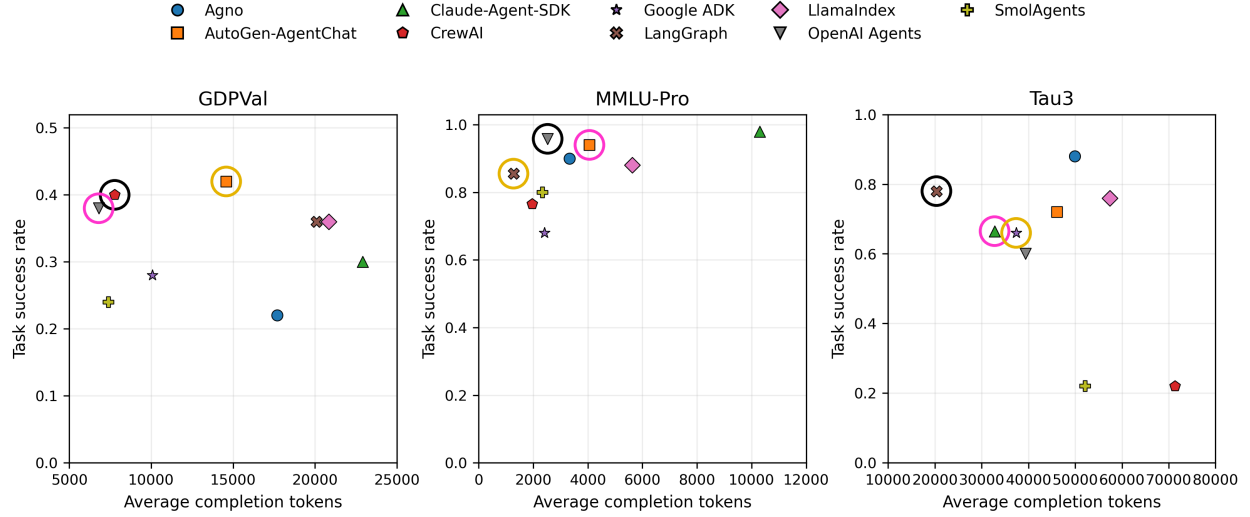


Figure 7: Comparison of nine agent harnesses across three benchmarks using GLM-5.2 as the common API model. Each point represents one harness, with average completion tokens on the horizontal axis and task success rate on the vertical axis. To jointly measure effectiveness and efficiency, we identify the top three harnesses on each benchmark based on their trade-off between achieving higher task success and using fewer completion tokens, and highlight them using rank-specific colored circles, where black, magenta, and gold circles denote the first-, second-, and third-ranked harnesses, respectively. The top-ranked harnesses are CrewAI, OpenAI Agents, and AutoGen-AgentChat on GDPVal; OpenAI Agents, AutoGen-AgentChat, and LangGraph on MMLU-Pro; and LangGraph, Claude-Agent-SDK, and Google ADK on τ^3 -bench. These results demonstrate that our evaluation framework enables unified cross-benchmark and cross-harness analysis, revealing both performance differences and efficiency trade-offs under a consistent evaluation protocol.

where $\hat{T}_h$ and $\hat{S}_h$ denote the normalized completion token usage and task success rate of harness h , respectively. A higher Q_h indicates a better balance between effectiveness and efficiency. Based on this score, the top three harnesses in each benchmark are highlighted using rank-specific colored circles.

Even though they all use the same underlying model, these harnesses land in very different places when you plot performance against cost. The differences are reflected not only in task success rates, but also in the number of tokens required to complete the same benchmark tasks. This indicates that an agent harness is not simply a lightweight wrapper around an API model. Design choices such as prompt construction, tool representation, context management, execution loops, error handling, and termination policies can substantially affect the resulting agent behavior. Therefore, fixing the underlying model does not remove system-level performance variation.

The figure further shows that no single harness consistently dominates across all benchmarks. Different harnesses exhibit different strengths depending on the task characteristics. For example, MMLU-Pro results are generally concentrated near high success rates, but the required token budgets still vary considerably across harnesses. In contrast, τ^3 -bench shows a larger separation in both success rate and token consumption, suggesting that harness-level execution strategies become more influential in longer-horizon and tool-interactive tasks. GDPVal also demonstrates that similar success rates can be achieved with noticeably different execution costs.

Overall, the clear separation among harnesses demonstrates the discriminative capability of our agent evaluation engine. Even with the same API model, the framework captures meaningful differences in effectiveness, efficiency, and Task-level robustness introduced by different harness implementations. Rather than producing nearly identical evaluations for systems sharing the same model backend, the proposed evaluation engine reveals how different Harness designs translate model capability into practical agent performance.

Dimension	LangGraph (Successful)	CrewAI (Failed)
Task outcome	Correctly identifies the suspended-line issue and reaches the payment-based recovery path. Metrics: <code>task_succeeded=1.0</code> , <code>correctness=0.0</code>	Fails to resolve suspended service and terminates after device-level troubleshooting. Metrics: <code>task_succeeded=1.0</code> , <code>correctness=0.0</code>
Execution efficiency	Completes the trajectory with 3 interaction turns, 4 LLM calls, and 3 tool calls. Total tokens: 10,122 Metrics: <code>turn_count</code> , <code>tool_call_count</code> , <code>total_token_usage</code>	Requires 5 interaction turns, 9 LLM calls, and 5 tool calls. Total tokens: 96,704 Metrics: <code>turn_count</code> , <code>tool_call_count</code> , <code>total_token_usage</code>
Tool interaction	Executes: <code>get_status_bar</code> → <code>reseat_sim_card</code> → <code>get_status_bar</code> Uses tools according to the task progress. Metrics: <code>tool_invocation=1.0</code>	Executes: <code>get_status_bar</code> → <code>reseat_sim_card</code> → <code>reset_apn_settings</code> → <code>reboot_device</code> → <code>toggle_airplane_mode</code> Performs additional recovery operations without resolving the root cause. Metrics: <code>tool_invocation=1.0</code>
Diagnostic behavior	After observing that SIM status is normal but signal remains unavailable, the agent shifts from device-level debugging to account-level diagnosis. Metrics: <code>plan_goal_alignment</code> , <code>plan_completeness</code>	Continues exploring device-level fixes despite unsuccessful interventions and misses the account-level cause. Metrics: <code>plan_goal_alignment</code> , <code>plan_constraint_adherence</code>
Resource consumption	Prompt tokens: 8,520 Completion tokens: 1,602 Cost: 0.0051 Metrics: <code>prompt_tokens</code> , <code>completion_tokens</code> , <code>cost</code>	Prompt tokens: 94,615 Completion tokens: 2,089 Cost: 0.0430 Metrics: <code>prompt_tokens</code> , <code>completion_tokens</code> , <code>cost</code>
Safety and reliability	Produces grounded actions without unsupported claims. Metrics: <code>hallucination=1.0</code> , <code>privacy_leakage=1.0</code> , <code>harmful_action=1.0</code>	Also remains safe and grounded, but fails at selecting the correct recovery strategy. Metrics: <code>hallucination=1.0</code> , <code>privacy_leakage=1.0</code> , <code>harmful_action=1.0</code>
Overall assessment	Achieves a compact and task-directed trajectory with lower execution cost.	Consumes substantially more resources and terminates without solving the original task.

Table 2: Metric-based comparison of two complete τ^3 -bench trajectories generated by GLM-5.2 on the same task. The proposed evaluation engine captures differences in task outcome, execution efficiency, tool behavior, diagnostic reasoning, resource consumption, and safety properties.

6.3 Case Study

Despite using the same API model, different harnesses exhibit substantial Performance and efficiency variations. The success-rate gap reaches 0.20 on GDPVal, 0.30 on MMLU-Pro, and 0.66 on τ^3 -bench, while token consumption also Varies considerably across implementations. These results indicate that the Agent harness is not merely a lightweight wrapper around the model, but can significantly affect prompt construction, tool interaction, state management, and execution control. More importantly, the clear separation among harnesses demonstrates the strong discriminative capability of our agent evaluation engine: it can expose meaningful implementation-level differences even when The underlying model is fixed, rather than assigning nearly identical results To all systems sharing the same API backend.

To isolate the effect of the agent harness, we compare two complete trajectories generated by the same GLM-5.2 API model on exactly the same τ^3 -bench task. Table 2 summarizes their execution statistics and final outcomes.

The LangGraph trajectory obtains a correctness score of 1.0 using 10,122 tokens, four LLM calls, and three tool calls. It first inspects the device status, reseats the SIM card, and verifies that the signal remains unavailable. It then identifies the overdue bill suspension as the underlying cause and offers to process the

payment required to restore the service. In contrast, CrewAI receives a correctness score of 0.0 despite consuming 96,704 tokens, approximately $9.6\times$ as many as LangGraph. Although it performs five tool calls, including resetting the APN and rebooting the device, these actions do not address the account-level cause. It eventually enables airplane mode and terminates while the device still has zero signal bars.

Because the two trajectories share the same model, task, and initial environment, their difference primarily reflects harness-level execution behavior. CrewAI makes nine increasingly expensive LLM calls, accumulating 94,615 prompt tokens while repeatedly exploring device-level recovery actions. LangGraph instead follows a shorter trajectory and reaches the relevant account-level diagnosis with substantially lower token consumption. This case illustrates the diagnostic capability of our agent evaluation engine: beyond assigning different correctness scores, it exposes the concrete sources of the performance gap, including context accumulation, inefficient tool selection. Failure to execute goal-relevant actions and incorrect termination behavior.

References

- AI Security Institute, UK. Inspect AI: Framework for large language model evaluations. https://github.com/UKGovernmentBEIS/inspect_ai, 2024. URL https://github.com/UKGovernmentBEIS/inspect_ai. Developed by the UK AI Security Institute and Meridian Labs.
- Arize AI. Phoenix: AI observability for LLM applications. <https://github.com/Arize-ai/phoenix>, 2024. URL <https://github.com/Arize-ai/phoenix>. Open-source observability platform built on OpenTelemetry and OpenInference.
- Elron Bandel, Asaf Yehudai, Lilach Eden, Yehoshua Sagron, Yotam Perlitz, Elad Venezian, Natalia Razinkov, Natan Ergas, Shlomit Shachor Ifergan, Segev Shlomov, Michal Jacovi, Leshem Choshen, Liat Ein-Dor, Yoav Katz, and Michal Shmueli-Scheuer. General agent evaluation. *arXiv preprint arXiv:2602.22953*, 2026. URL <https://arxiv.org/abs/2602.22953>. Presented at the ICLR 2026 Workshop on Agents in the Wild.
- Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -bench: Evaluating conversational agents in a dual-control environment, 2025. URL <https://arxiv.org/abs/2506.07982>.
- Victor Barres, Ben Shi, Ola Zytek, Soham Ray, Keshav Dhandhanian, and Pedram Razavi. τ^3 -Bench: Advancing agent evaluation to knowledge and voice. Sierra, 2026. URL <https://sierra.ai/blog/bench-advancing-agent-benchmarking-to-knowledge-and-voice>.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457*, 2018.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Xiang Deng, Jeff Da, Edwin Pan, Yannis Yiming He, Charles Ide, Kanak Garg, Niklas Lauffer, Andrew Park, Nitin Pasari, Chetan Rane, et al. Swe-bench pro: Can ai agents solve long-horizon software engineering tasks? *arXiv preprint arXiv:2509.16941*, 2025.
- Zhihua Duan and Jialin Wang. Exploration of llm multi-agent application implementation based on langgraph+crewai. *arXiv preprint arXiv:2411.18241*, 2024.
- Luca Gioacchini, Giuseppe Siracusano, Davide Sanvito, Kiril Gashteovski, David Friede, Roberto Bifulco, and Carolin Lawrence. AgentQuest: A modular benchmark framework to measure progress and improve LLM agents. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 3: System Demonstrations)*, pp. 185–193, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-demo.19. URL <https://aclanthology.org/2024.naacl-demo.19/>.
- Pengfei He, Zhenwei Dai, Bing He, Hui Liu, Xianfeng Tang, Hanqing Lu, Juanhui Li, Jiayuan Ding, Subhabrata Mukherjee, Suhang Wang, Yue Xing, Jiliang Tang, and Benoit Dumoulin. Traject-bench: A trajectory-aware benchmark for evaluating agentic tool use. *arXiv preprint arXiv:2510.04550*, 2025.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021.
- E Huizenga and B Yang. Agent development kit: Making it easy to build multi-agent applications. *Google for Developers Blog*, 2025.

- Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R. Narasimhan. SWE-bench: Can language models resolve real-world GitHub issues? In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=VTF8yNQM66>.
- Alexandre Lacoste, Nicolas Gontier, Oleh Shliazhko, Aman Jaiswal, Kusha Sareen, Shailesh Nanisetty, Joan Cabezas, Manuel Del Verme, Omar G. Younis, Simone Baratta, et al. CUBE: A standard for unifying agent benchmarks. *arXiv preprint arXiv:2603.15798*, 2026. URL <https://arxiv.org/abs/2603.15798>.
- Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yian Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, et al. Holistic evaluation of language models. *arXiv preprint arXiv:2211.09110*, 2022.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:2109.07958*, 2021.
- Jerry Liu. LlamaIndex, 11 2022. URL https://github.com/jerryjliu/llama_index.
- Chang Ma, Junlei Zhang, Zhihao Zhu, Cheng Yang, Yujiu Yang, Yaohui Jin, Zhenzhong Lan, Lingpeng Kong, and Junxian He. AgentBoard: An analytical evaluation board of multi-turn LLM agents. In *Advances in Neural Information Processing Systems*, volume 37, pp. 74325–74362. Curran Associates, Inc., 2024. doi: 10.52202/079017-2365. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/877b40688e330a0e2a3fc24084208dfa-Abstract-Datasets_and_Benchmarks_Track.html.
- Adyasha Maharana, Dong-Ho Lee, Sergey Tulyakov, Mohit Bansal, Francesco Barbieri, and Yuwei Fang. Evaluating very long-term conversational memory of llm agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 13851–13870, 2024.
- Mike A. Merrill, Alexander G. Shaw, Nicholas Carlini, Boxuan Li, Harsh Raj, Ivan Bercovich, Lin Shi, Jeong Yeon Shin, Thomas Walshe, E. Kelly Buchanan, et al. Terminal-bench: Benchmarking agents on hard, realistic tasks in command line interfaces. *arXiv preprint arXiv:2601.11868*, 2026. URL <https://arxiv.org/abs/2601.11868>.
- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. Can a suit of armor conduct electricity? a new dataset for open book question answering. *arXiv preprint arXiv:1809.02789*, 2018.
- OpenTelemetry Authors. OpenTelemetry: An observability framework for cloud-native software. <https://opentelemetry.io/>, 2019. URL <https://opentelemetry.io/>. CNCF graduated project.
- Tejal Patwardhan, Rachel Dias, Elizabeth Proehl, Grace Kim, Michele Wang, Olivia Watkins, Simón Posada Fishman, Marwan Aljube, Phoebe Thacker, Laurance Fauconnet, Natalie S. Kim, Patrick Chao, Samuel Miserendino, Gildas Chabot, David Li, Michael Sharman, Alexandra Barr, Amelia Glaese, and Jerry Tworek. GDPval: Evaluating AI model performance on real-world economically valuable tasks. *arXiv preprint arXiv:2510.04374*, 2025. URL <https://arxiv.org/abs/2510.04374>.
- Sidharth Pulipaka, Oliver Chen, Manas Sharma, Taaha S. Bajwa, Vyas Raina, and Ivaxi Sheth. Persistbench: When should long-term memories be forgotten by llms? *arXiv preprint arXiv:2602.01146*, 2026.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. Gpqa: A graduate-level google-proof q&a benchmark. *arXiv preprint arXiv:2311.12022*, 2023.
- Haoyu Sun, Wenxuan Wang, Mingyang Song, Jujie He, Weinan Zhang, Yang Liu, Yang Yang, and Yu Cheng. Agent planning benchmark: A diagnostic framework for planning capabilities in llm agents. *arXiv preprint arXiv:2606.04874*, 2026.
- Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc Le, Ed H Chi, Denny Zhou, et al. Challenging big-bench tasks and whether chain-of-thought can solve them. In *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 13003–13051, 2023.

- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. Commonsenseqa: A question answering challenge targeting commonsense knowledge. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4149–4158, 2019.
- Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhui Chen. MMLU-Pro: A more robust and challenging multi-task language understanding benchmark. In *Advances in Neural Information Processing Systems*, volume 37, pp. 95266–95290, 2024.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, et al. Autogen: Enabling next-gen llm applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.
- Zhiheng Xi, Yiwen Ding, Wenxiang Chen, Boyang Hong, Honglin Guo, Junzhe Wang, Xin Guo, Dingwen Yang, Chenyang Liao, Wei He, Songyang Gao, Lu Chen, Rui Zheng, Yicheng Zou, Tao Gui, Qi Zhang, Xipeng Qiu, Xuanjing Huang, Zuxuan Wu, and Yu-Gang Jiang. AgentGym: Evaluating and training large language model-based agents across diverse environments. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 27914–27961. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.1355. URL <https://aclanthology.org/2025.acl-long.1355/>.
- Shunyu Yao, Noah Shinn, Pedram Razavi, and Karthik Narasimhan. τ -bench: A benchmark for tool-agent-user interaction in real-world domains, 2024. URL <https://arxiv.org/abs/2406.12045>.
- Matei Zaharia, Andrew Chen, Aaron Davidson, Ali Ghodsi, Sue Ann Hong, Andy Konwinski, Siddharth Murching, Tomas Nykodym, Paul Ogilvie, Mani Parkhe, et al. Accelerating the machine learning lifecycle with mlflow. *IEEE Data Eng. Bull.*, 41(4):39–45, 2018.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019.
- Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied, Weizhu Chen, and Nan Duan. Agieval: A human-centric benchmark for evaluating foundation models. In *Findings of the association for computational linguistics: NAACL 2024*, pp. 2299–2314, 2024.
- Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, et al. Webarena: A realistic web environment for building autonomous agents. In *International Conference on Learning Representations*, volume 2024, pp. 15585–15606, 2024.