

Test Coverage Companion

Per-OP-code test specification document.
One fiche per file. One test per public method.

Companion to

Unifideck Operational Plan v1.3 Definitive Edition

Every fiche in this document maps 1-to-1 to an OP-code in the operational plan. Read alongside the matching plan fiche.

Document :	Test Coverage Companion
Version :	1.0 — May 2026
Author :	HardCPP (src893)
Status :	Draft for review
Scope :	Backend (Python)
Fiches :	232 backend OP-codes covered
Tests :	1746 test specifications (backend)
Reference :	Operational Plan v1.3 Definitive Edition

Table of contents

Fiches grouped by sub-package, one row per OP-code.

Examples

EX-1	• Pure-function test	p. 13
EX-2	• Mocked HTTP test	p. 14
EX-3	• Mocked filesystem test	p. 15
EX-4	• Async integration test	p. 16

actions/

OP-27a	• unifideck_uri.py	4 tests · p. 17
OP-27b	• dispatch.py	2 tests · p. 18

auth/

OP-28a	• browser.py	14 tests · p. 19
OP-28b	• orchestrator.py	4 tests · p. 22

auth/edge_browser/

OP-29a	• edge.py	22 tests · p. 23
OP-29b	• env.py	2 tests · p. 26
OP-29c	• launch.py	4 tests · p. 27
OP-29d	• detection.py	6 tests · p. 28
OP-29e	• installer.py	7 tests · p. 30
OP-29f	• cdp_client.py	11 tests · p. 32
OP-29g	• profile.py	11 tests · p. 34
OP-29h	• process_ops.py	4 tests · p. 36

bootstrap/

OP-61a	• cache_registry.py	2 tests · p. 37
OP-61b	• teardown.py	2 tests · p. 38
OP-61c	• pipeline_factory.py	2 tests · p. 39
OP-61d	• boot.py	2 tests · p. 40

cdp/

OP-30a	• cdp_client.py	19 tests · p. 41
OP-30b	• cdp_inject.py	21 tests · p. 44
OP-30c	• xcloud_browser_shims.py	4 tests · p. 47
OP-30d	• page_inject.py	4 tests · p. 48

Table of contents

compatibility/

OP-34a	• proton_helpers.py	31 tests · p. 49
OP-34b	• library.py	31 tests · p. 53

config/

OP-11a	• config_manager.py	15 tests · p. 57
OP-11b	• config_persistence.py	4 tests · p. 60
OP-11c	• i18n_schema.py	2 tests · p. 61
OP-11e	• validator.py	3 tests · p. 62
OP-11f	• key_presence.py	4 tests · p. 63
OP-11g	• startup.py	2 tests · p. 64
OP-11h	• user_config_path.py	2 tests · p. 65

core/

OP-04a	• cache_manager.py	16 tests · p. 66
OP-04b	• metrics_collector.py	5 tests · p. 69
OP-04c	• exe_finder.py	2 tests · p. 71
OP-04d	• sync_service.py	11 tests · p. 72
OP-04d2	• cross_store_dedup.py	2 tests · p. 74
OP-04e	• manifest.py	15 tests · p. 75
OP-04f	• paths.py	4 tests · p. 78

core/bin/

OP-07a	• binary_resolver.py	5 tests · p. 79
OP-07b	• binary_signatures.py	4 tests · p. 81
OP-07c	• cli_timeouts.py	2 tests · p. 82

core/io/

OP-06a	• async_file_ops.py	30 tests · p. 83
OP-06b	• safe_file_op.py	2 tests · p. 87

core/net/

OP-08a	• ssl_helpers.py	4 tests · p. 88
------------------------	------------------	-----------------

event_bus/

OP-09a	• event_bus.py	8 tests · p. 89
OP-09b	• event_priority.py	4 tests · p. 91
OP-09c	• priority_dispatcher.py	7 tests · p. 92
OP-09d	• event_replay.py	5 tests · p. 94
OP-09e	• event_bus_extensions.py	10 tests · p. 96
OP-09f	• event_bus_reliability.py	5 tests · p. 98

Table of contents

OP-09g	• event_bus_scaling.py	5 tests · p. 100
OP-09h	• event_bus_devex.py	10 tests · p. 102

event_bus/supervision/

OP-10a	• watchdog_handler.py	9 tests · p. 104
OP-10b	• metrics_handler.py	7 tests · p. 106

launcher/

OP-35a	• signals.py	9 tests · p. 108
OP-35b	• rpc.py	6 tests · p. 110
OP-35c	• dispatcher.py	2 tests · p. 112
OP-35d	• packaging.py	2 tests · p. 113
OP-35e	• bootstrap.py	2 tests · p. 114

launcher/cdp/

OP-38a	• cdp_primitives.py	10 tests · p. 115
OP-38b	• xcloud_cdp.py	2 tests · p. 117
OP-38c	• steam_controller_popup.py	2 tests · p. 118
OP-38d	• steam_controller_popup_targets.py	4 tests · p. 119
OP-38e	• steam_controller_popup_fiber.py	8 tests · p. 120

launcher/cloud/

OP-39a	• cloud_failure.py	6 tests · p. 122
OP-39b	• disk_space.py	7 tests · p. 124
OP-39c	• save_size_cache.py	6 tests · p. 126

launcher/diagnostics/

OP-40a	• correlation.py	9 tests · p. 128
OP-40c	• save_folder_inspector.py	2 tests · p. 130
OP-40d	• log_archive.py	10 tests · p. 131

launcher/flows/

OP-37a	• xcloud.py	2 tests · p. 133
OP-37b	• native.py	2 tests · p. 134
OP-37c	• auth.py	2 tests · p. 135

launcher/proton/

OP-41	• __init__.py	2 tests · p. 136
-----------------------	-------------------------------	------------------

Table of contents

launcher/proton/fixes/

OP-44a	• game_fixes.py	10 tests · p. 137
OP-44b	• galaxy_stub.py	2 tests · p. 139
OP-44c	• epic_prefix_fix.py	4 tests · p. 140
OP-44d	• epic_registry.py	2 tests · p. 141
OP-44e	• auth_args_stripper.py	4 tests · p. 142

launcher/proton/handlers/

OP-43a	• ubisoft.py	2 tests · p. 143
OP-43b	• epic.py	2 tests · p. 144
OP-43c	• generic.py	2 tests · p. 145
OP-43d	• gog_linux_dosbox.py	10 tests · p. 146

launcher/proton/infrastructure/

OP-42a	• core.py	2 tests · p. 148
OP-42b	• umu_runtime.py	6 tests · p. 149
OP-42c	• selector.py	12 tests · p. 151
OP-42d	• prefix_layout.py	6 tests · p. 153

launcher/proton/language_setup/

OP-45a	• resolver.py	2 tests · p. 155
OP-45b	• matchers.py	4 tests · p. 156
OP-45d	• amazon.py	2 tests · p. 157
OP-45e	• gog.py	2 tests · p. 158
OP-45f	• ubisoft.py	2 tests · p. 159

launcher/types/

OP-36a	• exit_codes.py	1 tests · p. 160
OP-36b	• errors.py	4 tests · p. 161
OP-36c	• context.py	6 tests · p. 162
OP-36d	• options.py	4 tests · p. 164

metadata/

OP-31a	• metacritic.py	17 tests · p. 165
OP-31b	• unifiidb.py	15 tests · p. 168

rpc/

OP-24b	• wrapper.py	2 tests · p. 171
OP-24c	• auto_wire.py	2 tests · p. 172
OP-24d	• composer.py	2 tests · p. 173

Table of contents

rpc/handlers/

OP-25a	• base.py	2 tests · p. 174
OP-25b	• action.py	2 tests · p. 175
OP-25c	• download.py	6 tests · p. 176
OP-25d	• launch.py	16 tests · p. 178
OP-25e	• observability.py	15 tests · p. 181
OP-25f	• security.py	10 tests · p. 184
OP-25g	• store.py	28 tests · p. 186
OP-25h	• ui.py	22 tests · p. 190

rpc/mixins/

OP-26a	• observability.py	14 tests · p. 193
OP-26b	• security.py	10 tests · p. 196
OP-26c	• download.py	12 tests · p. 198
OP-26d	• launch.py	16 tests · p. 200
OP-26e	• store.py	8 tests · p. 203
OP-26f	• sync.py	14 tests · p. 205
OP-26g	• ui.py	12 tests · p. 208
OP-26h	• cloud_failure.py	4 tests · p. 210
OP-26i	• config_validation.py	2 tests · p. 211
OP-26j	• playtime.py	4 tests · p. 212
OP-26k	• action.py	2 tests · p. 213

security/

OP-23a	• device_identity.py	5 tests · p. 214
OP-23b	• secure_token_store.py	4 tests · p. 216
OP-23c	• audit_emitter.py	16 tests · p. 217
OP-23d	• device_fingerprint.py	3 tests · p. 220
OP-23e	• audit_decorators.py	4 tests · p. 221

services/

OP-12a	• metadata_service.py	5 tests · p. 222
OP-12b	• proton_service.py	5 tests · p. 224
OP-12c	• account_service.py	8 tests · p. 226
OP-12d	• feature_flag_service.py	3 tests · p. 228
OP-12e	• probe_reaction_service.py	2 tests · p. 229

services/artwork/

OP-16a	• service.py	5 tests · p. 230
OP-16c	• fetcher.py	6 tests · p. 232

Table of contents

services/bootstrap/

OP-13a	• paths.py	2 tests · p. 234
OP-13d	• constructor.py	4 tests · p. 235
OP-13e	• startup.py	2 tests · p. 236
OP-13f	• teardown.py	2 tests · p. 237
OP-13g	• store_injector.py	2 tests · p. 238

services/cloud_save/

OP-17a	• service.py	4 tests · p. 239
OP-17c	• manifest.py	6 tests · p. 240
OP-17d	• fs_ops.py	8 tests · p. 242
OP-17e	• paths.py	4 tests · p. 244

services/download/

OP-15a	• service.py	10 tests · p. 245
OP-15c	• models.py	4 tests · p. 247
OP-15d	• validators.py	4 tests · p. 248
OP-15e	• persistence.py	4 tests · p. 249

services/launch_history/

OP-21a	• service.py	4 tests · p. 250
OP-21d	• config_readers.py	6 tests · p. 251
OP-21e	• persistence.py	4 tests · p. 253

services/launcher/

OP-20a	• service.py	7 tests · p. 254
OP-20b	• circuit_breaker.py	6 tests · p. 256
OP-20c	• error_toasts.py	4 tests · p. 258
OP-20d	• orchestrator.py	4 tests · p. 259
OP-20e	• helpers.py	12 tests · p. 260
OP-20f	• builder.py	2 tests · p. 262

services/microsoft_subscription/

OP-22a	• service.py	7 tests · p. 263
------------------------	--------------	------------------

services/playtime/

OP-18a	• service.py	11 tests · p. 265
OP-18b	• db.py	9 tests · p. 267

Table of contents

services/security/

OP-19a	• service.py	8 tests · p. 269
OP-19b	• audit_log.py	5 tests · p. 271
OP-19c	• bruteforce.py	4 tests · p. 273
OP-19d	• config_readers.py	8 tests · p. 274
OP-19e	• bus_emitter.py	2 tests · p. 276
OP-19f	• device_reset.py	4 tests · p. 277

services/shortcut/

OP-14a	• service.py	4 tests · p. 278
OP-14c	• games_map.py	6 tests · p. 279
OP-14d	• shortcut.py	2 tests · p. 281
OP-14g	• persistence.py	6 tests · p. 282

steam/

OP-32a	• steamgriddb.py	10 tests · p. 284
OP-32b	• library.py	11 tests · p. 286
OP-32c	• shortcuts.py	8 tests · p. 288
OP-32d	• owned_games.py	4 tests · p. 290

stores/amazon/

OP-49a	• amazon_store.py	23 tests · p. 291
OP-49b	• amazon_auth.py	5 tests · p. 295
OP-49c	• amazon_library.py	9 tests · p. 297
OP-49d	• amazon_install.py	5 tests · p. 299
OP-49e	• amazon_updates.py	7 tests · p. 301
OP-49f	• amazon_fuel.py	8 tests · p. 303

stores/epic/

OP-48a	• store.py	21 tests · p. 305
OP-48b	• auth.py	5 tests · p. 308
OP-48c	• library.py	8 tests · p. 310
OP-48d	• install.py	5 tests · p. 312
OP-48e	• updates.py	7 tests · p. 314
OP-48f	• filter.py	10 tests · p. 316
OP-48g	• exe_resolver.py	3 tests · p. 318
OP-48h	• legendary.py	2 tests · p. 319

stores/gog/

OP-50a	• store.py	34 tests · p. 320
OP-50b	• config.py	5 tests · p. 325
OP-50c	• library.py	12 tests · p. 327

Table of contents

OP-50e	• exe_resolver.py	6 tests · p. 329
OP-50f	• dlc.py	9 tests · p. 331
OP-50g	• updates.py	9 tests · p. 333
OP-50h	• auth.py	5 tests · p. 335
OP-50i	• http.py	4 tests · p. 337

stores/gog/install/

OP-51a	• installer.py	5 tests · p. 338
OP-51b	• primitives.py	6 tests · p. 340
OP-51c	• languages.py	2 tests · p. 342
OP-51d	• planner.py	8 tests · p. 343

stores/gog/tokens/

OP-52a	• manager.py	21 tests · p. 345
------------------------	--------------	-------------------

stores/microsoft/

OP-53a	• microsoft_store.py	24 tests · p. 348
OP-53b	• microsoft_catalog.py	3 tests · p. 352
OP-53c	• microsoft_browser_auth.py	5 tests · p. 353
OP-53d	• microsoft_config.py	4 tests · p. 355
OP-53e	• microsoft_auth.py	10 tests · p. 356
OP-53f	• microsoft_subscription.py	2 tests · p. 358

stores/microsoft/tokens/

OP-54a	• manager.py	3 tests · p. 359
OP-54b	• persistence.py	6 tests · p. 360
OP-54c	• oauth.py	4 tests · p. 362
OP-54d	• xbl_chain.py	4 tests · p. 363

stores/shared/

OP-47a	• store_registry.py	16 tests · p. 364
OP-47b	• store_base.py	22 tests · p. 367
OP-47c	• dlc.py	4 tests · p. 370
OP-47d	• cli_install_helpers.py	6 tests · p. 371

stores/ubisoft/

OP-55a	• store.py	46 tests · p. 373
OP-55b	• config.py	24 tests · p. 379
OP-55c	• paths.py	8 tests · p. 383
OP-55d	• binaries.py	11 tests · p. 385
OP-55e	• parser.py	9 tests · p. 387
OP-55f	• parser_binary.py	8 tests · p. 389

Table of contents

OP-55g	• id_map.py	17 tests · p. 391
OP-55h	• id_map_sources.py	8 tests · p. 394
OP-55i	• steam_filter.py	8 tests · p. 396
OP-55j	• specialists.py	2 tests · p. 398

stores/ubisoft/auth/

OP-58a	• facade.py	22 tests · p. 399
------------------------	-----------------------------	-------------------

stores/ubisoft/installer/

OP-56a	• installer.py	17 tests · p. 402
OP-56b	• cache.py	3 tests · p. 405
OP-56f	• registry.py	14 tests · p. 406

stores/ubisoft/library/

OP-57a	• facade.py	10 tests · p. 409
OP-57h	• detection_helpers.py	14 tests · p. 411
OP-57i	• wine_path.py	2 tests · p. 414

stores/ubisoft/prefix/

OP-59a	• manager.py	16 tests · p. 415
------------------------	------------------------------	-------------------

stores/ubisoft/session/

OP-60a	• facade.py	14 tests · p. 418
------------------------	-----------------------------	-------------------

utils/

OP-33a	• paths.py	10 tests · p. 421
OP-33b	• locale.py	6 tests · p. 423
OP-33c	• config_helpers.py	4 tests · p. 425

Annexes

A1	• Coverage heatmap by sub-package	p. 426
A2	• Test pyramid	p. 427
A3	• Roadmap by priority	p. 428
A4	• Fixtures catalog	p. 429
A5	• Store coverage matrix	p. 429
A6	• End-to-end scenarios (release-gate)	p. 430

Naming conventions

Every fiche in this document specifies the exact filename and pytest function name to use. The conventions below are mandatory ; CI rejects any test that does not match.

1. Test file location

```
tests/unit/<sub_package>/test_<source_file>.py
```

SOURCE / SUBJECT

```
py_modules/unifideck/core/cache_manager.py
py_modules/unifideck/steam/steamgriddb.py
py_modules/unifideck/metadata/metacritic.py
```

EXPECTED TEST NAME

```
tests/unit/core/test_cache_manager.py
tests/unit/steam/test_steamgriddb.py
tests/unit/metadata/test_metacritic.py
```

Mirror the source layout exactly. Drop the `py_modules/unifideck/` prefix and prepend `test_` to the basename. CI walks `tests/unit/` and matches filenames against source files ; missing pairs fail the lint step.

2. Test function name

```
def test_<subject>_<expected_behaviour>(...)
```

SOURCE / SUBJECT

```
CacheStore.set / .get
CacheStore.get with expired TTL
search_artwork on HTTP 401
fetch_all_kinds with one fetch failing
```

EXPECTED TEST NAME

```
test_cache_store_set_get_round_trip
test_cache_store_get_returns_none_when_ttl_expired
test_search_artwork_raises_auth_error_on_401
test_fetch_all_kinds_continues_when_one_fetch_fails
```

Subject first (method or class under test in snake_case), behaviour second, in present-tense imperative (returns, raises, falls_back). Avoid negations when possible : prefer `returns_empty_list_on_no_results` to `does_not_crash_when_no_results`.

3. Grouping with TestXxx classes (optional)

```
class TestSubject: def test_<behaviour>(self, ...): ...
```

SOURCE / SUBJECT

```
Multiple classes in one file
```

EXPECTED TEST NAME

```
class TestCacheStore: def test_set_get_round_trip(self): ...
class TestCacheManager: def test_register_creates_named_store(...): ...
```

When a source file exposes several classes, group their tests under one `TestXxx` class per source class so fixtures can be scoped sensibly.

EXAMPLE 1/4 — TIER 1 — PURE FUNCTION

No I/O · No mocks · Run in milliseconds

▼ Excerpt of the fiche

OP-31a

Filename : py_modules/unifideck/metadata/metacritic.py
Test file : tests/unit/metadata/test_metacritic.py
Test name : **test_to_roman_to_arabic_round_trip**
Covers : to_roman, to_arabic
Type : PURE — no mocks, no I/O
Purpose : Round-trip every Arabic number in [1,30] through to_roman and back through to_arabic and assert equality.
Fixtures : —

▼ Implementation

```
# tests/unit/metadata/test_metacritic.py

import pytest
from unifideck.metadata.metacritic import to_roman, to_arabic

@pytest.mark.parametrize('arabic', range(1, 31))
def test_to_roman_to_arabic_round_trip(arabic: int) -> None:
    # round-trip identity must hold for every value
    # the function claims to support
    roman = to_roman(arabic)
    assert to_arabic(roman) == arabic
    # Roman numerals are ASCII letters only
    assert all(c in 'IVXLCDM' for c in roman)
```

EXAMPLE 2/4 — TIER 2 — MOCKED HTTP

aioreponses · No real network · Deterministic

▼ Excerpt of the fiche

OP-32a

Filename : py_modules/unifideck/steam/steamgriddb.py
Test file : tests/unit/steam/test_steamgriddb.py
Test name : **test_search_artwork_returns_assets_on_200**
Covers : search_artwork
Type : MOCKED HTTP — aioresponses
Purpose : Register a fake 200 response for the SteamGridDB search endpoint and assert the client maps it to the expected list of ArtworkAsset dataclasses.
Fixtures : aioresponses, fake_sgdb_response

▼ Implementation

```
# tests/unit/steam/test_steamgriddb.py

import pytest
from aioresponses import aioresponses
from unifideck.steam.steamgriddb import search_artwork

@pytest.mark.asyncio
async def test_search_artwork_returns_assets_on_200(
    fake_sgdb_response: dict,
) -> None:
    url = 'https://www.steamgriddb.com/api/v2/search/autocomplete/Hades'
    with aioresponses() as mocked:
        mocked.get(url, status=200, payload=fake_sgdb_response)
        assets = await search_artwork('Hades')
    assert len(assets) == len(fake_sgdb_response['data'])
    assert all(a.url.startswith('https://') for a in assets)
```

EXAMPLE 3/4 — TIER 2 — MOCKED FILESYSTEM

tmp_path · monkeypatch · No real disk pollution

▼ Excerpt of the fiche

OP-04a

Filename : py_modules/unifideck/core/cache_manager.py
Test file : tests/unit/core/test_cache_manager.py
Test name : **test_cache_store_get_returns_none_when_ttl_expired**
Covers : CacheStore.get
Type : MOCKED FS — tmp_path + monkeypatch
Purpose : Write a value with a 1-second TTL, freeze time at T+10s, and assert that get() returns None — the store must respect TTL on read.
Fixtures : tmp_path, monkeypatch (time.time)

▼ Implementation

```
# tests/unit/core/test_cache_manager.py

from pathlib import Path
import pytest
from unifideck.core.cache_manager import CacheStore

def test_cache_store_get_returns_none_when_ttl_expired(
    tmp_path: Path,
    monkeypatch: pytest.MonkeyPatch,
) -> None:
    store = CacheStore('demo', tmp_path / 'demo.json', ttl_seconds=1)
    monkeypatch.setattr('time.time', lambda: 1000.0)
    store.set('key', 'value')
    monkeypatch.setattr('time.time', lambda: 1010.0)
    assert store.get('key') is None
```

EXAMPLE 4/4 — TIER 3 — ASYNC INTEGRATION

Multiple components · Real EventBus · Mock boundary only

▼ Excerpt of the fiche

OP-32a

Filename : py_modules/unifideck/steam/steamgriddb.py
Test file : tests/unit/steam/test_steamgriddb.py
Test name : **test_fetch_all_kinds_continues_when_one_fetch_fails**
Covers : fetch_all_kinds
Type : INTEGRATION — async gather + error isolation
Purpose : Schedule four parallel fetches, make one of them raise, and assert the remaining three still resolve normally (asyncio.gather with return_exceptions).
Fixtures : aioresponses, asyncio.timeout fixture

▼ Implementation

```
# tests/unit/steam/test_steamgriddb.py

import pytest
from aioresponses import aioresponses
from unifideck.steam.steamgriddb import fetch_all_kinds

@pytest.mark.asyncio
async def test_fetch_all_kinds_continues_when_one_fetch_fails(
    fake_sgdb_response: dict,
) -> None:
    base = 'https://www.steamgriddb.com/api/v2'
    with aioresponses() as mocked:
        mocked.get(f'{base}/grids/game/42', payload=fake_sgdb_response)
        mocked.get(f'{base}/heroes/game/42', status=500)
        mocked.get(f'{base}/logos/game/42', payload=fake_sgdb_response)
        mocked.get(f'{base}/icons/game/42', payload=fake_sgdb_response)
        result = await fetch_all_kinds(game_id=42)
    assert result.grids and result.logos and result.icons
    assert result.heroes is None
```

PRIORITY MEDIUM

TIER 1PURE4 TESTS

OP-27a

unifideck_uri.py

Source : py_modules/unifideck/actions/unifideck_uri.py | Lignes : 105 | Cible : 90%
Test file : tests/unit/actions/test_unifideck_uri.py

Public surface

[class]	ParsedAction	()
[func]	list_supported_verbs	(pure)
[func]	parse_unifideck_uri	(pure)

Tests to write (4)

⇒ **T-27a-01** list_supported_verbs — happy path PURE
Function : test_list_supported_verbs_happy_path
Covers : list_supported_verbs
Purpose : list supported verbs produces the expected output for a typical input.
Fixtures : —

⇒ **T-27a-02** list_supported_verbs — edge cases PURE
Function : test_list_supported_verbs_edge_cases
Covers : list_supported_verbs
Purpose : list supported verbs stays correct on empty / boundary inputs.
Fixtures : —

⇒ **T-27a-03** parse_unifideck_uri — happy path PURE
Function : test_parse_unifideck_uri_parses_well_formed_input
Covers : parse_unifideck_uri
Purpose : parse unifideck uri parses a well-formed input into the expected value.
Fixtures : —

⇒ **T-27a-04** parse_unifideck_uri — edge cases PURE
Function : test_parse_unifideck_uri_edge_cases
Covers : parse_unifideck_uri
Purpose : parse unifideck uri handles boundary inputs (empty, out-of-range) with a documented behaviour.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- OP-25b used by action.py
- OP-27b used by dispatch.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-27b

dispatch.py

Source : py_modules/unifideck/actions/dispatch.py | Lignes : 97 | Cible : 60%

Test file : tests/unit/actions/test_dispatch.py

Public surface

[async] dispatch_backend_action (async + I/O)

Tests to write (2)

⇒ T-27b-01 dispatch_backend_action — happy path

ASYNC

Function : test_dispatch_backend_action_happy_path
Covers : dispatch_backend_action
Purpose : dispatch backend action delivers the message exactly once on the happy path.
Fixtures : pytest-asyncio

⇒ T-27b-02 dispatch_backend_action — error handling

ASYNC

Function : test_dispatch_backend_action_raises_rpc_error_on_failure
Covers : dispatch_backend_action
Purpose : dispatch backend action raises RpcError when the input or upstream call fails.
Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-04d uses sync_service.py
- ← OP-17 uses __init__.py
- ← OP-24 uses __init__.py
- ← OP-27a uses unifideck_uri.py
- OP-26k used by action.py

● PRIORITY MEDIUM

TIER 1

PURE

14 TESTS

OP-28a

browser.py

Source : `py_modules/unifideck/auth/browser.py` | Lignes : 202 | Cible : 90%

Test file : [tests/unit/auth/test_browser.py](#)

Public surface

[class]	AuthCaptureResult	(code, state, to_dict)
[class]	OAuthBrowserMonitor	(__init__, wait_for_redirect, close_oauth_tab, cl...)
[func]	extract_oauth_params	(pure)
[func]	match_redirect	(pure)

Tests to write (14)

⇒ T-28a-01 extract_oauth_params — happy path

PURE

Function : [test_extract_oauth_params_happy_path](#)

Covers : `extract_oauth_params`

Purpose : `extract_oauth_params` returns the expected dict shape.

Fixtures : —

⇒ T-28a-02 extract_oauth_params — edge cases

PURE

Function : [test_extract_oauth_params_returns_empty_dict_on_empty_input](#)

Covers : `extract_oauth_params`

Purpose : `extract_oauth_params` returns an empty dict on empty input.

Fixtures : —

⇒ T-28a-03 match_redirect — happy path

MOCKED HTTP

Function : [test_match_redirect_happy_path](#)

Covers : `match_redirect`

Purpose : `match_redirect` returns True for the documented happy-path input.

Fixtures : `aioresponses`

⇒ T-28a-04 match_redirect — error handling

MOCKED HTTP

Function : [test_match_redirect_raises_on_network_failure](#)

Covers : `match_redirect`

Purpose : `match_redirect` surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `aioresponses`

⇒ T-28a-05 AuthCaptureResult.code — happy path

PURE

Function : [test_authcaptureresult_code_happy_path](#)

Covers : `AuthCaptureResult.code`

Purpose : `code` produces the expected output for a typical input.

Fixtures : —

OP-28a browser.py (cont.)

Tests to write (14) — cont.

⇒ T-28a-06 AuthCaptureResult.state — happy path

PURE

Function : test_authcaptureresult_state_happy_path

Covers : AuthCaptureResult.state

Purpose : state produces the expected output for a typical input.

Fixtures : —

⇒ T-28a-07 AuthCaptureResult.to_dict — happy path

PURE

Function : test_authcaptureresult_to_dict_returns_converted_value

Covers : AuthCaptureResult.to_dict

Purpose : to dict produces the converted value for a typical input.

Fixtures : —

⇒ T-28a-08 OAuthBrowserMonitor.__init__ — construction

PURE

Function : test_oauthbrowsermonitor_init_constructs_with_valid_args

Covers : OAuthBrowserMonitor.__init__

Purpose : OAuthBrowserMonitor stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-28a-09 OAuthBrowserMonitor.wait_for_redirect — happy path

ASYNC

Function : test_oauthbrowsermonitor_wait_for_redirect_happy_path

Covers : OAuthBrowserMonitor.wait_for_redirect

Purpose : wait for redirect resolves to the expected value on success.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-28a-10 OAuthBrowserMonitor.wait_for_redirect — error handling

ASYNC

Function : test_oauthbrowsermonitor_wait_for_redirect_handles_error

Covers : OAuthBrowserMonitor.wait_for_redirect

Purpose : wait for redirect surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-28a-11 OAuthBrowserMonitor.close_oauth_tab — happy path

ASYNC

Function : test_oauthbrowsermonitor_close_oauth_tab_happy_path

Covers : OAuthBrowserMonitor.close_oauth_tab

Purpose : close oauth tab returns True for the documented happy-path input.

Fixtures : pytest-asyncio

⇒ T-28a-12 OAuthBrowserMonitor.close_oauth_tab — error handling

ASYNC

Function : test_oauthbrowsermonitor_close_oauth_tab_handles_error

Covers : OAuthBrowserMonitor.close_oauth_tab

Purpose : close oauth tab surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-28a browser.py (cont.)

Tests to write (14) — cont.

⇒ **T-28a-13** OAuthBrowserMonitor.clear_store_cookies — happy path

ASYNC

Function : [test_oauthbrowsermonitor_clear_store_cookies_removes_target_and_reports_success](#)

Covers : OAuthBrowserMonitor.clear_store_cookies

Purpose : clear store cookies persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ **T-28a-14** OAuthBrowserMonitor.clear_store_cookies — error handling

ASYNC

Function : [test_oauthbrowsermonitor_clear_store_cookies_handles_error](#)

Covers : OAuthBrowserMonitor.clear_store_cookies

Purpose : clear store cookies surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- aioresponses
- monkeypatch (time.time)
- pytest-asyncio

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-30a uses `cdp_client.py`
- ← OP-33c uses `config_helpers.py`
- OP-28b used by `orchestrator.py`
- OP-48a used by `store.py`
- OP-49a used by `amazon_store.py`
- OP-50a used by `store.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-28b

orchestrator.py

Source : py_modules/unifideck/auth/orchestrator.py | Lignes : 281 | Cible : 90%

Test file : tests/unit/auth/test_orchestrator.py

Public surface

[class]

OrchestratorConfig

()

[class]

AuthOrchestrator

(__init__, run_flow, cancel_background)

Tests to write (4)

⇒ T-28b-01

AuthOrchestrator.__init__ — construction

PURE

Function :

test_authorchestrator_init_constructs_with_valid_args

Covers :

AuthOrchestrator.__init__

Purpose :

AuthOrchestrator stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-28b-02

AuthOrchestrator.run_flow — happy path

ASYNC

Function :

test_authorchestrator_run_flow_spawns_target_action

Covers :

AuthOrchestrator.run_flow

Purpose :

run flow spawns the target action and returns its handle.

Fixtures :

pytest-asyncio

⇒ T-28b-03

AuthOrchestrator.run_flow — error handling

ASYNC

Function :

test_authorchestrator_run_flow_handles_error

Covers :

AuthOrchestrator.run_flow

Purpose :

run flow surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-28b-04

AuthOrchestrator.cancel_background — happy path

PURE

Function :

test_authorchestrator_cancel_background_happy_path

Covers :

AuthOrchestrator.cancel_background

Purpose :

cancel background returns True for the documented happy-path input.

Fixtures :

—

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-28a uses browser.py
- OP-48a used by store.py
- OP-48b used by auth.py
- OP-49a used by amazon_store.py
- OP-49b used by amazon_auth.py

PRIORITY MEDIUM

TIER 1

PURE

22 TESTS

OP-29a

edge.py

Source : py_modules/unifideck/auth/edge_browser/edge.py | Lignes : 169 | Cible : 90%

Test file : tests/unit/auth/edge_browser/test_edge.py

Public surface

[class] EdgeBrowser (__init__, is_running, cleanup_stale_profile_stat...)

Tests to write (22)

⇒ T-29a-01 EdgeBrowser.__init__ — construction PURE

Function : test_edgebrowser_init_constructs_with_valid_args
Covers : EdgeBrowser.__init__
Purpose : EdgeBrowser stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-29a-02 EdgeBrowser.is_running — happy path PURE

Function : test_edgebrowser_is_running_returns_true_on_valid_input
Covers : EdgeBrowser.is_running
Purpose : is running returns True for a valid input.
Fixtures : —

⇒ T-29a-03 EdgeBrowser.cleanup_stale_profile_state — happy path PURE

Function : test_edgebrowser_cleanup_stale_profile_state_normalises_input
Covers : EdgeBrowser.cleanup_stale_profile_state
Purpose : cleanup stale profile state normalises the input as documented.
Fixtures : —

⇒ T-29a-04 EdgeBrowser.navigate_tab — happy path ASYNC

Function : test_edgebrowser_navigate_tab_happy_path
Covers : EdgeBrowser.navigate_tab
Purpose : navigate tab resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-29a-05 EdgeBrowser.navigate_tab — error handling ASYNC

Function : test_edgebrowser_navigate_tab_handles_error
Covers : EdgeBrowser.navigate_tab
Purpose : navigate tab surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

OP-29a edge.py (cont.)

Tests to write (22) — cont.

⇒ T-29a-06 EdgeBrowser.prepare_auth_launch — happy path

ASYNC

Function : `test_edgebrowser_prepare_auth_launch_happy_path`
 Covers : `EdgeBrowser.prepare_auth_launch`
 Purpose : prepare auth launch spawns the target action and returns its handle.
 Fixtures : `pytest-asyncio`

⇒ T-29a-07 EdgeBrowser.prepare_auth_launch — error handling

ASYNC

Function : `test_edgebrowser_prepare_auth_launch_handles_error`
 Covers : `EdgeBrowser.prepare_auth_launch`
 Purpose : prepare auth launch surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ T-29a-08 EdgeBrowser.close_auth_browser — happy path

ASYNC

Function : `test_edgebrowser_close_auth_browser_happy_path`
 Covers : `EdgeBrowser.close_auth_browser`
 Purpose : close auth browser resolves to the expected value on success.
 Fixtures : `pytest-asyncio`

⇒ T-29a-09 EdgeBrowser.close_auth_browser — error handling

ASYNC

Function : `test_edgebrowser_close_auth_browser_handles_error`
 Covers : `EdgeBrowser.close_auth_browser`
 Purpose : close auth browser surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ T-29a-10 EdgeBrowser.ensure_controller_permissions — happy path

PURE

Function : `test_edgebrowser_ensure_controller_permissions_happy_path`
 Covers : `EdgeBrowser.ensure_controller_permissions`
 Purpose : ensure controller permissions produces the expected output for a typical input.
 Fixtures : —

⇒ T-29a-11 EdgeBrowser.find_cmd — happy path

PURE

Function : `test_edgebrowser_find_cmd_returns_target_when_present`
 Covers : `EdgeBrowser.find_cmd`
 Purpose : find cmd returns the located target when it exists.
 Fixtures : —

⇒ T-29a-12 EdgeBrowser.is_installed — happy path

PURE

Function : `test_edgebrowser_is_installed_returns_true_on_valid_input`
 Covers : `EdgeBrowser.is_installed`
 Purpose : is installed returns True for a valid input.
 Fixtures : —

OP-29a edge.py (cont.)

Tests to write (22) — cont.

⇒ T-29a-13 EdgeBrowser.install — happy path

ASYNC

Function : [test_edgebrowser_install_completes_setup_steps](#)
Covers : `EdgeBrowser.install`
Purpose : install performs the setup steps end-to-end.
Fixtures : `pytest-asyncio`

⇒ T-29a-14 EdgeBrowser.install — error handling

ASYNC

Function : [test_edgebrowser_install_handles_error](#)
Covers : `EdgeBrowser.install`
Purpose : install surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-29a-15 EdgeBrowser.launch_auth — happy path

PURE

Function : [test_edgebrowser_launch_auth_spawns_target_action](#)
Covers : `EdgeBrowser.launch_auth`
Purpose : launch auth spawns the target action and returns its handle.
Fixtures : —

⇒ T-29a-16 EdgeBrowser.launch_xcloud — happy path

PURE

Function : [test_edgebrowser_launch_xcloud_spawns_target_action](#)
Covers : `EdgeBrowser.launch_xcloud`
Purpose : launch xcloud spawns the target action and returns its handle.
Fixtures : —

⇒ T-29a-17 EdgeBrowser.kill — happy path

PURE

Function : [test_edgebrowser_kill_happy_path](#)
Covers : `EdgeBrowser.kill`
Purpose : kill produces the expected output for a typical input.
Fixtures : —

⇒ T-29a-18 EdgeBrowser.has_xbox_session — happy path

PURE

Function : [test_edgebrowser_has_xbox_session_returns_true_on_valid_input](#)
Covers : `EdgeBrowser.has_xbox_session`
Purpose : has xbox session returns True for a valid input.
Fixtures : —

⇒ T-29a-19 EdgeBrowser.clear_cookies — happy path

PURE

Function : [test_edgebrowser_clear_cookies_removes_target_and_reports_success](#)
Covers : `EdgeBrowser.clear_cookies`
Purpose : clear cookies removes the target and reports success.
Fixtures : —

OP-29a edge.py (cont.)

Tests to write (22) — cont.

⇒ T-29a-20 EdgeBrowser.clear_profile_data — happy path

PURE

Function : [test_edgebrowser_clear_profile_data_removes_target_and_reports_success](#)

Covers : EdgeBrowser.clear_profile_data

Purpose : clear profile data removes the target and reports success.

Fixtures : —

⇒ T-29a-21 EdgeBrowser.wait_and_check_crash — happy path

ASYNC

Function : [test_edgebrowser_wait_and_check_crash_happy_path](#)

Covers : EdgeBrowser.wait_and_check_crash

Purpose : wait and check crash returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-29a-22 EdgeBrowser.wait_and_check_crash — error handling

ASYNC

Function : [test_edgebrowser_wait_and_check_crash_handles_error](#)

Covers : EdgeBrowser.wait_and_check_crash

Purpose : wait and check crash surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-29b uses env.py
- ← OP-29c uses launch.py
- ← OP-29e uses installer.py
- ← OP-29f uses cdp_client.py
- OP-29c used by launch.py

PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-29b

env.py

Source : py_modules/unifideck/auth/edge_browser/env.py | Lignes : 173 | Cible : 80%

Test file : tests/unit/auth/edge_browser/test_env.py

Public surface

[func] clean_env (pure)

Tests to write (2)

⇒ T-29b-01 clean_env — happy path

MOCKED FS

Function : test_clean_env_normalises_input
Covers : clean_env
Purpose : clean env normalises the input as documented.
Fixtures : tmp_path, monkeypatch (env vars)

⇒ T-29b-02 clean_env — error handling

MOCKED FS

Function : test_clean_env_handles_missing_or_corrupt_file
Covers : clean_env
Purpose : clean env handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path, monkeypatch (env vars)

Mocking dependencies

- monkeypatch (env vars)
- tmp_path

Linked fiches

- OP-29a used by edge.py
- OP-29c used by launch.py

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-29c

launch.py

Source : py_modules/unifideck/auth/edge_browser/launch.py | Lignes : 110 | Cible : 90%

Test file : tests/unit/auth/edge_browser/test_launch.py

Public surface

[func]	launch_auth	(pure)
[func]	launch_xcloud	(pure)

Tests to write (4)

⇒ **T-29c-01** **launch_auth — happy path** PURE

Function : [test_launch_auth_spawns_target_action](#)
Covers : launch_auth
Purpose : launch auth spawns the target action and returns its handle.
Fixtures : —

⇒ **T-29c-02** **launch_auth — edge cases** PURE

Function : [test_launch_auth_edge_cases](#)
Covers : launch_auth
Purpose : launch auth stays correct on empty / boundary inputs.
Fixtures : —

⇒ **T-29c-03** **launch_xcloud — happy path** PURE

Function : [test_launch_xcloud_spawns_target_action](#)
Covers : launch_xcloud
Purpose : launch xcloud spawns the target action and returns its handle.
Fixtures : —

⇒ **T-29c-04** **launch_xcloud — edge cases** PURE

Function : [test_launch_xcloud_edge_cases](#)
Covers : launch_xcloud
Purpose : launch xcloud stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-29a uses edge.py
- ← OP-29b uses env.py
- OP-29a used by edge.py

PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-29d

detection.py

Source : py_modules/unifideck/auth/edge_browser/detection.py | Lignes : 68 | Cible : 80%

Test file : tests/unit/auth/edge_browser/test_detection.py

Public surface

[func]	flatpak_remote_names	(pure)
[func]	find_edge_cmd	(pure)
[func]	is_edge_installed	(pure)

Tests to write (6)

T-29d-01 flatpak_remote_names — happy path

MOCKED SUBPROCESS

Function : test_flatpak_remote_names_happy_path
Covers : flatpak_remote_names
Purpose : flatpak remote names produces the expected output for a typical input.
Fixtures : monkeypatch (asyncio.create_subprocess_exec)

T-29d-02 flatpak_remote_names — error handling

MOCKED SUBPROCESS

Function : test_flatpak_remote_names_raises_on_non_zero_exit
Covers : flatpak_remote_names
Purpose : flatpak remote names reports a non-zero subprocess exit as a typed failure.
Fixtures : monkeypatch (asyncio.create_subprocess_exec)

T-29d-03 find_edge_cmd — happy path

MOCKED FS

Function : test_find_edge_cmd_returns_target_when_present
Covers : find_edge_cmd
Purpose : find edge cmd returns the located target when it exists.
Fixtures : tmp_path

T-29d-04 find_edge_cmd — error handling

MOCKED FS

Function : test_find_edge_cmd_handles_missing_or_corrupt_file
Covers : find_edge_cmd
Purpose : find edge cmd handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

T-29d-05 is_edge_installed — happy path

PURE

Function : test_is_edge_installed_returns_true_on_valid_input
Covers : is_edge_installed
Purpose : is edge installed returns True for a valid input.
Fixtures : —

*OP-29d detection.py (cont.)***Tests to write (6) — cont.****⇒ T-29d-06 is_edge_installed — edge cases****PURE**Function : **test_is_edge_installed_edge_cases**

Covers : is_edge_installed

Purpose : is edge installed stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- tmp_path

Linked fiches

→ OP-29e used by installer.py

PRIORITY MEDIUM

TIER 2

MOCKED

7 TESTS

OP-29e

installer.py

Source : py_modules/unifideck/auth/edge_browser/installer.py | Lignes : 251 | Cible : 80%

Test file : tests/unit/auth/edge_browser/test_installer.py

Public surface

[class] EdgeInstaller (__init__, ensure_controller_permissions, find_c...)

Tests to write (7)

⇒ T-29e-01 EdgeInstaller.__init__ — construction PURE

Function : test_edgeinstaller_init_constructs_with_valid_args
Covers : EdgeInstaller.__init__
Purpose : EdgeInstaller can be instantiated with the documented arguments.
Fixtures : —

⇒ T-29e-02 EdgeInstaller.ensure_controller_permissions — happy path MOCKED SUBPROCESS

Function : test_edgeinstaller_ensure_controller_permissions_happy_path
Covers : EdgeInstaller.ensure_controller_permissions
Purpose : ensure controller permissions returns True for the documented happy-path input.
Fixtures : tmp_path, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-29e-03 EdgeInstaller.ensure_controller_permissions — error handling MOCKED SUBPROCESS

Function : test_edgeinstaller_ensure_controller_permissions_handles_missing_or_corrupt_file
Covers : EdgeInstaller.ensure_controller_permissions
Purpose : ensure controller permissions handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-29e-04 EdgeInstaller.find_cmd — happy path PURE

Function : test_edgeinstaller_find_cmd_returns_target_when_present
Covers : EdgeInstaller.find_cmd
Purpose : find cmd returns the located target when it exists.
Fixtures : —

⇒ T-29e-05 EdgeInstaller.is_installed — happy path PURE

Function : test_edgeinstaller_is_installed_returns_true_on_valid_input
Covers : EdgeInstaller.is_installed
Purpose : is installed returns True for a valid input.
Fixtures : —

OP-29e installer.py (cont.)

Tests to write (7) — cont.

⇒ T-29e-06

EdgeInstaller.install — happy path

Function : test_edgeinstaller_install_completes_setup_steps

Covers : EdgeInstaller.install

Purpose : install performs the setup steps end-to-end.

Fixtures : pytest-asyncio, tmp_path, monkeypatch (asyncio.create_subprocess_exec)

MOCKED SUBPROCESS

⇒ T-29e-07

EdgeInstaller.install — error handling

Function : test_edgeinstaller_install_handles_missing_or_corrupt_file

Covers : EdgeInstaller.install

Purpose : install handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path, monkeypatch (asyncio.create_subprocess_exec)

MOCKED SUBPROCESS

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio
- tmp_path

Linked fiches

← OP-29d uses detection.py

→ OP-29a used by edge.py

PRIORITY MEDIUM

TIER 2

MOCKED

11 TESTS

OP-29f

cdp_client.py

Source : `py_modules/unifideck/auth/edge_browser/cdp_client.py` | Lignes : 183 | Cible : 80%
Test file : `tests/unit/auth/edge_browser/test_cdp_client.py`

Public surface

[class] `EdgeCDPClient` *(`__init__`, `get_browser_ws_url`, `probe_cdp`, `list_t...`)*

Tests to write (11)

⇒ **T-29f-01** **EdgeCDPClient.__init__ — construction** **PURE**
Function : `test_edgecdpclient_init_constructs_with_valid_args`
Covers : `EdgeCDPClient.__init__`
Purpose : EdgeCDPClient can be instantiated with the documented arguments.
Fixtures : —

⇒ **T-29f-02** **EdgeCDPClient.get_browser_ws_url — happy path** **MOCKED HTTP**
Function : `test_edgecdpclient_get_browser_ws_url_returns_value_on_success`
Covers : `EdgeCDPClient.get_browser_ws_url`
Purpose : get browser ws url returns the expected payload on a normal response.
Fixtures : `aioresponses`, `tmp_path`

⇒ **T-29f-03** **EdgeCDPClient.get_browser_ws_url — error handling** **MOCKED HTTP**
Function : `test_edgecdpclient_get_browser_ws_url_raises_on_network_failure`
Covers : `EdgeCDPClient.get_browser_ws_url`
Purpose : get browser ws url surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : `aioresponses`, `tmp_path`

⇒ **T-29f-04** **EdgeCDPClient.probe_cdp — happy path** **CDP / WEBSOCKET**
Function : `test_edgecdpclient_probe_cdp_happy_path`
Covers : `EdgeCDPClient.probe_cdp`
Purpose : probe cdp returns True for the documented happy-path input.
Fixtures : `aioresponses`, `tmp_path`, `fake_cdp_target` (`conftest.py`)

⇒ **T-29f-05** **EdgeCDPClient.probe_cdp — error handling** **CDP / WEBSOCKET**
Function : `test_edgecdpclient_probe_cdp_raises_on_network_failure`
Covers : `EdgeCDPClient.probe_cdp`
Purpose : probe cdp surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : `aioresponses`, `tmp_path`, `fake_cdp_target` (`conftest.py`)

OP-29f `cdp_client.py` (cont.)

Tests to write (11) — cont.

⇒ **T-29f-06** **EdgeCDPClient.list_targets — happy path**

MOCKED HTTP

Function : [test_edgedcpclient_list_targets_happy_path](#)Covers : `EdgeCDPClient.list_targets`

Purpose : list targets returns the expected list of items.

Fixtures : `aioreponses`, `tmp_path`⇒ **T-29f-07** **EdgeCDPClient.list_targets — error handling**

MOCKED HTTP

Function : [test_edgedcpclient_list_targets_raises_on_network_failure](#)Covers : `EdgeCDPClient.list_targets`Purpose : list targets surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.Fixtures : `aioreponses`, `tmp_path`⇒ **T-29f-08** **EdgeCDPClient.navigate_tab — happy path**

CDP / WEBSOCKET

Function : [test_edgedcpclient_navigate_tab_happy_path](#)Covers : `EdgeCDPClient.navigate_tab`

Purpose : navigate tab returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)⇒ **T-29f-09** **EdgeCDPClient.navigate_tab — error handling**

CDP / WEBSOCKET

Function : [test_edgedcpclient_navigate_tab_handles_error](#)Covers : `EdgeCDPClient.navigate_tab`

Purpose : navigate tab surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)⇒ **T-29f-10** **EdgeCDPClient.close_all_targets — happy path**

MOCKED HTTP

Function : [test_edgedcpclient_close_all_targets_happy_path](#)Covers : `EdgeCDPClient.close_all_targets`

Purpose : close all targets returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`⇒ **T-29f-11** **EdgeCDPClient.close_all_targets — error handling**

MOCKED HTTP

Function : [test_edgedcpclient_close_all_targets_raises_on_network_failure](#)Covers : `EdgeCDPClient.close_all_targets`Purpose : close all targets surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

Mocking dependencies

- `aioreponses`
- `fake_cdp_target` (`conftest.py`)
- `pytest-asyncio`
- `tmp_path`

Linked fiches

→ OP-29a used by `edge.py`

PRIORITY MEDIUM

TIER 2

MOCKED

11 TESTS

OP-29g

profile.py

Source : py_modules/unifideck/auth/edge_browser/profile.py | Lignes : 175 | Cible : 80%

Test file : tests/unit/auth/edge_browser/test_profile.py

Public surface

[class] EdgeProfileManager (__init__, migrate_legacy_profile, cleanup_stale...)

Tests to write (11)

⇒ T-29g-01 EdgeProfileManager.__init__ — construction PURE

Function : test_edgeprofilemanager_init_constructs_with_valid_args
Covers : EdgeProfileManager.__init__
Purpose : EdgeProfileManager stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-29g-02 EdgeProfileManager.migrate_legacy_profile — happy path MOCKED FS

Function : test_edgeprofilemanager_migrate_legacy_profile_happy_path
Covers : EdgeProfileManager.migrate_legacy_profile
Purpose : migrate legacy profile performs the side-effect without raising.
Fixtures : tmp_path

⇒ T-29g-03 EdgeProfileManager.migrate_legacy_profile — error handling MOCKED FS

Function : test_edgeprofilemanager_migrate_legacy_profile_handles_missing_or_corrupt_file
Covers : EdgeProfileManager.migrate_legacy_profile
Purpose : migrate legacy profile handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-29g-04 EdgeProfileManager.cleanup_stale_state — happy path MOCKED FS

Function : test_edgeprofilemanager_cleanup_stale_state_normalises_input
Covers : EdgeProfileManager.cleanup_stale_state
Purpose : cleanup stale state normalises the input as documented.
Fixtures : tmp_path

⇒ T-29g-05 EdgeProfileManager.cleanup_stale_state — error handling MOCKED FS

Function : test_edgeprofilemanager_cleanup_stale_state_handles_missing_or_corrupt_file
Covers : EdgeProfileManager.cleanup_stale_state
Purpose : cleanup stale state handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

OP-29g profile.py (cont.)

Tests to write (11) — cont.

⇒ T-29g-06 EdgeProfileManager.has_xbox_session — happy path

MOCKED FS

Function : [test_edgeprofilemanager_has_xbox_session_returns_true_on_valid_input](#)
Covers : EdgeProfileManager.has_xbox_session
Purpose : has xbox session returns True for a valid input.
Fixtures : tmp_path

⇒ T-29g-07 EdgeProfileManager.has_xbox_session — error handling

MOCKED FS

Function : [test_edgeprofilemanager_has_xbox_session_handles_missing_or_corrupt_file](#)
Covers : EdgeProfileManager.has_xbox_session
Purpose : has xbox session handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-29g-08 EdgeProfileManager.clear_cookies — happy path

MOCKED FS

Function : [test_edgeprofilemanager_clear_cookies_removes_target_and_reports_success](#)
Covers : EdgeProfileManager.clear_cookies
Purpose : clear cookies removes the target and reports success.
Fixtures : tmp_path

⇒ T-29g-09 EdgeProfileManager.clear_cookies — error handling

MOCKED FS

Function : [test_edgeprofilemanager_clear_cookies_handles_missing_or_corrupt_file](#)
Covers : EdgeProfileManager.clear_cookies
Purpose : clear cookies handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-29g-10 EdgeProfileManager.clear_profile_data — happy path

MOCKED FS

Function : [test_edgeprofilemanager_clear_profile_data_removes_target_and_reports_success](#)
Covers : EdgeProfileManager.clear_profile_data
Purpose : clear profile data removes the target and reports success.
Fixtures : tmp_path

⇒ T-29g-11 EdgeProfileManager.clear_profile_data — error handling

MOCKED FS

Function : [test_edgeprofilemanager_clear_profile_data_handles_missing_or_corrupt_file](#)
Covers : EdgeProfileManager.clear_profile_data
Purpose : clear profile data handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

→ OP-29a used by edge.py

PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-29h

process_ops.py

Source : py_modules/unifideck/auth/edge_browser/process_ops.py | Lignes : 88 | Cible : 80%

Test file : tests/unit/auth/edge_browser/test_process_ops.py

Public surface

[func]

graceful_kill

(pure)

[async]

wait_and_check_crash

(async + I/O)

Tests to write (4)

⇒ T-29h-01

graceful_kill — happy path

Function : test_graceful_kill_happy_path

Covers : graceful_kill

Purpose : graceful kill performs the side-effect without raising.

Fixtures : monkeypatch (asyncio.create_subprocess_exec)

MOCKED SUBPROCESS

⇒ T-29h-02

graceful_kill — error handling

Function : test_graceful_kill_raises_on_non_zero_exit

Covers : graceful_kill

Purpose : graceful kill reports a non-zero subprocess exit as a typed failure.

Fixtures : monkeypatch (asyncio.create_subprocess_exec)

MOCKED SUBPROCESS

⇒ T-29h-03

wait_and_check_crash — happy path

Function : test_wait_and_check_crash_happy_path

Covers : wait_and_check_crash

Purpose : wait and check crash returns True for a valid input.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), fake_cdp_target (conftest.py)

CDP / WEBSOCKET

⇒ T-29h-04

wait_and_check_crash — error handling

Function : test_wait_and_check_crash_raises_on_non_zero_exit

Covers : wait_and_check_crash

Purpose : wait and check crash reports a non-zero subprocess exit as a typed failure.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), fake_cdp_target (conftest.py)

CDP / WEBSOCKET

Mocking dependencies

- fake_cdp_target (conftest.py)
- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio

Linked fiches

→ OP-29a used by edge.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-61a

cache_registry.py

Source : py_modules/unifideck/bootstrap/cache_registry.py | Lignes : 22 | Cible : 90%

Test file : tests/unit/bootstrap/test_cache_registry.py

Public surface

[func] register_default_caches (pure)

Tests to write (2)

⇒ T-61a-01 register_default_caches — happy path PURE

Function : test_register_default_caches_completes_setup_steps

Covers : register_default_caches

Purpose : register default caches performs the setup steps end-to-end.

Fixtures : —

⇒ T-61a-02 register_default_caches — edge cases PURE

Function : test_register_default_caches_edge_cases

Covers : register_default_caches

Purpose : register default caches stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

→ OP-61d used by boot.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-61b

teardown.py
Source : `py_modules/unifideck/bootstrap/teardown.py` | Lignes : 13 | Cible : 60%
Test file : `tests/unit/bootstrap/test_teardown.py`

Public surface

`[async]`

unload_plugin

(async + I/O)

Tests to write (2)

⇒ T-61b-01

unload_plugin — happy path

ASYNC

Function : `test_unload_plugin_happy_path`

Covers : `unload_plugin`

Purpose : unload plugin resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-61b-02

unload_plugin — error handling

ASYNC

Function : `test_unload_plugin_handles_error`

Covers : `unload_plugin`

Purpose : unload plugin surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

• `pytest-asyncio`

Linked fiches

← OP-13 uses `__init__.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-61c

pipeline_factory.py

Source : py_modules/unifideck/bootstrap/pipeline_factory.py | Lignes : 39 | Cible : 60%

Test file : tests/unit/bootstrap/test_pipeline_factory.py

Public surface

[**async**] build_eventbus_pipeline (async + I/O)

Tests to write (2)

⇒ T-61c-01 build_eventbus_pipeline — happy path

ASYNC

Function : test_build_eventbus_pipeline_happy_path
Covers : build_eventbus_pipeline
Purpose : build eventbus pipeline produces the expected object from valid arguments.
Fixtures : pytest-asyncio

⇒ T-61c-02 build_eventbus_pipeline — error handling

ASYNC

Function : test_build_eventbus_pipeline_handles_error
Covers : build_eventbus_pipeline
Purpose : build eventbus pipeline surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-09c uses priority_dispatcher.py
- ← OP-09d uses event_replay.py
- ← OP-09g uses event_bus_scaling.py
- ← OP-09i uses bus_pipeline.py
- OP-61d used by boot.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-61d

boot.py

Source : `py_modules/unifideck/bootstrap/boot.py` | Lignes : 82 | Cible : 60%

Test file : `tests/unit/bootstrap/test_boot.py`

Public surface

`[async]`

boot_plugin

(async + I/O)

Tests to write (2)

⇒ T-61d-01

boot_plugin — happy path

ASYNC

Function : `test_boot_plugin_happy_path`

Covers : `boot_plugin`

Purpose : boot plugin resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-61d-02

boot_plugin — error handling

ASYNC

Function : `test_boot_plugin_handles_error`

Covers : `boot_plugin`

Purpose : boot plugin surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-04a uses `cache_manager.py`
- ← OP-04d uses `sync_service.py`
- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

19 TESTS

OP-30a

cdp_client.py

Source : `py_modules/unifideck/cdp/cdp_client.py` | Lignes : 206 | Cible : 60%

Test file : `tests/unit/cdp/test_cdp_client.py`

Public surface

`[class]` CDPClient

`(__init__, connect, disconnect, inject_css, evalu...`

Tests to write (19)

⇒ T-30a-01 CDPClient.__init__ — construction

PURE

Function : `test_cdpclient_init_constructs_with_valid_args`

Covers : CDPClient.__init__

Purpose : CDPClient stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-30a-02 CDPClient.connect — happy path

CDP / WEBSOCKET

Function : `test_cdpclient_connect_happy_path`

Covers : CDPClient.connect

Purpose : connect returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

⇒ T-30a-03 CDPClient.connect — error handling

CDP / WEBSOCKET

Function : `test_cdpclient_connect_handles_error`

Covers : CDPClient.connect

Purpose : connect surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

⇒ T-30a-04 CDPClient.disconnect — happy path

ASYNC

Function : `test_cdpclient_disconnect_happy_path`

Covers : CDPClient.disconnect

Purpose : disconnect resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-30a-05 CDPClient.disconnect — error handling

ASYNC

Function : `test_cdpclient_disconnect_handles_error`

Covers : CDPClient.disconnect

Purpose : disconnect surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-30a `cdp_client.py` (cont.)

Tests to write (19) — cont.

⇒ **T-30a-06** **CDPClient.inject_css — happy path**

ASYNC

Function : [test_cdpclient_inject_css_happy_path](#)Covers : `CDPClient.inject_css`

Purpose : inject css resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-30a-07** **CDPClient.inject_css — error handling**

ASYNC

Function : [test_cdpclient_inject_css_handles_error](#)Covers : `CDPClient.inject_css`

Purpose : inject css surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-30a-08** **CDPClient.evaluate — happy path**

CDP / WEBSOCKET

Function : [test_cdpclient_evaluate_happy_path](#)Covers : `CDPClient.evaluate`

Purpose : evaluate resolves to the expected value on success.

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)⇒ **T-30a-09** **CDPClient.evaluate — error handling**

CDP / WEBSOCKET

Function : [test_cdpclient_evaluate_handles_error](#)Covers : `CDPClient.evaluate`

Purpose : evaluate surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)⇒ **T-30a-10** **CDPClient.eval_js — happy path**

ASYNC

Function : [test_cdpclient_eval_js_happy_path](#)Covers : `CDPClient.eval_js`

Purpose : eval js resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-30a-11** **CDPClient.eval_js — error handling**

ASYNC

Function : [test_cdpclient_eval_js_handles_error](#)Covers : `CDPClient.eval_js`

Purpose : eval js surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-30a-12** **CDPClient.list_targets — happy path**

ASYNC

Function : [test_cdpclient_list_targets_happy_path](#)Covers : `CDPClient.list_targets`

Purpose : list targets resolves to the expected value on success.

Fixtures : `pytest-asyncio`

OP-30a `cdp_client.py` (cont.)

Tests to write (19) — cont.

⇒ **T-30a-13** **CDPClient.list_targets — error handling**

ASYNC

Function : [test_cdpclient_list_targets_handles_error](#)
Covers : `CDPClient.list_targets`
Purpose : list targets surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-30a-14** **CDPClient.close_target — happy path**

CDP / WEBSOCKET

Function : [test_cdpclient_close_target_happy_path](#)
Covers : `CDPClient.close_target`
Purpose : close target returns True for the documented happy-path input.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ **T-30a-15** **CDPClient.close_target — error handling**

CDP / WEBSOCKET

Function : [test_cdpclient_close_target_raises_on_http_200](#)
Covers : `CDPClient.close_target`
Purpose : close target surfaces a typed error on HTTP 200, not a swallowed exception.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ **T-30a-16** **CDPClient.navigate — happy path**

CDP / WEBSOCKET

Function : [test_cdpclient_navigate_happy_path](#)
Covers : `CDPClient.navigate`
Purpose : navigate resolves to the expected value on success.
Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

⇒ **T-30a-17** **CDPClient.navigate — error handling**

CDP / WEBSOCKET

Function : [test_cdpclient_navigate_handles_error](#)
Covers : `CDPClient.navigate`
Purpose : navigate surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

⇒ **T-30a-18** **CDPClient.wait_for_url — happy path**

ASYNC

Function : [test_cdpclient_wait_for_url_happy_path](#)
Covers : `CDPClient.wait_for_url`
Purpose : wait for url performs the side-effect without raising.
Fixtures : `pytest-asyncio`

⇒ **T-30a-19** **CDPClient.wait_for_url — error handling**

ASYNC

Function : [test_cdpclient_wait_for_url_handles_error](#)
Covers : `CDPClient.wait_for_url`
Purpose : wait for url surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-30a `cdp_client.py` (cont.)

Mocking dependencies

- `aioresponses`
- `fake_cdp_target` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- OP-13b used by `container.py`
- OP-28a used by `browser.py`
- OP-30b used by `cdp_inject.py`

PRIORITY MEDIUM

TIER 3

INTEGRATION

21 TESTS

OP-30b

cdp_inject.py

Source : py_modules/unifideck/cdp/cdp_inject.py | Lignes : 106 | Cible : 60%

Test file : tests/unit/cdp/test_cdp_inject.py

Public surface

[class]	SteamCSSInjector	(__init__, connect_to_steam, inject_css, remove...)
[func]	is_steam_ui_tab	(pure)
[func]	escape_css_for_template_literal	(pure)
[func]	build_marker_id	(pure)
[async]	get_cdp_client	(async + I/O)
[async]	shutdown_cdp_client	(async + I/O)

Tests to write (21)

⇒ T-30b-01 is_steam_ui_tab — happy path

Function : test_is_steam_ui_tab_returns_true_on_valid_input

Covers : is_steam_ui_tab

Purpose : is steam ui tab returns True for a valid input.

Fixtures : —

PURE

⇒ T-30b-02 is_steam_ui_tab — edge cases

Function : test_is_steam_ui_tab_edge_cases

Covers : is_steam_ui_tab

Purpose : is steam ui tab stays correct on empty / boundary inputs.

Fixtures : —

PURE

⇒ T-30b-03 escape_css_for_template_literal — happy path

Function : test_escape_css_for_template_literal_happy_path

Covers : escape_css_for_template_literal

Purpose : escape css for template literal produces the expected output for a typical input.

Fixtures : —

PURE

⇒ T-30b-04 escape_css_for_template_literal — edge cases

Function : test_escape_css_for_template_literal_edge_cases

Covers : escape_css_for_template_literal

Purpose : escape css for template literal stays correct on empty / boundary inputs.

Fixtures : —

PURE

OP-30b cdp_inject.py (cont.)

Tests to write (21) — cont.

⇒ T-30b-05 build_marker_id — happy path

PURE

Function : test_build_marker_id_happy_path

Covers : build_marker_id

Purpose : build marker id produces the expected object from valid arguments.

Fixtures : —

⇒ T-30b-06 build_marker_id — edge cases

PURE

Function : test_build_marker_id_edge_cases

Covers : build_marker_id

Purpose : build marker id stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-30b-07 get_cdp_client — happy path

CDP / WEBSOCKET

Function : test_get_cdp_client_returns_value_on_success

Covers : get_cdp_client

Purpose : get cdp client returns the expected payload on a normal response.

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

⇒ T-30b-08 get_cdp_client — error handling

CDP / WEBSOCKET

Function : test_get_cdp_client_handles_error

Covers : get_cdp_client

Purpose : get cdp client surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

⇒ T-30b-09 shutdown_cdp_client — happy path

CDP / WEBSOCKET

Function : test_shutdown_cdp_client_happy_path

Covers : shutdown_cdp_client

Purpose : shutdown cdp client resolves to the expected value on success.

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

⇒ T-30b-10 shutdown_cdp_client — error handling

CDP / WEBSOCKET

Function : test_shutdown_cdp_client_handles_error

Covers : shutdown_cdp_client

Purpose : shutdown cdp client surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

⇒ T-30b-11 SteamCSSInjector.__init__ — construction

PURE

Function : test_steamcssinjector_init_constructs_with_valid_args

Covers : SteamCSSInjector.__init__

Purpose : SteamCSSInjector can be instantiated with the documented arguments.

Fixtures : —

OP-30b cdp_inject.py (cont.)

Tests to write (21) — cont.

⇒ T-30b-12 SteamCSSInjector.connect_to_steam — happy path

ASYNC

Function : [test_steamcssinjector_connect_to_steam_happy_path](#)
Covers : `SteamCSSInjector.connect_to_steam`
Purpose : connect to steam produces the converted value for a typical input.
Fixtures : `pytest-asyncio`

⇒ T-30b-13 SteamCSSInjector.connect_to_steam — error handling

ASYNC

Function : [test_steamcssinjector_connect_to_steam_handles_error](#)
Covers : `SteamCSSInjector.connect_to_steam`
Purpose : connect to steam surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-30b-14 SteamCSSInjector.inject_css — happy path

ASYNC

Function : [test_steamcssinjector_inject_css_happy_path](#)
Covers : `SteamCSSInjector.inject_css`
Purpose : inject css returns True for the documented happy-path input.
Fixtures : `pytest-asyncio`

⇒ T-30b-15 SteamCSSInjector.inject_css — error handling

ASYNC

Function : [test_steamcssinjector_inject_css_handles_error](#)
Covers : `SteamCSSInjector.inject_css`
Purpose : inject css surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-30b-16 SteamCSSInjector.remove_css — happy path

ASYNC

Function : [test_steamcssinjector_remove_css_removes_target_and_reports_success](#)
Covers : `SteamCSSInjector.remove_css`
Purpose : remove css removes the target and reports success.
Fixtures : `pytest-asyncio`

⇒ T-30b-17 SteamCSSInjector.remove_css — error handling

ASYNC

Function : [test_steamcssinjector_remove_css_handles_error](#)
Covers : `SteamCSSInjector.remove_css`
Purpose : remove css surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-30b-18 SteamCSSInjector.hide_play_section — happy path

ASYNC

Function : [test_steamcssinjector_hide_play_section_happy_path](#)
Covers : `SteamCSSInjector.hide_play_section`
Purpose : hide play section resolves to the expected value on success.
Fixtures : `pytest-asyncio`

OP-30b `cdp_inject.py` (cont.)

Tests to write (21) — cont.

⇒ **T-30b-19** **SteamCSSInjector.hide_play_section — error handling**

ASYNC

Function : [test_steamcssinjector_hide_play_section_handles_error](#)
Covers : `SteamCSSInjector.hide_play_section`
Purpose : hide play section surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-30b-20** **SteamCSSInjector.show_play_section — happy path**

ASYNC

Function : [test_steamcssinjector_show_play_section_happy_path](#)
Covers : `SteamCSSInjector.show_play_section`
Purpose : show play section resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ **T-30b-21** **SteamCSSInjector.show_play_section — error handling**

ASYNC

Function : [test_steamcssinjector_show_play_section_handles_error](#)
Covers : `SteamCSSInjector.show_play_section`
Purpose : show play section surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

Mocking dependencies

- `fake_cdp_target` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

- ← OP-30a uses `cdp_client.py`
- OP-25h used by `ui.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-30c

xcloud_browser_shims.py

Source : py_modules/unifideck/cdp/xcloud_browser_shims.py | Lignes : 400 | Cible : 90%

Test file : tests/unit/cdp/test_xcloud_browser_shims.py

Public surface

[func] get_xcloud_browser_shims_js (pure)
[func] get_xcloud_navigation_js (pure)

Tests to write (4)

⇒ T-30c-01 get_xcloud_browser_shims_js — happy path PURE
Function : test_get_xcloud_browser_shims_js_returns_value_on_success
Covers : get_xcloud_browser_shims_js
Purpose : get xcloud browser shims js returns the expected payload on a normal response.
Fixtures : —

⇒ T-30c-02 get_xcloud_browser_shims_js — edge cases PURE
Function : test_get_xcloud_browser_shims_js_edge_cases
Covers : get_xcloud_browser_shims_js
Purpose : get xcloud browser shims js stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-30c-03 get_xcloud_navigation_js — happy path PURE
Function : test_get_xcloud_navigation_js_returns_value_on_success
Covers : get_xcloud_navigation_js
Purpose : get xcloud navigation js returns the expected payload on a normal response.
Fixtures : —

⇒ T-30c-04 get_xcloud_navigation_js — edge cases PURE
Function : test_get_xcloud_navigation_js_edge_cases
Covers : get_xcloud_navigation_js
Purpose : get xcloud navigation js stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

• (none — pure tests)

Linked fiches

→ OP-38b used by xcloud_cdp.py

● PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-30d

page_inject.py

Source : `py_modules/unifideck/cdp/page_inject.py` | Lignes : 183 | Cible : 80%

Test file : `tests/unit/cdp/test_page_inject.py`

Public surface

[async]

list_page_targets

(async + I/O)

[async]

inject_scripts

(async + I/O)

Tests to write (4)

⇒ T-30d-01list_page_targets — happy pathMOCKED HTTP

Function : `test_list_page_targets_happy_path`

Covers : `list_page_targets`

Purpose : list page targets returns the expected list of items.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

⇒ T-30d-02list_page_targets — error handlingMOCKED HTTP

Function : `test_list_page_targets_raises_on_network_failure`

Covers : `list_page_targets`

Purpose : list page targets surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

⇒ T-30d-03inject_scripts — happy pathMOCKED HTTP

Function : `test_inject_scripts_happy_path`

Covers : `inject_scripts`

Purpose : inject scripts returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-30d-04inject_scripts — error handlingMOCKED HTTP

Function : `test_inject_scripts_raises_on_network_failure`

Covers : `inject_scripts`

Purpose : inject scripts surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`

Mocking dependencies

- `aioreponses`
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- OP-38a used by `cdp_primitives.py`
- OP-38b used by `xcloud_cdp.py`

● PRIORITY MEDIUM

TIER 1

PURE

31 TESTS

OP-34a

proton_helpers.py

Source : `py_modules/unifideck/compatibility/proton_helpers.py` | Lignes : 320 | Cible : 90%Test file : `tests/unit/compatibility/test_proton_helpers.py`

Public surface

[class]	<code>CompatToolResult</code>	<i>(to_dict)</i>
[class]	<code>ProtonToolsManager</code>	<i>(__init__, get_for_app, set_for_app, clear_for_a...)</i>
[func]	<code>is_linux_runtime</code>	<i>(pure)</i>
[func]	<code>parse_compat_tool</code>	<i>(pure)</i>
[func]	<code>inject_compat_tool</code>	<i>(pure)</i>
[func]	<code>get_compat_tool_for_app</code>	<i>(pure)</i>
[func]	<code>get_compat_tool_for_game</code>	<i>(pure)</i>
[func]	<code>temporarily_clear_compat_tool</code>	<i>(pure)</i>
[func]	<code>restore_compat_tool</code>	<i>(pure)</i>
[func]	<code>save_proton_setting</code>	<i>(pure)</i>
[func]	<code>get_saved_proton_tool</code>	<i>(pure)</i>
[func]	<code>resolve_proton_path</code>	<i>(pure)</i>

Tests to write (31)

⇒ T-34a-01 `is_linux_runtime` — happy path

PURE

Function : `test_is_linux_runtime_returns_true_on_valid_input`Covers : `is_linux_runtime`Purpose : `is_linux_runtime` returns True for a valid input.

Fixtures : —

⇒ T-34a-02 `is_linux_runtime` — edge cases

PURE

Function : `test_is_linux_runtime_edge_cases`Covers : `is_linux_runtime`Purpose : `is_linux_runtime` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-34a-03 `parse_compat_tool` — happy path

PURE

Function : `test_parse_compat_tool_parses_well_formed_input`Covers : `parse_compat_tool`Purpose : `parse_compat_tool` parses a well-formed input into the expected value.

Fixtures : —

OP-34a *proton_helpers.py* (cont.)

Tests to write (31) — cont.

⇒ T-34a-04 **parse_compat_tool — edge cases**

PURE

Function : [test_parse_compat_tool_edge_cases](#)Covers : `parse_compat_tool`Purpose : `parse_compat_tool` handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

⇒ T-34a-05 **inject_compat_tool — happy path**

PURE

Function : [test_inject_compat_tool_happy_path](#)Covers : `inject_compat_tool`Purpose : `inject_compat_tool` produces the expected output for a typical input.

Fixtures : —

⇒ T-34a-06 **inject_compat_tool — edge cases**

PURE

Function : [test_inject_compat_tool_edge_cases](#)Covers : `inject_compat_tool`Purpose : `inject_compat_tool` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-34a-07 **get_compat_tool_for_app — happy path**

PURE

Function : [test_get_compat_tool_for_app_returns_value_on_success](#)Covers : `get_compat_tool_for_app`Purpose : `get_compat_tool_for_app` returns the expected payload on a normal response.

Fixtures : —

⇒ T-34a-08 **get_compat_tool_for_app — edge cases**

PURE

Function : [test_get_compat_tool_for_app_edge_cases](#)Covers : `get_compat_tool_for_app`Purpose : `get_compat_tool_for_app` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-34a-09 **get_compat_tool_for_game — happy path**

PURE

Function : [test_get_compat_tool_for_game_returns_value_on_success](#)Covers : `get_compat_tool_for_game`Purpose : `get_compat_tool_for_game` returns the expected payload on a normal response.

Fixtures : —

⇒ T-34a-10 **get_compat_tool_for_game — edge cases**

PURE

Function : [test_get_compat_tool_for_game_returns_empty_dict_on_empty_input](#)Covers : `get_compat_tool_for_game`Purpose : `get_compat_tool_for_game` returns an empty dict on empty input.

Fixtures : —

OP-34a *proton_helpers.py* (cont.)

Tests to write (31) — cont.

⇒ **T-34a-11** temporarily_clear_compat_tool — happy path

PURE

Function : [test_temporarily_clear_compat_tool_happy_path](#)
 Covers : temporarily_clear_compat_tool
 Purpose : temporarily clear compat tool removes the target and reports success.
 Fixtures : —

⇒ **T-34a-12** temporarily_clear_compat_tool — edge cases

PURE

Function : [test_temporarily_clear_compat_tool_returns_empty_dict_on_empty_input](#)
 Covers : temporarily_clear_compat_tool
 Purpose : temporarily clear compat tool returns an empty dict on empty input.
 Fixtures : —

⇒ **T-34a-13** restore_compat_tool — happy path

PURE

Function : [test_restore_compat_tool_happy_path](#)
 Covers : restore_compat_tool
 Purpose : restore compat tool returns the expected dict shape.
 Fixtures : —

⇒ **T-34a-14** restore_compat_tool — edge cases

PURE

Function : [test_restore_compat_tool_returns_empty_dict_on_empty_input](#)
 Covers : restore_compat_tool
 Purpose : restore compat tool returns an empty dict on empty input.
 Fixtures : —

⇒ **T-34a-15** save_proton_setting — happy path

WINE PREFIX

Function : [test_save_proton_setting_persists_value_to_disk](#)
 Covers : save_proton_setting
 Purpose : save proton setting persists the input correctly to disk.
 Fixtures : fake_prefix (conftest.py)

⇒ **T-34a-16** save_proton_setting — error handling

WINE PREFIX

Function : [test_save_proton_setting_handles_error](#)
 Covers : save_proton_setting
 Purpose : save proton setting surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : fake_prefix (conftest.py)

⇒ **T-34a-17** get_saved_proton_tool — happy path

WINE PREFIX

Function : [test_get_saved_proton_tool_returns_value_on_success](#)
 Covers : get_saved_proton_tool
 Purpose : get saved proton tool returns the expected payload on a normal response.
 Fixtures : fake_prefix (conftest.py)

OP-34a `proton_helpers.py` (cont.)

Tests to write (31) — cont.

⇒ **T-34a-18** `get_saved_proton_tool` — error handling

WINE PREFIX

Function : `test_get_saved_proton_tool_handles_error`Covers : `get_saved_proton_tool`Purpose : `get_saved_proton_tool` surfaces failures cleanly (typed result, no swallowed exception).Fixtures : `fake_prefix` (`conftest.py`)⇒ **T-34a-19** `resolve_proton_path` — happy path

WINE PREFIX

Function : `test_resolve_proton_path_returns_target_when_present`Covers : `resolve_proton_path`Purpose : `resolve_proton_path` returns the located target when it exists.Fixtures : `fake_prefix` (`conftest.py`)⇒ **T-34a-20** `resolve_proton_path` — error handling

WINE PREFIX

Function : `test_resolve_proton_path_handles_error`Covers : `resolve_proton_path`Purpose : `resolve_proton_path` surfaces failures cleanly (typed result, no swallowed exception).Fixtures : `fake_prefix` (`conftest.py`)⇒ **T-34a-21** `CompatToolResult.to_dict` — happy path

PURE

Function : `test_compattoolresult_to_dict_returns_converted_value`Covers : `CompatToolResult.to_dict`Purpose : `to_dict` produces the converted value for a typical input.

Fixtures : —

⇒ **T-34a-22** `ProtonToolsManager.__init__` — construction

PURE

Function : `test_protontoolsmanager_init_constructs_with_valid_args`Covers : `ProtonToolsManager.__init__`Purpose : `ProtonToolsManager` stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ **T-34a-23** `ProtonToolsManager.get_for_app` — happy path

PURE

Function : `test_protontoolsmanager_get_for_app_returns_value_on_success`Covers : `ProtonToolsManager.get_for_app`Purpose : `get_for_app` returns the expected payload on a normal response.

Fixtures : —

⇒ **T-34a-24** `ProtonToolsManager.set_for_app` — happy path

MOCKED FS

Function : `test_protontoolsmanager_set_for_app_happy_path`Covers : `ProtonToolsManager.set_for_app`Purpose : `set_for_app` produces the expected output for a typical input.Fixtures : `tmp_path`

OP-34a *proton_helpers.py* (cont.)

Tests to write (31) — cont.

⇒ T-34a-25 ProtonToolsManager.set_for_app — error handling

MOCKED FS

Function : [test_protontoolsmanager_set_for_app_handles_missing_or_corrupt_file](#)

Covers : ProtonToolsManager.set_for_app

Purpose : set for app handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-34a-26 ProtonToolsManager.clear_for_app — happy path

PURE

Function : [test_protontoolsmanager_clear_for_app_removes_target_and_reports_success](#)

Covers : ProtonToolsManager.clear_for_app

Purpose : clear for app removes the target and reports success.

Fixtures : —

⇒ T-34a-27 ProtonToolsManager.list_known_tools — happy path

PURE

Function : [test_protontoolsmanager_list_known_tools_happy_path](#)

Covers : ProtonToolsManager.list_known_tools

Purpose : list known tools produces the expected output for a typical input.

Fixtures : —

⇒ T-34a-28 ProtonToolsManager.load_proton_settings — happy path

WINE PREFIX

Function : [test_protontoolsmanager_load_proton_settings_returns_value_on_success](#)

Covers : ProtonToolsManager.load_proton_settings

Purpose : load proton settings returns the expected payload on a normal response.

Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-34a-29 ProtonToolsManager.load_proton_settings — error handling

WINE PREFIX

Function : [test_protontoolsmanager_load_proton_settings_handles_missing_or_corrupt_file](#)

Covers : ProtonToolsManager.load_proton_settings

Purpose : load proton settings handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-34a-30 ProtonToolsManager.save_proton_settings — happy path

WINE PREFIX

Function : [test_protontoolsmanager_save_proton_settings_persists_value_to_disk](#)

Covers : ProtonToolsManager.save_proton_settings

Purpose : save proton settings persists the input correctly to disk.

Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-34a-31 ProtonToolsManager.save_proton_settings — error handling

WINE PREFIX

Function : [test_protontoolsmanager_save_proton_settings_handles_missing_or_corrupt_file](#)

Covers : ProtonToolsManager.save_proton_settings

Purpose : save proton settings handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path, fake_prefix (conftest.py)

OP-34a *proton_helpers.py* (cont.)

Mocking dependencies

- `fake_prefix` (`conftest.py`)
- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-32b uses `library.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

31 TESTS

OP-34b

library.py

Source : py_modules/unifideck/compatibility/library.py | Lignes : 239 | Cible : 60%

Test file : tests/unit/compatibility/test_library.py

Public surface

[class]	CompatRating	(to_dict)
[class]	CompatLibrary	(__init__, get_for_appid, get_for_title, bulk_fetch)
[class]	BackgroundCompatFetcher	(__init__, start, stop, fetch)
[func]	parse_protondb_response	(pure)
[func]	parse_deck_verified_response	(pure)
[func]	load_compat_cache	(pure)
[func]	save_compat_cache	(pure)
[async]	search_steam_store	(async + I/O)
[async]	fetch_protondb_rating	(async + I/O)
[async]	fetch_deck_verified	(async + I/O)
[async]	get_compat_for_title	(async + I/O)
[async]	prefetch_compat	(async + I/O)

Tests to write (31)

⇒ T-34b-01 parse_protondb_response — happy path

WINE PREFIX

Function : test_parse_protondb_response_parses_well_formed_input

Covers : parse_protondb_response

Purpose : parse protondb response parses a well-formed input into the expected value.

Fixtures : fake_prefix (conftest.py)

⇒ T-34b-02 parse_protondb_response — error handling

WINE PREFIX

Function : test_parse_protondb_response_handles_error

Covers : parse_protondb_response

Purpose : parse protondb response surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : fake_prefix (conftest.py)

⇒ T-34b-03 parse_deck_verified_response — happy path

PURE

Function : test_parse_deck_verified_response_parses_well_formed_input

Covers : parse_deck_verified_response

Purpose : parse deck verified response parses a well-formed input into the expected value.

Fixtures : —

OP-34b library.py (cont.)

Tests to write (31) — cont.

⇒ T-34b-04 parse_deck_verified_response — edge cases

PURE

Function : test_parse_deck_verified_response_edge_cases

Covers : parse_deck_verified_response

Purpose : parse deck verified response handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

⇒ T-34b-05 load_compat_cache — happy path

PURE

Function : test_load_compat_cache_returns_value_on_success

Covers : load_compat_cache

Purpose : load compat cache returns the expected payload on a normal response.

Fixtures : —

⇒ T-34b-06 load_compat_cache — edge cases

PURE

Function : test_load_compat_cache_returns_empty_dict_on_empty_input

Covers : load_compat_cache

Purpose : load compat cache returns an empty dict on empty input.

Fixtures : —

⇒ T-34b-07 save_compat_cache — happy path

PURE

Function : test_save_compat_cache_persists_value_to_disk

Covers : save_compat_cache

Purpose : save compat cache persists the input correctly to disk.

Fixtures : —

⇒ T-34b-08 save_compat_cache — edge cases

PURE

Function : test_save_compat_cache_edge_cases

Covers : save_compat_cache

Purpose : save compat cache stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-34b-09 search_steam_store — happy path

ASYNC

Function : test_search_steam_store_happy_path

Covers : search_steam_store

Purpose : search steam store persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-34b-10 search_steam_store — error handling

ASYNC

Function : test_search_steam_store_handles_error

Covers : search_steam_store

Purpose : search steam store surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-34b library.py (cont.)

Tests to write (31) — cont.

⇒ T-34b-11 fetch_protondb_rating — happy path

MOCKED HTTP

Function : [test_fetch_protondb_rating_returns_value_on_success](#)
Covers : fetch_protondb_rating
Purpose : fetch protondb rating returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-12 fetch_protondb_rating — error handling

MOCKED HTTP

Function : [test_fetch_protondb_rating_raises_on_network_failure](#)
Covers : fetch_protondb_rating
Purpose : fetch protondb rating surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-13 fetch_deck_verified — happy path

MOCKED HTTP

Function : [test_fetch_deck_verified_returns_value_on_success](#)
Covers : fetch_deck_verified
Purpose : fetch deck verified returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-14 fetch_deck_verified — error handling

MOCKED HTTP

Function : [test_fetch_deck_verified_raises_on_network_failure](#)
Covers : fetch_deck_verified
Purpose : fetch deck verified surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-15 get_compat_for_title — happy path

ASYNC

Function : [test_get_compat_for_title_returns_value_on_success](#)
Covers : get_compat_for_title
Purpose : get compat for title returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-34b-16 get_compat_for_title — error handling

ASYNC

Function : [test_get_compat_for_title_handles_error](#)
Covers : get_compat_for_title
Purpose : get compat for title surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-34b-17 prefetch_compat — happy path

MOCKED HTTP

Function : [test_prefetch_compat_happy_path](#)
Covers : prefetch_compat
Purpose : prefetch compat resolves to the expected value on success.
Fixtures : pytest-asyncio, aioresponses

OP-34b library.py (cont.)

Tests to write (31) — cont.

⇒ T-34b-18 prefetch_compat — error handling

MOCKED HTTP

Function : [test_prefetch_compat_raises_on_network_failure](#)
 Covers : prefetch_compat
 Purpose : prefetch_compat surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
 Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-19 CompatRating.to_dict — happy path

PURE

Function : [test_compatrating_to_dict_returns_converted_value](#)
 Covers : CompatRating.to_dict
 Purpose : to_dict produces the converted value for a typical input.
 Fixtures : —

⇒ T-34b-20 CompatLibrary.__init__ — construction

PURE

Function : [test_compatlibrary_init_constructs_with_valid_args](#)
 Covers : CompatLibrary.__init__
 Purpose : CompatLibrary stores its constructor arguments on the expected instance attributes.
 Fixtures : —

⇒ T-34b-21 CompatLibrary.get_for_appid — happy path

MOCKED HTTP

Function : [test_compatlibrary_get_for_appid_returns_value_on_success](#)
 Covers : CompatLibrary.get_for_appid
 Purpose : get_for_appid returns the expected payload on a normal response.
 Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-22 CompatLibrary.get_for_appid — error handling

MOCKED HTTP

Function : [test_compatlibrary_get_for_appid_raises_on_network_failure](#)
 Covers : CompatLibrary.get_for_appid
 Purpose : get_for_appid surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
 Fixtures : pytest-asyncio, aioresponses

⇒ T-34b-23 CompatLibrary.get_for_title — happy path

ASYNC

Function : [test_compatlibrary_get_for_title_returns_value_on_success](#)
 Covers : CompatLibrary.get_for_title
 Purpose : get_for_title returns the expected payload on a normal response.
 Fixtures : pytest-asyncio

⇒ T-34b-24 CompatLibrary.get_for_title — error handling

ASYNC

Function : [test_compatlibrary_get_for_title_handles_error](#)
 Covers : CompatLibrary.get_for_title
 Purpose : get_for_title surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

OP-34b library.py (cont.)

Tests to write (31) — cont.

⇒ T-34b-25 CompatLibrary.bulk_fetch — happy path

ASYNC

Function : [test_compatlibrary_bulk_fetch_happy_path](#)
 Covers : CompatLibrary.bulk_fetch
 Purpose : bulk fetch returns the expected payload on a normal response.
 Fixtures : pytest-asyncio

⇒ T-34b-26 CompatLibrary.bulk_fetch — error handling

ASYNC

Function : [test_compatlibrary_bulk_fetch_handles_error](#)
 Covers : CompatLibrary.bulk_fetch
 Purpose : bulk fetch surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

⇒ T-34b-27 BackgroundCompatFetcher.__init__ — construction

PURE

Function : [test_backgroundcompatfetcher_init_constructs_with_valid_args](#)
 Covers : BackgroundCompatFetcher.__init__
 Purpose : BackgroundCompatFetcher can be instantiated with the documented arguments.
 Fixtures : —

⇒ T-34b-28 BackgroundCompatFetcher.start — happy path

PURE

Function : [test_backgroundcompatfetcher_start_spawns_target_action](#)
 Covers : BackgroundCompatFetcher.start
 Purpose : start spawns the target action and returns its handle.
 Fixtures : —

⇒ T-34b-29 BackgroundCompatFetcher.stop — happy path

PURE

Function : [test_backgroundcompatfetcher_stop_happy_path](#)
 Covers : BackgroundCompatFetcher.stop
 Purpose : stop produces the expected output for a typical input.
 Fixtures : —

⇒ T-34b-30 BackgroundCompatFetcher.fetch — happy path

ASYNC

Function : [test_backgroundcompatfetcher_fetch_returns_value_on_success](#)
 Covers : BackgroundCompatFetcher.fetch
 Purpose : fetch returns the expected payload on a normal response.
 Fixtures : pytest-asyncio

⇒ T-34b-31 BackgroundCompatFetcher.fetch — error handling

ASYNC

Function : [test_backgroundcompatfetcher_fetch_handles_error](#)
 Covers : BackgroundCompatFetcher.fetch
 Purpose : fetch surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

OP-34b *library.py* (cont.)

Mocking dependencies

- `aioresponses`
- `fake_prefix` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

- ← OP-04a uses `cache_manager.py`
- ← OP-11 uses `__init__.py`
- ← OP-32b uses `library.py`
- ← OP-33c uses `config_helpers.py`

● PRIORITY MEDIUM

TIER 2

MOCKED

15 TESTS

OP-11a

config_manager.py

Source : py_modules/unifideck/config/config_manager.py | Lignes : 231 | Cible : 80%

Test file : tests/unit/config/test_config_manager.py

Public surface

[class]

ConfigManager

(__init__, reload, get, get_str, get_int, get_bool, ...)

Tests to write (15)

⇒ T-11a-01

ConfigManager.__init__ — construction

PURE

Function : test_configmanager_init_constructs_with_valid_args

Covers : ConfigManager.__init__

Purpose : ConfigManager stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-11a-02

ConfigManager.reload — happy path

MOCKED FS

Function : test_configmanager_reload_happy_path

Covers : ConfigManager.reload

Purpose : reload produces the expected output for a typical input.

Fixtures : tmp_path

⇒ T-11a-03

ConfigManager.reload — error handling

MOCKED FS

Function : test_configmanager_reload_handles_missing_or_corrupt_file

Covers : ConfigManager.reload

Purpose : reload handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-11a-04

ConfigManager.get — happy path

PURE

Function : test_configmanager_get_happy_path

Covers : ConfigManager.get

Purpose : get produces the expected output for a typical input.

Fixtures : —

⇒ T-11a-05

ConfigManager.get_str — happy path

PURE

Function : test_configmanager_get_str_returns_value_on_success

Covers : ConfigManager.get_str

Purpose : get str returns the expected payload on a normal response.

Fixtures : —

OP-11a config_manager.py (cont.)

Tests to write (15) — cont.

⇒ T-11a-06 ConfigManager.get_int — happy path

PURE

Function : `test_configmanager_get_int_returns_value_on_success`
Covers : `ConfigManager.get_int`
Purpose : get int returns the expected payload on a normal response.
Fixtures : —

⇒ T-11a-07 ConfigManager.get_bool — happy path

PURE

Function : `test_configmanager_get_bool_returns_value_on_success`
Covers : `ConfigManager.get_bool`
Purpose : get bool returns the expected payload on a normal response.
Fixtures : —

⇒ T-11a-08 ConfigManager.set — happy path

MOCKED FS

Function : `test_configmanager_set_happy_path`
Covers : `ConfigManager.set`
Purpose : set performs the side-effect without raising.
Fixtures : `tmp_path`

⇒ T-11a-09 ConfigManager.set — error handling

MOCKED FS

Function : `test_configmanager_set_handles_missing_or_corrupt_file`
Covers : `ConfigManager.set`
Purpose : set handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ T-11a-10 ConfigManager.data_dir — happy path

MOCKED FS

Function : `test_configmanager_data_dir_happy_path`
Covers : `ConfigManager.data_dir`
Purpose : data dir produces the expected output for a typical input.
Fixtures : `tmp_path`

⇒ T-11a-11 ConfigManager.data_dir — error handling

MOCKED FS

Function : `test_configmanager_data_dir_handles_missing_or_corrupt_file`
Covers : `ConfigManager.data_dir`
Purpose : data dir handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ T-11a-12 ConfigManager.cache_dir — happy path

MOCKED FS

Function : `test_configmanager_cache_dir_happy_path`
Covers : `ConfigManager.cache_dir`
Purpose : cache dir produces the expected output for a typical input.
Fixtures : `tmp_path`

OP-11a `config_manager.py` (cont.)

Tests to write (15) — cont.

⇒ T-11a-13 **ConfigManager.cache_dir — error handling**

MOCKED FS

Function : `test_configmanager_cache_dir_handles_missing_or_corrupt_file`
Covers : `ConfigManager.cache_dir`
Purpose : cache dir handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ T-11a-14 **ConfigManager.path — happy path**

MOCKED FS

Function : `test_configmanager_path_happy_path`
Covers : `ConfigManager.path`
Purpose : path produces the expected output for a typical input.
Fixtures : `tmp_path`

⇒ T-11a-15 **ConfigManager.path — error handling**

MOCKED FS

Function : `test_configmanager_path_handles_missing_or_corrupt_file`
Covers : `ConfigManager.path`
Purpose : path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

Mocking dependencies

- `tmp_path`

Linked fiches

- OP-11f used by `key_presence.py`
- OP-25a used by `base.py`
- OP-35c used by `dispatcher.py`
- OP-35e used by `bootstrap.py`

PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-11b

config_persistence.py

Source : py_modules/unifideck/config/config_persistence.py | Lignes : 55 | Cible : 80%

Test file : tests/unit/config/test_config_persistence.py

Public surface

[func]	load_json_layer	(pure)
[func]	atomic_write_json	(pure)

Tests to write (4)

⇒ T-11b-01 load_json_layer — happy path

MOCKED FS

Function : test_load_json_layer_returns_value_on_success
Covers : load_json_layer
Purpose : load json layer returns the expected payload on a normal response.
Fixtures : tmp_path

⇒ T-11b-02 load_json_layer — error handling

MOCKED FS

Function : test_load_json_layer_handles_missing_or_corrupt_file
Covers : load_json_layer
Purpose : load json layer handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-11b-03 atomic_write_json — happy path

MOCKED FS

Function : test_atomic_write_json_happy_path
Covers : atomic_write_json
Purpose : atomic write json persists the input correctly to disk.
Fixtures : tmp_path

⇒ T-11b-04 atomic_write_json — error handling

MOCKED FS

Function : test_atomic_write_json_handles_missing_or_corrupt_file
Covers : atomic_write_json
Purpose : atomic write json handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

(no internal imports detected)

PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-11c

i18n_schema.py

Source : py_modules/unifideck/config/i18n_schema.py | Lignes : 108 | Cible : 80%

Test file : tests/unit/config/test_i18n_schema.py

Public surface

[class]

ConfigSchemaError

()

[func]

validate_i18n_schema

(pure)

Tests to write (2)

⇒ T-11c-01 validate_i18n_schema — happy path

Function : test_validate_i18n_schema_returns_true_on_valid_input

Covers : validate_i18n_schema

Purpose : validate i18n schema returns True for a valid input.

Fixtures : tmp_path

MOCKED FS

⇒ T-11c-02 validate_i18n_schema — error handling

Function : test_validate_i18n_schema_raises_config_schema_error_on_failure

Covers : validate_i18n_schema

Purpose : validate i18n schema raises ConfigSchemaError when the input or upstream call fails.

Fixtures : tmp_path

MOCKED FS

Mocking dependencies

• tmp_path

Linked fiches

(no internal imports detected)

PRIORITY MEDIUM

TIER 2

MOCKED

3 TESTS

OP-11e

validator.py

Source : py_modules/unifideck/config/validator.py | Lignes : 251 | Cible : 80%

Test file : tests/unit/config/test_validator.py

Public surface

[class]	ValidationError	()
[class]	ValidationResult	()
[class]	ConfigValidator	(__init__, validate_config)

Tests to write (3)

⇒ T-11e-01 ConfigValidator.__init__ — construction

PURE

Function : test_configvalidator_init_constructs_with_valid_args
Covers : ConfigValidator.__init__
Purpose : ConfigValidator stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-11e-02 ConfigValidator.validate_config — happy path

MOCKED FS

Function : test_configvalidator_validate_config_returns_true_on_valid_input
Covers : ConfigValidator.validate_config
Purpose : validate config returns True for a valid input.
Fixtures : pytest-asyncio, tmp_path

⇒ T-11e-03 ConfigValidator.validate_config — error handling

MOCKED FS

Function : test_configvalidator_validate_config_handles_missing_or_corrupt_file
Covers : ConfigValidator.validate_config
Purpose : validate config handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

Mocking dependencies

- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-05a uses events.py
- ← OP-09a uses event_bus.py

PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-11f

key_presence.py

Source : py_modules/unifideck/config/key_presence.py | Lignes : 166 | Cible : 80%

Test file : tests/unit/config/test_key_presence.py

Public surface

[class]	KeyPresenceError	()
[func]	assert_all_keys_resolve	(pure)
[func]	collect_missing_keys	(pure)

Tests to write (4)

⇒ T-11f-01 assert_all_keys_resolve — happy path

MOCKED FS

Function : test_assert_all_keys_resolve_happy_path
Covers : assert_all_keys_resolve
Purpose : assert all keys resolve returns the located target when it exists.
Fixtures : tmp_path

⇒ T-11f-02 assert_all_keys_resolve — error handling

MOCKED FS

Function : test_assert_all_keys_resolve_raises_key_presence_error_on_failure
Covers : assert_all_keys_resolve
Purpose : assert all keys resolve raises KeyPresenceError when the input or upstream call fails.
Fixtures : tmp_path

⇒ T-11f-03 collect_missing_keys — happy path

PURE

Function : test_collect_missing_keys_happy_path
Covers : collect_missing_keys
Purpose : collect missing keys produces the expected output for a typical input.
Fixtures : —

⇒ T-11f-04 collect_missing_keys — edge cases

PURE

Function : test_collect_missing_keys_edge_cases
Covers : collect_missing_keys
Purpose : collect missing keys stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-11a uses config_manager.py
- OP-11g used by startup.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-11g

startup.py

Source : `py_modules/unifideck/config/startup.py` | Lignes : 67 | Cible : 60%

Test file : `tests/unit/config/test_startup.py`

Public surface

[async]

validate_config_at_startup

(async + I/O)

Tests to write (2)

⇒ T-11g-01

validate_config_at_startup — happy path

ASYNC

Function : `test_validate_config_at_startup_returns_true_on_valid_input`

Covers : `validate_config_at_startup`

Purpose : validate config at startup returns True for a valid input.

Fixtures : `pytest-asyncio`

⇒ T-11g-02

validate_config_at_startup — error handling

ASYNC

Function : `test_validate_config_at_startup_handles_error`

Covers : `validate_config_at_startup`

Purpose : validate config at startup surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`
- ← OP-11f uses `key_presence.py`
- OP-61d used by `boot.py`

PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-11h

user_config_path.py

Source : py_modules/unifideck/config/user_config_path.py | Lignes : 11 | Cible : 80%

Test file : tests/unit/config/test_user_config_path.py

Public surface

[func] resolve_user_config_path (pure)

Tests to write (2)

⇒ T-11h-01 resolve_user_config_path — happy path

MOCKED FS

Function : test_resolve_user_config_path_returns_target_when_present
Covers : resolve_user_config_path
Purpose : resolve user config path returns the located target when it exists.
Fixtures : tmp_path, monkeypatch (env vars)

⇒ T-11h-02 resolve_user_config_path — error handling

MOCKED FS

Function : test_resolve_user_config_path_handles_missing_or_corrupt_file
Covers : resolve_user_config_path
Purpose : resolve user config path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path, monkeypatch (env vars)

Mocking dependencies

- monkeypatch (env vars)
- tmp_path

Linked fiches

(no internal imports detected)

● PRIORITY HIGH

TIER 1

PURE

16 TESTS

OP-04a

cache_manager.py

Source : py_modules/unifideck/core/cache_manager.py | Lignes : 171 | Cible : 95%

Test file : tests/unit/core/test_cache_manager.py

Public surface

[class]

CacheStore

(__init__, get, set, delete, clear, size)

[class]

CacheManager

(__init__, register, get, set, delete, clear, ...)

Tests to write (16)

⇒ T-04a-01CacheStore.__init__ — construction

PURE

Function : test_cachestore_init_constructs_with_valid_args

Covers : CacheStore.__init__

Purpose : CacheStore stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-04a-02CacheStore.get — happy path

PURE

Function : test_cachestore_get_happy_path

Covers : CacheStore.get

Purpose : get performs the side-effect without raising.

Fixtures : monkeypatch (time.time)

⇒ T-04a-03CacheStore.set — happy path

PURE

Function : test_cachestore_set_happy_path

Covers : CacheStore.set

Purpose : set produces the expected output for a typical input.

Fixtures : monkeypatch (time.time)

⇒ T-04a-04CacheStore.delete — happy path

PURE

Function : test_cachestore_delete_removes_target_and_reports_success

Covers : CacheStore.delete

Purpose : delete removes the target and reports success.

Fixtures : —

⇒ T-04a-05CacheStore.clear — happy path

PURE

Function : test_cachestore_clear_removes_target_and_reports_success

Covers : CacheStore.clear

Purpose : clear removes the target and reports success.

Fixtures : —

OP-04a *cache_manager.py* (cont.)

Tests to write (16) — cont.

⇒ T-04a-06 **CacheStore.size — happy path**

PURE

Function : [test_cachestore_size_returns_correct_count](#)Covers : `CacheStore.size`

Purpose : size returns the correct count for a populated input.

Fixtures : —

⇒ T-04a-07 **CacheManager.__init__ — construction**

PURE

Function : [test_cachemanager_init_constructs_with_valid_args](#)Covers : `CacheManager.__init__`

Purpose : CacheManager stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-04a-08 **CacheManager.register — happy path**

MOCKED FS

Function : [test_cachemanager_register_completes_setup_steps](#)Covers : `CacheManager.register`

Purpose : register performs the setup steps end-to-end.

Fixtures : `tmp_path`⇒ T-04a-09 **CacheManager.register — error handling**

MOCKED FS

Function : [test_cachemanager_register_handles_missing_or_corrupt_file](#)Covers : `CacheManager.register`

Purpose : register handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`⇒ T-04a-10 **CacheManager.get — happy path**

PURE

Function : [test_cachemanager_get_happy_path](#)Covers : `CacheManager.get`

Purpose : get produces the expected output for a typical input.

Fixtures : —

⇒ T-04a-11 **CacheManager.set — happy path**

PURE

Function : [test_cachemanager_set_happy_path](#)Covers : `CacheManager.set`

Purpose : set produces the expected output for a typical input.

Fixtures : —

⇒ T-04a-12 **CacheManager.delete — happy path**

PURE

Function : [test_cachemanager_delete_removes_target_and_reports_success](#)Covers : `CacheManager.delete`

Purpose : delete removes the target and reports success.

Fixtures : —

OP-04a `cache_manager.py` (cont.)

Tests to write (16) — cont.

⇒ **T-04a-13** **CacheManager.clear — happy path**

PURE

Function : [test_cachemanager_clear_removes_target_and_reports_success](#)Covers : `CacheManager.clear`

Purpose : clear removes the target and reports success.

Fixtures : —

⇒ **T-04a-14** **CacheManager.clear_all — happy path**

PURE

Function : [test_cachemanager_clear_all_removes_target_and_reports_success](#)Covers : `CacheManager.clear_all`

Purpose : clear all removes the target and reports success.

Fixtures : —

⇒ **T-04a-15** **CacheManager.cache_size — happy path**

PURE

Function : [test_cachemanager_cache_size_happy_path](#)Covers : `CacheManager.cache_size`

Purpose : cache size returns the correct count for a populated input.

Fixtures : —

⇒ **T-04a-16** **CacheManager.registered_names — happy path**

PURE

Function : [test_cachemanager_registered_names_completes_setup_steps](#)Covers : `CacheManager.registered_names`

Purpose : registered names performs the setup steps end-to-end.

Fixtures : —

Mocking dependencies

- `monkeypatch (time.time)`
- `tmp_path`

Linked fiches

- OP-12a used by `metadata_service.py`
- OP-13c used by `service_defs.py`
- OP-13d used by `constructor.py`
- OP-16a used by `service.py`

● PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-04b

metrics_collector.py

Source : py_modules/unifideck/core/metrics_collector.py | Lignes : 92 | Cible : 95%
Test file : tests/unit/core/test_metrics_collector.py

Public surface

[class]

MetricsCollector

(__init__, stop, get_plugin_metrics, reset)

Tests to write (5)

⇒ T-04b-01

MetricsCollector.__init__ — construction

PURE

Function : test_metricscollector_init_constructs_with_valid_args

Covers : MetricsCollector.__init__

Purpose : MetricsCollector stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-04b-02

MetricsCollector.stop — happy path

ASYNC

Function : test_metricscollector_stop_happy_path

Covers : MetricsCollector.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-04b-03

MetricsCollector.stop — error handling

ASYNC

Function : test_metricscollector_stop_handles_error

Covers : MetricsCollector.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-04b-04

MetricsCollector.get_plugin_metrics — happy path

PURE

Function : test_metricscollector_get_plugin_metrics_returns_value_on_success

Covers : MetricsCollector.get_plugin_metrics

Purpose : get plugin metrics returns the expected payload on a normal response.

Fixtures : monkeypatch (time.time)

⇒ T-04b-05

MetricsCollector.reset — happy path

PURE

Function : test_metricscollector_reset_happy_path

Covers : MetricsCollector.reset

Purpose : reset produces the expected output for a typical input.

Fixtures : —

OP-04b *metrics_collector.py* (cont.)

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09h uses `event_bus_devex.py`
- OP-13b used by `container.py`

● PRIORITY HIGH

TIER 2

MOCKED

2 TESTS

OP-04c

exe_finder.py

Source : py_modules/unifideck/core/exe_finder.py | Lignes : 107 | Cible : 85%

Test file : tests/unit/core/test_exe_finder.py

Public surface

[class]

ExeFinder

(find)

Tests to write (2)

⇒ T-04c-01

ExeFinder.find — happy path

MOCKED FS

Function : test_exefinder_find_returns_target_when_present

Covers : ExeFinder.find

Purpose : find returns the located target when it exists.

Fixtures : tmp_path

⇒ T-04c-02

ExeFinder.find — error handling

MOCKED FS

Function : test_exefinder_find_handles_missing_or_corrupt_file

Covers : ExeFinder.find

Purpose : find handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

Mocking dependencies

Linked fiches

• tmp_path

→ OP-47b used by store_base.py

● PRIORITY HIGH

TIER 3

INTEGRATION

11 TESTS

OP-04d

sync_service.py

Source : py_modules/unifideck/core/sync_service.py | Lignes : 282 | Cible : 65%
Test file : tests/unit/core/test_sync_service.py

Public surface

[class]

SyncService

(__init__, sync_all, sync_single_store, cancel, g...)

Tests to write (11)

⇒ T-04d-01

SyncService.__init__ — construction

PURE

Function : test_syncservice_init_constructs_with_valid_args

Covers : SyncService.__init__

Purpose : SyncService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-04d-02

SyncService.sync_all — happy path

ASYNC

Function : test_syncservice_sync_all_happy_path

Covers : SyncService.sync_all

Purpose : sync all resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-04d-03

SyncService.sync_all — error handling

ASYNC

Function : test_syncservice_sync_all_handles_error

Covers : SyncService.sync_all

Purpose : sync all surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-04d-04

SyncService.sync_single_store — happy path

ASYNC

Function : test_syncservice_sync_single_store_happy_path

Covers : SyncService.sync_single_store

Purpose : sync single store persists the input correctly to disk.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-04d-05

SyncService.sync_single_store — error handling

ASYNC

Function : test_syncservice_sync_single_store_handles_error

Covers : SyncService.sync_single_store

Purpose : sync single store surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

OP-04d sync_service.py (cont.)

Tests to write (11) — cont.

⇒ T-04d-06 SyncService.cancel — happy path

ASYNC

Function : [test_syncservice_cancel_happy_path](#)
 Covers : SyncService.cancel
 Purpose : cancel returns True for the documented happy-path input.
 Fixtures : pytest-asyncio

⇒ T-04d-07 SyncService.cancel — error handling

ASYNC

Function : [test_syncservice_cancel_handles_error](#)
 Covers : SyncService.cancel
 Purpose : cancel surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

⇒ T-04d-08 SyncService.get_status — happy path

PURE

Function : [test_syncservice_get_status_returns_value_on_success](#)
 Covers : SyncService.get_status
 Purpose : get status returns the expected payload on a normal response.
 Fixtures : —

⇒ T-04d-09 SyncService.get_all_games — happy path

PURE

Function : [test_syncservice_get_all_games_returns_value_on_success](#)
 Covers : SyncService.get_all_games
 Purpose : get all games returns the expected payload on a normal response.
 Fixtures : —

⇒ T-04d-10 SyncService.get_games_by_store — happy path

PURE

Function : [test_syncservice_get_games_by_store_returns_value_on_success](#)
 Covers : SyncService.get_games_by_store
 Purpose : get games by store returns the expected payload on a normal response.
 Fixtures : —

⇒ T-04d-11 SyncService.get_game_info — happy path

PURE

Function : [test_syncservice_get_game_info_returns_value_on_success](#)
 Covers : SyncService.get_game_info
 Purpose : get game info returns the expected payload on a normal response.
 Fixtures : —

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio

Linked fiches

- ← OP-04d2 uses cross_store_dedup.py
- ← OP-05 uses __init__.py
- ← OP-09 uses __init__.py
- ← OP-11 uses __init__.py
- OP-25a used by base.py
- OP-27b used by dispatch.py
- OP-61d used by boot.py

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-04d2

cross_store_dedup.py

Source : py_modules/unifideck/core/cross_store_dedup.py | Lignes : 128 | Cible : 95%

Test file : tests/unit/core/test_cross_store_dedup.py

Public surface

[func]

deduplicate_libraries

(pure)

Tests to write (2)

⇒ T-04d2-01

deduplicate_libraries — happy path

PURE

Function : test_deduplicate_libraries_happy_path

Covers : deduplicate_libraries

Purpose : deduplicate libraries produces the expected output for a typical input.

Fixtures : —

⇒ T-04d2-02

deduplicate_libraries — edge cases

PURE

Function : test_deduplicate_libraries_edge_cases

Covers : deduplicate_libraries

Purpose : deduplicate libraries stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-31b uses unifidb.py
- OP-04d used by sync_service.py

● PRIORITY HIGH

TIER 3

INTEGRATION

15 TESTS

OP-04e

manifest.py

Source : `py_modules/unifideck/core/manifest.py` | Lignes : 213 | Cible : 65%
Test file : `tests/unit/core/test_manifest.py`

Public surface

[class]	GameManifest	(to_dict, from_dict)
[class]	DiscoveryResult	(to_dict)
[func]	build_manifest	(pure)
[async]	write_manifest	(async + I/O)
[async]	read_manifest	(async + I/O)
[async]	discover_all	(async + I/O)
[async]	discover_installed_games	(async + I/O)
[async]	discover_and_log	(async + I/O)

Tests to write (15)

⇒ T-04e-01 build_manifest — happy path

PURE

Function : `test_build_manifest_happy_path`
Covers : `build_manifest`
Purpose : build manifest produces the expected object from valid arguments.
Fixtures : `monkeypatch (time.time)`

⇒ T-04e-02 build_manifest — edge cases

PURE

Function : `test_build_manifest_edge_cases`
Covers : `build_manifest`
Purpose : build manifest stays correct on empty / boundary inputs.
Fixtures : `monkeypatch (time.time)`

⇒ T-04e-03 write_manifest — happy path

MOCKED FS

Function : `test_write_manifest_persists_value_to_disk`
Covers : `write_manifest`
Purpose : write manifest persists the input correctly to disk.
Fixtures : `pytest-asyncio, tmp_path`

⇒ T-04e-04 write_manifest — error handling

MOCKED FS

Function : `test_write_manifest_handles_missing_or_corrupt_file`
Covers : `write_manifest`
Purpose : write manifest handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `pytest-asyncio, tmp_path`

OP-04e manifest.py (cont.)

Tests to write (15) — cont.

⇒ T-04e-05 read_manifest — happy path

MOCKED FS

Function : test_read_manifest_returns_value_on_success

Covers : read_manifest

Purpose : read manifest returns the expected payload on a normal response.

Fixtures : pytest-asyncio, tmp_path

⇒ T-04e-06 read_manifest — error handling

MOCKED FS

Function : test_read_manifest_handles_missing_or_corrupt_file

Covers : read_manifest

Purpose : read manifest handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-04e-07 discover_all — happy path

ASYNC

Function : test_discover_all_happy_path

Covers : discover_all

Purpose : discover all resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-04e-08 discover_all — error handling

ASYNC

Function : test_discover_all_handles_error

Covers : discover_all

Purpose : discover all surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-04e-09 discover_installed_games — happy path

ASYNC

Function : test_discover_installed_games_happy_path

Covers : discover_installed_games

Purpose : discover installed games performs the setup steps end-to-end.

Fixtures : pytest-asyncio

⇒ T-04e-10 discover_installed_games — error handling

ASYNC

Function : test_discover_installed_games_handles_error

Covers : discover_installed_games

Purpose : discover installed games surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-04e-11 discover_and_log — happy path

ASYNC

Function : test_discover_and_log_happy_path

Covers : discover_and_log

Purpose : discover and log resolves to the expected value on success.

Fixtures : pytest-asyncio

OP-04e manifest.py (cont.)

Tests to write (15) — cont.

⇒ T-04e-12 discover_and_log — error handling

ASYNC

Function : [test_discover_and_log_handles_error](#)
Covers : discover_and_log
Purpose : discover and log surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-04e-13 GameManifest.to_dict — happy path

PURE

Function : [test_gamemanifest_to_dict_returns_converted_value](#)
Covers : GameManifest.to_dict
Purpose : to dict produces the converted value for a typical input.
Fixtures : —

⇒ T-04e-14 GameManifest.from_dict — happy path

PURE

Function : [test_gamemanifest_from_dict_happy_path](#)
Covers : GameManifest.from_dict
Purpose : from dict produces the expected output for a typical input.
Fixtures : —

⇒ T-04e-15 DiscoveryResult.to_dict — happy path

PURE

Function : [test_discoveryresult_to_dict_returns_converted_value](#)
Covers : DiscoveryResult.to_dict
Purpose : to dict produces the converted value for a typical input.
Fixtures : —

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`
- ← OP-33a uses `paths.py`
- OP-48d used by `install.py`
- OP-49d used by `amazon_install.py`

● PRIORITY HIGH

TIER 2

MOCKED

4 TESTS

OP-04f

paths.py

Source : `py_modules/unifideck/core/paths.py` | Lignes : 37 | Cible : 85%

Test file : `tests/unit/core/test_paths.py`

Public surface

`[func]` `resolve_plugin_dir` *(pure)*

`[func]` `resolve_py_modules_dir` *(pure)*

Tests to write (4)

⇒ T-04f-01

resolve_plugin_dir — happy path

MOCKED FS

Function : `test_resolve_plugin_dir_returns_target_when_present`

Covers : `resolve_plugin_dir`

Purpose : resolve plugin dir returns the located target when it exists.

Fixtures : `tmp_path`, `monkeypatch` (env vars)

⇒ T-04f-02

resolve_plugin_dir — error handling

MOCKED FS

Function : `test_resolve_plugin_dir_handles_missing_or_corrupt_file`

Covers : `resolve_plugin_dir`

Purpose : resolve plugin dir handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`, `monkeypatch` (env vars)

⇒ T-04f-03

resolve_py_modules_dir — happy path

PURE

Function : `test_resolve_py_modules_dir_returns_target_when_present`

Covers : `resolve_py_modules_dir`

Purpose : resolve py modules dir returns the located target when it exists.

Fixtures : —

⇒ T-04f-04

resolve_py_modules_dir — edge cases

PURE

Function : `test_resolve_py_modules_dir_edge_cases`

Covers : `resolve_py_modules_dir`

Purpose : resolve py modules dir stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

Linked fiches

- `monkeypatch` (env vars)
- `tmp_path`

→ OP-35c used by `dispatcher.py`
→ OP-35e used by `bootstrap.py`
→ OP-44b used by `galaxy_stub.py`

● PRIORITY HIGH

TIER 2

MOCKED

5 TESTS

OP-07a

binary_resolver.py

Source : py_modules/unifideck/core/bin/binary_resolver.py | Lignes : 94 | Cible : 85%

Test file : tests/unit/core/bin/test_binary_resolver.py

Public surface

[class]

BinaryResolver

(__init__, resolve, check_version)

Tests to write (5)

⇒ T-07a-01

BinaryResolver.__init__ — construction

PURE

Function : test_binaryresolver_init_constructs_with_valid_args

Covers : BinaryResolver.__init__

Purpose : BinaryResolver stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-07a-02

BinaryResolver.resolve — happy path

MOCKED FS

Function : test_binaryresolver_resolve_returns_target_when_present

Covers : BinaryResolver.resolve

Purpose : resolve returns the located target when it exists.

Fixtures : tmp_path

⇒ T-07a-03

BinaryResolver.resolve — error handling

MOCKED FS

Function : test_binaryresolver_resolve_handles_missing_or_corrupt_file

Covers : BinaryResolver.resolve

Purpose : resolve handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-07a-04

BinaryResolver.check_version — happy path

MOCKED SUBPROCESS

Function : test_binaryresolver_check_version_returns_true_on_valid_input

Covers : BinaryResolver.check_version

Purpose : check version returns True for a valid input.

Fixtures : monkeypatch (asyncio.create_subprocess_exec)

⇒ T-07a-05

BinaryResolver.check_version — error handling

MOCKED SUBPROCESS

Function : test_binaryresolver_check_version_raises_on_non_zero_exit

Covers : BinaryResolver.check_version

Purpose : check version reports a non-zero subprocess exit as a typed failure.

Fixtures : monkeypatch (asyncio.create_subprocess_exec)

OP-07a *binary_resolver.py* (cont.)

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- tmp_path

Linked fiches

- ← OP-05c uses domain.py
- OP-47b used by store_base.py

● PRIORITY HIGH

TIER 2

MOCKED

4 TESTS

OP-07b

binary_signatures.py

Source : `py_modules/unifideck/core/bin/binary_signatures.py` | Lignes : 59 | Cible : 85%

Test file : `tests/unit/core/bin/test_binary_signatures.py`

Public surface

[func] compute_sha256 (pure)

[func] verify_bundled_binary (pure)

Tests to write (4)

⇒ T-07b-01 compute_sha256 — happy path

MOCKED FS

Function : `test_compute_sha256_happy_path`

Covers : compute_sha256

Purpose : compute sha256 produces the expected output for a typical input.

Fixtures : tmp_path

⇒ T-07b-02 compute_sha256 — error handling

MOCKED FS

Function : `test_compute_sha256_handles_missing_or_corrupt_file`

Covers : compute_sha256

Purpose : compute sha256 handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-07b-03 verify_bundled_binary — happy path

MOCKED FS

Function : `test_verify_bundled_binary_happy_path`

Covers : verify_bundled_binary

Purpose : verify bundled binary returns True for the documented happy-path input.

Fixtures : tmp_path

⇒ T-07b-04 verify_bundled_binary — error handling

MOCKED FS

Function : `test_verify_bundled_binary_handles_missing_or_corrupt_file`

Covers : verify_bundled_binary

Purpose : verify bundled binary handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

Mocking dependencies

• tmp_path

Linked fiches

(no internal imports detected)

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-07c

cli_timeouts.py

Source : py_modules/unifideck/core/bin/cli_timeouts.py | Lignes : 24 | Cible : 95%
Test file : tests/unit/core/bin/test_cli_timeouts.py

Public surface

[func]

read_cli_timeouts

(pure)

Tests to write (2)

⇒ T-07c-01

read_cli_timeouts — happy path

PURE

Function : test_read_cli_timeouts_returns_value_on_success

Covers : read_cli_timeouts

Purpose : read cli timeouts returns the expected payload on a normal response.

Fixtures : —

⇒ T-07c-02

read_cli_timeouts — edge cases

PURE

Function : test_read_cli_timeouts_edge_cases

Covers : read_cli_timeouts

Purpose : read cli timeouts stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

• (none — pure tests)

Linked fiches

← OP-11 uses __init__.py

PRIORITY HIGH

TIER 2

MOCKED

30 TESTS

OP-06a

async_file_ops.py

Source : py_modules/unifideck/core/io/async_file_ops.py | Lignes : 196 | Cible : 85%

Test file : tests/unit/core/io/test_async_file_ops.py

Public surface

[async]	exists	(async + I/O)
[async]	is_file	(async + I/O)
[async]	is_dir	(async + I/O)
[async]	listdir	(async + I/O)
[async]	stat	(async + I/O)
[async]	makedirs	(async + I/O)
[async]	ensure_dir	(async + I/O)
[async]	copy	(async + I/O)
[async]	move	(async + I/O)
[async]	remove	(async + I/O)
[async]	read_text	(async + I/O)
[async]	write_text	(async + I/O)
[async]	write_bytes	(async + I/O)
[async]	read_json	(async + I/O)
[async]	write_json	(async + I/O)

Tests to write (30)

⇒ T-06a-01 exists — happy path

MOCKED FS

Function : test_exists_happy_path
Covers : exists
Purpose : exists resolves to the expected value on success.
Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-02 exists — error handling

MOCKED FS

Function : test_exists_handles_missing_or_corrupt_file
Covers : exists
Purpose : exists handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-03 is_file — happy path

MOCKED FS

Function : test_is_file_returns_true_on_valid_input
Covers : is_file
Purpose : is file returns True for a valid input.
Fixtures : pytest-asyncio, tmp_path

OP-06a `async_file_ops.py` (cont.)

Tests to write (30) — cont.

⇒ T-06a-04 **is_file — error handling**

MOCKED FS

Function : `test_is_file_handles_missing_or_corrupt_file`
Covers : `is_file`
Purpose : is file handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-05 **is_dir — happy path**

MOCKED FS

Function : `test_is_dir_returns_true_on_valid_input`
Covers : `is_dir`
Purpose : is dir returns True for a valid input.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-06 **is_dir — error handling**

MOCKED FS

Function : `test_is_dir_handles_missing_or_corrupt_file`
Covers : `is_dir`
Purpose : is dir handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-07 **listdir — happy path**

MOCKED FS

Function : `test_listdir_happy_path`
Covers : `listdir`
Purpose : `listdir` returns the expected list of items.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-08 **listdir — error handling**

MOCKED FS

Function : `test_listdir_handles_missing_or_corrupt_file`
Covers : `listdir`
Purpose : `listdir` handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-09 **stat — happy path**

MOCKED FS

Function : `test_stat_happy_path`
Covers : `stat`
Purpose : `stat` performs the side-effect without raising.
Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-06a-10 **stat — error handling**

MOCKED FS

Function : `test_stat_handles_missing_or_corrupt_file`
Covers : `stat`
Purpose : `stat` handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `pytest-asyncio`, `tmp_path`

OP-06a *async_file_ops.py* (cont.)

Tests to write (30) — cont.

⇒ **T-06a-11** **makedirs — happy path**

MOCKED FS

Function : [test_makedirs_happy_path](#)
 Covers : makedirs
 Purpose : makedirs produces the expected object from valid arguments.
 Fixtures : pytest-asyncio, tmp_path

⇒ **T-06a-12** **makedirs — error handling**

MOCKED FS

Function : [test_makedirs_handles_missing_or_corrupt_file](#)
 Covers : makedirs
 Purpose : makedirs handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : pytest-asyncio, tmp_path

⇒ **T-06a-13** **ensure_dir — happy path**

ASYNC

Function : [test_ensure_dir_happy_path](#)
 Covers : ensure_dir
 Purpose : ensure_dir resolves to the expected value on success.
 Fixtures : pytest-asyncio

⇒ **T-06a-14** **ensure_dir — error handling**

ASYNC

Function : [test_ensure_dir_handles_error](#)
 Covers : ensure_dir
 Purpose : ensure_dir surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

⇒ **T-06a-15** **copy — happy path**

MOCKED FS

Function : [test_copy_happy_path](#)
 Covers : copy
 Purpose : copy returns True for the documented happy-path input.
 Fixtures : pytest-asyncio, tmp_path

⇒ **T-06a-16** **copy — error handling**

MOCKED FS

Function : [test_copy_handles_missing_or_corrupt_file](#)
 Covers : copy
 Purpose : copy handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : pytest-asyncio, tmp_path

⇒ **T-06a-17** **move — happy path**

MOCKED FS

Function : [test_move_happy_path](#)
 Covers : move
 Purpose : move returns True for the documented happy-path input.
 Fixtures : pytest-asyncio, tmp_path

OP-06a *async_file_ops.py* (cont.)

Tests to write (30) — cont.

⇒ T-06a-18 move — error handling

MOCKED FS

Function : [test_move_handles_missing_or_corrupt_file](#)

Covers : move

Purpose : move handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-19 remove — happy path

MOCKED FS

Function : [test_remove_removes_target_and_reports_success](#)

Covers : remove

Purpose : remove removes the target and reports success.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-20 remove — error handling

MOCKED FS

Function : [test_remove_handles_missing_or_corrupt_file](#)

Covers : remove

Purpose : remove handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-21 read_text — happy path

MOCKED FS

Function : [test_read_text_returns_value_on_success](#)

Covers : read_text

Purpose : read text returns the expected payload on a normal response.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-22 read_text — error handling

MOCKED FS

Function : [test_read_text_handles_missing_or_corrupt_file](#)

Covers : read_text

Purpose : read text handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-23 write_text — happy path

MOCKED FS

Function : [test_write_text_persists_value_to_disk](#)

Covers : write_text

Purpose : write text persists the input correctly to disk.

Fixtures : pytest-asyncio, tmp_path

⇒ T-06a-24 write_text — error handling

MOCKED FS

Function : [test_write_text_handles_missing_or_corrupt_file](#)

Covers : write_text

Purpose : write text handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

OP-06a `async_file_ops.py` (cont.)

Tests to write (30) — cont.

⇒ T-06a-25 **write_bytes — happy path**

ASYNC

Function : [test_write_bytes_persists_value_to_disk](#)Covers : `write_bytes`

Purpose : write bytes persists the input correctly to disk.

Fixtures : `pytest-asyncio`⇒ T-06a-26 **write_bytes — error handling**

ASYNC

Function : [test_write_bytes_handles_error](#)Covers : `write_bytes`

Purpose : write bytes surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-06a-27 **read_json — happy path**

ASYNC

Function : [test_read_json_returns_value_on_success](#)Covers : `read_json`

Purpose : read json returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ T-06a-28 **read_json — error handling**

ASYNC

Function : [test_read_json_handles_error](#)Covers : `read_json`

Purpose : read json surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-06a-29 **write_json — happy path**

ASYNC

Function : [test_write_json_persists_value_to_disk](#)Covers : `write_json`

Purpose : write json persists the input correctly to disk.

Fixtures : `pytest-asyncio`⇒ T-06a-30 **write_json — error handling**

ASYNC

Function : [test_write_json_handles_error](#)Covers : `write_json`

Purpose : write json surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- OP-12b used by `proton_service.py`
- OP-12c used by `account_service.py`
- OP-14g used by `persistence.py`
- OP-15e used by `persistence.py`

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-06b

safe_file_op.py

Source : `py_modules/unifideck/core/io/safe_file_op.py` | Lignes : 48 | Cible : 95%
Test file : `tests/unit/core/io/test_safe_file_op.py`

Public surface

[func]

safe_file_op

(pure)

Tests to write (2)

⇒ T-06b-01

safe_file_op — happy path

PURE

Function : `test_safe_file_op_happy_path`

Covers : `safe_file_op`

Purpose : safe file op produces the expected output for a typical input.

Fixtures : —

⇒ T-06b-02

safe_file_op — edge cases

PURE

Function : `test_safe_file_op_edge_cases`

Covers : `safe_file_op`

Purpose : safe file op stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

Linked fiches

• (none — pure tests)

(no internal imports detected)

● PRIORITY HIGH

TIER 1

PURE

4 TESTS

OP-08a

ssl_helpers.py

Source : `py_modules/unifideck/core/net/ssl_helpers.py` | Lignes : 36 | Cible : 95%
Test file : `tests/unit/core/net/test_ssl_helpers.py`

Public surface

`[func]` `ssl_ctx_strict` *(pure)*

`[func]` `ssl_ctx_permissive` *(pure)*

Tests to write (4)

⇒ T-08a-01

ssl_ctx_strict — happy path

PURE

Function : `test_ssl_ctx_strict_happy_path`
Covers : `ssl_ctx_strict`
Purpose : ssl ctx strict produces the expected output for a typical input.
Fixtures : —

⇒ T-08a-02

ssl_ctx_strict — edge cases

PURE

Function : `test_ssl_ctx_strict_edge_cases`
Covers : `ssl_ctx_strict`
Purpose : ssl ctx strict stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-08a-03

ssl_ctx_permissive — happy path

PURE

Function : `test_ssl_ctx_permissive_happy_path`
Covers : `ssl_ctx_permissive`
Purpose : ssl ctx permissive produces the expected output for a typical input.
Fixtures : —

⇒ T-08a-04

ssl_ctx_permissive — edge cases

PURE

Function : `test_ssl_ctx_permissive_edge_cases`
Covers : `ssl_ctx_permissive`
Purpose : ssl ctx permissive stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

Linked fiches

• (none — pure tests)

(no internal imports detected)

● PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-09a

event_bus.py

Source : py_modules/unifideck/event_bus/event_bus.py | Lignes : 107 | Cible : 95%
Test file : tests/unit/event_bus/test_event_bus.py

Public surface

[class]

EventBus

(__init__, on, once, off, clear, handler_count, ...)

Tests to write (8)

⇒ T-09a-01EventBus.__init__ — constructionPURE

Function : test_eventbus_init_constructs_with_valid_args

Covers : EventBus.__init__

Purpose : EventBus stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-09a-02EventBus.on — happy pathPURE

Function : test_eventbus_on_happy_path

Covers : EventBus.on

Purpose : on produces the expected output for a typical input.

Fixtures : —

⇒ T-09a-03EventBus.once — happy pathPURE

Function : test_eventbus_once_happy_path

Covers : EventBus.once

Purpose : once produces the expected output for a typical input.

Fixtures : —

⇒ T-09a-04EventBus.off — happy pathPURE

Function : test_eventbus_off_happy_path

Covers : EventBus.off

Purpose : off returns True for the documented happy-path input.

Fixtures : —

⇒ T-09a-05EventBus.clear — happy pathPURE

Function : test_eventbus_clear_removes_target_and_reports_success

Covers : EventBus.clear

Purpose : clear removes the target and reports success.

Fixtures : —

OP-09a `event_bus.py` (cont.)

Tests to write (8) — cont.

⇒ **T-09a-06** **EventBus.handler_count — happy path**

PURE

Function : `test_eventbus_handler_count_happy_path`
Covers : `EventBus.handler_count`
Purpose : handler count returns the correct count for a populated input.
Fixtures : —

⇒ **T-09a-07** **EventBus.emit — happy path**

ASYNC

Function : `test_eventbus_emit_delivers_payload`
Covers : `EventBus.emit`
Purpose : emit delivers the message exactly once on the happy path.
Fixtures : `pytest-asyncio`, `monkeypatch` (`time.time`)

⇒ **T-09a-08** **EventBus.emit — error handling**

ASYNC

Function : `test_eventbus_emit_handles_error`
Covers : `EventBus.emit`
Purpose : emit surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`, `monkeypatch` (`time.time`)

Mocking dependencies

- `monkeypatch` (`time.time`)
- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- OP-04b used by `metrics_collector.py`
- OP-04e used by `manifest.py`
- OP-09c used by `priority_dispatcher.py`
- OP-09e used by `event_bus_extensions.py`

PRIORITY HIGH

TIER 1

PURE

4 TESTS

OP-09b

event_priority.py

Source : py_modules/unifideck/event_bus/event_priority.py | Lignes : 59 | Cible : 95%

Test file : tests/unit/event_bus/test_event_priority.py

Public surface

[class]	EventPriority	()
[func]	get_priority	(pure)
[func]	get_coalesce_key	(pure)

Tests to write (4)

T-09b-01 get_priority — happy path

PURE

Function : test_get_priority_returns_value_on_success
Covers : get_priority
Purpose : get priority returns the expected payload on a normal response.
Fixtures : —

T-09b-02 get_priority — edge cases

PURE

Function : test_get_priority_edge_cases
Covers : get_priority
Purpose : get priority stays correct on empty / boundary inputs.
Fixtures : —

T-09b-03 get_coalesce_key — happy path

PURE

Function : test_get_coalesce_key_returns_value_on_success
Covers : get_coalesce_key
Purpose : get coalesce key returns the expected payload on a normal response.
Fixtures : —

T-09b-04 get_coalesce_key — edge cases

PURE

Function : test_get_coalesce_key_edge_cases
Covers : get_coalesce_key
Purpose : get coalesce key stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses __init__.py
- OP-09c used by priority_dispatcher.py

PRIORITY HIGH

TIER 3

INTEGRATION

7 TESTS

OP-09c

priority_dispatcher.py

Source : py_modules/unifideck/event_bus/priority_dispatcher.py | Lignes : 242 | Cible : 65%

Test file : tests/unit/event_bus/test_priority_dispatcher.py

Public surface

[class]

DispatcherMetrics

()

[class]

PriorityDispatcher

(__init__, start, stop, enqueue, get_metrics)

Tests to write (7)

⇒ T-09c-01

PriorityDispatcher.__init__ — construction

PURE

Function :

test_prioritydispatcher_init_constructs_with_valid_args

Covers :

PriorityDispatcher.__init__

Purpose :

PriorityDispatcher stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-09c-02

PriorityDispatcher.start — happy path

ASYNC

Function :

test_prioritydispatcher_start_spawns_target_action

Covers :

PriorityDispatcher.start

Purpose :

start spawns the target action and returns its handle.

Fixtures :

pytest-asyncio

⇒ T-09c-03

PriorityDispatcher.start — error handling

ASYNC

Function :

test_prioritydispatcher_start_handles_error

Covers :

PriorityDispatcher.start

Purpose :

start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-09c-04

PriorityDispatcher.stop — happy path

ASYNC

Function :

test_prioritydispatcher_stop_happy_path

Covers :

PriorityDispatcher.stop

Purpose :

stop performs the side-effect without raising.

Fixtures :

pytest-asyncio

⇒ T-09c-05

PriorityDispatcher.stop — error handling

ASYNC

Function :

test_prioritydispatcher_stop_handles_error

Covers :

PriorityDispatcher.stop

Purpose :

stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

OP-09c *priority_dispatcher.py* (cont.)

Tests to write (7) — cont.

⇒ **T-09c-06** **PriorityDispatcher.enqueue — happy path**

PURE

Function : [test_prioritydispatcher_enqueue_happy_path](#)Covers : `PriorityDispatcher.enqueue`

Purpose : enqueue returns True for the documented happy-path input.

Fixtures : —

⇒ **T-09c-07** **PriorityDispatcher.get_metrics — happy path**

PURE

Function : [test_prioritydispatcher_get_metrics_returns_value_on_success](#)Covers : `PriorityDispatcher.get_metrics`

Purpose : get_metrics returns the expected payload on a normal response.

Fixtures : —

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09b uses `event_priority.py`
- ← OP-09d uses `event_replay.py`
- OP-09e used by `event_bus_extensions.py`
- OP-09i used by `bus_pipeline.py`
- OP-25e used by `observability.py`
- OP-61c used by `pipeline_factory.py`

● PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-09d

event_replay.py

Source : py_modules/unifideck/event_bus/event_replay.py | Lignes : 108 | Cible : 95%
Test file : tests/unit/event_bus/test_event_replay.py

Public surface

[class]

EventReplayBuffer

(__init__, record, snapshot, size, clear)

Tests to write (5)

⇒ T-09d-01

EventReplayBuffer.__init__ — construction

PURE

Function : test_eventreplaybuffer_init_constructs_with_valid_args

Covers : EventReplayBuffer.__init__

Purpose : EventReplayBuffer stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-09d-02

EventReplayBuffer.record — happy path

PURE

Function : test_eventreplaybuffer_record_happy_path

Covers : EventReplayBuffer.record

Purpose : record produces the expected output for a typical input.

Fixtures : monkeypatch (time.time)

⇒ T-09d-03

EventReplayBuffer.snapshot — happy path

PURE

Function : test_eventreplaybuffer_snapshot_happy_path

Covers : EventReplayBuffer.snapshot

Purpose : snapshot produces the expected output for a typical input.

Fixtures : —

⇒ T-09d-04

EventReplayBuffer.size — happy path

PURE

Function : test_eventreplaybuffer_size_returns_correct_count

Covers : EventReplayBuffer.size

Purpose : size returns the correct count for a populated input.

Fixtures : —

⇒ T-09d-05

EventReplayBuffer.clear — happy path

PURE

Function : test_eventreplaybuffer_clear_removes_target_and_reports_success

Covers : EventReplayBuffer.clear

Purpose : clear removes the target and reports success.

Fixtures : —

OP-09d event_replay.py (cont.)

Mocking dependencies

- monkeypatch (time.time)

Linked fiches

- ← OP-05 uses __init__.py
- OP-09c used by priority_dispatcher.py
- OP-09e used by event_bus_extensions.py
- OP-09i used by bus_pipeline.py
- OP-19a used by service.py

PRIORITY HIGH

TIER 1

PURE

10 TESTS

OP-09e

event_bus_extensions.py

Source : py_modules/unifideck/event_bus/event_bus_extensions.py | Lignes : 196 | Cible : 95%

Test file : tests/unit/event_bus/test_event_bus_extensions.py

Public surface

[class]	EventPayload	()
[class]	EventSchema	(validate)
[class]	TypedEventRegistry	(__init__, declare, validate)
[class]	PredicateFilter	(__init__)
[class]	DebugSnapshot	(collect)
[class]	DeadLetterQueue	(__init__, record, snapshot, clear)

Tests to write (10)

⇒ T-09e-01

EventSchema.validate — happy path

PURE

Function : test_eventschema_validate_returns_true_on_valid_input

Covers : EventSchema.validate

Purpose : validate returns True for a valid input.

Fixtures : —

⇒ T-09e-02

TypedEventRegistry.__init__ — construction

PURE

Function : test_typedeventregistry_init_constructs_with_valid_args

Covers : TypedEventRegistry.__init__

Purpose : TypedEventRegistry can be instantiated with the documented arguments.

Fixtures : —

⇒ T-09e-03

TypedEventRegistry.declare — happy path

PURE

Function : test_typedeventregistry_declare_happy_path

Covers : TypedEventRegistry.declare

Purpose : declare produces the expected output for a typical input.

Fixtures : —

⇒ T-09e-04

TypedEventRegistry.validate — happy path

PURE

Function : test_typedeventregistry_validate_returns_true_on_valid_input

Covers : TypedEventRegistry.validate

Purpose : validate returns True for a valid input.

Fixtures : —

OP-09e event_bus_extensions.py (cont.)

Tests to write (10) — cont.

⇒ T-09e-05 PredicateFilter.__init__ — construction

PURE

Function : [test_predicatefilter_init_constructs_with_valid_args](#)

Covers : PredicateFilter.__init__

Purpose : PredicateFilter stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-09e-06 DebugSnapshot.collect — happy path

PURE

Function : [test_debugsnapshot_collect_happy_path](#)

Covers : DebugSnapshot.collect

Purpose : collect produces the expected output for a typical input.

Fixtures : —

⇒ T-09e-07 DeadLetterQueue.__init__ — construction

PURE

Function : [test_deadletterqueue_init_constructs_with_valid_args](#)

Covers : DeadLetterQueue.__init__

Purpose : DeadLetterQueue stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-09e-08 DeadLetterQueue.record — happy path

PURE

Function : [test_deadletterqueue_record_happy_path](#)

Covers : DeadLetterQueue.record

Purpose : record produces the expected output for a typical input.

Fixtures : —

⇒ T-09e-09 DeadLetterQueue.snapshot — happy path

PURE

Function : [test_deadletterqueue_snapshot_happy_path](#)

Covers : DeadLetterQueue.snapshot

Purpose : snapshot produces the expected output for a typical input.

Fixtures : —

⇒ T-09e-10 DeadLetterQueue.clear — happy path

PURE

Function : [test_deadletterqueue_clear_removes_target_and_reports_success](#)

Covers : DeadLetterQueue.clear

Purpose : clear removes the target and reports success.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-09c uses priority_dispatcher.py
- ← OP-09d uses event_replay.py

PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-09f

event_bus_reliability.py

Source : py_modules/unifideck/event_bus/event_bus_reliability.py | Lignes : 55 | Cible : 95%
Test file : tests/unit/event_bus/test_event_bus_reliability.py

Public surface

[class]

CircuitBreaker

(__init__, allow, record, is_open)

Tests to write (5)

⇒ T-09f-01

CircuitBreaker.__init__ — construction

PURE

Function : test_circuitbreaker_init_constructs_with_valid_args

Covers : CircuitBreaker.__init__

Purpose : CircuitBreaker stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-09f-02

CircuitBreaker.allow — happy path

PURE

Function : test_circuitbreaker_allow_happy_path

Covers : CircuitBreaker.allow

Purpose : allow returns True for the documented happy-path input.

Fixtures : monkeypatch (time.time)

⇒ T-09f-03

CircuitBreaker.record — happy path

PURE

Function : test_circuitbreaker_record_happy_path

Covers : CircuitBreaker.record

Purpose : record performs the side-effect without raising.

Fixtures : monkeypatch (time.time)

⇒ T-09f-04

CircuitBreaker.is_open — happy path

MOCKED FS

Function : test_circuitbreaker_is_open_returns_true_on_valid_input

Covers : CircuitBreaker.is_open

Purpose : is open returns True for a valid input.

Fixtures : tmp_path, monkeypatch (time.time)

⇒ T-09f-05

CircuitBreaker.is_open — error handling

MOCKED FS

Function : test_circuitbreaker_is_open_handles_missing_or_corrupt_file

Covers : CircuitBreaker.is_open

Purpose : is open handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path, monkeypatch (time.time)

OP-09f event_bus_reliability.py (cont.)

Mocking dependencies

- monkeypatch (time.time)
- tmp_path

Linked files

(no internal imports detected)

PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-09g

event_bus_scaling.py

Source : py_modules/unifideck/event_bus/event_bus_scaling.py | Lignes : 48 | Cible : 95%

Test file : tests/unit/event_bus/test_event_bus_scaling.py

Public surface

[class] BatchDispatcher (__init__, add, drain, flush_all, handler_supports...)

Tests to write (5)

⇒ T-09g-01 BatchDispatcher.__init__ — construction PURE

Function : test_batchdispatcher_init_constructs_with_valid_args
Covers : BatchDispatcher.__init__
Purpose : BatchDispatcher stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-09g-02 BatchDispatcher.add — happy path PURE

Function : test_batchdispatcher_add_happy_path
Covers : BatchDispatcher.add
Purpose : add returns True for the documented happy-path input.
Fixtures : monkeypatch (time.time)

⇒ T-09g-03 BatchDispatcher.drain — happy path PURE

Function : test_batchdispatcher_drain_happy_path
Covers : BatchDispatcher.drain
Purpose : drain produces the expected output for a typical input.
Fixtures : monkeypatch (time.time)

⇒ T-09g-04 BatchDispatcher.flush_all — happy path PURE

Function : test_batchdispatcher_flush_all_happy_path
Covers : BatchDispatcher.flush_all
Purpose : flush all produces the expected output for a typical input.
Fixtures : —

⇒ T-09g-05 BatchDispatcher.handler_supports_batch — happy path PURE

Function : test_batchdispatcher_handler_supports_batch_happy_path
Covers : BatchDispatcher.handler_supports_batch
Purpose : handler supports batch returns True for a valid input.
Fixtures : —

OP-09g `event_bus_scaling.py` (cont.)

Mocking dependencies

- monkeypatch (time.time)

Linked fiches

- OP-09c used by `priority_dispatcher.py`
- OP-09i used by `bus_pipeline.py`
- OP-61c used by `pipeline_factory.py`

● PRIORITY HIGH

TIER 1

PURE

10 TESTS

OP-09h

event_bus_devex.py

Source : `py_modules/unifideck/event_bus/event_bus_devex.py` | Lignes : 177 | Cible : 95%

Test file : `tests/unit/event_bus/test_event_bus_devex.py`

Public surface

[class]	SubscriptionRegistry	(<i>__init__, add, all, apply, clear</i>)
[class]	SchemaExtractor	(<i>extract_from_source</i>)
[func]	subscribe	(<i>pure</i>)
[func]	auto_wire	(<i>pure</i>)

Tests to write (10)

⇒ T-09h-01

subscribe — happy path

PURE

Function : `test_subscribe_happy_path`

Covers : `subscribe`

Purpose : `subscribe` produces the expected output for a typical input.

Fixtures : —

⇒ T-09h-02

subscribe — edge cases

PURE

Function : `test_subscribe_edge_cases`

Covers : `subscribe`

Purpose : `subscribe` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-09h-03

auto_wire — happy path

PURE

Function : `test_auto_wire_happy_path`

Covers : `auto_wire`

Purpose : `auto wire` produces the expected output for a typical input.

Fixtures : —

⇒ T-09h-04

auto_wire — edge cases

PURE

Function : `test_auto_wire_edge_cases`

Covers : `auto_wire`

Purpose : `auto wire` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-09h-05

SubscriptionRegistry.__init__ — construction

PURE

Function : `test_subscriptionregistry_init_constructs_with_valid_args`

Covers : `SubscriptionRegistry.__init__`

Purpose : `SubscriptionRegistry` can be instantiated with the documented arguments.

Fixtures : —

OP-09h event_bus_devex.py (cont.)

Tests to write (10) — cont.

⇒ T-09h-06 SubscriptionRegistry.add — happy path

PURE

Function : [test_subscriptionregistry_add_happy_path](#)

Covers : SubscriptionRegistry.add

Purpose : add produces the expected output for a typical input.

Fixtures : —

⇒ T-09h-07 SubscriptionRegistry.all — happy path

PURE

Function : [test_subscriptionregistry_all_happy_path](#)

Covers : SubscriptionRegistry.all

Purpose : all produces the expected output for a typical input.

Fixtures : —

⇒ T-09h-08 SubscriptionRegistry.apply — happy path

PURE

Function : [test_subscriptionregistry_apply_happy_path](#)

Covers : SubscriptionRegistry.apply

Purpose : apply produces the expected output for a typical input.

Fixtures : —

⇒ T-09h-09 SubscriptionRegistry.clear — happy path

PURE

Function : [test_subscriptionregistry_clear_removes_target_and_reports_success](#)

Covers : SubscriptionRegistry.clear

Purpose : clear removes the target and reports success.

Fixtures : —

⇒ T-09h-10 SchemaExtractor.extract_from_source — happy path

PURE

Function : [test_schemaextractor_extract_from_source_happy_path](#)

Covers : SchemaExtractor.extract_from_source

Purpose : extract from source produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-10a uses `watchdog_handler.py`
- OP-04b used by `metrics_collector.py`
- OP-12a used by `metadata_service.py`
- OP-12b used by `proton_service.py`
- OP-12d used by `feature_flag_service.py`

PRIORITY HIGH

TIER 1

PURE

9 TESTS

OP-10a

watchdog_handler.py

Source : py_modules/unifideck/event_bus/supervision/watchdog_handler.py | Lignes : 137 | Cible : 95%

Test file : tests/unit/event_bus/supervision/test_watchdog_handler.py

Public surface

[class]	HandlerTimeoutMetrics	()
[class]	HandlerWatchdog	(__init__, register, unregister, invoke, release_q...)
[class]	HandlerQuarantinedError	(__init__)

Tests to write (9)

T-10a-01 HandlerWatchdog.__init__ — construction

PURE

Function : test_handlerwatchdog_init_constructs_with_valid_args
Covers : HandlerWatchdog.__init__
Purpose : HandlerWatchdog stores its constructor arguments on the expected instance attributes.
Fixtures : —

T-10a-02 HandlerWatchdog.register — happy path

PURE

Function : test_handlerwatchdog_register_completes_setup_steps
Covers : HandlerWatchdog.register
Purpose : register performs the setup steps end-to-end.
Fixtures : —

T-10a-03 HandlerWatchdog.unregister — happy path

PURE

Function : test_handlerwatchdog_unregister_happy_path
Covers : HandlerWatchdog.unregister
Purpose : unregister produces the expected output for a typical input.
Fixtures : —

T-10a-04 HandlerWatchdog.invoke — happy path

ASYNC

Function : test_handlerwatchdog_invoke_happy_path
Covers : HandlerWatchdog.invoke
Purpose : invoke resolves to the expected value on success.
Fixtures : pytest-asyncio

T-10a-05 HandlerWatchdog.invoke — error handling

ASYNC

Function : test_handlerwatchdog_invoke_raises_handler_quarantined_error_on_failure
Covers : HandlerWatchdog.invoke
Purpose : invoke raises HandlerQuarantinedError when the input or upstream call fails.
Fixtures : pytest-asyncio

OP-10a watchdog_handler.py (cont.)

Tests to write (9) — cont.

⇒ **T-10a-06** HandlerWatchdog.release_quarantine — happy path

PURE

Function : [test_handlerwatchdog_release_quarantine_happy_path](#)

Covers : HandlerWatchdog.release_quarantine

Purpose : release quarantine returns True for the documented happy-path input.

Fixtures : —

⇒ **T-10a-07** HandlerWatchdog.quarantine_preemptive — happy path

PURE

Function : [test_handlerwatchdog_quarantine_preemptive_happy_path](#)

Covers : HandlerWatchdog.quarantine_preemptive

Purpose : quarantine preemptive returns True for the documented happy-path input.

Fixtures : —

⇒ **T-10a-08** HandlerWatchdog.get_metrics — happy path

PURE

Function : [test_handlerwatchdog_get_metrics_returns_value_on_success](#)

Covers : HandlerWatchdog.get_metrics

Purpose : get metrics returns the expected payload on a normal response.

Fixtures : —

⇒ **T-10a-09** HandlerQuarantinedError.__init__ — construction

PURE

Function : [test_handlerquarantinederror_init_constructs_with_valid_args](#)

Covers : HandlerQuarantinedError.__init__

Purpose : HandlerQuarantinedError can be instantiated with the documented arguments.

Fixtures : —

Mocking dependencies

- pytest-asyncio

Linked fiches

- OP-09c used by priority_dispatcher.py
- OP-09e used by event_bus_extensions.py
- OP-09h used by event_bus_devex.py
- OP-09i used by bus_pipeline.py

PRIORITY HIGH

TIER 1

PURE

7 TESTS

OP-10b

metrics_handler.py

Source : py_modules/unifideck/event_bus/supervision/metrics_handler.py | Lignes : 82 | Cible : 95%

Test file : tests/unit/event_bus/supervision/test_metrics_handler.py

Public surface

[class]	HandlerLatencyStats	(record, to_dict)
[class]	HandlerLatencyCollector	(__init__, record, get_snapshot, get_top_n, reset)

Tests to write (7)

⇒ T-10b-01	HandlerLatencyStats.record — happy path	PURE
Function :	test_handlerlatencystats_record_happy_path	
Covers :	HandlerLatencyStats.record	
Purpose :	record produces the expected output for a typical input.	
Fixtures :	—	

⇒ T-10b-02	HandlerLatencyStats.to_dict — happy path	PURE
Function :	test_handlerlatencystats_to_dict_returns_converted_value	
Covers :	HandlerLatencyStats.to_dict	
Purpose :	to dict produces the converted value for a typical input.	
Fixtures :	—	

⇒ T-10b-03	HandlerLatencyCollector.__init__ — construction	PURE
Function :	test_handlerlatencycollector_init_constructs_with_valid_args	
Covers :	HandlerLatencyCollector.__init__	
Purpose :	HandlerLatencyCollector can be instantiated with the documented arguments.	
Fixtures :	—	

⇒ T-10b-04	HandlerLatencyCollector.record — happy path	PURE
Function :	test_handlerlatencycollector_record_happy_path	
Covers :	HandlerLatencyCollector.record	
Purpose :	record produces the expected output for a typical input.	
Fixtures :	—	

⇒ T-10b-05	HandlerLatencyCollector.get_snapshot — happy path	PURE
Function :	test_handlerlatencycollector_get_snapshot_returns_value_on_success	
Covers :	HandlerLatencyCollector.get_snapshot	
Purpose :	get snapshot returns the expected payload on a normal response.	
Fixtures :	—	

OP-10b metrics_handler.py (cont.)

Tests to write (7) — cont.

⇒ T-10b-06

HandlerLatencyCollector.get_top_n — happy path

PURE

Function :

test_handlerlatencycollector_get_top_n_returns_value_on_success

Covers :

HandlerLatencyCollector.get_top_n

Purpose :

get top n returns the expected payload on a normal response.

Fixtures :

—

⇒ T-10b-07

HandlerLatencyCollector.reset — happy path

PURE

Function :

test_handlerlatencycollector_reset_happy_path

Covers :

HandlerLatencyCollector.reset

Purpose :

reset returns True for the documented happy-path input.

Fixtures :

—

Mocking dependencies

Linked fiches

• (none — pure tests)

→ OP-09e used by event_bus_extensions.py

→ OP-09i used by bus_pipeline.py

→ OP-61c used by pipeline_factory.py

PRIORITY MEDIUM

TIER 2

MOCKED

9 TESTS

OP-35a

signals.py

Source : py_modules/unifideck/launcher/signals.py | Lignes : 66 | Cible : 80%

Test file : tests/unit/launcher/test_signals.py

Public surface

[class]	SignalState	()
[class]	GameProcessRegistry	(__init__, track, untrack, terminate_all)
[func]	install_signal_handlers	(pure)

Tests to write (9)

⇒ T-35a-01	install_signal_handlers — happy path	PURE
Function :	test_install_signal_handlers_completes_setup_steps	
Covers :	install_signal_handlers	
Purpose :	install signal handlers performs the setup steps end-to-end.	
Fixtures :	—	

⇒ T-35a-02	install_signal_handlers — edge cases	PURE
Function :	test_install_signal_handlers_edge_cases	
Covers :	install_signal_handlers	
Purpose :	install signal handlers stays correct on empty / boundary inputs.	
Fixtures :	—	

⇒ T-35a-03	GameProcessRegistry.__init__ — construction	PURE
Function :	test_gameprocessregistry_init_constructs_with_valid_args	
Covers :	GameProcessRegistry.__init__	
Purpose :	GameProcessRegistry can be instantiated with the documented arguments.	
Fixtures :	—	

⇒ T-35a-04	GameProcessRegistry.track — happy path	MOCKED SUBPROCESS
Function :	test_gameprocessregistry_track_happy_path	
Covers :	GameProcessRegistry.track	
Purpose :	track produces the expected output for a typical input.	
Fixtures :	monkeypatch (asyncio.create_subprocess_exec)	

⇒ T-35a-05	GameProcessRegistry.track — error handling	MOCKED SUBPROCESS
Function :	test_gameprocessregistry_track_raises_on_non_zero_exit	
Covers :	GameProcessRegistry.track	
Purpose :	track reports a non-zero subprocess exit as a typed failure.	
Fixtures :	monkeypatch (asyncio.create_subprocess_exec)	

OP-35a *signals.py* (cont.)

Tests to write (9) — cont.

⇒ **T-35a-06** **GameProcessRegistry.untrack — happy path**

MOCKED SUBPROCESS

Function : [test_gameprocessregistry_untrack_happy_path](#)Covers : `GameProcessRegistry.untrack`

Purpose : untrack produces the expected output for a typical input.

Fixtures : monkeypatch (`asyncio.create_subprocess_exec`)⇒ **T-35a-07** **GameProcessRegistry.untrack — error handling**

MOCKED SUBPROCESS

Function : [test_gameprocessregistry_untrack_raises_on_non_zero_exit](#)Covers : `GameProcessRegistry.untrack`

Purpose : untrack reports a non-zero subprocess exit as a typed failure.

Fixtures : monkeypatch (`asyncio.create_subprocess_exec`)⇒ **T-35a-08** **GameProcessRegistry.terminate_all — happy path**

MOCKED SUBPROCESS

Function : [test_gameprocessregistry_terminate_all_happy_path](#)Covers : `GameProcessRegistry.terminate_all`

Purpose : terminate all produces the expected output for a typical input.

Fixtures : monkeypatch (`asyncio.create_subprocess_exec`)⇒ **T-35a-09** **GameProcessRegistry.terminate_all — error handling**

MOCKED SUBPROCESS

Function : [test_gameprocessregistry_terminate_all_raises_on_non_zero_exit](#)Covers : `GameProcessRegistry.terminate_all`

Purpose : terminate all reports a non-zero subprocess exit as a typed failure.

Fixtures : monkeypatch (`asyncio.create_subprocess_exec`)

Mocking dependencies

- monkeypatch (`asyncio.create_subprocess_exec`)

Linked fiches

→ OP-20a used by `service.py`

PRIORITY MEDIUM

TIER 3

INTEGRATION

6 TESTS

OP-35b

rpc.py

Source : py_modules/unifideck/launcher/rpc.py | Lignes : 62 | Cible : 60%

Test file : tests/unit/launcher/test_rpc.py

Public surface

[async]	emit_game_launched	(async + I/O)
[async]	emit_game_stopped	(async + I/O)
[async]	emit_stage	(async + I/O)

Tests to write (6)

T-35b-01 emit_game_launched — happy path

ASYNC

Function : test_emit_game_launched_delivers_payload
Covers : emit_game_launched
Purpose : emit game launched delivers the message exactly once on the happy path.
Fixtures : pytest-asyncio

T-35b-02 emit_game_launched — error handling

ASYNC

Function : test_emit_game_launched_handles_error
Covers : emit_game_launched
Purpose : emit game launched surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

T-35b-03 emit_game_stopped — happy path

ASYNC

Function : test_emit_game_stopped_delivers_payload
Covers : emit_game_stopped
Purpose : emit game stopped delivers the message exactly once on the happy path.
Fixtures : pytest-asyncio

T-35b-04 emit_game_stopped — error handling

ASYNC

Function : test_emit_game_stopped_handles_error
Covers : emit_game_stopped
Purpose : emit game stopped surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

T-35b-05 emit_stage — happy path

ASYNC

Function : test_emit_stage_delivers_payload
Covers : emit_stage
Purpose : emit stage delivers the message exactly once on the happy path.
Fixtures : pytest-asyncio

OP-35b *rpc.py* (cont.)

Tests to write (6) — cont.

⇒ T-35b-06

emit_stage — error handling

ASYNC

Function :

Covers :

Purpose :

Fixtures :

test_emit_stage_handles_error

emit_stage

emit stage surfaces failures cleanly (typed result, no swallowed exception).

pytest-asyncio

Mocking dependencies

Linked fiches

• pytest-asyncio

← OP-05 uses __init__.py

← OP-09 uses __init__.py

→ OP-20a used by service.py

→ OP-20d used by orchestrator.py

→ OP-20e used by helpers.py

● PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-35c

dispatcher.py

Source : py_modules/unifideck/launcher/dispatcher.py | Lignes : 210 | Cible : 90%

Test file : tests/unit/launcher/test_dispatcher.py

Public surface

[func]

main

(pure)

Tests to write (2)

⇒ T-35c-01

main — happy path

PURE

Function : test_main_happy_path

Covers : main

Purpose : main produces the expected output for a typical input.

Fixtures : —

⇒ T-35c-02

main — edge cases

PURE

Function : test_main_edge_cases

Covers : main

Purpose : main stays correct on empty / boundary inputs.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-04f uses paths.py
- ← OP-05b uses results.py
- ← OP-11a uses config_manager.py
- ← OP-21 uses __init__.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-35d

packaging.py

Source : py_modules/unifideck/launcher/packaging.py | Lignes : 57 | Cible : 90%

Test file : tests/unit/launcher/test_packaging.py

Public surface

[func] ensure_executable_files (pure)

Tests to write (2)

⇒ T-35d-01 ensure_executable_files — happy path

PURE

Function : test_ensure_executable_files_happy_path
Covers : ensure_executable_files
Purpose : ensure executable files produces the expected output for a typical input.
Fixtures : —

⇒ T-35d-02 ensure_executable_files — edge cases

PURE

Function : test_ensure_executable_files_edge_cases
Covers : ensure_executable_files
Purpose : ensure executable files stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

• (none — pure tests)

Linked fiches

→ OP-13e used by startup.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-35e

bootstrap.py

Source : py_modules/unifideck/launcher/bootstrap.py | Lignes : 66 | Cible : 90%

Test file : tests/unit/launcher/test_bootstrap.py

Public surface

[func] build_launcher_service (pure)

Tests to write (2)

⇒ T-35e-01 build_launcher_service — happy path

PURE

Function : test_build_launcher_service_happy_path
Covers : build_launcher_service
Purpose : build launcher service produces the expected object from valid arguments.
Fixtures : —

⇒ T-35e-02 build_launcher_service — edge cases

PURE

Function : test_build_launcher_service_edge_cases
Covers : build_launcher_service
Purpose : build launcher service stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-04f uses paths.py
- ← OP-09 uses __init__.py
- ← OP-11a uses config_manager.py
- ← OP-13 uses __init__.py
- OP-35c used by dispatcher.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

10 TESTS

OP-38a

cdp_primitives.py

Source : py_modules/unifideck/launcher/cdp/cdp_primitives.py | Lignes : 102 | Cible : 60%

Test file : tests/unit/launcher/cdp/test_cdp_primitives.py

Public surface

[async]	wait_for_titled_target	(async + I/O)
[async]	close_target	(async + I/O)
[async]	close_titled_targets	(async + I/O)
[async]	cdp_command	(async + I/O)
[async]	evaluate_in_target	(async + I/O)

Tests to write (10)

⇒ T-38a-01 wait_for_titled_target — happy path

ASYNC

Function : test_wait_for_titled_target_happy_path
Covers : wait_for_titled_target
Purpose : wait for titled target resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-38a-02 wait_for_titled_target — error handling

ASYNC

Function : test_wait_for_titled_target_handles_error
Covers : wait_for_titled_target
Purpose : wait for titled target surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-38a-03 close_target — happy path

MOCKED HTTP

Function : test_close_target_happy_path
Covers : close_target
Purpose : close target resolves to the expected value on success.
Fixtures : pytest-asyncio, aioresponses

⇒ T-38a-04 close_target — error handling

MOCKED HTTP

Function : test_close_target_raises_on_network_failure
Covers : close_target
Purpose : close target surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

OP-38a *cdp_primitives.py* (cont.)

Tests to write (10) — cont.

⇒ T-38a-05 **close_titled_targets — happy path**

ASYNC

Function : [test_close_titled_targets_happy_path](#)
 Covers : `close_titled_targets`
 Purpose : close titled targets resolves to the expected value on success.
 Fixtures : `pytest-asyncio`

⇒ T-38a-06 **close_titled_targets — error handling**

ASYNC

Function : [test_close_titled_targets_handles_error](#)
 Covers : `close_titled_targets`
 Purpose : close titled targets surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ T-38a-07 **cdp_command — happy path**

CDP / WEBSOCKET

Function : [test_cdp_command_happy_path](#)
 Covers : `cdp_command`
 Purpose : cdp command resolves to the expected value on success.
 Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38a-08 **cdp_command — error handling**

CDP / WEBSOCKET

Function : [test_cdp_command_raises_runtime_error_on_failure](#)
 Covers : `cdp_command`
 Purpose : cdp command raises `RuntimeError` when the input or upstream call fails.
 Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38a-09 **evaluate_in_target — happy path**

CDP / WEBSOCKET

Function : [test_evaluate_in_target_happy_path](#)
 Covers : `evaluate_in_target`
 Purpose : evaluate in target resolves to the expected value on success.
 Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38a-10 **evaluate_in_target — error handling**

CDP / WEBSOCKET

Function : [test_evaluate_in_target_raises_on_network_failure](#)
 Covers : `evaluate_in_target`
 Purpose : evaluate in target surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.
 Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

Mocking dependencies

- `aioreponses`
- `fake_cdp_target` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

- ← OP-30d uses `page_inject.py`
- OP-38c used by `steam_controller_popup.py`
- OP-38d used by `steam_controller_popup_targets.py`
- OP-38e used by `steam_controller_popup_fiber.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-38b

xcloud_cdp.py

Source : py_modules/unifideck/launcher/cdp/xcloud_cdp.py | Lignes : 156 | Cible : 60%

Test file : tests/unit/launcher/cdp/test_xcloud_cdp.py

Public surface

[async]

run_cdp_inject

(async + I/O)

Tests to write (2)

⇒ T-38b-01

run_cdp_inject — happy path

CDP / WEBSOCKET

Function : test_run_cdp_inject_spawns_target_action

Covers : run_cdp_inject

Purpose : run cdp inject spawns the target action and returns its handle.

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

⇒ T-38b-02

run_cdp_inject — error handling

CDP / WEBSOCKET

Function : test_run_cdp_inject_handles_error

Covers : run_cdp_inject

Purpose : run cdp inject surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, fake_cdp_target (conftest.py)

Mocking dependencies

- fake_cdp_target (conftest.py)
- pytest-asyncio

Linked fiches

- ← OP-30c uses xcloud_browser_shims.py
- ← OP-30d uses page_inject.py
- ← OP-38c uses steam_controller_popup.py
- OP-37a used by xcloud.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-38c

steam_controller_popup.py

Source : `py_modules/unifideck/launcher/cdp/steam_controller_popup.py` | Lignes : 180 | Cible : 60%

Test file : `tests/unit/launcher/cdp/test_steam_controller_popup.py`

Public surface

[**async**] `refresh_steam_controller_layout` *(async + I/O)*

Tests to write (2)

⇒ T-38c-01 `refresh_steam_controller_layout` — happy path

ASYNC

Function : `test_refresh_steam_controller_layout_happy_path`
Covers : `refresh_steam_controller_layout`
Purpose : `refresh_steam_controller_layout` returns `True` for the documented happy-path input.
Fixtures : `pytest-asyncio`

⇒ T-38c-02 `refresh_steam_controller_layout` — error handling

ASYNC

Function : `test_refresh_steam_controller_layout_handles_error`
Covers : `refresh_steam_controller_layout`
Purpose : `refresh_steam_controller_layout` surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-38a uses `cdp_primitives.py`
- ← OP-38d uses `steam_controller_popup_targets.py`
- ← OP-38e uses `steam_controller_popup_fiber.py`
- OP-38b used by `xcloud_cdp.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

4 TESTS

OP-38d

steam_controller_popup_targets.py

Source : `py_modules/unifideck/launcher/cdp/steam_controller_popup_targets.py` | Lignes : 56 | Cible : 60%

Test file : `tests/unit/launcher/cdp/test_steam_controller_popup_targets.py`

Public surface

[async]

open_controller_popup

(async + I/O)

[async]

wait_for_popup_root_ready

(async + I/O)

Tests to write (4)

⇒ T-38d-01

open_controller_popup — happy path

ASYNC

Function :

test_open_controller_popup_happy_path

Covers :

open_controller_popup

Purpose :

open controller popup resolves to the expected value on success.

Fixtures :

pytest-asyncio

⇒ T-38d-02

open_controller_popup — error handling

ASYNC

Function :

test_open_controller_popup_raises_runtime_error_on_failure

Covers :

open_controller_popup

Purpose :

open controller popup raises RuntimeError when the input or upstream call fails.

Fixtures :

pytest-asyncio

⇒ T-38d-03

wait_for_popup_root_ready — happy path

CDP / WEBSOCKET

Function :

test_wait_for_popup_root_ready_happy_path

Covers :

wait_for_popup_root_ready

Purpose :

wait for popup root ready returns the expected payload on a normal response.

Fixtures :

pytest-asyncio, aioresponses, fake_cdp_target (conftest.py)

⇒ T-38d-04

wait_for_popup_root_ready — error handling

CDP / WEBSOCKET

Function :

test_wait_for_popup_root_ready_raises_on_network_failure

Covers :

wait_for_popup_root_ready

Purpose :

wait for popup root ready surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures :

pytest-asyncio, aioresponses, fake_cdp_target (conftest.py)

Mocking dependencies

Linked fiches

- aioresponses
- fake_cdp_target (conftest.py)
- pytest-asyncio

← OP-38a uses `cdp_primitives.py`

→ OP-38c used by `steam_controller_popup.py`

Unifideck — Test coverage companion

OP-38d · steam_controller_popup_targets.py

Page 126

● PRIORITY MEDIUM

TIER 3

INTEGRATION

8 TESTS

OP-38e

steam_controller_popup_fiber.py

Source : `py_modules/unifideck/launcher/cdp/steam_controller_popup_fiber.py` | Lignes : 295 | Cible : 60%Test file : `tests/unit/launcher/cdp/test_steam_controller_popup_fiber.py`

Public surface

[async]	<code>resolve_popup_preview_context</code>	(async + I/O)
[async]	<code>preview_popup_config</code>	(async + I/O)
[async]	<code>set_active_popup_config</code>	(async + I/O)
[async]	<code>inspect_popup_state</code>	(async + I/O)

Tests to write (8)

⇒ T-38e-01 `resolve_popup_preview_context` — happy path

CDP / WEBSOCKET

Function : `test_resolve_popup_preview_context_returns_target_when_present`
Covers : `resolve_popup_preview_context`
Purpose : `resolve_popup_preview_context` returns the located target when it exists.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38e-02 `resolve_popup_preview_context` — error handling

CDP / WEBSOCKET

Function : `test_resolve_popup_preview_context_raises_on_network_failure`
Covers : `resolve_popup_preview_context`
Purpose : `resolve_popup_preview_context` surfaces network failures cleanly (`timeout`, `ClientError`) instead of swallowing them.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38e-03 `preview_popup_config` — happy path

CDP / WEBSOCKET

Function : `test_preview_popup_config_happy_path`
Covers : `preview_popup_config`
Purpose : `preview_popup_config` resolves to the expected value on success.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38e-04 `preview_popup_config` — error handling

CDP / WEBSOCKET

Function : `test_preview_popup_config_raises_on_network_failure`
Covers : `preview_popup_config`
Purpose : `preview_popup_config` surfaces network failures cleanly (`timeout`, `ClientError`) instead of swallowing them.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

⇒ T-38e-05 `set_active_popup_config` — happy path

CDP / WEBSOCKET

Function : `test_set_active_popup_config_happy_path`
Covers : `set_active_popup_config`
Purpose : `set_active_popup_config` resolves to the expected value on success.
Fixtures : `pytest-asyncio`, `aioreponses`, `fake_cdp_target` (`conftest.py`)

*OP-38e steam_controller_popup_fiber.py (cont.)***Tests to write (8) — cont.****⇒ T-38e-06 set_active_popup_config — error handling****CDP / WEBSOCKET****Function :** **test_set_active_popup_config_raises_on_network_failure****Covers :** set_active_popup_config**Purpose :** set active popup config surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.**Fixtures :** pytest-asyncio, aioresponses, fake_cdp_target (conftest.py)**⇒ T-38e-07 inspect_popup_state — happy path****CDP / WEBSOCKET****Function :** **test_inspect_popup_state_happy_path****Covers :** inspect_popup_state**Purpose :** inspect popup state resolves to the expected value on success.**Fixtures :** pytest-asyncio, aioresponses, fake_cdp_target (conftest.py)**⇒ T-38e-08 inspect_popup_state — error handling****CDP / WEBSOCKET****Function :** **test_inspect_popup_state_raises_on_network_failure****Covers :** inspect_popup_state**Purpose :** inspect popup state surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.**Fixtures :** pytest-asyncio, aioresponses, fake_cdp_target (conftest.py)**Mocking dependencies**

- aioresponses
- fake_cdp_target (conftest.py)
- pytest-asyncio

Linked fiches

- ← OP-38a uses cdp_primitives.py
- OP-38c used by steam_controller_popup.py

PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-39a

cloud_failure.py

Source : py_modules/unifideck/launcher/cloud/cloud_failure.py | Lignes : 179 | Cible : 80%

Test file : tests/unit/launcher/cloud/test_cloud_failure.py

Public surface

[func]	classify_cloud_error	(pure)
[func]	get_failure_behavior	(pure)
[async]	handle_cloud_sync_failure	(async + I/O)

Tests to write (6)

T-39a-01 classify_cloud_error — happy path

MOCKED HTTP

Function : test_classify_cloud_error_happy_path
Covers : classify_cloud_error
Purpose : classify cloud error produces the expected output for a typical input.
Fixtures : aioresponses

T-39a-02 classify_cloud_error — error handling

MOCKED HTTP

Function : test_classify_cloud_error_raises_on_http_401
Covers : classify_cloud_error
Purpose : classify cloud error surfaces a typed error on HTTP 401, not a swallowed exception.
Fixtures : aioresponses

T-39a-03 get_failure_behavior — happy path

PURE

Function : test_get_failure_behavior_returns_value_on_success
Covers : get_failure_behavior
Purpose : get failure behavior returns the expected payload on a normal response.
Fixtures : —

T-39a-04 get_failure_behavior — edge cases

PURE

Function : test_get_failure_behavior_edge_cases
Covers : get_failure_behavior
Purpose : get failure behavior stays correct on empty / boundary inputs.
Fixtures : —

T-39a-05 handle_cloud_sync_failure — happy path

ASYNC

Function : test_handle_cloud_sync_failure_happy_path
Covers : handle_cloud_sync_failure
Purpose : handle cloud sync failure performs the side-effect without raising.
Fixtures : pytest-asyncio

OP-39a *cloud_failure.py* (cont.)

Tests to write (6) — cont.

⇒ **T-39a-06** **handle_cloud_sync_failure — error handling**

ASYNC

Function : **test_handle_cloud_sync_failure_handles_error**

Covers : handle_cloud_sync_failure

Purpose : handle cloud sync failure surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- aioresponses
- pytest-asyncio

Linked fiches

- ← OP-05a uses events.py
- ← OP-09a uses event_bus.py
- ← OP-11 uses __init__.py
- ← OP-39b uses disk_space.py
- OP-20e used by helpers.py

PRIORITY MEDIUM

TIER 1

PURE

7 TESTS

OP-39b

disk_space.py

Source : py_modules/unifideck/launcher/cloud/disk_space.py | Lignes : 92 | Cible : 90%

Test file : tests/unit/launcher/cloud/test_disk_space.py

Public surface

[class]	DiskSpaceCheck	()
[class]	LowDiskSpaceError	(__init__)
[func]	get_min_free_bytes	(pure)
[func]	check_disk_space	(pure)
[func]	assert_enough_space	(pure)

Tests to write (7)

T-39b-01 get_min_free_bytes — happy path

PURE

Function : test_get_min_free_bytes_returns_value_on_success
Covers : get_min_free_bytes
Purpose : get min free bytes returns the expected payload on a normal response.
Fixtures : —

T-39b-02 get_min_free_bytes — edge cases

PURE

Function : test_get_min_free_bytes_edge_cases
Covers : get_min_free_bytes
Purpose : get min free bytes stays correct on empty / boundary inputs.
Fixtures : —

T-39b-03 check_disk_space — happy path

MOCKED FS

Function : test_check_disk_space_returns_true_on_valid_input
Covers : check_disk_space
Purpose : check disk space returns True for a valid input.
Fixtures : tmp_path

T-39b-04 check_disk_space — error handling

MOCKED FS

Function : test_check_disk_space_handles_missing_or_corrupt_file
Covers : check_disk_space
Purpose : check disk space handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

OP-39b `disk_space.py` (cont.)

Tests to write (7) — cont.

⇒ **T-39b-05** `assert_enough_space` — happy path

PURE

Function : `test_assert_enough_space_happy_path`Covers : `assert_enough_space`Purpose : `assert_enough_space` produces the expected output for a typical input.

Fixtures : —

⇒ **T-39b-06** `assert_enough_space` — edge cases

PURE

Function : `test_assert_enough_space_edge_cases`Covers : `assert_enough_space`Purpose : `assert_enough_space` stays correct on empty / boundary inputs.

Fixtures : —

⇒ **T-39b-07** `LowDiskSpaceError.__init__` — construction

PURE

Function : `test_lowdiskspaceerror_init_constructs_with_valid_args`Covers : `LowDiskSpaceError.__init__`Purpose : `LowDiskSpaceError` stores its constructor arguments on the expected instance attributes.

Fixtures : —

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-39c uses `save_size_cache.py`
- OP-20e used by `helpers.py`
- OP-39a used by `cloud_failure.py`

PRIORITY MEDIUM

TIER 1

PURE

6 TESTS

OP-39c

save_size_cache.py

Source : py_modules/unifideck/launcher/cloud/save_size_cache.py | Lignes : 121 | Cible : 90%

Test file : tests/unit/launcher/cloud/test_save_size_cache.py

Public surface

[class]	CachedSize	()
[func]	get_observed_size	(pure)
[func]	record_observed_size	(pure)
[func]	measure_directory_size	(pure)

Tests to write (6)

⇒ T-39c-01 get_observed_size — happy path

PURE

Function : test_get_observed_size_returns_value_on_success
Covers : get_observed_size
Purpose : get observed size returns the expected payload on a normal response.
Fixtures : monkeypatch (time.time)

⇒ T-39c-02 get_observed_size — edge cases

PURE

Function : test_get_observed_size_returns_none_on_missing_input
Covers : get_observed_size
Purpose : get observed size returns None on missing or invalid input rather than raising.
Fixtures : monkeypatch (time.time)

⇒ T-39c-03 record_observed_size — happy path

PURE

Function : test_record_observed_size_happy_path
Covers : record_observed_size
Purpose : record observed size returns the correct count for a populated input.
Fixtures : monkeypatch (time.time)

⇒ T-39c-04 record_observed_size — edge cases

PURE

Function : test_record_observed_size_returns_none_on_missing_input
Covers : record_observed_size
Purpose : record observed size returns None on missing or invalid input rather than raising.
Fixtures : monkeypatch (time.time)

⇒ T-39c-05 measure_directory_size — happy path

MOCKED FS

Function : test_measure_directory_size_happy_path
Covers : measure_directory_size
Purpose : measure directory size returns the correct count for a populated input.
Fixtures : tmp_path

OP-39c save_size_cache.py (cont.)

Tests to write (6) — cont.

⇒ T-39c-06

measure_directory_size — error handling

MOCKED FS

Function :

Covers :

Purpose :

Fixtures :

test_measure_directory_size_handles_missing_or_corrupt_file

measure_directory_size

measure directory size handles missing or corrupt files gracefully — empty result, never crash.

tmp_path

Mocking dependencies

Linked fiches

- monkeypatch (time.time)
- tmp_path

← OP-11 uses __init__.py

→ OP-20e used by helpers.py

→ OP-39b used by disk_space.py

PRIORITY MEDIUM

TIER 1

PURE

9 TESTS

OP-40a

correlation.py

Source : py_modules/unifideck/launcher/diagnostics/correlation.py | Lignes : 39 | Cible : 90%

Test file : tests/unit/launcher/diagnostics/test_correlation.py

Public surface

[class]	LaunchIdFilter	(filter)
[func]	new_launch_id	(pure)
[func]	get_launch_id	(pure)
[func]	launch_id_scope	(pure)
[func]	install_launch_id_logging	(pure)

Tests to write (9)

⇒ T-40a-01 new_launch_id — happy path

PURE

Function : test_new_launch_id_happy_path
Covers : new_launch_id
Purpose : new launch id spawns the target action and returns its handle.
Fixtures : —

⇒ T-40a-02 new_launch_id — edge cases

PURE

Function : test_new_launch_id_edge_cases
Covers : new_launch_id
Purpose : new launch id stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-40a-03 get_launch_id — happy path

PURE

Function : test_get_launch_id_returns_value_on_success
Covers : get_launch_id
Purpose : get launch id returns the expected payload on a normal response.
Fixtures : —

⇒ T-40a-04 get_launch_id — edge cases

PURE

Function : test_get_launch_id_edge_cases
Covers : get_launch_id
Purpose : get launch id stays correct on empty / boundary inputs.
Fixtures : —

OP-40a correlation.py (cont.)

Tests to write (9) — cont.

⇒ T-40a-05 launch_id_scope — happy path

PURE

Function : [test_launch_id_scope_spawns_target_action](#)
Covers : launch_id_scope
Purpose : launch id scope spawns the target action and returns its handle.
Fixtures : —

⇒ T-40a-06 launch_id_scope — edge cases

PURE

Function : [test_launch_id_scope_edge_cases](#)
Covers : launch_id_scope
Purpose : launch id scope stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-40a-07 install_launch_id_logging — happy path

PURE

Function : [test_install_launch_id_logging_completes_setup_steps](#)
Covers : install_launch_id_logging
Purpose : install launch id logging performs the setup steps end-to-end.
Fixtures : —

⇒ T-40a-08 install_launch_id_logging — edge cases

PURE

Function : [test_install_launch_id_logging_returns_none_on_missing_input](#)
Covers : install_launch_id_logging
Purpose : install launch id logging returns None on missing or invalid input rather than raising.
Fixtures : —

⇒ T-40a-09 LaunchIdFilter.filter — happy path

PURE

Function : [test_launchidfilter_filter_happy_path](#)
Covers : LaunchIdFilter.filter
Purpose : filter returns True for the documented happy-path input.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- OP-20b used by circuit_breaker.py
- OP-35c used by dispatcher.py
- OP-40b used by telemetry.py

● PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-40c

save_folder_inspector.py

Source : py_modules/unifideck/launcher/diagnostics/save_folder_inspector.py | Lignes : 78 | Cible : 80%

Test file : tests/unit/launcher/diagnostics/test_save_folder_inspector.py

Public surface

[func] inspect_save_folder (pure)

Tests to write (2)

⇒ T-40c-01 inspect_save_folder — happy path

MOCKED FS

Function : test_inspect_save_folder_happy_path
Covers : inspect_save_folder
Purpose : inspect save folder persists the input correctly to disk.
Fixtures : tmp_path

⇒ T-40c-02 inspect_save_folder — error handling

MOCKED FS

Function : test_inspect_save_folder_handles_missing_or_corrupt_file
Covers : inspect_save_folder
Purpose : inspect save folder handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

- OP-25d used by launch.py
- OP-26d used by launch.py

PRIORITY MEDIUM

TIER 1

PURE

10 TESTS

OP-40d

log_archive.py

Source : py_modules/unifideck/launcher/diagnostics/log_archive.py | Lignes : 159 | Cible : 90%

Test file : tests/unit/launcher/diagnostics/test_log_archive.py

Public surface

[func]	prune_old_launches	(pure)
[func]	attach_launch_handler	(pure)
[func]	detach_launch_handler	(pure)
[func]	read_launch_logs	(pure)
[func]	export_launch_logs	(pure)

Tests to write (10)

⇒ T-40d-01 prune_old_launches — happy path

PURE

Function : test_prune_old_launches_happy_path
Covers : prune_old_launches
Purpose : prune old launches spawns the target action and returns its handle.
Fixtures : monkeypatch (time.time)

⇒ T-40d-02 prune_old_launches — edge cases

PURE

Function : test_prune_old_launches_edge_cases
Covers : prune_old_launches
Purpose : prune old launches stays correct on empty / boundary inputs.
Fixtures : monkeypatch (time.time)

⇒ T-40d-03 attach_launch_handler — happy path

PURE

Function : test_attach_launch_handler_happy_path
Covers : attach_launch_handler
Purpose : attach launch handler spawns the target action and returns its handle.
Fixtures : —

⇒ T-40d-04 attach_launch_handler — edge cases

PURE

Function : test_attach_launch_handler_returns_none_on_missing_input
Covers : attach_launch_handler
Purpose : attach launch handler returns None on missing or invalid input rather than raising.
Fixtures : —

OP-40d log_archive.py (cont.)

Tests to write (10) — cont.

⇒ T-40d-05 detach_launch_handler — happy path

PURE

Function : [test_detach_launch_handler_happy_path](#)
 Covers : detach_launch_handler
 Purpose : detach launch handler spawns the target action and returns its handle.
 Fixtures : —

⇒ T-40d-06 detach_launch_handler — edge cases

PURE

Function : [test_detach_launch_handler_returns_none_on_missing_input](#)
 Covers : detach_launch_handler
 Purpose : detach launch handler returns None on missing or invalid input rather than raising.
 Fixtures : —

⇒ T-40d-07 read_launch_logs — happy path

MOCKED FS

Function : [test_read_launch_logs_returns_value_on_success](#)
 Covers : read_launch_logs
 Purpose : read launch logs returns the expected payload on a normal response.
 Fixtures : tmp_path

⇒ T-40d-08 read_launch_logs — error handling

MOCKED FS

Function : [test_read_launch_logs_handles_missing_or_corrupt_file](#)
 Covers : read_launch_logs
 Purpose : read launch logs handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : tmp_path

⇒ T-40d-09 export_launch_logs — happy path

MOCKED FS

Function : [test_export_launch_logs_happy_path](#)
 Covers : export_launch_logs
 Purpose : export launch logs spawns the target action and returns its handle.
 Fixtures : tmp_path

⇒ T-40d-10 export_launch_logs — error handling

MOCKED FS

Function : [test_export_launch_logs_handles_missing_or_corrupt_file](#)
 Covers : export_launch_logs
 Purpose : export launch logs handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : tmp_path

Mocking dependencies

- monkeypatch (time.time)
- tmp_path

Linked fiches

- ← OP-11 uses __init__.py
- OP-25d used by launch.py
- OP-26d used by launch.py
- OP-35c used by dispatcher.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-37a

xcloud.py

Source : `py_modules/unifideck/launcher/flows/xcloud.py` | Lignes : 96 | Cible : 60%
Test file : `tests/unit/launcher/flows/test_xcloud.py`

Public surface

[**async**]

launch_xcloud

(*async + I/O*)

Tests to write (2)

⇒ T-37a-01

launch_xcloud — happy path

CDP / WEBSOCKET

Function : `test_launch_xcloud_spawns_target_action`

Covers : `launch_xcloud`

Purpose : launch xcloud spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

⇒ T-37a-02

launch_xcloud — error handling

CDP / WEBSOCKET

Function : `test_launch_xcloud_raises_dependency_missing_error_on_failure`

Covers : `launch_xcloud`

Purpose : launch xcloud raises `DependencyMissingError` when the input or upstream call fails.

Fixtures : `pytest-asyncio`, `fake_cdp_target` (`conftest.py`)

Mocking dependencies

- `fake_cdp_target` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-29 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- ← OP-36b uses `errors.py`
- OP-20a used by `service.py`

● PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-37b

native.py

Source : `py_modules/unifideck/launcher/flows/native.py` | Lignes : 125 | Cible : 80%
Test file : `tests/unit/launcher/flows/test_native.py`

Public surface

[**async**]

native_launch

(*async + I/O*)

Tests to write (2)

⇒ **T-37b-01** native_launch — happy path

MOCKED SUBPROCESS

Function : `test_native_launch_happy_path`

Covers : `native_launch`

Purpose : native launch spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

⇒ **T-37b-02** native_launch — error handling

MOCKED SUBPROCESS

Function : `test_native_launch_raises_dependency_missing_error_on_failure`

Covers : `native_launch`

Purpose : native launch raises `DependencyMissingError` when the input or upstream call fails.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

Mocking dependencies

Linked fiches

- `monkeypatch` (`asyncio.create_subprocess_exec`)
- `pytest-asyncio`

- ← OP-05 uses `__init__.py`
- ← OP-36b uses `errors.py`
- ← OP-36c uses `context.py`
- OP-20d used by `orchestrator.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-37c

auth.py

Source : `py_modules/unifideck/launcher/flows/auth.py` | Lignes : 115 | Cible : 60%

Test file : `tests/unit/launcher/flows/test_auth.py`

Public surface

[async]

handle_store_auth

(async + I/O)

Tests to write (2)

⇒ T-37c-01

handle_store_auth — happy path

ASYNC

Function : `test_handle_store_auth_happy_path`

Covers : `handle_store_auth`

Purpose : `handle store auth persists the input correctly to disk.`

Fixtures : `pytest-asyncio`

⇒ T-37c-02

handle_store_auth — error handling

ASYNC

Function : `test_handle_store_auth_raises_game_not_found_error_on_failure`

Covers : `handle_store_auth`

Purpose : `handle store auth raises GameNotFoundError when the input or upstream call fails.`

Fixtures : `pytest-asyncio`

Mocking dependencies

Linked fiches

- `pytest-asyncio`
- ← OP-05 uses `__init__.py`
- ← OP-29 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- ← OP-36b uses `errors.py`
- OP-20a used by `service.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-41

`__init__.py`
Source : `py_modules/unifideck/launcher/proton/__init__.py` | Lignes : 24 | Cible : 60%
Test file : `tests/unit/launcher/proton/test__init__.py`

Public surface

`[async]` dispatch

(*async + I/O*)

Tests to write (2)

⇒ T-41-01 dispatch — happy path

ASYNC

Function : `test_dispatch_happy_path`
Covers : dispatch
Purpose : dispatch delivers the message exactly once on the happy path.
Fixtures : `pytest-asyncio`

⇒ T-41-02 dispatch — error handling

ASYNC

Function : `test_dispatch_handles_error`
Covers : dispatch
Purpose : dispatch surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

Mocking dependencies

Linked fiches

- `pytest-asyncio`

→ OP-20e used by `helpers.py`

PRIORITY MEDIUM

TIER 2

MOCKED

10 TESTS

OP-44a

game_fixes.py

Source : py_modules/unifideck/launcher/proton/fixes/game_fixes.py | Lignes : 171 | Cible : 80%

Test file : tests/unit/launcher/proton/fixes/test_game_fixes.py

Public surface

[class]	GameFix	()
[func]	get_exe_override	(pure)
[async]	fetch_umu_protonfixes	(async + I/O)
[async]	get_required_winetricks	(async + I/O)
[async]	get_game_fix	(async + I/O)
[func]	clear_cache	(pure)

Tests to write (10)

T-44a-01 get_exe_override — happy path

PURE

Function : test_get_exe_override_returns_value_on_success
Covers : get_exe_override
Purpose : get exe override returns the expected payload on a normal response.
Fixtures : —

T-44a-02 get_exe_override — edge cases

PURE

Function : test_get_exe_override_returns_none_on_missing_input
Covers : get_exe_override
Purpose : get exe override returns None on missing or invalid input rather than raising.
Fixtures : —

T-44a-03 fetch_umu_protonfixes — happy path

MOCKED HTTP

Function : test_fetch_umu_protonfixes_returns_value_on_success
Covers : fetch_umu_protonfixes
Purpose : fetch umu protonfixes returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses, monkeypatch (time.time)

T-44a-04 fetch_umu_protonfixes — error handling

MOCKED HTTP

Function : test_fetch_umu_protonfixes_raises_on_network_failure
Covers : fetch_umu_protonfixes
Purpose : fetch umu protonfixes surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses, monkeypatch (time.time)

OP-44a game_fixes.py (cont.)

Tests to write (10) — cont.

⇒ T-44a-05 **get_required_winetricks — happy path**

MOCKED HTTP

Function : [test_get_required_winetricks_returns_value_on_success](#)
Covers : `get_required_winetricks`
Purpose : `get_required_winetricks` returns the expected payload on a normal response.
Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-44a-06 **get_required_winetricks — error handling**

MOCKED HTTP

Function : [test_get_required_winetricks_raises_on_network_failure](#)
Covers : `get_required_winetricks`
Purpose : `get_required_winetricks` surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.
Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-44a-07 **get_game_fix — happy path**

MOCKED HTTP

Function : [test_get_game_fix_returns_value_on_success](#)
Covers : `get_game_fix`
Purpose : `get_game_fix` returns the expected payload on a normal response.
Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-44a-08 **get_game_fix — error handling**

MOCKED HTTP

Function : [test_get_game_fix_raises_on_network_failure](#)
Covers : `get_game_fix`
Purpose : `get_game_fix` surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.
Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-44a-09 **clear_cache — happy path**

PURE

Function : [test_clear_cache_removes_target_and_reports_success](#)
Covers : `clear_cache`
Purpose : `clear_cache` removes the target and reports success.
Fixtures : —

⇒ T-44a-10 **clear_cache — edge cases**

PURE

Function : [test_clear_cache_edge_cases](#)
Covers : `clear_cache`
Purpose : `clear_cache` stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- `aioreponses`
- `monkeypatch` (`time.time`)
- `pytest-asyncio`

Linked fiches

→ OP-43b used by epic.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-44b

galaxy_stub.py

Source : `py_modules/unifideck/launcher/proton/fixes/galaxy_stub.py` | Lignes : 79 | Cible : 60%

Test file : `tests/unit/launcher/proton/fixes/test_galaxy_stub.py`

Public surface

[func]

install_galaxy_stub

(pure)

Tests to write (2)

⇒ T-44b-01

install_galaxy_stub — happy path

WINE PREFIX

Function : `test_install_galaxy_stub_completes_setup_steps`

Covers : `install_galaxy_stub`

Purpose : install galaxy stub performs the setup steps end-to-end.

Fixtures : `tmp_path`, `fake_prefix` (`conftest.py`)

⇒ T-44b-02

install_galaxy_stub — error handling

WINE PREFIX

Function : `test_install_galaxy_stub_handles_missing_or_corrupt_file`

Covers : `install_galaxy_stub`

Purpose : install galaxy stub handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`, `fake_prefix` (`conftest.py`)

Mocking dependencies

Linked fiches

- `fake_prefix` (`conftest.py`)
- `tmp_path`

- ← OP-04f uses `paths.py`
- ← OP-42d uses `prefix_layout.py`
- OP-43c used by `generic.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-44c

epic_prefix_fix.py

Source : `py_modules/unifideck/launcher/proton/fixes/epic_prefix_fix.py` | Lignes : 216 | Cible : 90%

Test file : `tests/unit/launcher/proton/fixes/test_epic_prefix_fix.py`

Public surface

[func]	<code>normalize_prefix_root</code>	(pure)
[async]	<code>apply_epic_launcher_fix</code>	(async + I/O)

Tests to write (4)

⇒ T-44c-01

normalize_prefix_root — happy path

PURE

Function : `test_normalize_prefix_root_normalises_input`
Covers : `normalize_prefix_root`
Purpose : normalize prefix root normalises the input as documented.
Fixtures : —

⇒ T-44c-02

normalize_prefix_root — edge cases

PURE

Function : `test_normalize_prefix_root_edge_cases`
Covers : `normalize_prefix_root`
Purpose : normalize prefix root handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

⇒ T-44c-03

apply_epic_launcher_fix — happy path

WINE PREFIX

Function : `test_apply_epic_launcher_fix_happy_path`
Covers : `apply_epic_launcher_fix`
Purpose : apply epic launcher fix spawns the target action and returns its handle.
Fixtures : `pytest-asyncio`, `fake_prefix` (`conftest.py`)

⇒ T-44c-04

apply_epic_launcher_fix — error handling

WINE PREFIX

Function : `test_apply_epic_launcher_fix_handles_error`
Covers : `apply_epic_launcher_fix`
Purpose : apply epic launcher fix surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`, `fake_prefix` (`conftest.py`)

Mocking dependencies

- `fake_prefix` (`conftest.py`)
- `pytest-asyncio`

Linked fiches

→ OP-43a used by `ubisoft.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-44d

epic_registry.py

Source : `py_modules/unifideck/launcher/proton/fixes/epic_registry.py` | Lignes : 271 | Cible : 60%

Test file : `tests/unit/launcher/proton/fixes/test_epic_registry.py`

Public surface

[class]

RegistryInjectionResult

()

[async]

setup_registry

(*async + I/O*)

Tests to write (2)

⇒ T-44d-01 setup_registry — happy path

Function : `test_setup_registry_completes_setup_steps`

Covers : `setup_registry`

Purpose : setup registry performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`, `monkeypatch (env vars)`, `fake_prefix (conftest.py)`

WINE PREFIX

⇒ T-44d-02 setup_registry — error handling

Function : `test_setup_registry_handles_error`

Covers : `setup_registry`

Purpose : setup registry surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`, `monkeypatch (env vars)`, `fake_prefix (conftest.py)`

WINE PREFIX

Mocking dependencies

- `fake_prefix (conftest.py)`
- `monkeypatch (env vars)`
- `pytest-asyncio`

Linked fiches

→ OP-43a used by `ubisoft.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-44e

auth_args_stripper.py

Source : py_modules/unifideck/launcher/proton/fixes/auth_args_stripper.py | Lignes : 36 | Cible : 90%

Test file : tests/unit/launcher/proton/fixes/test_auth_args_stripper.py

Public surface

[func] strip_epic_auth_args (pure)
[func] should_strip_for_launch_context (pure)

Tests to write (4)

⇒ T-44e-01 strip_epic_auth_args — happy path PURE
Function : test_strip_epic_auth_args_normalises_input
Covers : strip_epic_auth_args
Purpose : strip epic auth args normalises the input as documented.
Fixtures : —

⇒ T-44e-02 strip_epic_auth_args — edge cases PURE
Function : test_strip_epic_auth_args_edge_cases
Covers : strip_epic_auth_args
Purpose : strip epic auth args handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

⇒ T-44e-03 should_strip_for_launch_context — happy path PURE
Function : test_should_strip_for_launch_context_happy_path
Covers : should_strip_for_launch_context
Purpose : should strip for launch context spawns the target action and returns its handle.
Fixtures : —

⇒ T-44e-04 should_strip_for_launch_context — edge cases PURE
Function : test_should_strip_for_launch_context_edge_cases
Covers : should_strip_for_launch_context
Purpose : should strip for launch context stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-36c uses context.py
- OP-43a used by ubisoft.py

PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-43a

ubisoft.py

Source : py_modules/unifideck/launcher/proton/handlers/ubisoft.py | Lignes : 181 | Cible : 80%

Test file : tests/unit/launcher/proton/handlers/test_ubisoft.py

Public surface

[async] ubisoft_launch (async + I/O)

Tests to write (2)

⇒ T-43a-01 ubisoft_launch — happy path

MOCKED SUBPROCESS

Function : test_ubisoft_launch_happy_path
Covers : ubisoft_launch
Purpose : ubisoft launch spawns the target action and returns its handle.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), monkeypatch (env vars)

⇒ T-43a-02 ubisoft_launch — error handling

MOCKED SUBPROCESS

Function : test_ubisoft_launch_raises_on_non_zero_exit
Covers : ubisoft_launch
Purpose : ubisoft launch reports a non-zero subprocess exit as a typed failure.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), monkeypatch (env vars)

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- monkeypatch (env vars)
- pytest-asyncio

Linked fiches

- ← OP-11a uses config_manager.py
- ← OP-36b uses errors.py
- ← OP-42a uses core.py
- ← OP-42b uses umu_runtime.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-43b

epic.py
Source : `py_modules/unifideck/launcher/proton/handlers/epic.py` | Lignes : 167 | Cible : 60%
Test file : `tests/unit/launcher/proton/handlers/test_epic.py`

Public surface

[**async**]

epic_launch

(*async + I/O*)

Tests to write (2)

⇒ **T-43b-01** epic_launch — happy path

WINE PREFIX

Function : `test_epic_launch_happy_path`
Covers : epic_launch
Purpose : epic launch spawns the target action and returns its handle.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), monkeypatch (env vars), fake_prefix (conftest.py)

⇒ **T-43b-02** epic_launch — error handling

WINE PREFIX

Function : `test_epic_launch_raises_game_failed_error_on_failure`
Covers : epic_launch
Purpose : epic launch raises GameFailedError when the input or upstream call fails.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), monkeypatch (env vars), fake_prefix (conftest.py)

- Mocking dependencies

 - fake_prefix (conftest.py)
 - monkeypatch (asyncio.create_subprocess_exec)
 - monkeypatch (env vars)
 - pytest-asyncio
- Linked fiches

 - ← OP-36b uses errors.py
 - ← OP-42a uses core.py
 - ← OP-42b uses umu_runtime.py
 - ← OP-44a uses game_fixes.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-43c

generic.py

Source : py_modules/unifideck/launcher/proton/handlers/generic.py | Lignes : 127 | Cible : 60%

Test file : tests/unit/launcher/proton/handlers/test_generic.py

Public surface

[async]

generic_launch

(async + I/O)

Tests to write (2)

⇒ T-43c-01 generic_launch — happy path

Function : test_generic_launch_happy_path

Covers : generic_launch

Purpose : generic launch spawns the target action and returns its handle.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), fake_prefix (confest.py)

WINE PREFIX

⇒ T-43c-02 generic_launch — error handling

Function : test_generic_launch_raises_game_failed_error_on_failure

Covers : generic_launch

Purpose : generic launch raises GameFailedError when the input or upstream call fails.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec), fake_prefix (confest.py)

WINE PREFIX

Mocking dependencies

• fake_prefix (confest.py)

• monkeypatch (asyncio.create_subprocess_exec)

• pytest-asyncio

Linked fiches

← OP-11a uses config_manager.py

← OP-36b uses errors.py

← OP-42a uses core.py

← OP-42b uses umu_runtime.py

● PRIORITY MEDIUM

TIER 1

PURE

10 TESTS

OP-43d

gog_linux_dosbox.py

Source : `py_modules/unifideck/launcher/proton/handlers/gog_linux_dosbox.py` | Lignes : 133 | Cible : 90%Test file : `tests/unit/launcher/proton/handlers/test_gog_linux_dosbox.py`

Public surface

[func]	<code>find_steam_runtime</code>	(pure)
[func]	<code>build_runtime_library_paths</code>	(pure)
[func]	<code>parse_dosbox_conf_args</code>	(pure)
[func]	<code>launch_via_steam_runtime</code>	(pure)
[func]	<code>main</code>	(pure)

Tests to write (10)

⇒ T-43d-01 `find_steam_runtime` — happy path

PURE

Function : `test_find_steam_runtime_returns_target_when_present`
Covers : `find_steam_runtime`
Purpose : find steam runtime returns the located target when it exists.
Fixtures : —

⇒ T-43d-02 `find_steam_runtime` — edge cases

PURE

Function : `test_find_steam_runtime_returns_none_on_missing_input`
Covers : `find_steam_runtime`
Purpose : find steam runtime returns None on missing or invalid input rather than raising.
Fixtures : —

⇒ T-43d-03 `build_runtime_library_paths` — happy path

PURE

Function : `test_build_runtime_library_paths_happy_path`
Covers : `build_runtime_library_paths`
Purpose : build runtime library paths produces the expected object from valid arguments.
Fixtures : —

⇒ T-43d-04 `build_runtime_library_paths` — edge cases

PURE

Function : `test_build_runtime_library_paths_edge_cases`
Covers : `build_runtime_library_paths`
Purpose : build runtime library paths stays correct on empty / boundary inputs.
Fixtures : —

OP-43d gog_linux_dosbox.py (cont.)

Tests to write (10) — cont.

⇒ T-43d-05 parse_dosbox_conf_args — happy path

MOCKED FS

Function : [test_parse_dosbox_conf_args_parses_well_formed_input](#)
 Covers : parse_dosbox_conf_args
 Purpose : parse dosbox conf args parses a well-formed input into the expected value.
 Fixtures : tmp_path

⇒ T-43d-06 parse_dosbox_conf_args — error handling

MOCKED FS

Function : [test_parse_dosbox_conf_args_raises_value_error_on_failure](#)
 Covers : parse_dosbox_conf_args
 Purpose : parse dosbox conf args raises ValueError when the input or upstream call fails.
 Fixtures : tmp_path

⇒ T-43d-07 launch_via_steam_runtime — happy path

PURE

Function : [test_launch_via_steam_runtime_spawns_target_action](#)
 Covers : launch_via_steam_runtime
 Purpose : launch via steam runtime spawns the target action and returns its handle.
 Fixtures : —

⇒ T-43d-08 launch_via_steam_runtime — edge cases

PURE

Function : [test_launch_via_steam_runtime_edge_cases](#)
 Covers : launch_via_steam_runtime
 Purpose : launch via steam runtime stays correct on empty / boundary inputs.
 Fixtures : —

⇒ T-43d-09 main — happy path

PURE

Function : [test_main_happy_path](#)
 Covers : main
 Purpose : main produces the expected output for a typical input.
 Fixtures : —

⇒ T-43d-10 main — edge cases

PURE

Function : [test_main_edge_cases](#)
 Covers : main
 Purpose : main stays correct on empty / boundary inputs.
 Fixtures : —

Mocking dependencies

- tmp_path

Linked fiches

(no internal imports detected)

PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-42a

core.py

Source : `py_modules/unifideck/launcher/proton/infrastructure/core.py` | Lignes : 120 | Cible : 60%

Test file : `tests/unit/launcher/proton/infrastructure/test_core.py`

Public surface

<code>[class]</code>	<code>ProtonLaunchPlan</code>	<code>()</code>
<code>[func]</code>	<code>proton_prepare</code>	<code>(pure)</code>

Tests to write (2)

⇒ T-42a-01 proton_prepare — happy path

WINE PREFIX

Function : `test_proton_prepare_happy_path`
Covers : `proton_prepare`
Purpose : `proton prepare` produces the expected output for a typical input.
Fixtures : `tmp_path`, `monkeypatch (env vars)`, `fake_prefix (conftest.py)`

⇒ T-42a-02 proton_prepare — error handling

WINE PREFIX

Function : `test_proton_prepare_handles_missing_or_corrupt_file`
Covers : `proton_prepare`
Purpose : `proton prepare` handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`, `monkeypatch (env vars)`, `fake_prefix (conftest.py)`

Mocking dependencies

- `fake_prefix (conftest.py)`
- `monkeypatch (env vars)`
- `tmp_path`

Linked fiches

- ← OP-36b uses `errors.py`
- ← OP-36c uses `context.py`
- OP-20a used by `service.py`
- OP-20e used by `helpers.py`
- OP-43a used by `ubisoft.py`
- OP-43b used by `epic.py`

● PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-42b

umu_runtime.py

Source : `py_modules/unifideck/launcher/proton/infrastructure/umu_runtime.py` | Lignes : 75 | Cible : 80%
Test file : `tests/unit/launcher/proton/infrastructure/test_umu_runtime.py`

Public surface

[func]

cleanup_umu_runtime_cache

(pure)

[func]

ensure_umu_runtime_ready

(pure)

[async]

run_umu_with_retry

(async + I/O)

Tests to write (6)

⇒ T-42b-01 cleanup_umu_runtime_cache — happy path

MOCKED FS

Function : `test_cleanup_umu_runtime_cache_normalises_input`

Covers : cleanup_umu_runtime_cache

Purpose : cleanup umu runtime cache spawns the target action and returns its handle.

Fixtures : tmp_path

⇒ T-42b-02 cleanup_umu_runtime_cache — error handling

MOCKED FS

Function : `test_cleanup_umu_runtime_cache_handles_missing_or_corrupt_file`

Covers : cleanup_umu_runtime_cache

Purpose : cleanup umu runtime cache handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-42b-03 ensure_umu_runtime_ready — happy path

WINE PREFIX

Function : `test_ensure_umu_runtime_ready_happy_path`

Covers : ensure_umu_runtime_ready

Purpose : ensure umu runtime ready returns the expected payload on a normal response.

Fixtures : tmp_path, monkeypatch (env vars), fake_prefix (confest.py)

⇒ T-42b-04 ensure_umu_runtime_ready — error handling

WINE PREFIX

Function : `test_ensure_umu_runtime_ready_handles_missing_or_corrupt_file`

Covers : ensure_umu_runtime_ready

Purpose : ensure umu runtime ready handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path, monkeypatch (env vars), fake_prefix (confest.py)

⇒ T-42b-05 run_umu_with_retry — happy path

MOCKED SUBPROCESS

Function : `test_run_umu_with_retry_spawns_target_action`

Covers : run_umu_with_retry

Purpose : run umu with retry spawns the target action and returns its handle.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

OP-42b umu_runtime.py (cont.)

Tests to write (6) — cont.

⇒ T-42b-06

run_umu_with_retry — error handling

MOCKED SUBPROCESS

Function :

test_run_umu_with_retry_raises_on_non_zero_exit

Covers :

run_umu_with_retry

Purpose :

run umu with retry reports a non-zero subprocess exit as a typed failure.

Fixtures :

pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

Mocking dependencies

- fake_prefix (conftest.py)
- monkeypatch (asyncio.create_subprocess_exec)
- monkeypatch (env vars)
- pytest-asyncio
- tmp_path

Linked fiches

- OP-20e used by helpers.py
- OP-43a used by ubisoft.py
- OP-43b used by epic.py
- OP-43c used by generic.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

12 TESTS

OP-42c

selector.py

Source : py_modules/unifideck/launcher/proton/infrastructure/selector.py | Lignes : 154 | Cible : 60%

Test file : tests/unit/launcher/proton/infrastructure/test_selector.py

Public surface

[func]	find_python_3_10_plus	(pure)
[func]	resolve_proton_path	(pure)
[func]	get_unifideck_proton_tool	(pure)
[func]	get_steam_compat_tool_override	(pure)
[func]	find_any_ge_proton	(pure)
[func]	select_proton_version	(pure)

Tests to write (12)

⇒ T-42c-01 find_python_3_10_plus — happy path

MOCKED SUBPROCESS

Function : test_find_python_3_10_plus_returns_target_when_present
Covers : find_python_3_10_plus
Purpose : find python 3 10 plus returns the located target when it exists.
Fixtures : tmp_path, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-42c-02 find_python_3_10_plus — error handling

MOCKED SUBPROCESS

Function : test_find_python_3_10_plus_raises_dependency_missing_error_on_failure
Covers : find_python_3_10_plus
Purpose : find python 3 10 plus raises DependencyMissingError when the input or upstream call fails.
Fixtures : tmp_path, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-42c-03 resolve_proton_path — happy path

WINE PREFIX

Function : test_resolve_proton_path_returns_target_when_present
Covers : resolve_proton_path
Purpose : resolve proton path returns the located target when it exists.
Fixtures : tmp_path, fake_prefix (confest.py)

⇒ T-42c-04 resolve_proton_path — error handling

WINE PREFIX

Function : test_resolve_proton_path_handles_missing_or_corrupt_file
Covers : resolve_proton_path
Purpose : resolve proton path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path, fake_prefix (confest.py)

OP-42c selector.py (cont.)

Tests to write (12) — cont.

⇒ T-42c-05 get_unifideck_proton_tool — happy path

WINE PREFIX

Function : [test_get_unifideck_proton_tool_returns_value_on_success](#)
 Covers : get_unifideck_proton_tool
 Purpose : get unifideck proton tool returns the expected payload on a normal response.
 Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-42c-06 get_unifideck_proton_tool — error handling

WINE PREFIX

Function : [test_get_unifideck_proton_tool_handles_missing_or_corrupt_file](#)
 Covers : get_unifideck_proton_tool
 Purpose : get unifideck proton tool handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-42c-07 get_steam_compat_tool_override — happy path

MOCKED FS

Function : [test_get_steam_compat_tool_override_returns_value_on_success](#)
 Covers : get_steam_compat_tool_override
 Purpose : get steam compat tool override returns the expected payload on a normal response.
 Fixtures : tmp_path

⇒ T-42c-08 get_steam_compat_tool_override — error handling

MOCKED FS

Function : [test_get_steam_compat_tool_override_handles_missing_or_corrupt_file](#)
 Covers : get_steam_compat_tool_override
 Purpose : get steam compat tool override handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : tmp_path

⇒ T-42c-09 find_any_ge_proton — happy path

WINE PREFIX

Function : [test_find_any_ge_proton_returns_target_when_present](#)
 Covers : find_any_ge_proton
 Purpose : find any ge proton returns the located target when it exists.
 Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-42c-10 find_any_ge_proton — error handling

WINE PREFIX

Function : [test_find_any_ge_proton_handles_missing_or_corrupt_file](#)
 Covers : find_any_ge_proton
 Purpose : find any ge proton handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : tmp_path, fake_prefix (conftest.py)

⇒ T-42c-11 select_proton_version — happy path

WINE PREFIX

Function : [test_select_proton_version_happy_path](#)
 Covers : select_proton_version
 Purpose : select proton version produces the expected output for a typical input.
 Fixtures : fake_prefix (conftest.py)

*OP-42c selector.py (cont.)***Tests to write (12) — cont.****⇒ T-42c-12 select_proton_version — error handling****WINE PREFIX****Function :** `test_select_proton_version_raises_proton_unavailable_error_on_failure`**Covers :** `select_proton_version`**Purpose :** select proton version raises ProtonUnavailableError when the input or upstream call fails.**Fixtures :** `fake_prefix (conftest.py)`**Mocking dependencies**

- `fake_prefix (conftest.py)`
- `monkeypatch (asyncio.create_subprocess_exec)`
- `tmp_path`

Linked fiches

- ← OP-36b uses `errors.py`
- OP-20e used by `helpers.py`

PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-42d

prefix_layout.py

Source : py_modules/unifideck/launcher/proton/infrastructure/prefix_layout.py | Lignes : 37 | Cible : 80%
Test file : tests/unit/launcher/proton/infrastructure/test_prefix_layout.py

Public surface

[func]	normalize_prefix_root	(pure)
[func]	resolve_registry_prefix	(pure)
[func]	resolve_drive_c	(pure)

Tests to write (6)

T-42d-01 normalize_prefix_root — happy path

MOCKED FS

Function : test_normalize_prefix_root_normalises_input
Covers : normalize_prefix_root
Purpose : normalize prefix root normalises the input as documented.
Fixtures : tmp_path

T-42d-02 normalize_prefix_root — error handling

MOCKED FS

Function : test_normalize_prefix_root_handles_missing_or_corrupt_file
Covers : normalize_prefix_root
Purpose : normalize prefix root handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

T-42d-03 resolve_registry_prefix — happy path

MOCKED FS

Function : test_resolve_registry_prefix_returns_target_when_present
Covers : resolve_registry_prefix
Purpose : resolve registry prefix returns the located target when it exists.
Fixtures : tmp_path

T-42d-04 resolve_registry_prefix — error handling

MOCKED FS

Function : test_resolve_registry_prefix_handles_missing_or_corrupt_file
Covers : resolve_registry_prefix
Purpose : resolve registry prefix handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

T-42d-05 resolve_drive_c — happy path

WINE PREFIX

Function : test_resolve_drive_c_returns_target_when_present
Covers : resolve_drive_c
Purpose : resolve drive c returns the located target when it exists.
Fixtures : tmp_path, fake_prefix (conftest.py)

OP-42d prefix_layout.py (cont.)

Tests to write (6) — cont.

⇒ T-42d-06

resolve_drive_c — error handling

Function : test_resolve_drive_c_handles_missing_or_corrupt_file

Covers : resolve_drive_c

Purpose : resolve drive c handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path, fake_prefix (conftest.py)

WINE PREFIX

Mocking dependencies

- fake_prefix (conftest.py)
- tmp_path

Linked fiches

→ OP-44b used by galaxy_stub.py

→ OP-45c used by registry_io.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-45a

resolver.py

Source : py_modules/unifideck/launcher/proton/language_setup/resolver.py | Lignes : 63 | Cible : 90%

Test file : tests/unit/launcher/proton/language_setup/test_resolver.py

Public surface

[func] get_unifideck_language (pure)

Tests to write (2)

⇒ T-45a-01 get_unifideck_language — happy path

PURE

Function : test_get_unifideck_language_returns_value_on_success
Covers : get_unifideck_language
Purpose : get unifideck language returns the expected payload on a normal response.
Fixtures : —

⇒ T-45a-02 get_unifideck_language — edge cases

PURE

Function : test_get_unifideck_language_edge_cases
Covers : get_unifideck_language
Purpose : get unifideck language stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-33b uses locale.py
- OP-45b used by matchers.py
- OP-45c used by registry_io.py
- OP-45d used by amazon.py
- OP-45e used by gog.py

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-45b

matchers.py

Source : py_modules/unifideck/launcher/proton/language_setup/matchers.py | Lignes : 28 | Cible : 90%

Test file : tests/unit/launcher/proton/language_setup/test_matchers.py

Public surface

[func]	smart_match_locale	(pure)
[func]	smart_match_gog_language	(pure)

Tests to write (4)

T-45b-01 smart_match_locale — happy path

PURE

Function : test_smart_match_locale_happy_path
Covers : smart_match_locale
Purpose : smart match locale performs the side-effect without raising.
Fixtures : —

T-45b-02 smart_match_locale — edge cases

PURE

Function : test_smart_match_locale_returns_none_on_missing_input
Covers : smart_match_locale
Purpose : smart match locale returns None on missing or invalid input rather than raising.
Fixtures : —

T-45b-03 smart_match_gog_language — happy path

PURE

Function : test_smart_match_gog_language_happy_path
Covers : smart_match_gog_language
Purpose : smart match gog language performs the side-effect without raising.
Fixtures : —

T-45b-04 smart_match_gog_language — edge cases

PURE

Function : test_smart_match_gog_language_returns_none_on_missing_input
Covers : smart_match_gog_language
Purpose : smart match gog language returns None on missing or invalid input rather than raising.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-45a uses resolver.py
- OP-45c used by registry_io.py
- OP-45e used by gog.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-45d

amazon.py

Source : py_modules/unifideck/launcher/proton/language_setup/amazon.py | Lignes : 18 | Cible : 90%

Test file : tests/unit/launcher/proton/language_setup/test_amazon.py

Public surface

[func] apply_amazon_language (pure)

Tests to write (2)

⇒ T-45d-01 apply_amazon_language — happy path

PURE

Function : test_apply_amazon_language_happy_path
Covers : apply_amazon_language
Purpose : apply amazon language produces the expected output for a typical input.
Fixtures : —

⇒ T-45d-02 apply_amazon_language — edge cases

PURE

Function : test_apply_amazon_language_edge_cases
Covers : apply_amazon_language
Purpose : apply amazon language stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-45a uses resolver.py
- ← OP-45c uses registry_io.py

PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-45e

gog.py

Source : py_modules/unifideck/launcher/proton/language_setup/gog.py | Lignes : 76 | Cible : 80%

Test file : tests/unit/launcher/proton/language_setup/test_gog.py

Public surface

[func] apply_gog_language (pure)

Tests to write (2)

⇒ T-45e-01 apply_gog_language — happy path

MOCKED FS

Function : test_apply_gog_language_happy_path
Covers : apply_gog_language
Purpose : apply gog language returns True for the documented happy-path input.
Fixtures : tmp_path

⇒ T-45e-02 apply_gog_language — error handling

MOCKED FS

Function : test_apply_gog_language_handles_missing_or_corrupt_file
Covers : apply_gog_language
Purpose : apply gog language handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-45a uses resolver.py
- ← OP-45b uses matchers.py
- ← OP-45c uses registry_io.py

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-45f

ubisoft.py

Source : py_modules/unifideck/launcher/proton/language_setup/ubisoft.py | Lignes : 105 | Cible : 90%

Test file : tests/unit/launcher/proton/language_setup/test_ubisoft.py

Public surface

[func] apply_ubisoft_language (pure)

Tests to write (2)

⇒ T-45f-01 apply_ubisoft_language — happy path

PURE

Function : test_apply_ubisoft_language_happy_path
Covers : apply_ubisoft_language
Purpose : apply ubisoft language produces the expected output for a typical input.
Fixtures : —

⇒ T-45f-02 apply_ubisoft_language — edge cases

PURE

Function : test_apply_ubisoft_language_edge_cases
Covers : apply_ubisoft_language
Purpose : apply ubisoft language stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-45a uses resolver.py
- ← OP-45c uses registry_io.py

PRIORITY LOW

TIER 1

PURE

1 TESTS

OP-36a

exit_codes.py

Source : py_modules/unifideck/launcher/types/exit_codes.py | Lignes : 31 | Cible : 80%

Test file : tests/unit/launcher/types/test_exit_codes.py

Public surface

[class] ExitCode (user_message_key)

Tests to write (1)

⇒ T-36a-01 ExitCode.user_message_key — happy path

PURE

Function : test_exitcode_user_message_key_happy_path
Covers : ExitCode.user_message_key
Purpose : user message key produces the expected output for a typical input.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- OP-35c used by dispatcher.py
- OP-36b used by errors.py

PRIORITY LOW

TIER 1

PURE

4 TESTS

OP-36b

errors.py

Source : py_modules/unifideck/launcher/types/errors.py | Lignes : 60 | Cible : 80%

Test file : tests/unit/launcher/types/test_errors.py

Public surface

[class]	LauncherError	(__init__, with_context, to_log_dict)
[class]	LaunchAbortedError	()
[class]	DependencyMissingError	()
[class]	GameNotFoundError	()
[class]	PrefixCorruptedError	()
[class]	ProtonUnavailableError	()
[class]	UmuRuntimeError	()
[class]	GameFailedError	(__init__)

Tests to write (4)

T-36b-01 LauncherError.__init__ — construction

PURE

Function : test_launchererror_init_constructs_with_valid_args
Covers : LauncherError.__init__
Purpose : LauncherError can be instantiated with the documented arguments.
Fixtures : —

T-36b-02 LauncherError.with_context — happy path

PURE

Function : test_launchererror_with_context_happy_path
Covers : LauncherError.with_context
Purpose : with context produces the expected output for a typical input.
Fixtures : —

T-36b-03 LauncherError.to_log_dict — happy path

PURE

Function : test_launchererror_to_log_dict_returns_converted_value
Covers : LauncherError.to_log_dict
Purpose : to log dict produces the converted value for a typical input.
Fixtures : —

T-36b-04 GameFailedError.__init__ — construction

PURE

Function : test_gamefailederror_init_constructs_with_valid_args
Covers : GameFailedError.__init__
Purpose : GameFailedError can be instantiated with the documented arguments.
Fixtures : —

OP-36b errors.py (cont.)

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-36a uses exit_codes.py
- OP-20a used by service.py
- OP-20c used by error_toasts.py
- OP-20d used by orchestrator.py
- OP-20e used by helpers.py

PRIORITY LOW

TIER 1

PURE

6 TESTS

OP-36c

context.py

Source : py_modules/unifideck/launcher/types/context.py | Lignes : 86 | Cible : 80%

Test file : tests/unit/launcher/types/test_context.py

Public surface

[class]	LaunchContext	(is_xcloud, is_windows_game, is_native_linux, ...)
[class]	RuntimeState	(to_log_dict)

Tests to write (6)

⇒ T-36c-01	LaunchContext.is_xcloud — happy path	PURE
Function :	test_launchcontext_is_xcloud_returns_true_on_valid_input	
Covers :	LaunchContext.is_xcloud	
Purpose :	is xcloud returns True for a valid input.	
Fixtures :	—	

⇒ T-36c-02	LaunchContext.is_windows_game — happy path	PURE
Function :	test_launchcontext_is_windows_game_returns_true_on_valid_input	
Covers :	LaunchContext.is_windows_game	
Purpose :	is windows game returns True for a valid input.	
Fixtures :	—	

⇒ T-36c-03	LaunchContext.is_native_linux — happy path	PURE
Function :	test_launchcontext_is_native_linux_returns_true_on_valid_input	
Covers :	LaunchContext.is_native_linux	
Purpose :	is native linux returns True for a valid input.	
Fixtures :	—	

⇒ T-36c-04	LaunchContext.game_key — happy path	PURE
Function :	test_launchcontext_game_key_happy_path	
Covers :	LaunchContext.game_key	
Purpose :	game key produces the expected output for a typical input.	
Fixtures :	—	

⇒ T-36c-05	LaunchContext.to_log_dict — happy path	PURE
Function :	test_launchcontext_to_log_dict_returns_converted_value	
Covers :	LaunchContext.to_log_dict	
Purpose :	to log dict produces the converted value for a typical input.	
Fixtures :	—	

OP-36c context.py (cont.)

Tests to write (6) — cont.

⇒ T-36c-06

RuntimeState.to_log_dict — happy path

PURE

Function :

Covers :

Purpose :

Fixtures :

test_runtimestate_to_log_dict_returns_converted_value

RuntimeState.to_log_dict

to log dict produces the converted value for a typical input.

—

Mocking dependencies

Linked fiches

• (none — pure tests)

→ OP-20a used by service.py

→ OP-20b used by circuit_breaker.py

→ OP-20c used by error_toasts.py

→ OP-20d used by orchestrator.py

● PRIORITY LOW

TIER 2

MOCKED

4 TESTS

OP-36d

options.py

Source : `py_modules/unifideck/launcher/types/options.py` | Lignes : 114 | Cible : 70%

Test file : `tests/unit/launcher/types/test_options.py`

Public surface

[class]	ParsedOptions	()
[func]	parse_launch_options	(pure)
[func]	apply_lsfg_env	(pure)

Tests to write (4)

⇒ T-36d-01 parse_launch_options — happy path

MOCKED FS

Function : `test_parse_launch_options_parses_well_formed_input`

Covers : parse_launch_options

Purpose : parse launch options parses a well-formed input into the expected value.

Fixtures : tmp_path

⇒ T-36d-02 parse_launch_options — error handling

MOCKED FS

Function : `test_parse_launch_options_handles_missing_or_corrupt_file`

Covers : parse_launch_options

Purpose : parse launch options handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-36d-03 apply_lsfg_env — happy path

MOCKED FS

Function : `test_apply_lsfg_env_happy_path`

Covers : apply_lsfg_env

Purpose : apply lsfg env returns the expected dict shape.

Fixtures : tmp_path

⇒ T-36d-04 apply_lsfg_env — error handling

MOCKED FS

Function : `test_apply_lsfg_env_handles_missing_or_corrupt_file`

Covers : apply_lsfg_env

Purpose : apply lsfg env handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

- OP-20d used by orchestrator.py
- OP-20e used by helpers.py

PRIORITY MEDIUM

TIER 1

PURE

17 TESTS

OP-31a

metacritic.py

Source : py_modules/unifideck/metadata/metacritic.py | Lignes : 201 | Cible : 90%

Test file : tests/unit/metadata/test_metacritic.py

Public surface

[class]	MetacriticScore	(to_dict)
[func]	slugify_game_name	(pure)
[func]	clean_title	(pure)
[func]	strip_suffixes	(pure)
[func]	to_roman	(pure)
[func]	to_arabic	(pure)
[func]	get_numeral_variants	(pure)
[func]	sanitize_description	(pure)
[async]	fetch_score	(async + I/O)

Tests to write (17)

⇒ T-31a-01 slugify_game_name — happy path

PURE

Function : test_slugify_game_name_normalises_input
Covers : slugify_game_name
Purpose : slugify game name normalises the input as documented.
Fixtures : —

⇒ T-31a-02 slugify_game_name — edge cases

PURE

Function : test_slugify_game_name_edge_cases
Covers : slugify_game_name
Purpose : slugify game name handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

⇒ T-31a-03 clean_title — happy path

PURE

Function : test_clean_title_normalises_input
Covers : clean_title
Purpose : clean title normalises the input as documented.
Fixtures : —

⇒ T-31a-04 clean_title — edge cases

PURE

Function : test_clean_title_edge_cases
Covers : clean_title
Purpose : clean title handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

OP-31a metacritic.py (cont.)

Tests to write (17) — cont.

⇒ T-31a-05 strip_suffixes — happy path

PURE

Function : [test_strip_suffixes_normalises_input](#)
Covers : strip_suffixes
Purpose : strip suffixes normalises the input as documented.
Fixtures : —

⇒ T-31a-06 strip_suffixes — edge cases

PURE

Function : [test_strip_suffixes_edge_cases](#)
Covers : strip_suffixes
Purpose : strip suffixes handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

⇒ T-31a-07 to_roman — happy path

PURE

Function : [test_to_roman_returns_converted_value](#)
Covers : to_roman
Purpose : to_roman produces the converted value for a typical input.
Fixtures : —

⇒ T-31a-08 to_roman — edge cases

PURE

Function : [test_to_roman_edge_cases](#)
Covers : to_roman
Purpose : to_roman handles boundary inputs (empty, out-of-range) with a documented behaviour.
Fixtures : —

⇒ T-31a-09 to_arabic — happy path

PURE

Function : [test_to_arabic_returns_converted_value](#)
Covers : to_arabic
Purpose : to_arabic produces the converted value for a typical input.
Fixtures : —

⇒ T-31a-10 to_arabic — edge cases

PURE

Function : [test_to_arabic_edge_cases](#)
Covers : to_arabic
Purpose : to_arabic handles boundary inputs (empty, out-of-range) with a documented behaviour.
Fixtures : —

⇒ T-31a-11 get_numeral_variants — happy path

PURE

Function : [test_get_numeral_variants_returns_value_on_success](#)
Covers : get_numeral_variants
Purpose : get numeral variants returns the expected payload on a normal response.
Fixtures : —

OP-31a metacritic.py (cont.)

Tests to write (17) — cont.

⇒ T-31a-12 **get_numeral_variants — edge cases**

PURE

Function : [test_get_numeral_variants_edge_cases](#)
 Covers : `get_numeral_variants`
 Purpose : `get_numeral_variants` stays correct on empty / boundary inputs.
 Fixtures : —

⇒ T-31a-13 **sanitize_description — happy path**

PURE

Function : [test_sanitize_description_normalises_input](#)
 Covers : `sanitize_description`
 Purpose : `sanitize_description` normalises the input as documented.
 Fixtures : —

⇒ T-31a-14 **sanitize_description — edge cases**

PURE

Function : [test_sanitize_description_edge_cases](#)
 Covers : `sanitize_description`
 Purpose : `sanitize_description` handles unicode, accents and whitespace edge cases without crashing.
 Fixtures : —

⇒ T-31a-15 **fetch_score — happy path**

MOCKED HTTP

Function : [test_fetch_score_returns_value_on_success](#)
 Covers : `fetch_score`
 Purpose : `fetch_score` returns the expected payload on a normal response.
 Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-31a-16 **fetch_score — error handling**

MOCKED HTTP

Function : [test_fetch_score_raises_on_network_failure](#)
 Covers : `fetch_score`
 Purpose : `fetch_score` surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.
 Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-31a-17 **MetacriticScore.to_dict — happy path**

PURE

Function : [test_metacritic_score_to_dict_returns_converted_value](#)
 Covers : `MetacriticScore.to_dict`
 Purpose : `to_dict` produces the converted value for a typical input.
 Fixtures : —

Mocking dependencies

- `aioreponses`
- `pytest-asyncio`

Linked files

- ← OP-11 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- OP-12a used by `metadata_service.py`

PRIORITY MEDIUM

TIER 1

PURE

15 TESTS

OP-31b

unifidb.py

Source : py_modules/unifideck/metadata/unifidb.py | Lignes : 173 | Cible : 90%
Test file : tests/unit/metadata/test_unifidb.py

Public surface

[class]	UnifiDBResult	(to_dict)
[func]	normalize_title_for_matching	(pure)
[func]	get_first_char_for_bucket	(pure)
[func]	score_title_match	(pure)
[func]	extract_store_id	(pure)
[func]	get_best_match	(pure)
[func]	game_to_cache_format	(pure)
[async]	lookup	(async + I/O)

Tests to write (15)

⇒ T-31b-01 normalize_title_for_matching — happy path

PURE

Function : test_normalize_title_for_matching_normalises_input
Covers : normalize_title_for_matching
Purpose : normalize title for matching normalises the input as documented.
Fixtures : —

⇒ T-31b-02 normalize_title_for_matching — edge cases

PURE

Function : test_normalize_title_for_matching_edge_cases
Covers : normalize_title_for_matching
Purpose : normalize title for matching handles unicode, accents and whitespace edge cases without crashing.
Fixtures : —

⇒ T-31b-03 get_first_char_for_bucket — happy path

PURE

Function : test_get_first_char_for_bucket_returns_value_on_success
Covers : get_first_char_for_bucket
Purpose : get first char for bucket returns the expected payload on a normal response.
Fixtures : —

⇒ T-31b-04 get_first_char_for_bucket — edge cases

PURE

Function : test_get_first_char_for_bucket_edge_cases
Covers : get_first_char_for_bucket
Purpose : get first char for bucket stays correct on empty / boundary inputs.
Fixtures : —

OP-31b unifiadb.py (cont.)

Tests to write (15) — cont.

⇒ T-31b-05 score_title_match — happy path

PURE

Function : test_score_title_match_happy_path

Covers : score_title_match

Purpose : score title match produces the expected output for a typical input.

Fixtures : —

⇒ T-31b-06 score_title_match — edge cases

PURE

Function : test_score_title_match_edge_cases

Covers : score_title_match

Purpose : score title match stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-31b-07 extract_store_id — happy path

PURE

Function : test_extract_store_id_happy_path

Covers : extract_store_id

Purpose : extract store id persists the input correctly to disk.

Fixtures : —

⇒ T-31b-08 extract_store_id — edge cases

PURE

Function : test_extract_store_id_returns_none_on_missing_input

Covers : extract_store_id

Purpose : extract store id returns None on missing or invalid input rather than raising.

Fixtures : —

⇒ T-31b-09 get_best_match — happy path

PURE

Function : test_get_best_match_returns_value_on_success

Covers : get_best_match

Purpose : get best match returns the expected payload on a normal response.

Fixtures : —

⇒ T-31b-10 get_best_match — edge cases

PURE

Function : test_get_best_match_returns_none_on_missing_input

Covers : get_best_match

Purpose : get best match returns None on missing or invalid input rather than raising.

Fixtures : —

⇒ T-31b-11 game_to_cache_format — happy path

PURE

Function : test_game_to_cache_format_happy_path

Covers : game_to_cache_format

Purpose : game to cache format produces the converted value for a typical input.

Fixtures : —

OP-31b unifidb.py (cont.)

Tests to write (15) — cont.

⇒ T-31b-12 game_to_cache_format — edge cases

PURE

Function : [test_game_to_cache_format_returns_empty_dict_on_empty_input](#)

Covers : game_to_cache_format

Purpose : game to cache format returns an empty dict on empty input.

Fixtures : —

⇒ T-31b-13 lookup — happy path

MOCKED HTTP

Function : [test_lookup_happy_path](#)

Covers : lookup

Purpose : lookup returns the located target when it exists.

Fixtures : pytest-asyncio, aioresponses

⇒ T-31b-14 lookup — error handling

MOCKED HTTP

Function : [test_lookup_raises_on_network_failure](#)

Covers : lookup

Purpose : lookup surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

⇒ T-31b-15 UnifiDBResult.to_dict — happy path

PURE

Function : [test_unifidbresult_to_dict_returns_converted_value](#)

Covers : UnifiDBResult.to_dict

Purpose : to dict produces the converted value for a typical input.

Fixtures : —

Mocking dependencies

- aioresponses
- pytest-asyncio

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- OP-04d2 used by `cross_store_dedup.py`
- OP-12a used by `metadata_service.py`
- OP-32d used by `owned_games.py`

● **PRIORITY HIGH**

TIER 1

PURE

2 TESTS

OP-24b

wrapper.py

Source : py_modules/unifideck/rpc/wrapper.py | Lignes : 73 | Cible : 95%

Test file : tests/unit/rpc/test_wrapper.py

Public surface

[func] rpc_wrapper (pure)

Tests to write (2)

⇒ T-24b-01 rpc_wrapper — happy path

PURE

Function : test_rpc_wrapper_happy_path
Covers : rpc_wrapper
Purpose : rpc wrapper returns the expected dict shape.
Fixtures : —

⇒ T-24b-02 rpc_wrapper — edge cases

PURE

Function : test_rpc_wrapper_returns_empty_dict_on_empty_input
Covers : rpc_wrapper
Purpose : rpc wrapper returns an empty dict on empty input.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-24a uses errors.py
- OP-24c used by auto_wire.py
- OP-25a used by base.py
- OP-25b used by action.py
- OP-25d used by launch.py

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-24c

auto_wire.py

Source : py_modules/unifideck/rpc/auto_wire.py | Lignes : 17 | Cible : 95%

Test file : tests/unit/rpc/test_auto_wire.py

Public surface

[func] auto_wrap_rpc_methods (pure)

Tests to write (2)

⇒ T-24c-01 auto_wrap_rpc_methods — happy path

PURE

Function : test_auto_wrap_rpc_methods_happy_path
Covers : auto_wrap_rpc_methods
Purpose : auto wrap rpc methods produces the expected output for a typical input.
Fixtures : —

⇒ T-24c-02 auto_wrap_rpc_methods — edge cases

PURE

Function : test_auto_wrap_rpc_methods_edge_cases
Covers : auto_wrap_rpc_methods
Purpose : auto wrap rpc methods stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

← OP-24b uses wrapper.py

PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-24d

composer.py

Source : py_modules/unifideck/rpc/composer.py | Lignes : 25 | Cible : 95%

Test file : tests/unit/rpc/test_composer.py

Public surface

[func] bind_handlers (pure)

Tests to write (2)

⇒ T-24d-01 bind_handlers — happy path

PURE

Function : test_bind_handlers_happy_path
Covers : bind_handlers
Purpose : bind handlers produces the expected output for a typical input.
Fixtures : —

⇒ T-24d-02 bind_handlers — edge cases

PURE

Function : test_bind_handlers_edge_cases
Covers : bind_handlers
Purpose : bind handlers stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

← OP-25a uses base.py

PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-25a

base.py

Source : py_modules/unifideck/rpc/handlers/base.py | Lignes : 43 | Cible : 95%

Test file : tests/unit/rpc/handlers/test_base.py

Public surface

[class] RpcHandlerBase (__init__, handler_methods)

Tests to write (2)

⇒ T-25a-01 RpcHandlerBase.__init__ — construction

PURE

Function : test_rpchandlerbase_init_constructs_with_valid_args
Covers : RpcHandlerBase.__init__
Purpose : RpcHandlerBase stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-25a-02 RpcHandlerBase.handler_methods — happy path

PURE

Function : test_rpchandlerbase_handler_methods_happy_path
Covers : RpcHandlerBase.handler_methods
Purpose : handler methods produces the expected output for a typical input.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-04d uses sync_service.py
- ← OP-09a uses event_bus.py
- ← OP-11a uses config_manager.py
- OP-24d used by composer.py
- OP-25 used by __init__.py
- OP-25b used by action.py
- OP-25c used by download.py

● PRIORITY HIGH

TIER 3

INTEGRATION

2 TESTS

OP-25b

action.py

Source : `py_modules/unifideck/rpc/handlers/action_handlers.py` | Lignes : 86 | Cible : 65%

Test file : `tests/unit/rpc/handlers/test_action.py`

Public surface

`[class]` ActionHandlers *(dispatch_unifideck_action)*

Tests to write (2)

⇒ T-25b-01 ActionHandlers.dispatch_unifideck_action — happy path ASYNC

Function : `test_actionhandlers_dispatch_unifideck_action_happy_path`

Covers : ActionHandlers.dispatch_unifideck_action

Purpose : dispatch unifideck action delivers the message exactly once on the happy path.

Fixtures : pytest-asyncio

⇒ T-25b-02 ActionHandlers.dispatch_unifideck_action — error handling ASYNC

Function : `test_actionhandlers_dispatch_unifideck_action_raises_rpc_error_on_failure`

Covers : ActionHandlers.dispatch_unifideck_action

Purpose : dispatch unifideck action raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-24b uses `wrapper.py`
- ← OP-25a uses `base.py`
- ← OP-27a uses `unifideck_uri.py`
- OP-25 used by `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

6 TESTS

OP-25c

download.py

Source : `py_modules/unifideck/rpc/handlers/download_handlers.py` | Lignes : 18 | Cible : 65%

Test file : `tests/unit/rpc/handlers/test_download.py`

Public surface

`[class]` DownloadHandlers

(cancel_download, get_download_queue, get_s...)

Tests to write (6)

⇒ T-25c-01 DownloadHandlers.cancel_download — happy path

ASYNC

Function : `test_downloadhandlers_cancel_download_happy_path`

Covers : `DownloadHandlers.cancel_download`

Purpose : cancel download resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-25c-02 DownloadHandlers.cancel_download — error handling

ASYNC

Function : `test_downloadhandlers_cancel_download_handles_error`

Covers : `DownloadHandlers.cancel_download`

Purpose : cancel download surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-25c-03 DownloadHandlers.get_download_queue — happy path

ASYNC

Function : `test_downloadhandlers_get_download_queue_returns_value_on_success`

Covers : `DownloadHandlers.get_download_queue`

Purpose : get download queue returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`

⇒ T-25c-04 DownloadHandlers.get_download_queue — error handling

ASYNC

Function : `test_downloadhandlers_get_download_queue_handles_error`

Covers : `DownloadHandlers.get_download_queue`

Purpose : get download queue surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-25c-05 DownloadHandlers.get_storage_locations — happy path

ASYNC

Function : `test_downloadhandlers_get_storage_locations_returns_value_on_success`

Covers : `DownloadHandlers.get_storage_locations`

Purpose : get storage locations returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`

*OP-25c download.py (cont.)***Tests to write (6) — cont.****⇒ T-25c-06 DownloadHandlers.get_storage_locations — error handling****ASYNC****Function :** `test_downloadhandlers_get_storage_locations_handles_error`**Covers :** `DownloadHandlers.get_storage_locations`**Purpose :** get storage locations surfaces failures cleanly (typed result, no swallowed exception).**Fixtures :** `pytest-asyncio`**Mocking dependencies**

- `pytest-asyncio`

Linked fiches← OP-25a uses `base.py`→ OP-25 used by `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

16 TESTS

OP-25d

launch.py

Source : py_modules/unifideck/rpc/handlers/launch_handlers.py | Lignes : 84 | Cible : 65%

Test file : tests/unit/rpc/handlers/test_launch.py

Public surface

[class]

LaunchHandlers

(get_launch_failures, clear_launch_failures, arm...)

Tests to write (16)

⇒ T-25d-01

LaunchHandlers.get_launch_failures — happy path

MOCKED FS

Function : test_launchhandlers_get_launch_failures_returns_value_on_success

Covers : LaunchHandlers.get_launch_failures

Purpose : get launch failures returns the expected payload on a normal response.

Fixtures : pytest-asyncio, tmp_path

⇒ T-25d-02

LaunchHandlers.get_launch_failures — error handling

MOCKED FS

Function : test_launchhandlers_get_launch_failures_handles_missing_or_corrupt_file

Covers : LaunchHandlers.get_launch_failures

Purpose : get launch failures handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-25d-03

LaunchHandlers.clear_launch_failures — happy path

ASYNC

Function : test_launchhandlers_clear_launch_failures_removes_target_and_reports_success

Covers : LaunchHandlers.clear_launch_failures

Purpose : clear launch failures removes the target and reports success.

Fixtures : pytest-asyncio

⇒ T-25d-04

LaunchHandlers.clear_launch_failures — error handling

ASYNC

Function : test_launchhandlers_clear_launch_failures_handles_error

Covers : LaunchHandlers.clear_launch_failures

Purpose : clear launch failures surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25d-05

LaunchHandlers.arm_circuit_bypass — happy path

ASYNC

Function : test_launchhandlers_arm_circuit_bypass_happy_path

Covers : LaunchHandlers.arm_circuit_bypass

Purpose : arm circuit bypass returns the expected dict shape.

Fixtures : pytest-asyncio

OP-25d launch.py (cont.)

Tests to write (16) — cont.

⇒ T-25d-06 LaunchHandlers.arm_circuit_bypass — error handling

ASYNC

Function : [test_launchhandlers_arm_circuit_bypass_handles_error](#)
Covers : LaunchHandlers.arm_circuit_bypass
Purpose : arm circuit bypass surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-25d-07 LaunchHandlers.get_launch_logs — happy path

ASYNC

Function : [test_launchhandlers_get_launch_logs_returns_value_on_success](#)
Covers : LaunchHandlers.get_launch_logs
Purpose : get launch logs returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-25d-08 LaunchHandlers.get_launch_logs — error handling

ASYNC

Function : [test_launchhandlers_get_launch_logs_handles_error](#)
Covers : LaunchHandlers.get_launch_logs
Purpose : get launch logs surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-25d-09 LaunchHandlers.export_launch_logs — happy path

ASYNC

Function : [test_launchhandlers_export_launch_logs_happy_path](#)
Covers : LaunchHandlers.export_launch_logs
Purpose : export launch logs spawns the target action and returns its handle.
Fixtures : pytest-asyncio

⇒ T-25d-10 LaunchHandlers.export_launch_logs — error handling

ASYNC

Function : [test_launchhandlers_export_launch_logs_handles_error](#)
Covers : LaunchHandlers.export_launch_logs
Purpose : export launch logs surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-25d-11 LaunchHandlers.list_save_folder — happy path

ASYNC

Function : [test_launchhandlers_list_save_folder_happy_path](#)
Covers : LaunchHandlers.list_save_folder
Purpose : list save folder persists the input correctly to disk.
Fixtures : pytest-asyncio

⇒ T-25d-12 LaunchHandlers.list_save_folder — error handling

ASYNC

Function : [test_launchhandlers_list_save_folder_raises_rpc_error_on_failure](#)
Covers : LaunchHandlers.list_save_folder
Purpose : list save folder raises RpcError when the input or upstream call fails.
Fixtures : pytest-asyncio

OP-25d *launch.py* (cont.)

Tests to write (16) — cont.

⇒ **T-25d-13** **LaunchHandlers.get_playtime — happy path**

ASYNC

Function : [test_launchhandlers_get_playtime_returns_value_on_success](#)Covers : `LaunchHandlers.get_playtime`

Purpose : get playtime returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-25d-14** **LaunchHandlers.get_playtime — error handling**

ASYNC

Function : [test_launchhandlers_get_playtime_handles_error](#)Covers : `LaunchHandlers.get_playtime`

Purpose : get playtime surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-25d-15** **LaunchHandlers.get_all_playtimes — happy path**

ASYNC

Function : [test_launchhandlers_get_all_playtimes_returns_value_on_success](#)Covers : `LaunchHandlers.get_all_playtimes`

Purpose : get all playtimes returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-25d-16** **LaunchHandlers.get_all_playtimes — error handling**

ASYNC

Function : [test_launchhandlers_get_all_playtimes_handles_error](#)Covers : `LaunchHandlers.get_all_playtimes`

Purpose : get all playtimes surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-24b uses `wrapper.py`
- ← OP-25a uses `base.py`
- ← OP-40c uses `save_folder_inspector.py`
- ← OP-40d uses `log_archive.py`
- OP-25 used by `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

15 TESTS

OP-25e

observability.py

Source : `py_modules/unifideck/rpc/handlers/observability_handlers.py` | Lignes : 137 | Cible : 65%

Test file : `tests/unit/rpc/handlers/test_observability.py`

Public surface

`[class]` `ObservabilityHandlers` *(`set_bus_collaborators`, `get_plugin_metrics`, `get...`)*

Tests to write (15)

⇒ **T-25e-01** **ObservabilityHandlers.set_bus_collaborators — happy path**

PURE

Function : `test_observabilityhandlers_set_bus_collaborators_happy_path`

Covers : `ObservabilityHandlers.set_bus_collaborators`

Purpose : `set bus collaborators produces the expected output for a typical input.`

Fixtures : `—`

⇒ **T-25e-02** **ObservabilityHandlers.get_plugin_metrics — happy path**

ASYNC

Function : `test_observabilityhandlers_get_plugin_metrics_returns_value_on_success`

Covers : `ObservabilityHandlers.get_plugin_metrics`

Purpose : `get plugin metrics returns the expected payload on a normal response.`

Fixtures : `pytest-asyncio`

⇒ **T-25e-03** **ObservabilityHandlers.get_plugin_metrics — error handling**

ASYNC

Function : `test_observabilityhandlers_get_plugin_metrics_handles_error`

Covers : `ObservabilityHandlers.get_plugin_metrics`

Purpose : `get plugin metrics surfaces failures cleanly (typed result, no swallowed exception).`

Fixtures : `pytest-asyncio`

⇒ **T-25e-04** **ObservabilityHandlers.get_bus_health — happy path**

ASYNC

Function : `test_observabilityhandlers_get_bus_health_returns_value_on_success`

Covers : `ObservabilityHandlers.get_bus_health`

Purpose : `get bus health returns the expected payload on a normal response.`

Fixtures : `pytest-asyncio`

⇒ **T-25e-05** **ObservabilityHandlers.get_bus_health — error handling**

ASYNC

Function : `test_observabilityhandlers_get_bus_health_handles_error`

Covers : `ObservabilityHandlers.get_bus_health`

Purpose : `get bus health surfaces failures cleanly (typed result, no swallowed exception).`

Fixtures : `pytest-asyncio`

OP-25e observability.py (cont.)

Tests to write (15) — cont.

⇒ T-25e-06 ObservabilityHandlers.subscribe_replay — happy path

ASYNC

Function : [test_observabilityhandlers_subscribe_replay_happy_path](#)
Covers : ObservabilityHandlers.subscribe_replay
Purpose : subscribe replay returns the expected list of items.
Fixtures : pytest-asyncio

⇒ T-25e-07 ObservabilityHandlers.subscribe_replay — error handling

ASYNC

Function : [test_observabilityhandlers_subscribe_replay_handles_error](#)
Covers : ObservabilityHandlers.subscribe_replay
Purpose : subscribe replay surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-25e-08 ObservabilityHandlers.release_quarantine — happy path

ASYNC

Function : [test_observabilityhandlers_release_quarantine_happy_path](#)
Covers : ObservabilityHandlers.release_quarantine
Purpose : release quarantine returns the expected dict shape.
Fixtures : pytest-asyncio

⇒ T-25e-09 ObservabilityHandlers.release_quarantine — error handling

ASYNC

Function : [test_observabilityhandlers_release_quarantine_handles_error](#)
Covers : ObservabilityHandlers.release_quarantine
Purpose : release quarantine surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-25e-10 ObservabilityHandlers.get_feature_flags — happy path

ASYNC

Function : [test_observabilityhandlers_get_feature_flags_returns_value_on_success](#)
Covers : ObservabilityHandlers.get_feature_flags
Purpose : get feature flags returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-25e-11 ObservabilityHandlers.get_feature_flags — error handling

ASYNC

Function : [test_observabilityhandlers_get_feature_flags_raises_rpc_error_on_failure](#)
Covers : ObservabilityHandlers.get_feature_flags
Purpose : get feature flags raises RpcError when the input or upstream call fails.
Fixtures : pytest-asyncio

⇒ T-25e-12 ObservabilityHandlers.get_probe_history — happy path

ASYNC

Function : [test_observabilityhandlers_get_probe_history_returns_value_on_success](#)
Covers : ObservabilityHandlers.get_probe_history
Purpose : get probe history returns the expected payload on a normal response.
Fixtures : pytest-asyncio

OP-25e observability.py (cont.)

Tests to write (15) — cont.

⇒ **T-25e-13** **ObservabilityHandlers.get_probe_history — error handling** **ASYNC**Function : [test_observabilityhandlers_get_probe_history_raises_rpc_error_on_failure](#)Covers : `ObservabilityHandlers.get_probe_history`Purpose : get probe history raises `RpcError` when the input or upstream call fails.Fixtures : `pytest-asyncio`⇒ **T-25e-14** **ObservabilityHandlers.report_runtime_probes — happy path** **ASYNC**Function : [test_observabilityhandlers_report_runtime_probes_happy_path](#)Covers : `ObservabilityHandlers.report_runtime_probes`

Purpose : report runtime probes spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`⇒ **T-25e-15** **ObservabilityHandlers.report_runtime_probes — error handling** **ASYNC**Function : [test_observabilityhandlers_report_runtime_probes_handles_error](#)Covers : `ObservabilityHandlers.report_runtime_probes`

Purpose : report runtime probes surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09c uses `priority_dispatcher.py`
- ← OP-10a uses `watchdog_handler.py`
- ← OP-24b uses `wrapper.py`
- OP-25 used by `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

10 TESTS

OP-25f

security.py

Source : py_modules/unifideck/rpc/handlers/security_handlers.py | Lignes : 29 | Cible : 65%

Test file : tests/unit/rpc/handlers/test_security.py

Public surface

[class]

SecurityHandlers

(get_security_audit_log, get_security_counters, ...)

Tests to write (10)

⇒ T-25f-01

SecurityHandlers.get_security_audit_log — happy path

ASYNC

Function : test_securityhandlers_get_security_audit_log_returns_value_on_success

Covers : SecurityHandlers.get_security_audit_log

Purpose : get security audit log returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25f-02

SecurityHandlers.get_security_audit_log — error handling

ASYNC

Function : test_securityhandlers_get_security_audit_log_handles_error

Covers : SecurityHandlers.get_security_audit_log

Purpose : get security audit log surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25f-03

SecurityHandlers.get_security_counters — happy path

ASYNC

Function : test_securityhandlers_get_security_counters_returns_value_on_success

Covers : SecurityHandlers.get_security_counters

Purpose : get security counters returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25f-04

SecurityHandlers.get_security_counters — error handling

ASYNC

Function : test_securityhandlers_get_security_counters_handles_error

Covers : SecurityHandlers.get_security_counters

Purpose : get security counters surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25f-05

SecurityHandlers.get_security_bruteforce_status — happy path

ASYNC

Function : test_securityhandlers_get_security_bruteforce_status_returns_value_on_success

Covers : SecurityHandlers.get_security_bruteforce_status

Purpose : get security bruteforce status returns the expected payload on a normal response.

Fixtures : pytest-asyncio

OP-25f security.py (cont.)

Tests to write (10) — cont.

⇒ **T-25f-06** **SecurityHandlers.get_security_bruteforce_status — error handling** **ASYNC**Function : [test_securityhandlers_get_security_bruteforce_status_handles_error](#)

Covers : SecurityHandlers.get_security_bruteforce_status

Purpose : get security bruteforce status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-25f-07** **SecurityHandlers.clear_security_audit_log — happy path** **ASYNC**Function : [test_securityhandlers_clear_security_audit_log_removes_target_and_reports_success](#)

Covers : SecurityHandlers.clear_security_audit_log

Purpose : clear security audit log removes the target and reports success.

Fixtures : pytest-asyncio

⇒ **T-25f-08** **SecurityHandlers.clear_security_audit_log — error handling** **ASYNC**Function : [test_securityhandlers_clear_security_audit_log_handles_error](#)

Covers : SecurityHandlers.clear_security_audit_log

Purpose : clear security audit log surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-25f-09** **SecurityHandlers.reset_security_bruteforce — happy path** **ASYNC**Function : [test_securityhandlers_reset_security_bruteforce_happy_path](#)

Covers : SecurityHandlers.reset_security_bruteforce

Purpose : reset security bruteforce returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ **T-25f-10** **SecurityHandlers.reset_security_bruteforce — error handling** **ASYNC**Function : [test_securityhandlers_reset_security_bruteforce_handles_error](#)

Covers : SecurityHandlers.reset_security_bruteforce

Purpose : reset security bruteforce surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked files

← OP-25a uses base.py

→ OP-25 used by __init__.py

● PRIORITY HIGH

TIER 3

INTEGRATION

28 TESTS

OP-25g

store.py

Source : py_modules/unifideck/rpc/handlers/store_handlers.py | Lignes : 63 | Cible : 65%

Test file : tests/unit/rpc/handlers/test_store.py

Public surface

[class]

StoreHandlers

(store_auth, check_store_status, get_store_info...)

Tests to write (28)

⇒ T-25g-01

StoreHandlers.store_auth — happy path

ASYNC

Function : test_storehandlers_store_auth_persists_value_to_disk

Covers : StoreHandlers.store_auth

Purpose : store auth persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-25g-02

StoreHandlers.store_auth — error handling

ASYNC

Function : test_storehandlers_store_auth_handles_error

Covers : StoreHandlers.store_auth

Purpose : store auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-03

StoreHandlers.check_store_status — happy path

ASYNC

Function : test_storehandlers_check_store_status_returns_true_on_valid_input

Covers : StoreHandlers.check_store_status

Purpose : check store status persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-25g-04

StoreHandlers.check_store_status — error handling

ASYNC

Function : test_storehandlers_check_store_status_handles_error

Covers : StoreHandlers.check_store_status

Purpose : check store status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-05

StoreHandlers.get_store_infos — happy path

ASYNC

Function : test_storehandlers_get_store_infos_returns_value_on_success

Covers : StoreHandlers.get_store_infos

Purpose : get store infos returns the expected payload on a normal response.

Fixtures : pytest-asyncio

OP-25g store.py (cont.)

Tests to write (28) — cont.

⇒ T-25g-06 StoreHandlers.get_store_infos — error handling

ASYNC

Function : [test_storehandlers_get_store_infos_handles_error](#)

Covers : StoreHandlers.get_store_infos

Purpose : get store infos surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-07 StoreHandlers.clear_store_auths — happy path

ASYNC

Function : [test_storehandlers_clear_store_auths_removes_target_and_reports_success](#)

Covers : StoreHandlers.clear_store_auths

Purpose : clear store auths persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-25g-08 StoreHandlers.clear_store_auths — error handling

ASYNC

Function : [test_storehandlers_clear_store_auths_handles_error](#)

Covers : StoreHandlers.clear_store_auths

Purpose : clear store auths surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-09 StoreHandlers.sync_libraries — happy path

ASYNC

Function : [test_storehandlers_sync_libraries_happy_path](#)

Covers : StoreHandlers.sync_libraries

Purpose : sync libraries resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-25g-10 StoreHandlers.sync_libraries — error handling

ASYNC

Function : [test_storehandlers_sync_libraries_handles_error](#)

Covers : StoreHandlers.sync_libraries

Purpose : sync libraries surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-11 StoreHandlers.force_sync_libraries — happy path

ASYNC

Function : [test_storehandlers_force_sync_libraries_happy_path](#)

Covers : StoreHandlers.force_sync_libraries

Purpose : force sync libraries resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-25g-12 StoreHandlers.force_sync_libraries — error handling

ASYNC

Function : [test_storehandlers_force_sync_libraries_handles_error](#)

Covers : StoreHandlers.force_sync_libraries

Purpose : force sync libraries surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-25g store.py (cont.)

Tests to write (28) — cont.

⇒ T-25g-13 StoreHandlers.get_sync_status — happy path

ASYNC

Function : [test_storehandlers_get_sync_status_returns_value_on_success](#)

Covers : StoreHandlers.get_sync_status

Purpose : get sync status returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25g-14 StoreHandlers.get_sync_status — error handling

ASYNC

Function : [test_storehandlers_get_sync_status_handles_error](#)

Covers : StoreHandlers.get_sync_status

Purpose : get sync status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-15 StoreHandlers.get_sync_progress — happy path

ASYNC

Function : [test_storehandlers_get_sync_progress_returns_value_on_success](#)

Covers : StoreHandlers.get_sync_progress

Purpose : get sync progress returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25g-16 StoreHandlers.get_sync_progress — error handling

ASYNC

Function : [test_storehandlers_get_sync_progress_handles_error](#)

Covers : StoreHandlers.get_sync_progress

Purpose : get sync progress surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-17 StoreHandlers.cancel_sync — happy path

ASYNC

Function : [test_storehandlers_cancel_sync_happy_path](#)

Covers : StoreHandlers.cancel_sync

Purpose : cancel sync resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-25g-18 StoreHandlers.cancel_sync — error handling

ASYNC

Function : [test_storehandlers_cancel_sync_handles_error](#)

Covers : StoreHandlers.cancel_sync

Purpose : cancel sync surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-19 StoreHandlers.get_all_unifideck_games — happy path

ASYNC

Function : [test_storehandlers_get_all_unifideck_games_returns_value_on_success](#)

Covers : StoreHandlers.get_all_unifideck_games

Purpose : get all unifideck games returns the expected payload on a normal response.

Fixtures : pytest-asyncio

OP-25g store.py (cont.)

Tests to write (28) — cont.

⇒ T-25g-20 StoreHandlers.get_all_unifideck_games — error handling

ASYNC

Function : [test_storehandlers_get_all_unifideck_games_handles_error](#)

Covers : StoreHandlers.get_all_unifideck_games

Purpose : get all unifideck games surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-21 StoreHandlers.get_game_info — happy path

ASYNC

Function : [test_storehandlers_get_game_info_returns_value_on_success](#)

Covers : StoreHandlers.get_game_info

Purpose : get game info returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25g-22 StoreHandlers.get_game_info — error handling

ASYNC

Function : [test_storehandlers_get_game_info_handles_error](#)

Covers : StoreHandlers.get_game_info

Purpose : get game info surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25g-23 StoreHandlers.install_game — happy path

ASYNC

Function : [test_storehandlers_install_game_completes_setup_steps](#)

Covers : StoreHandlers.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio

⇒ T-25g-24 StoreHandlers.install_game — error handling

ASYNC

Function : [test_storehandlers_install_game_raises_rpc_error_on_failure](#)

Covers : StoreHandlers.install_game

Purpose : install game raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

⇒ T-25g-25 StoreHandlers.uninstall_game — happy path

ASYNC

Function : [test_storehandlers_uninstall_game_happy_path](#)

Covers : StoreHandlers.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-25g-26 StoreHandlers.uninstall_game — error handling

ASYNC

Function : [test_storehandlers_uninstall_game_raises_rpc_error_on_failure](#)

Covers : StoreHandlers.uninstall_game

Purpose : uninstall game raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

OP-25g store.py (cont.)

Tests to write (28) — cont.

⇒ T-25g-27 StoreHandlers.check_game_update — happy path

ASYNC

Function : [test_storehandlers_check_game_update_returns_true_on_valid_input](#)

Covers : StoreHandlers.check_game_update

Purpose : check game update returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-25g-28 StoreHandlers.check_game_update — error handling

ASYNC

Function : [test_storehandlers_check_game_update_raises_rpc_error_on_failure](#)

Covers : StoreHandlers.check_game_update

Purpose : check game update raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-24b uses wrapper.py
- ← OP-25a uses base.py
- OP-25 used by __init__.py

● PRIORITY HIGH

TIER 3

INTEGRATION

22 TESTS

OP-25h

ui.py

Source : `py_modules/unifideck/rpc/handlers/ui_handlers.py` | Lignes : 110 | Cible : 65%

Test file : `tests/unit/rpc/handlers/test_ui.py`

Public surface

`[class]` UIHandlers

(*notify_game_launched, notify_game_stopped, ...*)

Tests to write (22)

⇒ T-25h-01 UIHandlers.notify_game_launched — happy path

ASYNC

Function : `test_uihandlers_notify_game_launched_happy_path`

Covers : `UIHandlers.notify_game_launched`

Purpose : notify game launched spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-25h-02 UIHandlers.notify_game_launched — error handling

ASYNC

Function : `test_uihandlers_notify_game_launched_handles_error`

Covers : `UIHandlers.notify_game_launched`

Purpose : notify game launched surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-25h-03 UIHandlers.notify_game_stopped — happy path

ASYNC

Function : `test_uihandlers_notify_game_stopped_happy_path`

Covers : `UIHandlers.notify_game_stopped`

Purpose : notify game stopped returns the expected dict shape.

Fixtures : `pytest-asyncio`

⇒ T-25h-04 UIHandlers.notify_game_stopped — error handling

ASYNC

Function : `test_uihandlers_notify_game_stopped_handles_error`

Covers : `UIHandlers.notify_game_stopped`

Purpose : notify game stopped surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-25h-05 UIHandlers.hide_play_section — happy path

ASYNC

Function : `test_uihandlers_hide_play_section_happy_path`

Covers : `UIHandlers.hide_play_section`

Purpose : hide play section returns the expected dict shape.

Fixtures : `pytest-asyncio`

OP-25h ui.py (cont.)

Tests to write (22) — cont.

⇒ T-25h-06 UIHandlers.hide_play_section — error handling

ASYNC

Function : `test_uihandlers_hide_play_section_handles_error`
Covers : `UIHandlers.hide_play_section`
Purpose : hide play section surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-25h-07 UIHandlers.unhide_play_section — happy path

ASYNC

Function : `test_uihandlers_unhide_play_section_happy_path`
Covers : `UIHandlers.unhide_play_section`
Purpose : unhide play section returns the expected dict shape.
Fixtures : `pytest-asyncio`

⇒ T-25h-08 UIHandlers.unhide_play_section — error handling

ASYNC

Function : `test_uihandlers_unhide_play_section_handles_error`
Covers : `UIHandlers.unhide_play_section`
Purpose : unhide play section surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-25h-09 UIHandlers.inject_hide_css — happy path

ASYNC

Function : `test_uihandlers_inject_hide_css_happy_path`
Covers : `UIHandlers.inject_hide_css`
Purpose : inject hide css returns the expected dict shape.
Fixtures : `pytest-asyncio`

⇒ T-25h-10 UIHandlers.inject_hide_css — error handling

ASYNC

Function : `test_uihandlers_inject_hide_css_handles_error`
Covers : `UIHandlers.inject_hide_css`
Purpose : inject hide css surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-25h-11 UIHandlers.get_game_metadata — happy path

ASYNC

Function : `test_uihandlers_get_game_metadata_returns_value_on_success`
Covers : `UIHandlers.get_game_metadata`
Purpose : get game metadata returns the expected payload on a normal response.
Fixtures : `pytest-asyncio`

⇒ T-25h-12 UIHandlers.get_game_metadata — error handling

ASYNC

Function : `test_uihandlers_get_game_metadata_handles_error`
Covers : `UIHandlers.get_game_metadata`
Purpose : get game metadata surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-25h ui.py (cont.)

Tests to write (22) — cont.

⇒ T-25h-13 UIHandlers.get_language_preference — happy path

ASYNC

Function : [test_uihandlers_get_language_preference_returns_value_on_success](#)

Covers : UIHandlers.get_language_preference

Purpose : get language preference returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25h-14 UIHandlers.get_language_preference — error handling

ASYNC

Function : [test_uihandlers_get_language_preference_handles_error](#)

Covers : UIHandlers.get_language_preference

Purpose : get language preference surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25h-15 UIHandlers.set_language_preference — happy path

ASYNC

Function : [test_uihandlers_set_language_preference_happy_path](#)

Covers : UIHandlers.set_language_preference

Purpose : set language preference returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ T-25h-16 UIHandlers.set_language_preference — error handling

ASYNC

Function : [test_uihandlers_set_language_preference_handles_error](#)

Covers : UIHandlers.set_language_preference

Purpose : set language preference surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25h-17 UIHandlers.get_cloud_failure_behaviors — happy path

ASYNC

Function : [test_uihandlers_get_cloud_failure_behaviors_returns_value_on_success](#)

Covers : UIHandlers.get_cloud_failure_behaviors

Purpose : get cloud failure behaviors returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25h-18 UIHandlers.get_cloud_failure_behaviors — error handling

ASYNC

Function : [test_uihandlers_get_cloud_failure_behaviors_handles_error](#)

Covers : UIHandlers.get_cloud_failure_behaviors

Purpose : get cloud failure behaviors surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-25h-19 UIHandlers.set_cloud_failure_behavior — happy path

ASYNC

Function : [test_uihandlers_set_cloud_failure_behavior_happy_path](#)

Covers : UIHandlers.set_cloud_failure_behavior

Purpose : set cloud failure behavior returns the expected dict shape.

Fixtures : pytest-asyncio

OP-25h ui.py (cont.)

Tests to write (22) — cont.

⇒ T-25h-20 UIHandlers.set_cloud_failure_behavior — error handling

ASYNC

Function : [test_uihandlers_set_cloud_failure_behavior_raises_rpc_error_on_failure](#)

Covers : UIHandlers.set_cloud_failure_behavior

Purpose : set cloud failure behavior raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

⇒ T-25h-21 UIHandlers.get_config_validation_status — happy path

ASYNC

Function : [test_uihandlers_get_config_validation_status_returns_value_on_success](#)

Covers : UIHandlers.get_config_validation_status

Purpose : get config validation status returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-25h-22 UIHandlers.get_config_validation_status — error handling

ASYNC

Function : [test_uihandlers_get_config_validation_status_handles_error](#)

Covers : UIHandlers.get_config_validation_status

Purpose : get config validation status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-24b uses `wrapper.py`
- ← OP-25a uses `base.py`
- ← OP-30b uses `cdp_inject.py`
- OP-25 used by `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

14 TESTS

OP-26a

observability.py

Source : `py_modules/unifideck/rpc/mixins/observability.py` | Lignes : 120 | Cible : 65%

Test file : `tests/unit/rpc/mixins/test_observability.py`

Public surface

`[class]` `ObservabilityRPCMixin` *(`get_plugin_metrics`, `get_bus_health`, `subscribe...`)*

Tests to write (14)

⇒ **T-26a-01** **ObservabilityRPCMixin.get_plugin_metrics — happy path**

ASYNC

Function : `test_observabilityrpcmixin_get_plugin_metrics_returns_value_on_success`

Covers : `ObservabilityRPCMixin.get_plugin_metrics`

Purpose : `get_plugin_metrics` returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`

⇒ **T-26a-02** **ObservabilityRPCMixin.get_plugin_metrics — error handling**

ASYNC

Function : `test_observabilityrpcmixin_get_plugin_metrics_handles_error`

Covers : `ObservabilityRPCMixin.get_plugin_metrics`

Purpose : `get_plugin_metrics` surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ **T-26a-03** **ObservabilityRPCMixin.get_bus_health — happy path**

ASYNC

Function : `test_observabilityrpcmixin_get_bus_health_returns_value_on_success`

Covers : `ObservabilityRPCMixin.get_bus_health`

Purpose : `get_bus_health` returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`

⇒ **T-26a-04** **ObservabilityRPCMixin.get_bus_health — error handling**

ASYNC

Function : `test_observabilityrpcmixin_get_bus_health_handles_error`

Covers : `ObservabilityRPCMixin.get_bus_health`

Purpose : `get_bus_health` surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ **T-26a-05** **ObservabilityRPCMixin.subscribe_replay — happy path**

ASYNC

Function : `test_observabilityrpcmixin_subscribe_replay_happy_path`

Covers : `ObservabilityRPCMixin.subscribe_replay`

Purpose : `subscribe_replay` returns the expected list of items.

Fixtures : `pytest-asyncio`

OP-26a observability.py (cont.)

Tests to write (14) — cont.

⇒ T-26a-06 ObservabilityRPCMixin.subscribe_replay — error handling

ASYNC

Function : [test_observabilityrpcmixin_subscribe_replay_handles_error](#)
Covers : ObservabilityRPCMixin.subscribe_replay
Purpose : subscribe replay surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-26a-07 ObservabilityRPCMixin.release_quarantine — happy path

ASYNC

Function : [test_observabilityrpcmixin_release_quarantine_happy_path](#)
Covers : ObservabilityRPCMixin.release_quarantine
Purpose : release quarantine returns the expected dict shape.
Fixtures : pytest-asyncio

⇒ T-26a-08 ObservabilityRPCMixin.release_quarantine — error handling

ASYNC

Function : [test_observabilityrpcmixin_release_quarantine_handles_error](#)
Covers : ObservabilityRPCMixin.release_quarantine
Purpose : release quarantine surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-26a-09 ObservabilityRPCMixin.get_feature_flags — happy path

ASYNC

Function : [test_observabilityrpcmixin_get_feature_flags_returns_value_on_success](#)
Covers : ObservabilityRPCMixin.get_feature_flags
Purpose : get feature flags returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-26a-10 ObservabilityRPCMixin.get_feature_flags — error handling

ASYNC

Function : [test_observabilityrpcmixin_get_feature_flags_raises_rpc_error_on_failure](#)
Covers : ObservabilityRPCMixin.get_feature_flags
Purpose : get feature flags raises RpcError when the input or upstream call fails.
Fixtures : pytest-asyncio

⇒ T-26a-11 ObservabilityRPCMixin.get_probe_history — happy path

ASYNC

Function : [test_observabilityrpcmixin_get_probe_history_returns_value_on_success](#)
Covers : ObservabilityRPCMixin.get_probe_history
Purpose : get probe history returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-26a-12 ObservabilityRPCMixin.get_probe_history — error handling

ASYNC

Function : [test_observabilityrpcmixin_get_probe_history_raises_rpc_error_on_failure](#)
Covers : ObservabilityRPCMixin.get_probe_history
Purpose : get probe history raises RpcError when the input or upstream call fails.
Fixtures : pytest-asyncio

OP-26a observability.py (cont.)

Tests to write (14) — cont.

⇒ T-26a-13

ObservabilityRPCMixin.report_runtime_probes — happy path

ASYNC

Function :

test_observabilityrpcmixin_report_runtime_probes_happy_path

Covers :

ObservabilityRPCMixin.report_runtime_probes

Purpose :

report runtime probes spawns the target action and returns its handle.

Fixtures :

pytest-asyncio

⇒ T-26a-14

ObservabilityRPCMixin.report_runtime_probes — error handling

ASYNC

Function :

test_observabilityrpcmixin_report_runtime_probes_handles_error

Covers :

ObservabilityRPCMixin.report_runtime_probes

Purpose :

report runtime probes surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

Mocking dependencies

• pytest-asyncio

Linked fiches

← OP-05 uses __init__.py

← OP-24 uses __init__.py

● PRIORITY HIGH

TIER 3

INTEGRATION

10 TESTS

OP-26b

security.py

Source : py_modules/unifideck/rpc/mixins/security.py | Lignes : 37 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_security.py

Public surface

[class]

SecurityRPCMixin

(get_security_audit_log, get_security_counters, ...)

Tests to write (10)

⇒ T-26b-01

SecurityRPCMixin.get_security_audit_log — happy path

ASYNC

Function : test_securityrpcmixinget_security_audit_log_returns_value_on_success

Covers : SecurityRPCMixin.get_security_audit_log

Purpose : get security audit log returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26b-02

SecurityRPCMixin.get_security_audit_log — error handling

ASYNC

Function : test_securityrpcmixinget_security_audit_log_handles_error

Covers : SecurityRPCMixin.get_security_audit_log

Purpose : get security audit log surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26b-03

SecurityRPCMixin.get_security_counters — happy path

ASYNC

Function : test_securityrpcmixinget_security_counters_returns_value_on_success

Covers : SecurityRPCMixin.get_security_counters

Purpose : get security counters returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26b-04

SecurityRPCMixin.get_security_counters — error handling

ASYNC

Function : test_securityrpcmixinget_security_counters_handles_error

Covers : SecurityRPCMixin.get_security_counters

Purpose : get security counters surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26b-05

SecurityRPCMixin.get_security_bruteforce_status — happy

ASYNC

Function : test_securityrpcmixinget_security_bruteforce_status_returns_value_on_success

Covers : SecurityRPCMixin.get_security_bruteforce_status

Purpose : get security bruteforce status returns the expected payload on a normal response.

Fixtures : pytest-asyncio

OP-26b security.py (cont.)

Tests to write (10) — cont.

⇒ **T-26b-06** **SecurityRPCMixin.get_security_bruteforce_status — error handling** **ASYNC**Function : [test_securityrpcmixin_get_security_bruteforce_status_handles_error](#)

Covers : SecurityRPCMixin.get_security_bruteforce_status

Purpose : get security bruteforce status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26b-07** **SecurityRPCMixin.clear_security_audit_log — happy path** **ASYNC**Function : [test_securityrpcmixin_clear_security_audit_log_removes_target_and_reports_success](#)

Covers : SecurityRPCMixin.clear_security_audit_log

Purpose : clear security audit log removes the target and reports success.

Fixtures : pytest-asyncio

⇒ **T-26b-08** **SecurityRPCMixin.clear_security_audit_log — error handling** **ASYNC**Function : [test_securityrpcmixin_clear_security_audit_log_handles_error](#)

Covers : SecurityRPCMixin.clear_security_audit_log

Purpose : clear security audit log surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26b-09** **SecurityRPCMixin.reset_security_bruteforce — happy path** **ASYNC**Function : [test_securityrpcmixin_reset_security_bruteforce_happy_path](#)

Covers : SecurityRPCMixin.reset_security_bruteforce

Purpose : reset security bruteforce returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ **T-26b-10** **SecurityRPCMixin.reset_security_bruteforce — error handling** **ASYNC**Function : [test_securityrpcmixin_reset_security_bruteforce_handles_error](#)

Covers : SecurityRPCMixin.reset_security_bruteforce

Purpose : reset security bruteforce surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

← OP-24 uses `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

12 TESTS

OP-26c

download.py

Source : py_modules/unifideck/rpc/mixins/download.py | Lignes : 46 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_download.py

Public surface

[class]

DownloadRPCMixin

(install_game, uninstall_game, check_game_up...)

Tests to write (12)

⇒ T-26c-01

DownloadRPCMixin.install_game — happy path

ASYNC

Function : test_downloadrpcmixin_install_game_completes_setup_steps

Covers : DownloadRPCMixin.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio

⇒ T-26c-02

DownloadRPCMixin.install_game — error handling

ASYNC

Function : test_downloadrpcmixin_install_game_handles_error

Covers : DownloadRPCMixin.install_game

Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26c-03

DownloadRPCMixin.uninstall_game — happy path

ASYNC

Function : test_downloadrpcmixin_uninstall_game_happy_path

Covers : DownloadRPCMixin.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-26c-04

DownloadRPCMixin.uninstall_game — error handling

ASYNC

Function : test_downloadrpcmixin_uninstall_game_handles_error

Covers : DownloadRPCMixin.uninstall_game

Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26c-05

DownloadRPCMixin.check_game_update — happy path

ASYNC

Function : test_downloadrpcmixin_check_game_update_returns_true_on_valid_input

Covers : DownloadRPCMixin.check_game_update

Purpose : check game update returns True for a valid input.

Fixtures : pytest-asyncio

OP-26c download.py (cont.)

Tests to write (12) — cont.

⇒ **T-26c-06** DownloadRPCMixin.check_game_update — error handling

ASYNC

Function : [test_downloadrpcmixin_check_game_update_handles_error](#)

Covers : DownloadRPCMixin.check_game_update

Purpose : check game update surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26c-07** DownloadRPCMixin.cancel_download — happy path

ASYNC

Function : [test_downloadrpcmixin_cancel_download_happy_path](#)

Covers : DownloadRPCMixin.cancel_download

Purpose : cancel download resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-26c-08** DownloadRPCMixin.cancel_download — error handling

ASYNC

Function : [test_downloadrpcmixin_cancel_download_handles_error](#)

Covers : DownloadRPCMixin.cancel_download

Purpose : cancel download surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26c-09** DownloadRPCMixin.get_download_queue — happy path

ASYNC

Function : [test_downloadrpcmixin_get_download_queue_returns_value_on_success](#)

Covers : DownloadRPCMixin.get_download_queue

Purpose : get download queue returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ **T-26c-10** DownloadRPCMixin.get_download_queue — error handling

ASYNC

Function : [test_downloadrpcmixin_get_download_queue_handles_error](#)

Covers : DownloadRPCMixin.get_download_queue

Purpose : get download queue surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26c-11** DownloadRPCMixin.get_storage_locations — happy path

ASYNC

Function : [test_downloadrpcmixin_get_storage_locations_returns_value_on_success](#)

Covers : DownloadRPCMixin.get_storage_locations

Purpose : get storage locations returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ **T-26c-12** DownloadRPCMixin.get_storage_locations — error handling

ASYNC

Function : [test_downloadrpcmixin_get_storage_locations_handles_error](#)

Covers : DownloadRPCMixin.get_storage_locations

Purpose : get storage locations surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-26c *download.py* (cont.)

Mocking dependencies

- `pytest-asyncio`

Linked files

← OP-24 uses `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

16 TESTS

OP-26d

launch.py

Source : py_modules/unifideck/rpc/mixins/launch.py | Lignes : 99 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_launch.py

Public surface

[class]

LaunchRPCMixin

(notify_game_launched, notify_game_stopped, ...)

Tests to write (16)

⇒ T-26d-01

LaunchRPCMixin.notify_game_launched — happy path

ASYNC

Function : test_launchrpcmixin_notify_game_launched_happy_path

Covers : LaunchRPCMixin.notify_game_launched

Purpose : notify game launched spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ T-26d-02

LaunchRPCMixin.notify_game_launched — error handling

ASYNC

Function : test_launchrpcmixin_notify_game_launched_handles_error

Covers : LaunchRPCMixin.notify_game_launched

Purpose : notify game launched surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26d-03

LaunchRPCMixin.notify_game_stopped — happy path

ASYNC

Function : test_launchrpcmixin_notify_game_stopped_happy_path

Covers : LaunchRPCMixin.notify_game_stopped

Purpose : notify game stopped returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ T-26d-04

LaunchRPCMixin.notify_game_stopped — error handling

ASYNC

Function : test_launchrpcmixin_notify_game_stopped_handles_error

Covers : LaunchRPCMixin.notify_game_stopped

Purpose : notify game stopped surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26d-05

LaunchRPCMixin.get_launch_failures — happy path

MOCKED FS

Function : test_launchrpcmixin_get_launch_failures_returns_value_on_success

Covers : LaunchRPCMixin.get_launch_failures

Purpose : get launch failures returns the expected payload on a normal response.

Fixtures : pytest-asyncio, tmp_path

OP-26d launch.py (cont.)

Tests to write (16) — cont.

⇒ T-26d-06 LaunchRPCMixin.get_launch_failures — error handling

MOCKED FS

Function : [test_launchrpcmixin_get_launch_failures_handles_missing_or_corrupt_file](#)

Covers : LaunchRPCMixin.get_launch_failures

Purpose : get launch failures handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-26d-07 LaunchRPCMixin.clear_launch_failures — happy path

ASYNC

Function : [test_launchrpcmixin_clear_launch_failures_removes_target_and_reports_success](#)

Covers : LaunchRPCMixin.clear_launch_failures

Purpose : clear launch failures removes the target and reports success.

Fixtures : pytest-asyncio

⇒ T-26d-08 LaunchRPCMixin.clear_launch_failures — error handling

ASYNC

Function : [test_launchrpcmixin_clear_launch_failures_handles_error](#)

Covers : LaunchRPCMixin.clear_launch_failures

Purpose : clear launch failures surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26d-09 LaunchRPCMixin.arm_circuit_bypass — happy path

ASYNC

Function : [test_launchrpcmixin_arm_circuit_bypass_happy_path](#)

Covers : LaunchRPCMixin.arm_circuit_bypass

Purpose : arm circuit bypass returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ T-26d-10 LaunchRPCMixin.arm_circuit_bypass — error handling

ASYNC

Function : [test_launchrpcmixin_arm_circuit_bypass_handles_error](#)

Covers : LaunchRPCMixin.arm_circuit_bypass

Purpose : arm circuit bypass surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26d-11 LaunchRPCMixin.get_launch_logs — happy path

ASYNC

Function : [test_launchrpcmixin_get_launch_logs_returns_value_on_success](#)

Covers : LaunchRPCMixin.get_launch_logs

Purpose : get launch logs returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26d-12 LaunchRPCMixin.get_launch_logs — error handling

ASYNC

Function : [test_launchrpcmixin_get_launch_logs_handles_error](#)

Covers : LaunchRPCMixin.get_launch_logs

Purpose : get launch logs surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-26d *launch.py* (cont.)

Tests to write (16) — cont.

⇒ **T-26d-13** **LaunchRPCMixin.export_launch_logs — happy path**

ASYNC

Function : [test_launchrpcmixin_export_launch_logs_happy_path](#)

Covers : LaunchRPCMixin.export_launch_logs

Purpose : export launch logs spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ **T-26d-14** **LaunchRPCMixin.export_launch_logs — error handling**

ASYNC

Function : [test_launchrpcmixin_export_launch_logs_handles_error](#)

Covers : LaunchRPCMixin.export_launch_logs

Purpose : export launch logs surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-26d-15** **LaunchRPCMixin.list_save_folder — happy path**

ASYNC

Function : [test_launchrpcmixin_list_save_folder_happy_path](#)

Covers : LaunchRPCMixin.list_save_folder

Purpose : list save folder persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ **T-26d-16** **LaunchRPCMixin.list_save_folder — error handling**

ASYNC

Function : [test_launchrpcmixin_list_save_folder_raises_rpc_error_on_failure](#)

Covers : LaunchRPCMixin.list_save_folder

Purpose : list save folder raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-24 uses `__init__.py`
- ← OP-40c uses `save_folder_inspector.py`
- ← OP-40d uses `log_archive.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

8 TESTS

OP-26e

store.py

Source : py_modules/unifideck/rpc/mixins/store.py | Lignes : 19 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_store.py

Public surface

[class]

StoreRPCMixin

(store_auth, check_store_status, get_store_info...)

Tests to write (8)

⇒ T-26e-01

StoreRPCMixin.store_auth — happy path

ASYNC

Function : test_storerpcmixin_store_auth_persists_value_to_disk

Covers : StoreRPCMixin.store_auth

Purpose : store auth persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-26e-02

StoreRPCMixin.store_auth — error handling

ASYNC

Function : test_storerpcmixin_store_auth_handles_error

Covers : StoreRPCMixin.store_auth

Purpose : store auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26e-03

StoreRPCMixin.check_store_status — happy path

ASYNC

Function : test_storerpcmixin_check_store_status_returns_true_on_valid_input

Covers : StoreRPCMixin.check_store_status

Purpose : check store status persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-26e-04

StoreRPCMixin.check_store_status — error handling

ASYNC

Function : test_storerpcmixin_check_store_status_handles_error

Covers : StoreRPCMixin.check_store_status

Purpose : check store status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26e-05

StoreRPCMixin.get_store_infos — happy path

ASYNC

Function : test_storerpcmixin_get_store_infos_returns_value_on_success

Covers : StoreRPCMixin.get_store_infos

Purpose : get store infos returns the expected payload on a normal response.

Fixtures : pytest-asyncio

OP-26e store.py (cont.)

Tests to write (8) — cont.

⇒ T-26e-06StoreRPCMixin.get_store_infos — error handlingASYNC

Function : test_storerpcmixin_get_store_infos_handles_error

Covers : StoreRPCMixin.get_store_infos

Purpose : get store infos surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26e-07StoreRPCMixin.clear_store_auths — happy pathASYNC

Function : test_storerpcmixin_clear_store_auths_removes_target_and_reports_success

Covers : StoreRPCMixin.clear_store_auths

Purpose : clear store auths persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-26e-08StoreRPCMixin.clear_store_auths — error handlingASYNC

Function : test_storerpcmixin_clear_store_auths_handles_error

Covers : StoreRPCMixin.clear_store_auths

Purpose : clear store auths surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

• pytest-asyncio

Linked fiches

(no internal imports detected)

● PRIORITY HIGH

TIER 3

INTEGRATION

14 TESTS

OP-26f

sync.py

Source : `py_modules/unifideck/rpc/mixins/sync.py` | Lignes : 26 | Cible : 65%

Test file : `tests/unit/rpc/mixins/test_sync.py`

Public surface

`[class]` SyncRPCMixin

(sync_libraries, force_sync_libraries, get_sync_...)

Tests to write (14)

⇒ T-26f-01 SyncRPCMixin.sync_libraries — happy path

ASYNC

Function : `test_syncrpcmixin_sync_libraries_happy_path`
Covers : `SyncRPCMixin.sync_libraries`
Purpose : sync libraries resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-26f-02 SyncRPCMixin.sync_libraries — error handling

ASYNC

Function : `test_syncrpcmixin_sync_libraries_handles_error`
Covers : `SyncRPCMixin.sync_libraries`
Purpose : sync libraries surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-26f-03 SyncRPCMixin.force_sync_libraries — happy path

ASYNC

Function : `test_syncrpcmixin_force_sync_libraries_happy_path`
Covers : `SyncRPCMixin.force_sync_libraries`
Purpose : force sync libraries resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-26f-04 SyncRPCMixin.force_sync_libraries — error handling

ASYNC

Function : `test_syncrpcmixin_force_sync_libraries_handles_error`
Covers : `SyncRPCMixin.force_sync_libraries`
Purpose : force sync libraries surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-26f-05 SyncRPCMixin.get_sync_status — happy path

ASYNC

Function : `test_syncrpcmixin_get_sync_status_returns_value_on_success`
Covers : `SyncRPCMixin.get_sync_status`
Purpose : get sync status returns the expected payload on a normal response.
Fixtures : `pytest-asyncio`

OP-26f sync.py (cont.)

Tests to write (14) — cont.

⇒ T-26f-06 SyncRPCMixin.get_sync_status — error handling

ASYNC

Function : [test_syncrpcmixin_get_sync_status_handles_error](#)
Covers : SyncRPCMixin.get_sync_status
Purpose : get sync status surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-26f-07 SyncRPCMixin.get_sync_progress — happy path

ASYNC

Function : [test_syncrpcmixin_get_sync_progress_returns_value_on_success](#)
Covers : SyncRPCMixin.get_sync_progress
Purpose : get sync progress returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-26f-08 SyncRPCMixin.get_sync_progress — error handling

ASYNC

Function : [test_syncrpcmixin_get_sync_progress_handles_error](#)
Covers : SyncRPCMixin.get_sync_progress
Purpose : get sync progress surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-26f-09 SyncRPCMixin.cancel_sync — happy path

ASYNC

Function : [test_syncrpcmixin_cancel_sync_happy_path](#)
Covers : SyncRPCMixin.cancel_sync
Purpose : cancel sync resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-26f-10 SyncRPCMixin.cancel_sync — error handling

ASYNC

Function : [test_syncrpcmixin_cancel_sync_handles_error](#)
Covers : SyncRPCMixin.cancel_sync
Purpose : cancel sync surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-26f-11 SyncRPCMixin.get_all_unifideck_games — happy path

ASYNC

Function : [test_syncrpcmixin_get_all_unifideck_games_returns_value_on_success](#)
Covers : SyncRPCMixin.get_all_unifideck_games
Purpose : get all unifideck games returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-26f-12 SyncRPCMixin.get_all_unifideck_games — error handling

ASYNC

Function : [test_syncrpcmixin_get_all_unifideck_games_handles_error](#)
Covers : SyncRPCMixin.get_all_unifideck_games
Purpose : get all unifideck games surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

OP-26f sync.py (cont.)

Tests to write (14) — cont.

⇒ T-26f-13

SyncRPCMixin.get_game_info — happy path

ASYNC

Function :

Covers :

Purpose :

Fixtures :

test_syncrpcmixin_get_game_info_returns_value_on_success

SyncRPCMixin.get_game_info

get game info returns the expected payload on a normal response.

pytest-asyncio

⇒ T-26f-14

SyncRPCMixin.get_game_info — error handling

ASYNC

Function :

Covers :

Purpose :

Fixtures :

test_syncrpcmixin_get_game_info_handles_error

SyncRPCMixin.get_game_info

get game info surfaces failures cleanly (typed result, no swallowed exception).

pytest-asyncio

Mocking dependencies

Linked fiches

• pytest-asyncio

(no internal imports detected)

● PRIORITY HIGH

TIER 3

INTEGRATION

12 TESTS

OP-26g

ui.py

Source : py_modules/unifideck/rpc/mixins/ui.py | Lignes : 25 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_ui.py

Public surface

[class]

UIRPCMixin

(get_game_metadata, hide_play_section, unhid...)

Tests to write (12)

⇒ T-26g-01

UIRPCMixin.get_game_metadata — happy path

ASYNC

Function : test_uirpcmixin_get_game_metadata_returns_value_on_success

Covers : UIRPCMixin.get_game_metadata

Purpose : get game metadata returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26g-02

UIRPCMixin.get_game_metadata — error handling

ASYNC

Function : test_uirpcmixin_get_game_metadata_handles_error

Covers : UIRPCMixin.get_game_metadata

Purpose : get game metadata surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26g-03

UIRPCMixin.hide_play_section — happy path

ASYNC

Function : test_uirpcmixin_hide_play_section_happy_path

Covers : UIRPCMixin.hide_play_section

Purpose : hide play section resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-26g-04

UIRPCMixin.hide_play_section — error handling

ASYNC

Function : test_uirpcmixin_hide_play_section_handles_error

Covers : UIRPCMixin.hide_play_section

Purpose : hide play section surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26g-05

UIRPCMixin.unhide_play_section — happy path

ASYNC

Function : test_uirpcmixin_unhide_play_section_happy_path

Covers : UIRPCMixin.unhide_play_section

Purpose : unhide play section resolves to the expected value on success.

Fixtures : pytest-asyncio

OP-26g ui.py (cont.)

Tests to write (12) — cont.

⇒ T-26g-06 UIRPCMixin.unhide_play_section — error handling

ASYNC

Function : [test_uirpcmixin_unhide_play_section_handles_error](#)

Covers : UIRPCMixin.unhide_play_section

Purpose : unhide play section surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26g-07 UIRPCMixin.inject_hide_css — happy path

ASYNC

Function : [test_uirpcmixin_inject_hide_css_happy_path](#)

Covers : UIRPCMixin.inject_hide_css

Purpose : inject hide css resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-26g-08 UIRPCMixin.inject_hide_css — error handling

ASYNC

Function : [test_uirpcmixin_inject_hide_css_handles_error](#)

Covers : UIRPCMixin.inject_hide_css

Purpose : inject hide css surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26g-09 UIRPCMixin.get_language_preference — happy path

ASYNC

Function : [test_uirpcmixin_get_language_preference_returns_value_on_success](#)

Covers : UIRPCMixin.get_language_preference

Purpose : get language preference returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26g-10 UIRPCMixin.get_language_preference — error handling

ASYNC

Function : [test_uirpcmixin_get_language_preference_handles_error](#)

Covers : UIRPCMixin.get_language_preference

Purpose : get language preference surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26g-11 UIRPCMixin.set_language_preference — happy path

ASYNC

Function : [test_uirpcmixin_set_language_preference_happy_path](#)

Covers : UIRPCMixin.set_language_preference

Purpose : set language preference returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ T-26g-12 UIRPCMixin.set_language_preference — error handling

ASYNC

Function : [test_uirpcmixin_set_language_preference_handles_error](#)

Covers : UIRPCMixin.set_language_preference

Purpose : set language preference surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-26g ui.py (cont.)

Mocking dependencies

- pytest-asyncio

Linked files

(no internal imports detected)

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-26h

cloud_failure.py

Source : py_modules/unifideck/rpc/mixins/cloud_failure.py | Lignes : 38 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_cloud_failure.py

Public surface

[class]

CloudFailureRPCMixin

(get_cloud_failure_behaviors, set_cloud_failure...)

Tests to write (4)

⇒ T-26h-01CloudFailureRPCMixin.get_cloud_failure_behaviors — happyASYNC

Function : test_cloudfailurerpcmixin_get_cloud_failure_behaviors_returns_value_on_success

Covers : CloudFailureRPCMixin.get_cloud_failure_behaviors

Purpose : get cloud failure behaviors returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-26h-02CloudFailureRPCMixin.get_cloud_failure_behaviors — errorASYNC

Function : test_cloudfailurerpcmixin_get_cloud_failure_behaviors_handles_error

Covers : CloudFailureRPCMixin.get_cloud_failure_behaviors

Purpose : get cloud failure behaviors surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-26h-03CloudFailureRPCMixin.set_cloud_failure_behavior — happyASYNC

Function : test_cloudfailurerpcmixin_set_cloud_failure_behavior_happy_path

Covers : CloudFailureRPCMixin.set_cloud_failure_behavior

Purpose : set cloud failure behavior returns the expected dict shape.

Fixtures : pytest-asyncio

⇒ T-26h-04CloudFailureRPCMixin.set_cloud_failure_behavior — errorASYNC

Function : test_cloudfailurerpcmixin_set_cloud_failure_behavior_raises_rpc_error_on_failure

Covers : CloudFailureRPCMixin.set_cloud_failure_behavior

Purpose : set cloud failure behavior raises RpcError when the input or upstream call fails.

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

← OP-24 uses __init__.py

● PRIORITY HIGH

TIER 3

INTEGRATION

2 TESTS

OP-26i

config_validation.py

Source : `py_modules/unifideck/rpc/mixins/config_validation.py` | Lignes : 29 | Cible : 65%

Test file : `tests/unit/rpc/mixins/test_config_validation.py`

Public surface

`[class]` ConfigValidationRPCMixin

(`get_config_validation_status`)

Tests to write (2)

- ⇒ T-26i-01

ConfigValidationRPCMixin.get_config_validation_status —

ASYNC

Function : `test_configvalidationrpcmixin_get_config_validation_status_returns_value_on_succe...`

Covers : ConfigValidationRPCMixin.get_config_validation_status

Purpose : get config validation status returns the expected payload on a normal response.

Fixtures : pytest-asyncio
- ⇒ T-26i-02

ConfigValidationRPCMixin.get_config_validation_status —

ASYNC

Function : `test_configvalidationrpcmixin_get_config_validation_status_handles_error`

Covers : ConfigValidationRPCMixin.get_config_validation_status

Purpose : get config validation status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

• `pytest-asyncio`

Linked fiches

(no internal imports detected)

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-26j

playtime.py

Source : py_modules/unifideck/rpc/mixins/playtime.py | Lignes : 11 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_playtime.py

Public surface

[class]

PlaytimeRPCMixin

(get_playtime, get_all_playtimes)

Tests to write (4)

⇒ T-26j-01

PlaytimeRPCMixin.get_playtime — happy path

ASYNC

Function :

test_playtimerpcmixin_get_playtime_returns_value_on_success

Covers :

PlaytimeRPCMixin.get_playtime

Purpose :

get playtime returns the expected payload on a normal response.

Fixtures :

pytest-asyncio

⇒ T-26j-02

PlaytimeRPCMixin.get_playtime — error handling

ASYNC

Function :

test_playtimerpcmixin_get_playtime_handles_error

Covers :

PlaytimeRPCMixin.get_playtime

Purpose :

get playtime surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-26j-03

PlaytimeRPCMixin.get_all_playtimes — happy path

ASYNC

Function :

test_playtimerpcmixin_get_all_playtimes_returns_value_on_success

Covers :

PlaytimeRPCMixin.get_all_playtimes

Purpose :

get all playtimes returns the expected payload on a normal response.

Fixtures :

pytest-asyncio

⇒ T-26j-04

PlaytimeRPCMixin.get_all_playtimes — error handling

ASYNC

Function :

test_playtimerpcmixin_get_all_playtimes_handles_error

Covers :

PlaytimeRPCMixin.get_all_playtimes

Purpose :

get all playtimes surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

Mocking dependencies

Linked fiches

• pytest-asyncio

(no internal imports detected)

● PRIORITY HIGH

TIER 3

INTEGRATION

2 TESTS

OP-26k

action.py

Source : py_modules/unifideck/rpc/mixins/action.py | Lignes : 15 | Cible : 65%

Test file : tests/unit/rpc/mixins/test_action.py

Public surface

[class]

ActionRPCMixin

(dispatch_unifideck_action)

Tests to write (2)

⇒ T-26k-01 ActionRPCMixin.dispatch_unifideck_action — happy path ASYNC

Function : test_actionrpcmixin_dispatch_unifideck_action_happy_path

Covers : ActionRPCMixin.dispatch_unifideck_action

Purpose : dispatch unifideck action delivers the message exactly once on the happy path.

Fixtures : pytest-asyncio

⇒ T-26k-02 ActionRPCMixin.dispatch_unifideck_action — error handling ASYNC

Function : test_actionrpcmixin_dispatch_unifideck_action_handles_error

Covers : ActionRPCMixin.dispatch_unifideck_action

Purpose : dispatch unifideck action surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

• pytest-asyncio

Linked fiches

← OP-27b uses dispatch.py

PRIORITY MEDIUM

TIER 1

PURE

5 TESTS

OP-23a

device_identity.py

Source : py_modules/unifideck/security/device_identity.py | Lignes : 105 | Cible : 90%

Test file : tests/unit/security/test_device_identity.py

Public surface

[class]

DeviceIdentityError

()

[class]

DeviceIdentity

(__init__, read)

[class]

FakeDeviceIdentity

(__init__, read)

Tests to write (5)

⇒ T-23a-01

DeviceIdentity.__init__ — construction

PURE

Function :

test_deviceidentity_init_constructs_with_valid_args

Covers :

DeviceIdentity.__init__

Purpose :

DeviceIdentity stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-23a-02

DeviceIdentity.read — happy path

MOCKED FS

Function :

test_deviceidentity_read_returns_value_on_success

Covers :

DeviceIdentity.read

Purpose :

read returns the expected payload on a normal response.

Fixtures :

tmp_path

⇒ T-23a-03

DeviceIdentity.read — error handling

MOCKED FS

Function :

test_deviceidentity_read_raises_device_identity_error_on_failure

Covers :

DeviceIdentity.read

Purpose :

read raises DeviceIdentityError when the input or upstream call fails.

Fixtures :

tmp_path

⇒ T-23a-04

FakeDeviceIdentity.__init__ — construction

PURE

Function :

test_fakedeviceidentity_init_constructs_with_valid_args

Covers :

FakeDeviceIdentity.__init__

Purpose :

FakeDeviceIdentity can be instantiated with the documented arguments.

Fixtures :

—

⇒ T-23a-05

FakeDeviceIdentity.read — happy path

PURE

Function :

test_fakedeviceidentity_read_returns_value_on_success

Covers :

FakeDeviceIdentity.read

Purpose :

read returns the expected payload on a normal response.

Fixtures :

—

OP-23a *device_identity.py* (cont.)

Mocking dependencies

- tmp_path

Linked fiches

- OP-23b used by `secure_token_store.py`
- OP-23d used by `device_fingerprint.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-23b

secure_token_store.py

Source : py_modules/unifideck/security/secure_token_store.py | Lignes : 247 | Cible : 90%

Test file : tests/unit/security/test_secure_token_store.py

Public surface

[class]

SecureTokenStoreError

()

[class]

SecureTokenStore

(__init__, encrypt_payload, decrypt_payload, is...)

Tests to write (4)

⇒ T-23b-01

SecureTokenStore.__init__ — construction

PURE

Function :

test_securetokenstore_init_constructs_with_valid_args

Covers :

SecureTokenStore.__init__

Purpose :

SecureTokenStore stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-23b-02

SecureTokenStore.encrypt_payload — happy path

PURE

Function :

test_securetokenstore_encrypt_payload_happy_path

Covers :

SecureTokenStore.encrypt_payload

Purpose :

encrypt payload produces the expected output for a typical input.

Fixtures :

—

⇒ T-23b-03

SecureTokenStore.decrypt_payload — happy path

PURE

Function :

test_securetokenstore_decrypt_payload_happy_path

Covers :

SecureTokenStore.decrypt_payload

Purpose :

decrypt payload produces the expected output for a typical input.

Fixtures :

—

⇒ T-23b-04

SecureTokenStore.is_encrypted — happy path

PURE

Function :

test_securetokenstore_is_encrypted_returns_true_on_valid_input

Covers :

SecureTokenStore.is_encrypted

Purpose :

is encrypted returns True for a valid input.

Fixtures :

—

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05a uses events.py
- ← OP-23a uses device_identity.py

PRIORITY MEDIUM

TIER 1

PURE

16 TESTS

OP-23c

audit_emitter.py

Source : py_modules/unifideck/security/audit_emitter.py | Lignes : 151 | Cible : 90%

Test file : tests/unit/security/test_audit_emitter.py

Public surface

[func]	emit_auth_started	(pure)
[func]	emit_auth_completed	(pure)
[func]	emit_auth_failed	(pure)
[func]	emit_token_file_migrated	(pure)
[func]	emit_legacy_plaintext_detected	(pure)
[func]	emit_permissions_check	(pure)
[func]	emit_external_auth_check_failed	(pure)
[func]	audit_auth_flow	(pure)

Tests to write (16)

⇒ T-23c-01	emit_auth_started — happy path	PURE
Function :	test_emit_auth_started_delivers_payload	
Covers :	emit_auth_started	
Purpose :	emit auth started delivers the message exactly once on the happy path.	
Fixtures :	—	

⇒ T-23c-02	emit_auth_started — edge cases	PURE
Function :	test_emit_auth_started_edge_cases	
Covers :	emit_auth_started	
Purpose :	emit auth started stays correct on empty / boundary inputs.	
Fixtures :	—	

⇒ T-23c-03	emit_auth_completed — happy path	PURE
Function :	test_emit_auth_completed_delivers_payload	
Covers :	emit_auth_completed	
Purpose :	emit auth completed delivers the message exactly once on the happy path.	
Fixtures :	—	

⇒ T-23c-04	emit_auth_completed — edge cases	PURE
Function :	test_emit_auth_completed_edge_cases	
Covers :	emit_auth_completed	
Purpose :	emit auth completed stays correct on empty / boundary inputs.	
Fixtures :	—	

OP-23c `audit_emitter.py` (cont.)

Tests to write (16) — cont.

⇒ T-23c-05 **emit_auth_failed — happy path**

PURE

Function : `test_emit_auth_failed_delivers_payload`Covers : `emit_auth_failed`

Purpose : emit auth failed delivers the message exactly once on the happy path.

Fixtures : —

⇒ T-23c-06 **emit_auth_failed — edge cases**

PURE

Function : `test_emit_auth_failed_edge_cases`Covers : `emit_auth_failed`

Purpose : emit auth failed stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-23c-07 **emit_token_file_migrated — happy path**

PURE

Function : `test_emit_token_file_migrated_delivers_payload`Covers : `emit_token_file_migrated`

Purpose : emit token file migrated delivers the message exactly once on the happy path.

Fixtures : —

⇒ T-23c-08 **emit_token_file_migrated — edge cases**

PURE

Function : `test_emit_token_file_migrated_edge_cases`Covers : `emit_token_file_migrated`

Purpose : emit token file migrated stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-23c-09 **emit_legacy_plaintext_detected — happy path**

PURE

Function : `test_emit_legacy_plaintext_detected_delivers_payload`Covers : `emit_legacy_plaintext_detected`

Purpose : emit legacy plaintext detected delivers the message exactly once on the happy path.

Fixtures : —

⇒ T-23c-10 **emit_legacy_plaintext_detected — edge cases**

PURE

Function : `test_emit_legacy_plaintext_detected_edge_cases`Covers : `emit_legacy_plaintext_detected`

Purpose : emit legacy plaintext detected stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-23c-11 **emit_permissions_check — happy path**

PURE

Function : `test_emit_permissions_check_delivers_payload`Covers : `emit_permissions_check`

Purpose : emit permissions check returns True for a valid input.

Fixtures : —

OP-23c `audit_emitter.py` (cont.)

Tests to write (16) — cont.

⇒ T-23c-12 `emit_permissions_check` — edge cases

PURE

Function : `test_emit_permissions_check_edge_cases`
Covers : `emit_permissions_check`
Purpose : emit permissions check stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-23c-13 `emit_external_auth_check_failed` — happy path

PURE

Function : `test_emit_external_auth_check_failed_delivers_payload`
Covers : `emit_external_auth_check_failed`
Purpose : emit external auth check failed returns True for a valid input.
Fixtures : —

⇒ T-23c-14 `emit_external_auth_check_failed` — edge cases

PURE

Function : `test_emit_external_auth_check_failed_edge_cases`
Covers : `emit_external_auth_check_failed`
Purpose : emit external auth check failed stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-23c-15 `audit_auth_flow` — happy path

PURE

Function : `test_audit_auth_flow_happy_path`
Covers : `audit_auth_flow`
Purpose : audit auth flow produces the expected output for a typical input.
Fixtures : `monkeypatch (time.time)`

⇒ T-23c-16 `audit_auth_flow` — edge cases

PURE

Function : `test_audit_auth_flow_edge_cases`
Covers : `audit_auth_flow`
Purpose : audit auth flow stays correct on empty / boundary inputs.
Fixtures : `monkeypatch (time.time)`

Mocking dependencies

- `monkeypatch (time.time)`

Linked fiches

- ← OP-05a uses `events.py`
- ← OP-09a uses `event_bus.py`

● PRIORITY MEDIUM

TIER 1

PURE

3 TESTS

OP-23d

device_fingerprint.py

Source : py_modules/unifideck/security/device_fingerprint.py | Lignes : 119 | Cible : 90%

Test file : tests/unit/security/test_device_fingerprint.py

Public surface

[class]

FingerprintState

()

[class]

DeviceFingerprint

(__init__, verify_or_initialize, reinitialize)

Tests to write (3)

- ⇒ T-23d-01

DeviceFingerprint.__init__ — construction

PURE

Function : test_devicefingerprint_init_constructs_with_valid_args

Covers : DeviceFingerprint.__init__

Purpose : DeviceFingerprint stores its constructor arguments on the expected instance attributes.

Fixtures : —
- ⇒ T-23d-02

DeviceFingerprint.verify_or_initialize — happy path

PURE

Function : test_devicefingerprint_verify_or_initialize_happy_path

Covers : DeviceFingerprint.verify_or_initialize

Purpose : verify or initialize performs the setup steps end-to-end.

Fixtures : monkeypatch (time.time)
- ⇒ T-23d-03

DeviceFingerprint.reinitialize — happy path

PURE

Function : test_devicefingerprint_reinitialize_happy_path

Covers : DeviceFingerprint.reinitialize

Purpose : reinitialize produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- monkeypatch (time.time)

Linked fiches

← OP-23a uses device_identity.py

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-23e

audit_decorators.py

Source : py_modules/unifideck/security/audit_decorators.py | Lignes : 90 | Cible : 90%

Test file : tests/unit/security/test_audit_decorators.py

Public surface

[func] audit_auth_flow (pure)
[func] audit_token_op (pure)

Tests to write (4)

⇒ T-23e-01 audit_auth_flow — happy path PURE

Function : test_audit_auth_flow_happy_path
Covers : audit_auth_flow
Purpose : audit auth flow produces the expected output for a typical input.
Fixtures : monkeypatch (time.time)

⇒ T-23e-02 audit_auth_flow — edge cases PURE

Function : test_audit_auth_flow_edge_cases
Covers : audit_auth_flow
Purpose : audit auth flow stays correct on empty / boundary inputs.
Fixtures : monkeypatch (time.time)

⇒ T-23e-03 audit_token_op — happy path PURE

Function : test_audit_token_op_happy_path
Covers : audit_token_op
Purpose : audit token op produces the expected output for a typical input.
Fixtures : —

⇒ T-23e-04 audit_token_op — edge cases PURE

Function : test_audit_token_op_edge_cases
Covers : audit_token_op
Purpose : audit token op stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- monkeypatch (time.time)

Linked fiches

← OP-05a uses events.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

5 TESTS

OP-12a

metadata_service.py

Source : py_modules/unifideck/services/metadata_service.py | Lignes : 105 | Cible : 60%

Test file : tests/unit/services/test_metadata_service.py

Public surface

[class] MetadataService (__init__, stop, enrich)

Tests to write (5)

⇒ T-12a-01 MetadataService.__init__ — construction

PURE

Function : test_metadataservice_init_constructs_with_valid_args
Covers : MetadataService.__init__
Purpose : MetadataService stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-12a-02 MetadataService.stop — happy path

ASYNC

Function : test_metadataservice_stop_happy_path
Covers : MetadataService.stop
Purpose : stop resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-12a-03 MetadataService.stop — error handling

ASYNC

Function : test_metadataservice_stop_handles_error
Covers : MetadataService.stop
Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-12a-04 MetadataService.enrich — happy path

MOCKED HTTP

Function : test_metadataservice_enrich_happy_path
Covers : MetadataService.enrich
Purpose : enrich resolves to the expected value on success.
Fixtures : pytest-asyncio, aioresponses

⇒ T-12a-05 MetadataService.enrich — error handling

MOCKED HTTP

Function : test_metadataservice_enrich_raises_on_network_failure
Covers : MetadataService.enrich
Purpose : enrich surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

OP-12a `metadata_service.py` (cont.)

Mocking dependencies

- `aioresponses`
- `pytest-asyncio`

Linked fiches

- ← OP-04a uses `cache_manager.py`
- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09h uses `event_bus_devex.py`
- OP-13b used by `container.py`

PRIORITY MEDIUM

TIER 3

INTEGRATION

5 TESTS

OP-12b

proton_service.py

Source : py_modules/unifideck/services/proton_service.py | Lignes : 99 | Cible : 60%

Test file : tests/unit/services/test_proton_service.py

Public surface

[class] ProtonService (__init__, stop, set_compat_tool)

Tests to write (5)

⇒ T-12b-01 ProtonService.__init__ — construction PURE

Function : test_protonservice_init_constructs_with_valid_args

Covers : ProtonService.__init__

Purpose : ProtonService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-12b-02 ProtonService.stop — happy path ASYNC

Function : test_protonservice_stop_happy_path

Covers : ProtonService.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-12b-03 ProtonService.stop — error handling ASYNC

Function : test_protonservice_stop_handles_error

Covers : ProtonService.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-12b-04 ProtonService.set_compat_tool — happy path MOCKED FS

Function : test_protonservice_set_compat_tool_happy_path

Covers : ProtonService.set_compat_tool

Purpose : set compat tool resolves to the expected value on success.

Fixtures : pytest-asyncio, tmp_path

⇒ T-12b-05 ProtonService.set_compat_tool — error handling MOCKED FS

Function : test_protonservice_set_compat_tool_handles_missing_or_corrupt_file

Covers : ProtonService.set_compat_tool

Purpose : set compat tool handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

OP-12b *proton_service.py* (cont.)

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-06a uses `async_file_ops.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09h uses `event_bus_devex.py`
- OP-13b used by `container.py`
- OP-20a used by `service.py`
- OP-20f used by `builder.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

8 TESTS

OP-12c

account_service.py

Source : py_modules/unifideck/services/account_service.py | Lignes : 102 | Cible : 60%

Test file : tests/unit/services/test_account_service.py

Public surface

[class]

AccountService

(__init__, start, stop, get_current_user, force_ch...)

Tests to write (8)

⇒ T-12c-01

AccountService.__init__ — construction

PURE

Function :

test_accountservice_init_constructs_with_valid_args

Covers :

AccountService.__init__

Purpose :

AccountService stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-12c-02

AccountService.start — happy path

ASYNC

Function :

test_accountservice_start_spawns_target_action

Covers :

AccountService.start

Purpose :

start spawns the target action and returns its handle.

Fixtures :

pytest-asyncio

⇒ T-12c-03

AccountService.start — error handling

ASYNC

Function :

test_accountservice_start_handles_error

Covers :

AccountService.start

Purpose :

start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-12c-04

AccountService.stop — happy path

ASYNC

Function :

test_accountservice_stop_happy_path

Covers :

AccountService.stop

Purpose :

stop resolves to the expected value on success.

Fixtures :

pytest-asyncio

⇒ T-12c-05

AccountService.stop — error handling

ASYNC

Function :

test_accountservice_stop_handles_error

Covers :

AccountService.stop

Purpose :

stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

OP-12c `account_service.py` (cont.)

Tests to write (8) — cont.

⇒ **T-12c-06** **AccountService.get_current_user — happy path**

PURE

Function : `test_accountservice_get_current_user_returns_value_on_success`Covers : `AccountService.get_current_user`

Purpose : get current user returns the expected payload on a normal response.

Fixtures : —

⇒ **T-12c-07** **AccountService.force_check — happy path**

ASYNC

Function : `test_accountservice_force_check_happy_path`Covers : `AccountService.force_check`

Purpose : force check returns True for a valid input.

Fixtures : `pytest-asyncio`⇒ **T-12c-08** **AccountService.force_check — error handling**

ASYNC

Function : `test_accountservice_force_check_handles_error`Covers : `AccountService.force_check`

Purpose : force check surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-06a uses `async_file_ops.py`
- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`
- OP-13b used by `container.py`

PRIORITY MEDIUM

TIER 1

PURE

3 TESTS

OP-12d

feature_flag_service.py

Source : `py_modules/unifideck/services/feature_flag_service.py` | Lignes : 110 | Cible : 90%

Test file : `tests/unit/services/test_feature_flag_service.py`

Public surface

[class] FeatureFlagService (`__init__`, `get_flags`, `is_enabled`)

Tests to write (3)

⇒ T-12d-01 FeatureFlagService.__init__ — construction

PURE

Function : `test_featureflagservice_init_constructs_with_valid_args`
Covers : FeatureFlagService.__init__
Purpose : FeatureFlagService stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-12d-02 FeatureFlagService.get_flags — happy path

PURE

Function : `test_featureflagservice_get_flags_returns_value_on_success`
Covers : FeatureFlagService.get_flags
Purpose : get flags returns the expected payload on a normal response.
Fixtures : —

⇒ T-12d-03 FeatureFlagService.is_enabled — happy path

PURE

Function : `test_featureflagservice_is_enabled_returns_true_on_valid_input`
Covers : FeatureFlagService.is_enabled
Purpose : is enabled returns True for a valid input.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09h uses `event_bus_devex.py`
- OP-13b used by `container.py`

PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-12e

probe_reaction_service.py

Source : py_modules/unifideck/services/probe_reaction_service.py | Lignes : 114 | Cible : 90%

Test file : tests/unit/services/test_probe_reaction_service.py

Public surface

[class] ProbeReactionService (__init__, get_history)

Tests to write (2)

⇒ T-12e-01 ProbeReactionService.__init__ — construction

PURE

Function : test_probereactionservice_init_constructs_with_valid_args
Covers : ProbeReactionService.__init__
Purpose : ProbeReactionService stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-12e-02 ProbeReactionService.get_history — happy path

PURE

Function : test_probereactionservice_get_history_returns_value_on_success
Covers : ProbeReactionService.get_history
Purpose : get history returns the expected payload on a normal response.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-09h uses event_bus_devex.py
- OP-13b used by container.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

5 TESTS

OP-16a

service.py

Source : py_modules/unifideck/services/artwork/service.py | Lignes : 99 | Cible : 60%

Test file : tests/unit/services/artwork/test_service.py

Public surface

[class] ArtworkService (__init__, stop, fetch_artwork)

Tests to write (5)

⇒ T-16a-01 ArtworkService.__init__ — construction PURE

Function : test_artworkservice_init_constructs_with_valid_args

Covers : ArtworkService.__init__

Purpose : ArtworkService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-16a-02 ArtworkService.stop — happy path ASYNC

Function : test_artworkservice_stop_happy_path

Covers : ArtworkService.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-16a-03 ArtworkService.stop — error handling ASYNC

Function : test_artworkservice_stop_handles_error

Covers : ArtworkService.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-16a-04 ArtworkService.fetch_artwork — happy path MOCKED HTTP

Function : test_artworkservice_fetch_artwork_returns_value_on_success

Covers : ArtworkService.fetch_artwork

Purpose : fetch artwork returns the expected payload on a normal response.

Fixtures : pytest-asyncio, aioresponses

⇒ T-16a-05 ArtworkService.fetch_artwork — error handling MOCKED HTTP

Function : test_artworkservice_fetch_artwork_raises_on_network_failure

Covers : ArtworkService.fetch_artwork

Purpose : fetch artwork surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

OP-16a service.py (cont.)

Mocking dependencies

- aioreponses
- pytest-asyncio

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-09h uses event_bus_devex.py

● PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-16c

fetcher.py

Source : `py_modules/unifideck/services/artwork/fetcher.py` | Lignes : 74 | Cible : 80%
Test file : `tests/unit/services/artwork/test_fetcher.py`

Public surface

[async]	<code>has_artwork</code>	(<i>async</i> + I/O)
[async]	<code>find_artwork_url</code>	(<i>async</i> + I/O)
[async]	<code>download_and_save</code>	(<i>async</i> + I/O)

Tests to write (6)

⇒ **T-16c-01** **has_artwork — happy path**

MOCKED FS

Function : `test_has_artwork_returns_true_on_valid_input`

Covers : `has_artwork`

Purpose : has artwork returns True for a valid input.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ **T-16c-02** **has_artwork — error handling**

MOCKED FS

Function : `test_has_artwork_handles_missing_or_corrupt_file`

Covers : `has_artwork`

Purpose : has artwork handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ **T-16c-03** **find_artwork_url — happy path**

ASYNC

Function : `test_find_artwork_url_returns_target_when_present`

Covers : `find_artwork_url`

Purpose : find artwork url returns the located target when it exists.

Fixtures : `pytest-asyncio`

⇒ **T-16c-04** **find_artwork_url — error handling**

ASYNC

Function : `test_find_artwork_url_handles_error`

Covers : `find_artwork_url`

Purpose : find artwork url surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ **T-16c-05** **download_and_save — happy path**

MOCKED HTTP

Function : `test_download_and_save_happy_path`

Covers : `download_and_save`

Purpose : download and save persists the input correctly to disk.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

OP-16c *fetcher.py* (cont.)

Tests to write (6) — cont.

⇒ T-16c-06

download_and_save — error handling

MOCKED HTTP

Function :

Covers :

Purpose :

Fixtures :

test_download_and_save_raises_on_http_200

download_and_save

download and save surfaces a typed error on HTTP 200, not a swallowed exception.

pytest-asyncio, aioresponses, tmp_path

Mocking dependencies

Linked fiches

- aioresponses
- pytest-asyncio
- tmp_path

← OP-06a uses `async_file_ops.py`

← OP-11 uses `__init__.py`

← OP-32a uses `steamgriddb.py`

→ OP-16a used by `service.py`

→ OP-16b used by `event_handlers.py`

● PRIORITY MEDIUM

TIER 2

MOCKED

2 TESTS

OP-13a

paths.py

Source : `py_modules/unifideck/services/bootstrap/paths.py` | Lignes : 63 | Cible : 80%
Test file : `tests/unit/services/bootstrap/test_paths.py`

Public surface

`[class]` ServicePaths

(from_config)

Tests to write (2)

⇒ T-13a-01 ServicePaths.from_config — happy path

MOCKED FS

Function : `test_servicepaths_from_config_happy_path`

Covers : `ServicePaths.from_config`

Purpose : from config produces the expected output for a typical input.

Fixtures : `tmp_path`

⇒ T-13a-02 ServicePaths.from_config — error handling

MOCKED FS

Function : `test_servicepaths_from_config_handles_missing_or_corrupt_file`

Covers : `ServicePaths.from_config`

Purpose : from config handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-32b uses `library.py`
- OP-13c used by `service_defs.py`
- OP-13d used by `constructor.py`

PRIORITY MEDIUM

TIER 1PURE4 TESTS

OP-13d

constructor.py

Source : py_modules/unifideck/services/bootstrap/constructor.py | Lignes : 70 | Cible : 90%
Test file : tests/unit/services/bootstrap/test_constructor.py

Public surface

[func] bootstrap_services (pure)
[func] build_service_subset (pure)

Tests to write (4)

⇒ T-13d-01 bootstrap_services — happy path PURE
Function : test_bootstrap_services_happy_path
Covers : bootstrap_services
Purpose : bootstrap services produces the expected output for a typical input.
Fixtures : —

⇒ T-13d-02 bootstrap_services — edge cases PURE
Function : test_bootstrap_services_edge_cases
Covers : bootstrap_services
Purpose : bootstrap services stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-13d-03 build_service_subset — happy path PURE
Function : test_build_service_subset_happy_path
Covers : build_service_subset
Purpose : build service subset produces the expected object from valid arguments.
Fixtures : —

⇒ T-13d-04 build_service_subset — edge cases PURE
Function : test_build_service_subset_edge_cases
Covers : build_service_subset
Purpose : build service subset stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-09a uses event_bus.py
- ← OP-09i uses bus_pipeline.py
- ← OP-11 uses __init__.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-13e

startup.py

Source : `py_modules/unifideck/services/bootstrap/startup.py` | Lignes : 46 | Cible : 60%

Test file : `tests/unit/services/bootstrap/test_startup.py`

Public surface

[async]

start_async_services

(async + I/O)

Tests to write (2)

⇒ T-13e-01

start_async_services — happy path

ASYNC

Function : `test_start_async_services_spawns_target_action`

Covers : `start_async_services`

Purpose : start async services spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-13e-02

start_async_services — error handling

ASYNC

Function : `test_start_async_services_handles_error`

Covers : `start_async_services`

Purpose : start async services surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

• `pytest-asyncio`

Linked fiches

← OP-13b uses `container.py`

← OP-35d uses `packaging.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-13f

teardown.py

Source : `py_modules/unifideck/services/bootstrap/teardown.py` | Lignes : 32 | Cible : 60%

Test file : `tests/unit/services/bootstrap/test_teardown.py`

Public surface

[async]

stop_all_services

(async + I/O)

Tests to write (2)

⇒ T-13f-01

stop_all_services — happy path

ASYNC

Function : `test_stop_all_services_happy_path`

Covers : `stop_all_services`

Purpose : stop all services resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-13f-02

stop_all_services — error handling

ASYNC

Function : `test_stop_all_services_handles_error`

Covers : `stop_all_services`

Purpose : stop all services surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

• `pytest-asyncio`

Linked fiches

← OP-13b uses `container.py`

● PRIORITY MEDIUM

TIER 1

PURE

2 TESTS

OP-13g

store_injector.py

Source : `py_modules/unifideck/services/bootstrap/store_injector.py` | Lignes : 53 | Cible : 90%
Test file : `tests/unit/services/bootstrap/test_store_injector.py`

Public surface

[func]

inject_store_dependencies

(pure)

Tests to write (2)

⇒ T-13g-01

inject_store_dependencies — happy path

PURE

Function : `test_inject_store_dependencies_happy_path`

Covers : `inject_store_dependencies`

Purpose : inject store dependencies persists the input correctly to disk.

Fixtures : —

⇒ T-13g-02

inject_store_dependencies — edge cases

PURE

Function : `test_inject_store_dependencies_returns_none_on_missing_input`

Covers : `inject_store_dependencies`

Purpose : inject store dependencies returns None on missing or invalid input rather than raising.

Fixtures : —

Mocking dependencies

Linked fiches

• (none — pure tests)

← OP-13b uses `container.py`

← OP-46 uses `__init__.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-17a

service.py

Source : py_modules/unifideck/services/cloud_save/service.py | Lignes : 60 | Cible : 90%

Test file : tests/unit/services/cloud_save/test_service.py

Public surface

[class] CloudSaveService (__init__, stop, get_local_save_dir)

Tests to write (4)

⇒ T-17a-01 CloudSaveService.__init__ — construction

PURE

Function : test_cloudsaveservice_init_constructs_with_valid_args
Covers : CloudSaveService.__init__
Purpose : CloudSaveService stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-17a-02 CloudSaveService.stop — happy path

ASYNC

Function : test_cloudsaveservice_stop_happy_path
Covers : CloudSaveService.stop
Purpose : stop resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-17a-03 CloudSaveService.stop — error handling

ASYNC

Function : test_cloudsaveservice_stop_handles_error
Covers : CloudSaveService.stop
Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-17a-04 CloudSaveService.get_local_save_dir — happy path

PURE

Function : test_cloudsaveservice_get_local_save_dir_returns_value_on_success
Covers : CloudSaveService.get_local_save_dir
Purpose : get local save dir returns the expected payload on a normal response.
Fixtures : —

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-09h uses event_bus_devex.py
- ← OP-11 uses __init__.py

PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-17c

manifest.py

Source : py_modules/unifideck/services/cloud_save/manifest.py | Lignes : 45 | Cible : 80%

Test file : tests/unit/services/cloud_save/test_manifest.py

Public surface

[async]	read_manifest	(async + I/O)
[async]	write_manifest	(async + I/O)
[async]	build_manifest	(async + I/O)

Tests to write (6)

⇒ T-17c-01

read_manifest — happy path

MOCKED FS

Function :

test_read_manifest_returns_value_on_success

Covers :

read_manifest

Purpose :

read manifest returns the expected payload on a normal response.

Fixtures :

pytest-asyncio, tmp_path

⇒ T-17c-02

read_manifest — error handling

MOCKED FS

Function :

test_read_manifest_handles_missing_or_corrupt_file

Covers :

read_manifest

Purpose :

read manifest handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

pytest-asyncio, tmp_path

⇒ T-17c-03

write_manifest — happy path

MOCKED FS

Function :

test_write_manifest_persists_value_to_disk

Covers :

write_manifest

Purpose :

write manifest persists the input correctly to disk.

Fixtures :

pytest-asyncio, tmp_path

⇒ T-17c-04

write_manifest — error handling

MOCKED FS

Function :

test_write_manifest_handles_missing_or_corrupt_file

Covers :

write_manifest

Purpose :

write manifest handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

pytest-asyncio, tmp_path

⇒ T-17c-05

build_manifest — happy path

MOCKED FS

Function :

test_build_manifest_happy_path

Covers :

build_manifest

Purpose :

build manifest produces the expected object from valid arguments.

Fixtures :

pytest-asyncio, tmp_path

OP-17c manifest.py (cont.)

Tests to write (6) — cont.

⇒ T-17c-06

build_manifest — error handling

MOCKED FS

Function :

test_build_manifest_handles_missing_or_corrupt_file

Covers :

build_manifest

Purpose :

build manifest handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

pytest-asyncio, tmp_path

Mocking dependencies

- pytest-asyncio
- tmp_path

Linked fiches

← OP-17d uses fs_ops.py

← OP-17f uses constants.py

→ OP-17b used by sync.py

PRIORITY MEDIUM

TIER 2

MOCKED

8 TESTS

OP-17d

fs_ops.py

Source : py_modules/unifideck/services/cloud_save/fs_ops.py | Lignes : 58 | Cible : 80%

Test file : tests/unit/services/cloud_save/test_fs_ops.py

Public surface

[func]	walk_mtimes	(pure)
[func]	copy_tree	(pure)
[func]	read_text	(pure)
[func]	write_text	(pure)

Tests to write (8)

⇒ T-17d-01 walk_mtimes — happy path

MOCKED FS

Function : test_walk_mtimes_happy_path
Covers : walk_mtimes
Purpose : walk mtimes produces the expected output for a typical input.
Fixtures : tmp_path

⇒ T-17d-02 walk_mtimes — error handling

MOCKED FS

Function : test_walk_mtimes_handles_missing_or_corrupt_file
Covers : walk_mtimes
Purpose : walk mtimes handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-17d-03 copy_tree — happy path

MOCKED FS

Function : test_copy_tree_happy_path
Covers : copy_tree
Purpose : copy tree performs the side-effect without raising.
Fixtures : tmp_path

⇒ T-17d-04 copy_tree — error handling

MOCKED FS

Function : test_copy_tree_handles_missing_or_corrupt_file
Covers : copy_tree
Purpose : copy tree handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-17d-05 read_text — happy path

MOCKED FS

Function : test_read_text_returns_value_on_success
Covers : read_text
Purpose : read text returns the expected payload on a normal response.
Fixtures : tmp_path

OP-17d fs_ops.py (cont.)

Tests to write (8) — cont.

⇒ T-17d-06

read_text — error handling

Function : test_read_text_handles_missing_or_corrupt_file

Covers : read_text

Purpose : read text handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

MOCKED FS

⇒ T-17d-07

write_text — happy path

Function : test_write_text_persists_value_to_disk

Covers : write_text

Purpose : write text persists the input correctly to disk.

Fixtures : tmp_path

MOCKED FS

⇒ T-17d-08

write_text — error handling

Function : test_write_text_handles_missing_or_corrupt_file

Covers : write_text

Purpose : write text handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

MOCKED FS

Mocking dependencies

• tmp_path

Linked fiches

← OP-17f uses constants.py

→ OP-17b used by sync.py

→ OP-17c used by manifest.py

● PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-17e

paths.py

Source : `py_modules/unifideck/services/cloud_save/paths.py` | Lignes : 8 | Cible : 80%

Test file : `tests/unit/services/cloud_save/test_paths.py`

Public surface

`[func]` `local_save_dir` *(pure)*

`[func]` `remote_save_dir` *(pure)*

Tests to write (4)

⇒ **T-17e-01** **local_save_dir — happy path**

MOCKED FS

Function : `test_local_save_dir_happy_path`

Covers : `local_save_dir`

Purpose : local save dir persists the input correctly to disk.

Fixtures : `tmp_path`

⇒ **T-17e-02** **local_save_dir — error handling**

MOCKED FS

Function : `test_local_save_dir_handles_missing_or_corrupt_file`

Covers : `local_save_dir`

Purpose : local save dir handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

⇒ **T-17e-03** **remote_save_dir — happy path**

MOCKED FS

Function : `test_remote_save_dir_happy_path`

Covers : `remote_save_dir`

Purpose : remote save dir persists the input correctly to disk.

Fixtures : `tmp_path`

⇒ **T-17e-04** **remote_save_dir — error handling**

MOCKED FS

Function : `test_remote_save_dir_handles_missing_or_corrupt_file`

Covers : `remote_save_dir`

Purpose : remote save dir handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

Mocking dependencies

- `tmp_path`

Linked fiches

- OP-17a used by `service.py`
- OP-17b used by `sync.py`

● PRIORITY MEDIUM

TIER 3

INTEGRATION

10 TESTS

OP-15a

service.py

Source : `py_modules/unifideck/services/download/service.py` | Lignes : 102 | Cible : 60%

Test file : `tests/unit/services/download/test_service.py`

Public surface

`[class]` DownloadService *(__init__, start, stop, add, cancel, get_queue)*

Tests to write (10)

⇒ T-15a-01 DownloadService.__init__ — construction PURE

Function : `test_downloadservice_init_constructs_with_valid_args`

Covers : DownloadService.__init__

Purpose : DownloadService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-15a-02 DownloadService.start — happy path ASYNC

Function : `test_downloadservice_start_spawns_target_action`

Covers : DownloadService.start

Purpose : start spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ T-15a-03 DownloadService.start — error handling ASYNC

Function : `test_downloadservice_start_handles_error`

Covers : DownloadService.start

Purpose : start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-15a-04 DownloadService.stop — happy path ASYNC

Function : `test_downloadservice_stop_happy_path`

Covers : DownloadService.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-15a-05 DownloadService.stop — error handling ASYNC

Function : `test_downloadservice_stop_handles_error`

Covers : DownloadService.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-15a service.py (cont.)

Tests to write (10) — cont.

⇒ T-15a-06 DownloadService.add — happy path

ASYNC

Function : [test_downloads_service_add_happy_path](#)

Covers : DownloadService.add

Purpose : add resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-15a-07 DownloadService.add — error handling

ASYNC

Function : [test_downloads_service_add_handles_error](#)

Covers : DownloadService.add

Purpose : add surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-15a-08 DownloadService.cancel — happy path

ASYNC

Function : [test_downloads_service_cancel_happy_path](#)

Covers : DownloadService.cancel

Purpose : cancel resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-15a-09 DownloadService.cancel — error handling

ASYNC

Function : [test_downloads_service_cancel_handles_error](#)

Covers : DownloadService.cancel

Purpose : cancel surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-15a-10 DownloadService.get_queue — happy path

PURE

Function : [test_downloads_service_get_queue_returns_value_on_success](#)

Covers : DownloadService.get_queue

Purpose : get queue returns the expected payload on a normal response.

Fixtures : —

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-15b uses `worker.py`
- ← OP-15c uses `models.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-15c

models.py

Source : py_modules/unifideck/services/download/models.py | Lignes : 45 | Cible : 90%

Test file : tests/unit/services/download/test_models.py

Public surface

[class]	DownloadItem	(to_dict, from_dict)
[func]	classify_download_error	(pure)

Tests to write (4)

⇒ T-15c-01	classify_download_error — happy path	PURE
Function :	test_classify_download_error_happy_path	
Covers :	classify_download_error	
Purpose :	classify download error produces the expected output for a typical input.	
Fixtures :	—	

⇒ T-15c-02	classify_download_error — edge cases	PURE
Function :	test_classify_download_error_edge_cases	
Covers :	classify_download_error	
Purpose :	classify download error stays correct on empty / boundary inputs.	
Fixtures :	—	

⇒ T-15c-03	DownloadItem.to_dict — happy path	PURE
Function :	test_downloaditem_to_dict_returns_converted_value	
Covers :	DownloadItem.to_dict	
Purpose :	to dict produces the converted value for a typical input.	
Fixtures :	—	

⇒ T-15c-04	DownloadItem.from_dict — happy path	PURE
Function :	test_downloaditem_from_dict_happy_path	
Covers :	DownloadItem.from_dict	
Purpose :	from dict produces the expected output for a typical input.	
Fixtures :	—	

Mocking dependencies

- (none — pure tests)

Linked fiches

- OP-15a used by service.py
- OP-15b used by worker.py
- OP-15d used by validators.py
- OP-15e used by persistence.py

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-15d

validators.py

Source : py_modules/unifideck/services/download/validators.py | Lignes : 36 | Cible : 90%

Test file : tests/unit/services/download/test_validators.py

Public surface

[func]	item_key	(pure)
[func]	validate_path	(pure)

Tests to write (4)

T-15d-01 item_key — happy path

PURE

Function : test_item_key_happy_path
Covers : item_key
Purpose : item key produces the expected output for a typical input.
Fixtures : —

T-15d-02 item_key — edge cases

PURE

Function : test_item_key_edge_cases
Covers : item_key
Purpose : item key stays correct on empty / boundary inputs.
Fixtures : —

T-15d-03 validate_path — happy path

MOCKED FS

Function : test_validate_path_returns_true_on_valid_input
Covers : validate_path
Purpose : validate path returns True for a valid input.
Fixtures : tmp_path

T-15d-04 validate_path — error handling

MOCKED FS

Function : test_validate_path_handles_missing_or_corrupt_file
Covers : validate_path
Purpose : validate path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-15c uses models.py
- OP-15a used by service.py
- OP-15b used by worker.py

PRIORITY MEDIUM

TIER 3

INTEGRATION

4 TESTS

OP-15e

persistence.py

Source : py_modules/unifideck/services/download/persistence.py | Lignes : 33 | Cible : 60%

Test file : tests/unit/services/download/test_persistence.py

Public surface

[async] load_queue (async + I/O)
[async] save_queue (async + I/O)

Tests to write (4)

⇒ T-15e-01 load_queue — happy path ASYNC
Function : test_load_queue_returns_value_on_success
Covers : load_queue
Purpose : load queue returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-15e-02 load_queue — error handling ASYNC
Function : test_load_queue_handles_error
Covers : load_queue
Purpose : load queue surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-15e-03 save_queue — happy path ASYNC
Function : test_save_queue_persists_value_to_disk
Covers : save_queue
Purpose : save queue persists the input correctly to disk.
Fixtures : pytest-asyncio

⇒ T-15e-04 save_queue — error handling ASYNC
Function : test_save_queue_handles_error
Covers : save_queue
Purpose : save queue surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-06a uses async_file_ops.py
- ← OP-15c uses models.py
- OP-15a used by service.py

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-21a

service.py

Source : py_modules/unifideck/services/launch_history/service.py | Lignes : 98 | Cible : 90%

Test file : tests/unit/services/launch_history/test_service.py

Public surface

[class] LaunchHistoryService (__init__, threshold, window_seconds, fast_boot...)

Tests to write (4)

⇒ T-21a-01 LaunchHistoryService.__init__ — construction PURE

Function : test_launchhistoryservice_init_constructs_with_valid_args

Covers : LaunchHistoryService.__init__

Purpose : LaunchHistoryService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-21a-02 LaunchHistoryService.threshold — happy path PURE

Function : test_launchhistoryservice_threshold_happy_path

Covers : LaunchHistoryService.threshold

Purpose : threshold produces the expected output for a typical input.

Fixtures : —

⇒ T-21a-03 LaunchHistoryService.window_seconds — happy path PURE

Function : test_launchhistoryservice_window_seconds_happy_path

Covers : LaunchHistoryService.window_seconds

Purpose : window seconds produces the expected output for a typical input.

Fixtures : —

⇒ T-21a-04 LaunchHistoryService.fast_boot_seconds — happy path PURE

Function : test_launchhistoryservice_fast_boot_seconds_happy_path

Covers : LaunchHistoryService.fast_boot_seconds

Purpose : fast boot seconds produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05a uses events.py
- ← OP-09h uses event_bus_devex.py
- ← OP-21b uses failures.py
- ← OP-21c uses bypass.py

● PRIORITY MEDIUM

TIER 1PURE6 TESTS

OP-21d

config_readers.py

Source : py_modules/unifideck/services/launch_history/config_readers.py | Lignes : 29 | Cible : 90%
Test file : tests/unit/services/launch_history/test_config_readers.py

Public surface

[func]	read_threshold	(pure)
[func]	read_window_seconds	(pure)
[func]	read_fast_boot_seconds	(pure)

Tests to write (6)

⇒ T-21d-01 read_threshold — happy path PURE

Function : test_read_threshold_returns_value_on_success
Covers : read_threshold
Purpose : read threshold returns the expected payload on a normal response.
Fixtures : —

⇒ T-21d-02 read_threshold — edge cases PURE

Function : test_read_threshold_edge_cases
Covers : read_threshold
Purpose : read threshold stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-21d-03 read_window_seconds — happy path PURE

Function : test_read_window_seconds_returns_value_on_success
Covers : read_window_seconds
Purpose : read window seconds returns the expected payload on a normal response.
Fixtures : —

⇒ T-21d-04 read_window_seconds — edge cases PURE

Function : test_read_window_seconds_edge_cases
Covers : read_window_seconds
Purpose : read window seconds stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-21d-05 read_fast_boot_seconds — happy path PURE

Function : test_read_fast_boot_seconds_returns_value_on_success
Covers : read_fast_boot_seconds
Purpose : read fast boot seconds returns the expected payload on a normal response.
Fixtures : —

OP-21d config_readers.py (cont.)

Tests to write (6) — cont.

⇒ T-21d-06

read_fast_boot_seconds — edge cases

PURE

Function :

test_read_fast_boot_seconds_edge_cases

Covers :

read_fast_boot_seconds

Purpose :

read fast boot seconds stays correct on empty / boundary inputs.

Fixtures :

—

Mocking dependencies

• (none — pure tests)

Linked fiches

→ OP-21a used by service.py

● PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-21e

persistence.py

Source : py_modules/unifideck/services/launch_history/persistence.py | Lignes : 37 | Cible : 80%

Test file : tests/unit/services/launch_history/test_persistence.py

Public surface

[func]

load_history

(pure)

[func]

save_history

(pure)

Tests to write (4)

⇒ T-21e-01

load_history — happy path

MOCKED FS

Function :

test_load_history_returns_value_on_success

Covers :

load_history

Purpose :

load history returns the expected payload on a normal response.

Fixtures :

tmp_path

⇒ T-21e-02

load_history — error handling

MOCKED FS

Function :

test_load_history_handles_missing_or_corrupt_file

Covers :

load_history

Purpose :

load history handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

tmp_path

⇒ T-21e-03

save_history — happy path

MOCKED FS

Function :

test_save_history_persists_value_to_disk

Covers :

save_history

Purpose :

save history persists the input correctly to disk.

Fixtures :

tmp_path

⇒ T-21e-04

save_history — error handling

MOCKED FS

Function :

test_save_history_handles_missing_or_corrupt_file

Covers :

save_history

Purpose :

save history handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

tmp_path

Mocking dependencies

• tmp_path

Linked fiches

→ OP-21b used by failures.py
→ OP-21c used by bypass.py

● PRIORITY HIGH

TIER 3

INTEGRATION

7 TESTS

OP-20a

service.py

Source : `py_modules/unifideck/services/launcher/service.py` | Lignes : 252 | Cible : 65%

Test file : `tests/unit/services/launcher/test_service.py`

Public surface

`[class]` LauncherService

`(__init__, start, stop, launch)`

Tests to write (7)

⇒ T-20a-01 LauncherService.__init__ — construction

PURE

Function : `test_launcherservice_init_constructs_with_valid_args`

Covers : `LauncherService.__init__`

Purpose : LauncherService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-20a-02 LauncherService.start — happy path

ASYNC

Function : `test_launcherservice_start_spawns_target_action`

Covers : `LauncherService.start`

Purpose : start spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-20a-03 LauncherService.start — error handling

ASYNC

Function : `test_launcherservice_start_handles_error`

Covers : `LauncherService.start`

Purpose : start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-20a-04 LauncherService.stop — happy path

ASYNC

Function : `test_launcherservice_stop_happy_path`

Covers : `LauncherService.stop`

Purpose : stop resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-20a-05 LauncherService.stop — error handling

ASYNC

Function : `test_launcherservice_stop_handles_error`

Covers : `LauncherService.stop`

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-20a service.py (cont.)

Tests to write (7) — cont.

⇒ T-20a-06

LauncherService.launch — happy path

ASYNC

Function : test_launcherservice_launch_spawns_target_action

Covers : LauncherService.launch

Purpose : launch spawns the target action and returns its handle.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-20a-07

LauncherService.launch — error handling

ASYNC

Function : test_launcherservice_launch_handles_error

Covers : LauncherService.launch

Purpose : launch surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

Mocking dependencies

Linked fiches

- monkeypatch (time.time)
- pytest-asyncio

- ← OP-05 uses __init__.py
- ← OP-09 uses __init__.py
- ← OP-12b uses proton_service.py
- ← OP-14 uses __init__.py
- OP-20b used by circuit_breaker.py
- OP-20c used by error_toasts.py
- OP-20d used by orchestrator.py
- OP-20e used by helpers.py

● PRIORITY HIGH

TIER 3

INTEGRATION

6 TESTS

OP-20b

circuit_breaker.py

Source : py_modules/unifideck/services/launcher/circuit_breaker.py | Lignes : 74 | Cible : 65%

Test file : tests/unit/services/launcher/test_circuit_breaker.py

Public surface

[async]

get_launch_id_or_none

(async + I/O)

[async]

emit_circuit_open_toast

(async + I/O)

[async]

check_circuit_breaker

(async + I/O)

Tests to write (6)

⇒ T-20b-01

get_launch_id_or_none — happy path

ASYNC

Function :

test_get_launch_id_or_none_returns_value_on_success

Covers :

get_launch_id_or_none

Purpose :

get launch id or none returns the expected payload on a normal response.

Fixtures :

pytest-asyncio

⇒ T-20b-02

get_launch_id_or_none — error handling

ASYNC

Function :

test_get_launch_id_or_none_handles_error

Covers :

get_launch_id_or_none

Purpose :

get launch id or none surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-20b-03

emit_circuit_open_toast — happy path

ASYNC

Function :

test_emit_circuit_open_toast_delivers_payload

Covers :

emit_circuit_open_toast

Purpose :

emit circuit open toast delivers the message exactly once on the happy path.

Fixtures :

pytest-asyncio

⇒ T-20b-04

emit_circuit_open_toast — error handling

ASYNC

Function :

test_emit_circuit_open_toast_handles_error

Covers :

emit_circuit_open_toast

Purpose :

emit circuit open toast surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-20b-05

check_circuit_breaker — happy path

MOCKED FS

Function :

test_check_circuit_breaker_returns_true_on_valid_input

Covers :

check_circuit_breaker

Purpose :

check circuit breaker returns True for a valid input.

Fixtures :

pytest-asyncio, tmp_path

OP-20b circuit_breaker.py (cont.)

Tests to write (6) — cont.

⇒ T-20b-06

check_circuit_breaker — error handling

MOCKED FS

Function :

test_check_circuit_breaker_handles_missing_or_corrupt_file

Covers :

check_circuit_breaker

Purpose :

check circuit breaker handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

pytest-asyncio, tmp_path

Mocking dependencies

Linked fiches

- pytest-asyncio
- tmp_path

- ← OP-05 uses __init__.py
- ← OP-05a uses events.py
- ← OP-20a uses service.py
- ← OP-36c uses context.py
- OP-20a used by service.py
- OP-20c used by error_toasts.py

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-20c

error_toasts.py

Source : `py_modules/unifideck/services/launcher/error_toasts.py` | Lignes : 69 | Cible : 65%

Test file : `tests/unit/services/launcher/test_error_toasts.py`

Public surface

[async]

emit_launcher_error_toast

(async + I/O)

[async]

handle_launcher_error

(async + I/O)

Tests to write (4)

⇒ T-20c-01

emit_launcher_error_toast — happy path

ASYNC

Function : `test_emit_launcher_error_toast_delivers_payload`

Covers : `emit_launcher_error_toast`

Purpose : emit launcher error toast delivers the message exactly once on the happy path.

Fixtures : `pytest-asyncio`

⇒ T-20c-02

emit_launcher_error_toast — error handling

ASYNC

Function : `test_emit_launcher_error_toast_handles_error`

Covers : `emit_launcher_error_toast`

Purpose : emit launcher error toast surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-20c-03

handle_launcher_error — happy path

ASYNC

Function : `test_handle_launcher_error_happy_path`

Covers : `handle_launcher_error`

Purpose : handle launcher error spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-20c-04

handle_launcher_error — error handling

ASYNC

Function : `test_handle_launcher_error_handles_error`

Covers : `handle_launcher_error`

Purpose : handle launcher error surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-05a uses `events.py`
- ← OP-20a uses `service.py`
- ← OP-20b uses `circuit_breaker.py`
- OP-20a used by `service.py`

● PRIORITY HIGH

TIER 2

MOCKED

4 TESTS

OP-20d

orchestrator.py

Source : `py_modules/unifideck/services/launcher/orchestrator.py` | Lignes : 73 | Cible : 85%

Test file : `tests/unit/services/launcher/test_orchestrator.py`

Public surface

[async]

launch_windows

(*async* + I/O)

[async]

launch_native

(*async* + I/O)

Tests to write (4)

- ⇒ T-20d-01

launch_windows — happy path

MOCKED SUBPROCESS

Function : `test_launch_windows_spawns_target_action`

Covers : `launch_windows`

Purpose : launch windows spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)
- ⇒ T-20d-02

launch_windows — error handling

MOCKED SUBPROCESS

Function : `test_launch_windows_raises_on_non_zero_exit`

Covers : `launch_windows`

Purpose : launch windows reports a non-zero subprocess exit as a typed failure.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)
- ⇒ T-20d-03

launch_native — happy path

ASYNC

Function : `test_launch_native_spawns_target_action`

Covers : `launch_native`

Purpose : launch native spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`
- ⇒ T-20d-04

launch_native — error handling

ASYNC

Function : `test_launch_native_handles_error`

Covers : `launch_native`

Purpose : launch native surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

- Mocking dependencies

- `monkeypatch` (`asyncio.create_subprocess_exec`)
 - `pytest-asyncio`
- Linked fiches

← OP-05 uses `__init__.py`

← OP-20a uses `service.py`

← OP-20e uses `helpers.py`

← OP-35b uses `rpc.py`

→ OP-20a used by `service.py`
- Unifideck — Test coverage companion

OP-20d · orchestrator.py

Page 272

● PRIORITY HIGH

TIER 3

INTEGRATION

12 TESTS

OP-20e

helpers.py

Source : `py_modules/unifideck/services/launcher/helpers.py` | Lignes : 212 | Cible : 65%

Test file : `tests/unit/services/launcher/test_helpers.py`

Public surface

[async]	prepare_windows_plan	(async + I/O)
[async]	cloud_sync_phase	(async + I/O)
[async]	run_game_subprocess	(async + I/O)
[async]	sync_saves_and_track_size	(async + I/O)
[func]	resolve_exit_code	(pure)
[func]	elapsed_since_launch	(pure)

Tests to write (12)

⇒ T-20e-01 prepare_windows_plan — happy path

ASYNC

Function : `test_prepare_windows_plan_happy_path`

Covers : prepare_windows_plan

Purpose : prepare windows plan resolves to the expected value on success.

Fixtures : pytest-asyncio, monkeypatch (env vars)

⇒ T-20e-02 prepare_windows_plan — error handling

ASYNC

Function : `test_prepare_windows_plan_handles_error`

Covers : prepare_windows_plan

Purpose : prepare windows plan surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (env vars)

⇒ T-20e-03 cloud_sync_phase — happy path

ASYNC

Function : `test_cloud_sync_phase_happy_path`

Covers : cloud_sync_phase

Purpose : cloud sync phase resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-20e-04 cloud_sync_phase — error handling

ASYNC

Function : `test_cloud_sync_phase_handles_error`

Covers : cloud_sync_phase

Purpose : cloud sync phase surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-20e helpers.py (cont.)

Tests to write (12) — cont.

⇒ T-20e-05 run_game_subprocess — happy path

MOCKED SUBPROCESS

Function : `test_run_game_subprocess_spawns_target_action`
 Covers : `run_game_subprocess`
 Purpose : run game subprocess spawns the target action and returns its handle.
 Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

⇒ T-20e-06 run_game_subprocess — error handling

MOCKED SUBPROCESS

Function : `test_run_game_subprocess_raises_on_non_zero_exit`
 Covers : `run_game_subprocess`
 Purpose : run game subprocess reports a non-zero subprocess exit as a typed failure.
 Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

⇒ T-20e-07 sync_saves_and_track_size — happy path

ASYNC

Function : `test_sync_saves_and_track_size_happy_path`
 Covers : `sync_saves_and_track_size`
 Purpose : `sync_saves_and_track_size` persists the input correctly to disk.
 Fixtures : `pytest-asyncio`

⇒ T-20e-08 sync_saves_and_track_size — error handling

ASYNC

Function : `test_sync_saves_and_track_size_handles_error`
 Covers : `sync_saves_and_track_size`
 Purpose : `sync_saves_and_track_size` surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ T-20e-09 resolve_exit_code — happy path

PURE

Function : `test_resolve_exit_code_returns_target_when_present`
 Covers : `resolve_exit_code`
 Purpose : `resolve_exit_code` returns the located target when it exists.
 Fixtures : —

⇒ T-20e-10 resolve_exit_code — edge cases

PURE

Function : `test_resolve_exit_code_edge_cases`
 Covers : `resolve_exit_code`
 Purpose : `resolve_exit_code` stays correct on empty / boundary inputs.
 Fixtures : —

⇒ T-20e-11 elapsed_since_launch — happy path

PURE

Function : `test_elapsed_since_launch_happy_path`
 Covers : `elapsed_since_launch`
 Purpose : `elapsed_since_launch` spawns the target action and returns its handle.
 Fixtures : —

OP-20e helpers.py (cont.)

Tests to write (12) — cont.

⇒ T-20e-12

elapsed_since_launch — edge cases

PURE

Function :

Covers :

Purpose :

Fixtures :

test_elapsed_since_launch_edge_cases

elapsed_since_launch

elapsed since launch stays correct on empty / boundary inputs.

—

Mocking dependencies

Linked fiches

- monkeypatch (asyncio.create_subprocess_exec)
- monkeypatch (env vars)
- pytest-asyncio

← OP-20a uses service.py

← OP-35b uses rpc.py

← OP-36b uses errors.py

← OP-36c uses context.py

→ OP-20a used by service.py

→ OP-20d used by orchestrator.py

● PRIORITY HIGH

TIER 2

MOCKED

2 TESTS

OP-20f

builder.py

Source : `py_modules/unifideck/services/launcher/builder.py` | Lignes : 52 | Cible : 85%

Test file : `tests/unit/services/launcher/test_builder.py`

Public surface

[func]

build_standalone

(pure)

Tests to write (2)

⇒ T-20f-01

build_standalone — happy path

MOCKED FS

Function : `test_build_standalone_happy_path`

Covers : `build_standalone`

Purpose : build standalone produces the expected object from valid arguments.

Fixtures : `tmp_path`

⇒ T-20f-02

build_standalone — error handling

MOCKED FS

Function : `test_build_standalone_handles_missing_or_corrupt_file`

Covers : `build_standalone`

Purpose : build standalone handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

Mocking dependencies

Linked fiches

• `tmp_path`

← OP-09 uses `__init__.py`

← OP-12b uses `proton_service.py`

← OP-14 uses `__init__.py`

← OP-17 uses `__init__.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

7 TESTS

OP-22a

service.py

Source : py_modules/unifideck/services/microsoft_subscription/service.py | Lignes : 110 | Cible : 65%

Test file : tests/unit/services/microsoft_subscription/test_service.py

Public surface

[class]

MicrosoftSubscriptionService

(__init__, get_tier, has_active_subscription, inva...)

Tests to write (7)

⇒ T-22a-01

MicrosoftSubscriptionService.__init__ — construction

PURE

Function : test_microsoftsubscriptionservice_init_constructs_with_valid_args

Covers : MicrosoftSubscriptionService.__init__

Purpose : MicrosoftSubscriptionService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-22a-02

MicrosoftSubscriptionService.get_tier — happy path

ASYNC

Function : test_microsoftsubscriptionservice_get_tier_returns_value_on_success

Covers : MicrosoftSubscriptionService.get_tier

Purpose : get tier returns the expected payload on a normal response.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-22a-03

MicrosoftSubscriptionService.get_tier — error handling

ASYNC

Function : test_microsoftsubscriptionservice_get_tier_handles_error

Covers : MicrosoftSubscriptionService.get_tier

Purpose : get tier surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-22a-04

MicrosoftSubscriptionService.has_active_subscription — ha

ASYNC

Function : test_microsoftsubscriptionservice_has_active_subscription_returns_true_on_valid_i...

Covers : MicrosoftSubscriptionService.has_active_subscription

Purpose : has active subscription returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-22a-05

MicrosoftSubscriptionService.has_active_subscription — er

ASYNC

Function : test_microsoftsubscriptionservice_has_active_subscription_handles_error

Covers : MicrosoftSubscriptionService.has_active_subscription

Purpose : has active subscription surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-22a service.py (cont.)

Tests to write (7) — cont.

⇒ T-22a-06

MicrosoftSubscriptionService.invalidate — happy path

Function : test_microsoftsubscription_service_invalidate_happy_path

Covers : MicrosoftSubscriptionService.invalidate

Purpose : invalidate resolves to the expected value on success.

Fixtures : pytest-asyncio

ASYNC

⇒ T-22a-07

MicrosoftSubscriptionService.invalidate — error handling

Function : test_microsoftsubscription_service_invalidate_handles_error

Covers : MicrosoftSubscriptionService.invalidate

Purpose : invalidate surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

ASYNC

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-05 uses __init__.py
- ← OP-05a uses events.py
- ← OP-09a uses event_bus.py

PRIORITY MEDIUM

TIER 2

MOCKED

11 TESTS

OP-18a

service.py

Source : py_modules/unifideck/services/playtime/service.py | Lignes : 115 | Cible : 80%

Test file : tests/unit/services/playtime/test_service.py

Public surface

[class] PlaytimeService (__init__, start, stop, get_playtime, get_all_playti...)

Tests to write (11)

⇒ T-18a-01 PlaytimeService.__init__ — construction PURE

Function : test_playtimeservice_init_constructs_with_valid_args

Covers : PlaytimeService.__init__

Purpose : PlaytimeService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-18a-02 PlaytimeService.start — happy path ASYNC

Function : test_playtimeservice_start_spawns_target_action

Covers : PlaytimeService.start

Purpose : start spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ T-18a-03 PlaytimeService.start — error handling ASYNC

Function : test_playtimeservice_start_handles_error

Covers : PlaytimeService.start

Purpose : start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-18a-04 PlaytimeService.stop — happy path ASYNC

Function : test_playtimeservice_stop_happy_path

Covers : PlaytimeService.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-18a-05 PlaytimeService.stop — error handling ASYNC

Function : test_playtimeservice_stop_handles_error

Covers : PlaytimeService.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-18a service.py (cont.)

Tests to write (11) — cont.

⇒ T-18a-06 PlaytimeService.get_playtime — happy path

MOCKED HTTP

Function : [test_playtimeservice_get_playtime_returns_value_on_success](#)
Covers : PlaytimeService.get_playtime
Purpose : get playtime returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-18a-07 PlaytimeService.get_playtime — error handling

MOCKED HTTP

Function : [test_playtimeservice_get_playtime_raises_on_network_failure](#)
Covers : PlaytimeService.get_playtime
Purpose : get playtime surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

⇒ T-18a-08 PlaytimeService.get_all_playtimes — happy path

MOCKED HTTP

Function : [test_playtimeservice_get_all_playtimes_returns_value_on_success](#)
Covers : PlaytimeService.get_all_playtimes
Purpose : get all playtimes returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-18a-09 PlaytimeService.get_all_playtimes — error handling

MOCKED HTTP

Function : [test_playtimeservice_get_all_playtimes_raises_on_network_failure](#)
Covers : PlaytimeService.get_all_playtimes
Purpose : get all playtimes surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

⇒ T-18a-10 PlaytimeService.get_session_history — happy path

MOCKED HTTP

Function : [test_playtimeservice_get_session_history_returns_value_on_success](#)
Covers : PlaytimeService.get_session_history
Purpose : get session history returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-18a-11 PlaytimeService.get_session_history — error handling

MOCKED HTTP

Function : [test_playtimeservice_get_session_history_raises_on_network_failure](#)
Covers : PlaytimeService.get_session_history
Purpose : get session history surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

Mocking dependencies

- aioresponses
- pytest-asyncio

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-09h uses `event_bus_devex.py`
- ← OP-18b uses `db.py`

PRIORITY MEDIUM

TIER 2

MOCKED

9 TESTS

OP-18b

db.py

Source : py_modules/unifideck/services/playtime/db.py | Lignes : 92 | Cible : 80%

Test file : tests/unit/services/playtime/test_db.py

Public surface

[class] PlaytimeDB (__init__, close, insert_session, fetch_total, fetc...)

Tests to write (9)

⇒ T-18b-01 PlaytimeDB.__init__ — construction PURE

Function : test_playtimedb_init_constructs_with_valid_args
Covers : PlaytimeDB.__init__
Purpose : PlaytimeDB stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-18b-02 PlaytimeDB.close — happy path PURE

Function : test_playtimedb_close_happy_path
Covers : PlaytimeDB.close
Purpose : close produces the expected output for a typical input.
Fixtures : —

⇒ T-18b-03 PlaytimeDB.insert_session — happy path PURE

Function : test_playtimedb_insert_session_happy_path
Covers : PlaytimeDB.insert_session
Purpose : insert session produces the expected output for a typical input.
Fixtures : —

⇒ T-18b-04 PlaytimeDB.fetch_total — happy path MOCKED HTTP

Function : test_playtimedb_fetch_total_returns_value_on_success
Covers : PlaytimeDB.fetch_total
Purpose : fetch total returns the expected payload on a normal response.
Fixtures : aioresponses

⇒ T-18b-05 PlaytimeDB.fetch_total — error handling MOCKED HTTP

Function : test_playtimedb_fetch_total_raises_on_network_failure
Covers : PlaytimeDB.fetch_total
Purpose : fetch total surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : aioresponses

OP-18b db.py (cont.)

Tests to write (9) — cont.

⇒ T-18b-06 PlaytimeDB.fetch_all_totals — happy path

MOCKED HTTP

Function : [test_playtimedb_fetch_all_totals_returns_value_on_success](#)

Covers : PlaytimeDB.fetch_all_totals

Purpose : fetch all totals returns the expected payload on a normal response.

Fixtures : aioresponses

⇒ T-18b-07 PlaytimeDB.fetch_all_totals — error handling

MOCKED HTTP

Function : [test_playtimedb_fetch_all_totals_raises_on_network_failure](#)

Covers : PlaytimeDB.fetch_all_totals

Purpose : fetch all totals surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : aioresponses

⇒ T-18b-08 PlaytimeDB.fetch_sessions — happy path

MOCKED HTTP

Function : [test_playtimedb_fetch_sessions_returns_value_on_success](#)

Covers : PlaytimeDB.fetch_sessions

Purpose : fetch sessions returns the expected payload on a normal response.

Fixtures : aioresponses

⇒ T-18b-09 PlaytimeDB.fetch_sessions — error handling

MOCKED HTTP

Function : [test_playtimedb_fetch_sessions_raises_on_network_failure](#)

Covers : PlaytimeDB.fetch_sessions

Purpose : fetch sessions surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : aioresponses

Mocking dependencies

- aioresponses

Linked fiches

→ OP-18a used by service.py

● PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-19a

service.py

Source : `py_modules/unifideck/services/security/service.py` | Lignes : 134 | Cible : 95%

Test file : `tests/unit/services/security/test_service.py`

Public surface

`[class]` SecurityService

`(__init__, start, get_audit_log, get_counters, get...)`

Tests to write (8)

⇒ T-19a-01 SecurityService.__init__ — construction

PURE

Function : `test_securityservice_init_constructs_with_valid_args`

Covers : SecurityService.__init__

Purpose : SecurityService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-19a-02 SecurityService.start — happy path

ASYNC

Function : `test_securityservice_start_spawns_target_action`

Covers : SecurityService.start

Purpose : start spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-19a-03 SecurityService.start — error handling

ASYNC

Function : `test_securityservice_start_handles_error`

Covers : SecurityService.start

Purpose : start surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-19a-04 SecurityService.get_audit_log — happy path

PURE

Function : `test_securityservice_get_audit_log_returns_value_on_success`

Covers : SecurityService.get_audit_log

Purpose : get audit log returns the expected payload on a normal response.

Fixtures : —

⇒ T-19a-05 SecurityService.get_counters — happy path

PURE

Function : `test_securityservice_get_counters_returns_value_on_success`

Covers : SecurityService.get_counters

Purpose : get counters returns the expected payload on a normal response.

Fixtures : —

OP-19a service.py (cont.)

Tests to write (8) — cont.

⇒ T-19a-06 SecurityService.get_bruteforce_status — happy path

PURE

Function : [test_securityservice_get_bruteforce_status_returns_value_on_success](#)

Covers : SecurityService.get_bruteforce_status

Purpose : get bruteforce status returns the expected payload on a normal response.

Fixtures : —

⇒ T-19a-07 SecurityService.clear_audit_log — happy path

PURE

Function : [test_securityservice_clear_audit_log_removes_target_and_reports_success](#)

Covers : SecurityService.clear_audit_log

Purpose : clear audit log removes the target and reports success.

Fixtures : —

⇒ T-19a-08 SecurityService.reset_bruteforce_state — happy path

PURE

Function : [test_securityservice_reset_bruteforce_state_happy_path](#)

Covers : SecurityService.reset_bruteforce_state

Purpose : reset bruteforce state produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05a uses events.py
- ← OP-09a uses event_bus.py
- ← OP-09d uses event_replay.py
- ← OP-09h uses event_bus_devex.py
- OP-19f used by device_reset.py

PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-19b

audit_log.py

Source : py_modules/unifideck/services/security/audit_log.py | Lignes : 43 | Cible : 95%

Test file : tests/unit/services/security/test_audit_log.py

Public surface

[class] AuditLog (__init__, record, snapshot, counters, clear)

Tests to write (5)

⇒ T-19b-01 AuditLog.__init__ — construction PURE

Function : test_auditlog_init_constructs_with_valid_args
Covers : AuditLog.__init__
Purpose : AuditLog stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-19b-02 AuditLog.record — happy path PURE

Function : test_auditlog_record_happy_path
Covers : AuditLog.record
Purpose : record produces the expected output for a typical input.
Fixtures : monkeypatch (time.time)

⇒ T-19b-03 AuditLog.snapshot — happy path PURE

Function : test_auditlog_snapshot_happy_path
Covers : AuditLog.snapshot
Purpose : snapshot produces the expected output for a typical input.
Fixtures : —

⇒ T-19b-04 AuditLog.counters — happy path PURE

Function : test_auditlog_counters_returns_correct_count
Covers : AuditLog.counters
Purpose : counters returns the correct count for a populated input.
Fixtures : —

⇒ T-19b-05 AuditLog.clear — happy path PURE

Function : test_auditlog_clear_removes_target_and_reports_success
Covers : AuditLog.clear
Purpose : clear removes the target and reports success.
Fixtures : —

OP-19b *audit_log.py* (cont.)

Mocking dependencies

- monkeypatch (time.time)

Linked fiches

- OP-19a used by service.py
- OP-19g used by tokens.py
- OP-19h used by permissions.py
- OP-19i used by auth.py

● PRIORITY HIGH

TIER 1

PURE

4 TESTS

OP-19c

bruteforce.py

Source : `py_modules/unifideck/services/security/bruteforce.py` | Lignes : 62 | Cible : 95%

Test file : `tests/unit/services/security/test_bruteforce.py`

Public surface

[class]

BruteForceDetector

(`__init__`, `check`, `status`, `reset`)

Tests to write (4)

⇒ T-19c-01

BruteForceDetector.__init__ — construction

PURE

Function :

`test_bruteforcedetector_init_constructs_with_valid_args`

Covers :

`BruteForceDetector.__init__`

Purpose :

BruteForceDetector stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-19c-02

BruteForceDetector.check — happy path

PURE

Function :

`test_bruteforcedetector_check_returns_true_on_valid_input`

Covers :

`BruteForceDetector.check`

Purpose :

check returns True for a valid input.

Fixtures :

`monkeypatch (time.time)`

⇒ T-19c-03

BruteForceDetector.status — happy path

PURE

Function :

`test_bruteforcedetector_status_happy_path`

Covers :

`BruteForceDetector.status`

Purpose :

status returns the expected dict shape.

Fixtures :

`monkeypatch (time.time)`

⇒ T-19c-04

BruteForceDetector.reset — happy path

PURE

Function :

`test_bruteforcedetector_reset_happy_path`

Covers :

`BruteForceDetector.reset`

Purpose :

reset produces the expected output for a typical input.

Fixtures :

—

Mocking dependencies

Linked fiches

• `monkeypatch (time.time)`

→ OP-19a used by `service.py`

→ OP-19g used by `tokens.py`

Unifideck — Test coverage companion

OP-19c · bruteforce.py

Page 287

● PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-19d

config_readers.py

Source : `py_modules/unifideck/services/security/config_readers.py` | Lignes : 44 | Cible : 95%

Test file : `tests/unit/services/security/test_config_readers.py`

Public surface

[func]	read_int	(pure)
[func]	read_float	(pure)
[func]	read_str	(pure)
[func]	read_list	(pure)

Tests to write (8)

⇒ T-19d-01

read_int — happy path

PURE

Function :

`test_read_int_returns_value_on_success`

Covers :

read_int

Purpose :

read int returns the expected payload on a normal response.

Fixtures :

—

⇒ T-19d-02

read_int — edge cases

PURE

Function :

`test_read_int_edge_cases`

Covers :

read_int

Purpose :

read int stays correct on empty / boundary inputs.

Fixtures :

—

⇒ T-19d-03

read_float — happy path

PURE

Function :

`test_read_float_returns_value_on_success`

Covers :

read_float

Purpose :

read float returns the expected payload on a normal response.

Fixtures :

—

⇒ T-19d-04

read_float — edge cases

PURE

Function :

`test_read_float_edge_cases`

Covers :

read_float

Purpose :

read float stays correct on empty / boundary inputs.

Fixtures :

—

⇒ T-19d-05

read_str — happy path

PURE

Function :

`test_read_str_returns_value_on_success`

Covers :

read_str

Purpose :

read str returns the expected payload on a normal response.

Fixtures :

—

OP-19d config_readers.py (cont.)

Tests to write (8) — cont.

⇒ T-19d-06

read_str — edge cases

PURE

Function : test_read_str_edge_cases

Covers : read_str

Purpose : read str stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-19d-07

read_list — happy path

PURE

Function : test_read_list_returns_value_on_success

Covers : read_list

Purpose : read list returns the expected payload on a normal response.

Fixtures : —

⇒ T-19d-08

read_list — edge cases

PURE

Function : test_read_list_returns_empty_list_on_empty_input

Covers : read_list

Purpose : read list returns an empty list on empty input.

Fixtures : —

Mocking dependencies

Linked fiches

- (none — pure tests)

← OP-11 uses __init__.py

→ OP-19a used by service.py

→ OP-19f used by device_reset.py

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-19e

bus_emitter.py

Source : `py_modules/unifideck/services/security/bus_emitter.py` | Lignes : 25 | Cible : 95%
Test file : `tests/unit/services/security/test_bus_emitter.py`

Public surface

[func]

emit_security_event

(pure)

Tests to write (2)

⇒ T-19e-01

emit_security_event — happy path

PURE

Function : `test_emit_security_event_delivers_payload`

Covers : `emit_security_event`

Purpose : emit security event delivers the message exactly once on the happy path.

Fixtures : —

⇒ T-19e-02

emit_security_event — edge cases

PURE

Function : `test_emit_security_event_returns_none_on_missing_input`

Covers : `emit_security_event`

Purpose : emit security event returns None on missing or invalid input rather than raising.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-05a uses `events.py`
- ← OP-09a uses `event_bus.py`
- OP-19a used by `service.py`
- OP-19f used by `device_reset.py`
- OP-19h used by `permissions.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-19f

device_reset.py

Source : `py_modules/unifideck/services/security/device_reset.py` | Lignes : 80 | Cible : 65%

Test file : `tests/unit/services/security/test_device_reset.py`

Public surface

[async]

check_device_fingerprint

(async + I/O)

[async]

handle_device_reset

(async + I/O)

Tests to write (4)

⇒ T-19f-01

check_device_fingerprint — happy path

ASYNC

Function :

test_check_device_fingerprint_returns_true_on_valid_input

Covers :

check_device_fingerprint

Purpose :

check device fingerprint returns True for a valid input.

Fixtures :

pytest-asyncio

⇒ T-19f-02

check_device_fingerprint — error handling

ASYNC

Function :

test_check_device_fingerprint_handles_error

Covers :

check_device_fingerprint

Purpose :

check device fingerprint surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-19f-03

handle_device_reset — happy path

MOCKED FS

Function :

test_handle_device_reset_happy_path

Covers :

handle_device_reset

Purpose :

handle device reset resolves to the expected value on success.

Fixtures :

pytest-asyncio, tmp_path

⇒ T-19f-04

handle_device_reset — error handling

MOCKED FS

Function :

test_handle_device_reset_handles_missing_or_corrupt_file

Covers :

handle_device_reset

Purpose :

handle device reset handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

pytest-asyncio, tmp_path

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-19a uses `service.py`
- ← OP-19d uses `config_readers.py`
- ← OP-19e uses `bus_emitter.py`
- ← OP-23 uses `__init__.py`
- OP-19a used by `service.py`

PRIORITY MEDIUM

TIER 1

PURE

4 TESTS

OP-14a

service.py

Source : py_modules/unifideck/services/shortcut/service.py | Lignes : 73 | Cible : 90%

Test file : tests/unit/services/shortcut/test_service.py

Public surface

[class] ShortcutService (__init__, stop, generate_app_id)

Tests to write (4)

⇒ T-14a-01 ShortcutService.__init__ — construction PURE

Function : test_shortcutservice_init_constructs_with_valid_args

Covers : ShortcutService.__init__

Purpose : ShortcutService stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-14a-02 ShortcutService.stop — happy path ASYNC

Function : test_shortcutservice_stop_happy_path

Covers : ShortcutService.stop

Purpose : stop resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-14a-03 ShortcutService.stop — error handling ASYNC

Function : test_shortcutservice_stop_handles_error

Covers : ShortcutService.stop

Purpose : stop surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-14a-04 ShortcutService.generate_app_id — happy path PURE

Function : test_shortcutservice_generate_app_id_happy_path

Covers : ShortcutService.generate_app_id

Purpose : generate app id produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-09h uses event_bus_devex.py
- ← OP-14b uses events.py
- OP-14d used by shortcut.py

PRIORITY MEDIUM

TIER 1

PURE

6 TESTS

OP-14c

games_map.py

Source : py_modules/unifideck/services/shortcut/games_map.py | Lignes : 43 | Cible : 90%

Test file : tests/unit/services/shortcut/test_games_map.py

Public surface

[class]	GameMapEntry	()
[func]	generate_app_id	(pure)
[func]	parse_games_map	(pure)
[func]	format_games_map	(pure)

Tests to write (6)

⇒ T-14c-01 generate_app_id — happy path

PURE

Function : test_generate_app_id_happy_path
Covers : generate_app_id
Purpose : generate app id produces the expected output for a typical input.
Fixtures : —

⇒ T-14c-02 generate_app_id — edge cases

PURE

Function : test_generate_app_id_edge_cases
Covers : generate_app_id
Purpose : generate app id stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-14c-03 parse_games_map — happy path

MOCKED FS

Function : test_parse_games_map_parses_well_formed_input
Covers : parse_games_map
Purpose : parse games map parses a well-formed input into the expected value.
Fixtures : tmp_path

⇒ T-14c-04 parse_games_map — error handling

MOCKED FS

Function : test_parse_games_map_handles_missing_or_corrupt_file
Covers : parse_games_map
Purpose : parse games map handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-14c-05 format_games_map — happy path

PURE

Function : test_format_games_map_happy_path
Covers : format_games_map
Purpose : format games map produces the expected output for a typical input.
Fixtures : —

OP-14c games_map.py (cont.)

Tests to write (6) — cont.

⇒ T-14c-06

format_games_map — edge cases

PURE

Function :

Covers :

Purpose :

Fixtures :

test_format_games_map_edge_cases

format_games_map

format games map stays correct on empty / boundary inputs.

—

Mocking dependencies

Linked fiches

• tmp_path

→ OP-14a used by service.py

→ OP-14d used by shortcut.py

→ OP-14e used by games_map_mixin.py

→ OP-14g used by persistence.py

● PRIORITY MEDIUM

TIER 3

INTEGRATION

2 TESTS

OP-14d

shortcut.py

Source : `py_modules/unifideck/services/shortcut/auth_shortcut.py` | Lignes : 112 | Cible : 60%
Test file : `tests/unit/services/shortcut/test_shortcut.py`

Public surface

[async]

build_auth_shortcut

(async + I/O)

Tests to write (2)

⇒ T-14d-01

build_auth_shortcut — happy path

ASYNC

Function : `test_build_auth_shortcut_happy_path`

Covers : `build_auth_shortcut`

Purpose : build auth shortcut produces the expected object from valid arguments.

Fixtures : `pytest-asyncio`

⇒ T-14d-02

build_auth_shortcut — error handling

ASYNC

Function : `test_build_auth_shortcut_handles_error`

Covers : `build_auth_shortcut`

Purpose : build auth shortcut surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

• `pytest-asyncio`

Linked fiches

← OP-05 uses `__init__.py`

← OP-14a uses `service.py`

← OP-14c uses `games_map.py`

→ OP-14f used by `vdf_shortcuts.py`

PRIORITY MEDIUM

TIER 2

MOCKED

6 TESTS

OP-14g

persistence.py

Source : py_modules/unifideck/services/shortcut/persistence.py | Lignes : 55 | Cible : 80%

Test file : tests/unit/services/shortcut/test_persistence.py

Public surface

[async]	load_shortcuts	(async + I/O)
[async]	load_games_map	(async + I/O)
[async]	save_all	(async + I/O)

Tests to write (6)

⇒ T-14g-01 load_shortcuts — happy path

ASYNC

Function : test_load_shortcuts_returns_value_on_success
Covers : load_shortcuts
Purpose : load shortcuts returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-14g-02 load_shortcuts — error handling

ASYNC

Function : test_load_shortcuts_handles_error
Covers : load_shortcuts
Purpose : load shortcuts surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-14g-03 load_games_map — happy path

MOCKED FS

Function : test_load_games_map_returns_value_on_success
Covers : load_games_map
Purpose : load games map returns the expected payload on a normal response.
Fixtures : pytest-asyncio, tmp_path

⇒ T-14g-04 load_games_map — error handling

MOCKED FS

Function : test_load_games_map_handles_missing_or_corrupt_file
Covers : load_games_map
Purpose : load games map handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

⇒ T-14g-05 save_all — happy path

MOCKED FS

Function : test_save_all_persists_value_to_disk
Covers : save_all
Purpose : save all persists the input correctly to disk.
Fixtures : pytest-asyncio, tmp_path

OP-14g persistence.py (cont.)

Tests to write (6) — cont.

⇒ T-14g-06

save_all — error handling

MOCKED FS

Function :

Covers :

Purpose :

Fixtures :

test_save_all_handles_missing_or_corrupt_file

save_all

save all handles missing or corrupt files gracefully — empty result, never crash.

pytest-asyncio, tmp_path

Mocking dependencies

Linked fiches

- pytest-asyncio
- tmp_path

← OP-06a uses async_file_ops.py

← OP-14c uses games_map.py

← OP-32c uses shortcuts.py

→ OP-14a used by service.py

PRIORITY MEDIUM

TIER 2

MOCKED

10 TESTS

OP-32a

steamgriddb.py

Source : py_modules/unifideck/steam/steamgriddb.py | Lignes : 186 | Cible : 80%

Test file : tests/unit/steam/test_steamgriddb.py

Public surface

[class]	ArtworkAsset	(to_dict)
[class]	SteamGridDBClient	(__init__, search_artwork, fetch_all_kinds)
[async]	search_artwork	(async + I/O)
[async]	fetch_all_kinds	(async + I/O)

Tests to write (10)

T-32a-01 search_artwork — happy path

MOCKED HTTP

Function : test_search_artwork_happy_path
Covers : search_artwork
Purpose : search artwork performs the side-effect without raising.
Fixtures : pytest-asyncio, aioresponses

T-32a-02 search_artwork — error handling

MOCKED HTTP

Function : test_search_artwork_raises_value_error_on_failure
Covers : search_artwork
Purpose : search artwork raises ValueError when the input or upstream call fails.
Fixtures : pytest-asyncio, aioresponses

T-32a-03 fetch_all_kinds — happy path

MOCKED HTTP

Function : test_fetch_all_kinds_returns_value_on_success
Covers : fetch_all_kinds
Purpose : fetch all kinds returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

T-32a-04 fetch_all_kinds — error handling

MOCKED HTTP

Function : test_fetch_all_kinds_raises_on_network_failure
Covers : fetch_all_kinds
Purpose : fetch all kinds surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

T-32a-05 ArtworkAsset.to_dict — happy path

PURE

Function : test_artworkasset_to_dict_returns_converted_value
Covers : ArtworkAsset.to_dict
Purpose : to dict produces the converted value for a typical input.
Fixtures : —

OP-32a steamgriddb.py (cont.)

Tests to write (10) — cont.

⇒ T-32a-06 SteamGridDBClient.__init__ — construction

PURE

Function : [test_steamgriddbclient_init_constructs_with_valid_args](#)
 Covers : SteamGridDBClient.__init__
 Purpose : SteamGridDBClient can be instantiated with the documented arguments.
 Fixtures : —

⇒ T-32a-07 SteamGridDBClient.search_artwork — happy path

ASYNC

Function : [test_steamgriddbclient_search_artwork_happy_path](#)
 Covers : SteamGridDBClient.search_artwork
 Purpose : search artwork resolves to the expected value on success.
 Fixtures : pytest-asyncio

⇒ T-32a-08 SteamGridDBClient.search_artwork — error handling

ASYNC

Function : [test_steamgriddbclient_search_artwork_handles_error](#)
 Covers : SteamGridDBClient.search_artwork
 Purpose : search artwork surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : pytest-asyncio

⇒ T-32a-09 SteamGridDBClient.fetch_all_kinds — happy path

MOCKED HTTP

Function : [test_steamgriddbclient_fetch_all_kinds_returns_value_on_success](#)
 Covers : SteamGridDBClient.fetch_all_kinds
 Purpose : fetch all kinds returns the expected payload on a normal response.
 Fixtures : pytest-asyncio, aioresponses

⇒ T-32a-10 SteamGridDBClient.fetch_all_kinds — error handling

MOCKED HTTP

Function : [test_steamgriddbclient_fetch_all_kinds_raises_on_network_failure](#)
 Covers : SteamGridDBClient.fetch_all_kinds
 Purpose : fetch all kinds surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
 Fixtures : pytest-asyncio, aioresponses

Mocking dependencies

- aioresponses
- pytest-asyncio

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-33c uses config_helpers.py
- OP-16c used by fetcher.py
- OP-55a used by store.py
- OP-58a used by facade.py

PRIORITY MEDIUM

TIER 2

MOCKED

11 TESTS

OP-32b

library.py

Source : py_modules/unifideck/steam/library.py | Lignes : 157 | Cible : 80%

Test file : tests/unit/steam/test_library.py

Public surface

[class]	SteamStoreResult	(to_dict)
[func]	find_steam_path	(pure)
[func]	find_grid_path	(pure)
[func]	find_shortcuts_vdf	(pure)
[async]	search_store	(async + I/O)
[async]	batch_search_store	(async + I/O)

Tests to write (11)

T-32b-01 find_steam_path — happy path

MOCKED FS

Function : test_find_steam_path_returns_target_when_present
Covers : find_steam_path
Purpose : find steam path returns the located target when it exists.
Fixtures : tmp_path

T-32b-02 find_steam_path — error handling

MOCKED FS

Function : test_find_steam_path_handles_missing_or_corrupt_file
Covers : find_steam_path
Purpose : find steam path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

T-32b-03 find_grid_path — happy path

MOCKED FS

Function : test_find_grid_path_returns_target_when_present
Covers : find_grid_path
Purpose : find grid path returns the located target when it exists.
Fixtures : tmp_path

T-32b-04 find_grid_path — error handling

MOCKED FS

Function : test_find_grid_path_handles_missing_or_corrupt_file
Covers : find_grid_path
Purpose : find grid path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

OP-32b library.py (cont.)

Tests to write (11) — cont.

⇒ T-32b-05 find_shortcuts_vdf — happy path

MOCKED FS

Function : test_find_shortcuts_vdf_returns_target_when_present

Covers : find_shortcuts_vdf

Purpose : find shortcuts vdf returns the located target when it exists.

Fixtures : tmp_path

⇒ T-32b-06 find_shortcuts_vdf — error handling

MOCKED FS

Function : test_find_shortcuts_vdf_handles_missing_or_corrupt_file

Covers : find_shortcuts_vdf

Purpose : find shortcuts vdf handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-32b-07 search_store — happy path

MOCKED HTTP

Function : test_search_store_happy_path

Covers : search_store

Purpose : search store persists the input correctly to disk.

Fixtures : pytest-asyncio, aioresponses, tmp_path

⇒ T-32b-08 search_store — error handling

MOCKED HTTP

Function : test_search_store_raises_on_http_200

Covers : search_store

Purpose : search store surfaces a typed error on HTTP 200, not a swallowed exception.

Fixtures : pytest-asyncio, aioresponses, tmp_path

⇒ T-32b-09 batch_search_store — happy path

ASYNC

Function : test_batch_search_store_happy_path

Covers : batch_search_store

Purpose : batch search store persists the input correctly to disk.

Fixtures : pytest-asyncio

⇒ T-32b-10 batch_search_store — error handling

ASYNC

Function : test_batch_search_store_handles_error

Covers : batch_search_store

Purpose : batch search store surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-32b-11 SteamStoreResult.to_dict — happy path

PURE

Function : test_steamstoreresult_to_dict_returns_converted_value

Covers : SteamStoreResult.to_dict

Purpose : to dict produces the converted value for a typical input.

Fixtures : —

OP-32b library.py (cont.)

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-33c uses config_helpers.py
- OP-12a used by metadata_service.py
- OP-13a used by paths.py
- OP-32d used by owned_games.py
- OP-34a used by proton_helpers.py

PRIORITY MEDIUM

TIER 2

MOCKED

8 TESTS

OP-32c

shortcuts.py

Source : py_modules/unifideck/steam/shortcuts.py | Lignes : 150 | Cible : 80%

Test file : tests/unit/steam/test_shortcuts.py

Public surface

[class]	VDFError	()
[func]	load_shortcuts_vdf	(pure)
[func]	read_shortcuts	(pure)
[func]	save_shortcuts_vdf	(pure)
[func]	write_shortcuts	(pure)

Tests to write (8)

T-32c-01 load_shortcuts_vdf — happy path

MOCKED FS

Function : test_load_shortcuts_vdf_returns_value_on_success
Covers : load_shortcuts_vdf
Purpose : load shortcuts vdf returns the expected payload on a normal response.
Fixtures : tmp_path

T-32c-02 load_shortcuts_vdf — error handling

MOCKED FS

Function : test_load_shortcuts_vdf_raises_v_d_f_error_on_failure
Covers : load_shortcuts_vdf
Purpose : load shortcuts vdf raises VDFError when the input or upstream call fails.
Fixtures : tmp_path

T-32c-03 read_shortcuts — happy path

PURE

Function : test_read_shortcuts_returns_value_on_success
Covers : read_shortcuts
Purpose : read shortcuts returns the expected payload on a normal response.
Fixtures : —

T-32c-04 read_shortcuts — edge cases

PURE

Function : test_read_shortcuts_returns_empty_list_on_empty_input
Covers : read_shortcuts
Purpose : read shortcuts returns an empty list on empty input.
Fixtures : —

OP-32c shortcuts.py (cont.)

Tests to write (8) — cont.		
⇒ T-32c-05	save_shortcuts_vdf — happy path	MOCKED FS
Function :	test_save_shortcuts_vdf_persists_value_to_disk	
Covers :	save_shortcuts_vdf	
Purpose :	save shortcuts vdf persists the input correctly to disk.	
Fixtures :	tmp_path	
⇒ T-32c-06	save_shortcuts_vdf — error handling	MOCKED FS
Function :	test_save_shortcuts_vdf_raises_v_d_f_error_on_failure	
Covers :	save_shortcuts_vdf	
Purpose :	save shortcuts vdf raises VDFError when the input or upstream call fails.	
Fixtures :	tmp_path	
⇒ T-32c-07	write_shortcuts — happy path	PURE
Function :	test_write_shortcuts_persists_value_to_disk	
Covers :	write_shortcuts	
Purpose :	write shortcuts persists the input correctly to disk.	
Fixtures :	—	
⇒ T-32c-08	write_shortcuts — edge cases	PURE
Function :	test_write_shortcuts_edge_cases	
Covers :	write_shortcuts	
Purpose :	write shortcuts stays correct on empty / boundary inputs.	
Fixtures :	—	
Mocking dependencies		Linked fiches
• tmp_path		→ OP-14g used by persistence.py

PRIORITY MEDIUM

TIER 2

MOCKED

4 TESTS

OP-32d

owned_games.py

Source : py_modules/unifideck/steam/owned_games.py | Lignes : 118 | Cible : 80%

Test file : tests/unit/steam/test_owned_games.py

Public surface

[func] get_owned_titles (pure)
[func] invalidate_cache (pure)

Tests to write (4)

⇒ T-32d-01 get_owned_titles — happy path

MOCKED FS

Function : test_get_owned_titles_returns_value_on_success
Covers : get_owned_titles
Purpose : get owned titles returns the expected payload on a normal response.
Fixtures : tmp_path

⇒ T-32d-02 get_owned_titles — error handling

MOCKED FS

Function : test_get_owned_titles_handles_missing_or_corrupt_file
Covers : get_owned_titles
Purpose : get owned titles handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-32d-03 invalidate_cache — happy path

PURE

Function : test_invalidate_cache_happy_path
Covers : invalidate_cache
Purpose : invalidate cache produces the expected output for a typical input.
Fixtures : —

⇒ T-32d-04 invalidate_cache — edge cases

PURE

Function : test_invalidate_cache_edge_cases
Covers : invalidate_cache
Purpose : invalidate cache stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-31b uses unifidb.py
- ← OP-32b uses library.py
- OP-04d used by sync_service.py

● PRIORITY HIGH

TIER 3

INTEGRATION

23 TESTS

OP-49a

amazon_store.py

Source : `py_modules/unifideck/stores/amazon/amazon_store.py` | Lignes : 257 | Cible : 65%
Test file : `tests/unit/stores/amazon/test_amazon_store.py`

Public surface

`[class]` AmazonStore

`(__init__, is_available, start_auth, complete_auth...)`

Tests to write (23)

- ⇒ T-49a-01

AmazonStore.__init__ — construction

PURE

Function : `test_amazonstore_init_constructs_with_valid_args`
Covers : `AmazonStore.__init__`
Purpose : AmazonStore stores its constructor arguments on the expected instance attributes.
Fixtures : —
- ⇒ T-49a-02

AmazonStore.is_available — happy path

ASYNC

Function : `test_amazonstore_is_available_returns_true_on_valid_input`
Covers : `AmazonStore.is_available`
Purpose : is available returns True for a valid input.
Fixtures : `pytest-asyncio`
- ⇒ T-49a-03

AmazonStore.is_available — error handling

ASYNC

Function : `test_amazonstore_is_available_handles_error`
Covers : `AmazonStore.is_available`
Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`
- ⇒ T-49a-04

AmazonStore.start_auth — happy path

ASYNC

Function : `test_amazonstore_start_auth_spawns_target_action`
Covers : `AmazonStore.start_auth`
Purpose : start auth spawns the target action and returns its handle.
Fixtures : `pytest-asyncio`
- ⇒ T-49a-05

AmazonStore.start_auth — error handling

ASYNC

Function : `test_amazonstore_start_auth_handles_error`
Covers : `AmazonStore.start_auth`
Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-49a *amazon_store.py* (cont.)

Tests to write (23) — cont.

⇒ **T-49a-06** **AmazonStore.complete_auth — happy path**

ASYNC

Function : [test_amazonstore_complete_auth_happy_path](#)

Covers : AmazonStore.complete_auth

Purpose : complete auth resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-49a-07** **AmazonStore.complete_auth — error handling**

ASYNC

Function : [test_amazonstore_complete_auth_handles_error](#)

Covers : AmazonStore.complete_auth

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-49a-08** **AmazonStore.logout — happy path**

ASYNC

Function : [test_amazonstore_logout_happy_path](#)

Covers : AmazonStore.logout

Purpose : logout resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-49a-09** **AmazonStore.logout — error handling**

ASYNC

Function : [test_amazonstore_logout_handles_error](#)

Covers : AmazonStore.logout

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-49a-10** **AmazonStore.get_library — happy path**

ASYNC

Function : [test_amazonstore_get_library_returns_value_on_success](#)

Covers : AmazonStore.get_library

Purpose : get library returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ **T-49a-11** **AmazonStore.get_library — error handling**

ASYNC

Function : [test_amazonstore_get_library_handles_error](#)

Covers : AmazonStore.get_library

Purpose : get library surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-49a-12** **AmazonStore.install_game — happy path**

ASYNC

Function : [test_amazonstore_install_game_completes_setup_steps](#)

Covers : AmazonStore.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio

OP-49a *amazon_store.py* (cont.)

Tests to write (23) — cont.

⇒ **T-49a-13** **AmazonStore.install_game — error handling**

ASYNC

Function : [test_amazonstore_install_game_handles_error](#)
Covers : `AmazonStore.install_game`
Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-49a-14** **AmazonStore.uninstall_game — happy path**

ASYNC

Function : [test_amazonstore_uninstall_game_happy_path](#)
Covers : `AmazonStore.uninstall_game`
Purpose : uninstall game resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ **T-49a-15** **AmazonStore.uninstall_game — error handling**

ASYNC

Function : [test_amazonstore_uninstall_game_handles_error](#)
Covers : `AmazonStore.uninstall_game`
Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-49a-16** **AmazonStore.update_game — happy path**

ASYNC

Function : [test_amazonstore_update_game_happy_path](#)
Covers : `AmazonStore.update_game`
Purpose : update game resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ **T-49a-17** **AmazonStore.update_game — error handling**

ASYNC

Function : [test_amazonstore_update_game_handles_error](#)
Covers : `AmazonStore.update_game`
Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-49a-18** **AmazonStore.check_for_updates — happy path**

ASYNC

Function : [test_amazonstore_check_for_updates_returns_true_on_valid_input](#)
Covers : `AmazonStore.check_for_updates`
Purpose : check for updates returns True for a valid input.
Fixtures : `pytest-asyncio`

⇒ **T-49a-19** **AmazonStore.check_for_updates — error handling**

ASYNC

Function : [test_amazonstore_check_for_updates_handles_error](#)
Covers : `AmazonStore.check_for_updates`
Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-49a *amazon_store.py* (cont.)

Tests to write (23) — cont.

⇒ **T-49a-20** **AmazonStore.get_game_size — happy path**

ASYNC

Function : [test_amazonstore_get_game_size_returns_value_on_success](#)

Covers : AmazonStore.get_game_size

Purpose : get game size returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ **T-49a-21** **AmazonStore.get_game_size — error handling**

ASYNC

Function : [test_amazonstore_get_game_size_handles_error](#)

Covers : AmazonStore.get_game_size

Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-49a-22** **AmazonStore.get_official_url — happy path**

ASYNC

Function : [test_amazonstore_get_official_url_returns_value_on_success](#)

Covers : AmazonStore.get_official_url

Purpose : get official url returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ **T-49a-23** **AmazonStore.get_official_url — error handling**

ASYNC

Function : [test_amazonstore_get_official_url_handles_error](#)

Covers : AmazonStore.get_official_url

Purpose : get official url surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-04a uses `cache_manager.py`
- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`

● PRIORITY HIGH

TIER 2

MOCKED

5 TESTS

OP-49b

amazon_auth.py

Source : py_modules/unifideck/stores/amazon/amazon_auth.py | Lignes : 180 | Cible : 85%

Test file : tests/unit/stores/amazon/test_amazon_auth.py

Public surface

[class]

AmazonAuthFlow

(__init__, start_auth, logout)

Tests to write (5)

⇒ T-49b-01AmazonAuthFlow.__init__ — construction

PURE

Function : test_amazonauthflow_init_constructs_with_valid_args

Covers : AmazonAuthFlow.__init__

Purpose : AmazonAuthFlow stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-49b-02AmazonAuthFlow.start_auth — happy path

MOCKED HTTP

Function : test_amazonauthflow_start_auth_spawns_target_action

Covers : AmazonAuthFlow.start_auth

Purpose : start auth spawns the target action and returns its handle.

Fixtures : pytest-asyncio, aioresponses

⇒ T-49b-03AmazonAuthFlow.start_auth — error handling

MOCKED HTTP

Function : test_amazonauthflow_start_auth_raises_on_network_failure

Covers : AmazonAuthFlow.start_auth

Purpose : start auth surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

⇒ T-49b-04AmazonAuthFlow.logout — happy path

MOCKED SUBPROCESS

Function : test_amazonauthflow_logout_happy_path

Covers : AmazonAuthFlow.logout

Purpose : logout resolves to the expected value on success.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-49b-05AmazonAuthFlow.logout — error handling

MOCKED SUBPROCESS

Function : test_amazonauthflow_logout_raises_on_non_zero_exit

Covers : AmazonAuthFlow.logout

Purpose : logout reports a non-zero subprocess exit as a typed failure.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

OP-49b amazon_auth.py (cont.)

Mocking dependencies

- aioresponses
- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-23 uses __init__.py
- ← OP-28b uses orchestrator.py
- OP-49a used by amazon_store.py

● PRIORITY HIGH

TIER 3

INTEGRATION

9 TESTS

OP-49c

amazon_library.py

Source : `py_modules/unifideck/stores/amazon/amazon_library.py` | Lignes : 130 | Cible : 65%
Test file : `tests/unit/stores/amazon/test_amazon_library.py`

Public surface

[class]

AmazonLibraryReader

(`__init__`, `read_owned_games`, `read_installed_i...`)

[func]

merge_install_status

(`pure`)

Tests to write (9)

⇒ T-49c-01merge_install_status — happy path

PURE

Function : `test_merge_install_status_happy_path`

Covers : `merge_install_status`

Purpose : `merge install status performs the setup steps end-to-end.`

Fixtures : `—`

⇒ T-49c-02merge_install_status — edge cases

PURE

Function : `test_merge_install_status_edge_cases`

Covers : `merge_install_status`

Purpose : `merge install status stays correct on empty / boundary inputs.`

Fixtures : `—`

⇒ T-49c-03AmazonLibraryReader.__init__ — construction

PURE

Function : `test_amazonlibraryreader_init_constructs_with_valid_args`

Covers : `AmazonLibraryReader.__init__`

Purpose : `AmazonLibraryReader stores its constructor arguments on the expected instance attributes.`

Fixtures : `—`

⇒ T-49c-04AmazonLibraryReader.read_owned_games — happy path

ASYNC

Function : `test_amazonlibraryreader_read_owned_games_returns_value_on_success`

Covers : `AmazonLibraryReader.read_owned_games`

Purpose : `read owned games returns the expected payload on a normal response.`

Fixtures : `pytest-asyncio`

⇒ T-49c-05AmazonLibraryReader.read_owned_games — error handling

ASYNC

Function : `test_amazonlibraryreader_read_owned_games_handles_error`

Covers : `AmazonLibraryReader.read_owned_games`

Purpose : `read owned games surfaces failures cleanly (typed result, no swallowed exception).`

Fixtures : `pytest-asyncio`

OP-49c *amazon_library.py* (cont.)

Tests to write (9) — cont.

⇒ **T-49c-06** **AmazonLibraryReader.read_installed_ids — happy path**

ASYNC

Function : [test_amazonlibraryreader_read_installed_ids_returns_value_on_success](#)Covers : `AmazonLibraryReader.read_installed_ids`

Purpose : read installed ids returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-49c-07** **AmazonLibraryReader.read_installed_ids — error handling**

ASYNC

Function : [test_amazonlibraryreader_read_installed_ids_handles_error](#)Covers : `AmazonLibraryReader.read_installed_ids`

Purpose : read installed ids surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-49c-08** **AmazonLibraryReader.get_official_url — happy path**

ASYNC

Function : [test_amazonlibraryreader_get_official_url_returns_value_on_success](#)Covers : `AmazonLibraryReader.get_official_url`

Purpose : get official url returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-49c-09** **AmazonLibraryReader.get_official_url — error handling**

ASYNC

Function : [test_amazonlibraryreader_get_official_url_handles_error](#)Covers : `AmazonLibraryReader.get_official_url`

Purpose : get official url surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-06a uses `async_file_ops.py`
- OP-49a used by `amazon_store.py`
- OP-49d used by `amazon_install.py`
- OP-49e used by `amazon_updates.py`

● PRIORITY HIGH

TIER 2

MOCKED

5 TESTS

OP-49d

amazon_install.py

Source : py_modules/unifideck/stores/amazon/amazon_install.py | Lignes : 256 | Cible : 85%

Test file : tests/unit/stores/amazon/test_amazon_install.py

Public surface

[class]

AmazonInstaller

(__init__, install_game, uninstall_game)

Tests to write (5)

⇒ T-49d-01

AmazonInstaller.__init__ — construction

PURE

Function : test_amazoninstaller_init_constructs_with_valid_args

Covers : AmazonInstaller.__init__

Purpose : AmazonInstaller stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-49d-02

AmazonInstaller.install_game — happy path

MOCKED FS

Function : test_amazoninstaller_install_game_completes_setup_steps

Covers : AmazonInstaller.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio, tmp_path

⇒ T-49d-03

AmazonInstaller.install_game — error handling

MOCKED FS

Function : test_amazoninstaller_install_game_handles_missing_or_corrupt_file

Covers : AmazonInstaller.install_game

Purpose : install game handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-49d-04

AmazonInstaller.uninstall_game — happy path

MOCKED SUBPROCESS

Function : test_amazoninstaller_uninstall_game_happy_path

Covers : AmazonInstaller.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-49d-05

AmazonInstaller.uninstall_game — error handling

MOCKED SUBPROCESS

Function : test_amazoninstaller_uninstall_game_raises_on_non_zero_exit

Covers : AmazonInstaller.uninstall_game

Purpose : uninstall game reports a non-zero subprocess exit as a typed failure.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

OP-49d *amazon_install.py* (cont.)

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-04e uses manifest.py
- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-47d uses cli_install_helpers.py
- OP-49a used by amazon_store.py

● PRIORITY HIGH

TIER 2

MOCKED

7 TESTS

OP-49e

amazon_updates.py

Source : py_modules/unifideck/stores/amazon/amazon_updates.py | Lignes : 108 | Cible : 85%

Test file : tests/unit/stores/amazon/test_amazon_updates.py

Public surface

[class]

AmazonUpdateChecker

(__init__, check_for_updates, get_game_size, r...)

Tests to write (7)

⇒ T-49e-01

AmazonUpdateChecker.__init__ — construction

PURE

Function :

test_amazonupdatechecker_init_constructs_with_valid_args

Covers :

AmazonUpdateChecker.__init__

Purpose :

AmazonUpdateChecker stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-49e-02

AmazonUpdateChecker.check_for_updates — happy path

MOCKED SUBPROCESS

Function :

test_amazonupdatechecker_check_for_updates_returns_true_on_valid_input

Covers :

AmazonUpdateChecker.check_for_updates

Purpose :

check for updates returns True for a valid input.

Fixtures :

pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-49e-03

AmazonUpdateChecker.check_for_updates — error handling

MOCKED SUBPROCESS

Function :

test_amazonupdatechecker_check_for_updates_raises_on_non_zero_exit

Covers :

AmazonUpdateChecker.check_for_updates

Purpose :

check for updates reports a non-zero subprocess exit as a typed failure.

Fixtures :

pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-49e-04

AmazonUpdateChecker.get_game_size — happy path

MOCKED SUBPROCESS

Function :

test_amazonupdatechecker_get_game_size_returns_value_on_success

Covers :

AmazonUpdateChecker.get_game_size

Purpose :

get game size returns the expected payload on a normal response.

Fixtures :

pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-49e-05

AmazonUpdateChecker.get_game_size — error handling

MOCKED SUBPROCESS

Function :

test_amazonupdatechecker_get_game_size_raises_on_non_zero_exit

Covers :

AmazonUpdateChecker.get_game_size

Purpose :

get game size reports a non-zero subprocess exit as a typed failure.

Fixtures :

pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

OP-49e *amazon_updates.py* (cont.)

Tests to write (7) — cont.

⇒ **T-49e-06** **AmazonUpdateChecker.resolve_current_base_path — happy** **MOCKED FS**Function : **test_amazonupdatechecker_resolve_current_base_path_returns_target_when_present**Covers : `AmazonUpdateChecker.resolve_current_base_path`

Purpose : resolve current base path returns the located target when it exists.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ **T-49e-07** **AmazonUpdateChecker.resolve_current_base_path — error** **MOCKED FS**Function : **test_amazonupdatechecker_resolve_current_base_path_handles_missing_or_corrupt_file**Covers : `AmazonUpdateChecker.resolve_current_base_path`

Purpose : resolve current base path handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

Mocking dependencies

- `monkeypatch` (`asyncio.create_subprocess_exec`)
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-09a uses `event_bus.py`
- ← OP-49c uses `amazon_library.py`
- OP-49a used by `amazon_store.py`

PRIORITY HIGH

TIER 2

MOCKED

8 TESTS

OP-49f

amazon_fuel.py

Source : `py_modules/unifideck/stores/amazon/amazon_fuel.py` | Lignes : 92 | Cible : 85%

Test file : `tests/unit/stores/amazon/test_amazon_fuel.py`

Public surface

[func]	candidate_fuel_dirs	(pure)
[func]	parse_fuel_json_content	(pure)
[func]	extract_main_command	(pure)
[func]	find_exe_from_fuel	(pure)

Tests to write (8)

⇒ T-49f-01 candidate_fuel_dirs — happy path

MOCKED FS

Function : `test_candidate_fuel_dirs_happy_path`

Covers : `candidate_fuel_dirs`

Purpose : `candidate_fuel_dirs` returns the expected list of items.

Fixtures : `tmp_path`

⇒ T-49f-02 candidate_fuel_dirs — error handling

MOCKED FS

Function : `test_candidate_fuel_dirs_handles_missing_or_corrupt_file`

Covers : `candidate_fuel_dirs`

Purpose : `candidate_fuel_dirs` handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

⇒ T-49f-03 parse_fuel_json_content — happy path

PURE

Function : `test_parse_fuel_json_content_parses_well_formed_input`

Covers : `parse_fuel_json_content`

Purpose : `parse_fuel_json_content` parses a well-formed input into the expected value.

Fixtures : —

⇒ T-49f-04 parse_fuel_json_content — edge cases

PURE

Function : `test_parse_fuel_json_content_returns_none_on_missing_input`

Covers : `parse_fuel_json_content`

Purpose : `parse_fuel_json_content` handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

⇒ T-49f-05 extract_main_command — happy path

PURE

Function : `test_extract_main_command_happy_path`

Covers : `extract_main_command`

Purpose : `extract_main_command` produces the expected output for a typical input.

Fixtures : —

OP-49f amazon_fuel.py (cont.)

Tests to write (8) — cont.

⇒ T-49f-06

extract_main_command — edge cases

PURE

Function :

test_extract_main_command_returns_none_on_missing_input

Covers :

extract_main_command

Purpose :

extract main command returns None on missing or invalid input rather than raising.

Fixtures :

—

⇒ T-49f-07

find_exe_from_fuel — happy path

MOCKED FS

Function :

test_find_exe_from_fuel_returns_target_when_present

Covers :

find_exe_from_fuel

Purpose :

find exe from fuel returns the located target when it exists.

Fixtures :

tmp_path

⇒ T-49f-08

find_exe_from_fuel — error handling

MOCKED FS

Function :

test_find_exe_from_fuel_handles_missing_or_corrupt_file

Covers :

find_exe_from_fuel

Purpose :

find exe from fuel handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

tmp_path

Mocking dependencies

Linked fiches

- tmp_path

→ OP-49d used by amazon_install.py

● PRIORITY HIGH

TIER 3

INTEGRATION

21 TESTS

OP-48a

store.py

Source : py_modules/unifideck/stores/epic/store.py | Lignes : 261 | Cible : 65%

Test file : tests/unit/stores/epic/test_store.py

Public surface

[class]

EpicStore

(__init__, is_available, start_auth, complete_auth...)

Tests to write (21)

⇒ T-48a-01

EpicStore.__init__ — construction

PURE

Function : test_epicstore_init_constructs_with_valid_args

Covers : EpicStore.__init__

Purpose : EpicStore stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-48a-02

EpicStore.is_available — happy path

ASYNC

Function : test_epicstore_is_available_returns_true_on_valid_input

Covers : EpicStore.is_available

Purpose : is available returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-48a-03

EpicStore.is_available — error handling

ASYNC

Function : test_epicstore_is_available_handles_error

Covers : EpicStore.is_available

Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-48a-04

EpicStore.start_auth — happy path

ASYNC

Function : test_epicstore_start_auth_spawns_target_action

Covers : EpicStore.start_auth

Purpose : start auth spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ T-48a-05

EpicStore.start_auth — error handling

ASYNC

Function : test_epicstore_start_auth_handles_error

Covers : EpicStore.start_auth

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-48a store.py (cont.)

Tests to write (21) — cont.

⇒ T-48a-06 EpicStore.complete_auth — happy path

ASYNC

Function : [test_epicstore_complete_auth_happy_path](#)

Covers : EpicStore.complete_auth

Purpose : complete auth resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-48a-07 EpicStore.complete_auth — error handling

ASYNC

Function : [test_epicstore_complete_auth_handles_error](#)

Covers : EpicStore.complete_auth

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-48a-08 EpicStore.logout — happy path

ASYNC

Function : [test_epicstore_logout_happy_path](#)

Covers : EpicStore.logout

Purpose : logout resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-48a-09 EpicStore.logout — error handling

ASYNC

Function : [test_epicstore_logout_handles_error](#)

Covers : EpicStore.logout

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-48a-10 EpicStore.get_library — happy path

ASYNC

Function : [test_epicstore_get_library_returns_value_on_success](#)

Covers : EpicStore.get_library

Purpose : get library returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-48a-11 EpicStore.get_library — error handling

ASYNC

Function : [test_epicstore_get_library_handles_error](#)

Covers : EpicStore.get_library

Purpose : get library surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-48a-12 EpicStore.install_game — happy path

ASYNC

Function : [test_epicstore_install_game_completes_setup_steps](#)

Covers : EpicStore.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio

OP-48a store.py (cont.)

Tests to write (21) — cont.

⇒ **T-48a-13** EpicStore.install_game — error handling

ASYNC

Function : [test_epicstore_install_game_handles_error](#)

Covers : EpicStore.install_game

Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-48a-14** EpicStore.uninstall_game — happy path

ASYNC

Function : [test_epicstore_uninstall_game_happy_path](#)

Covers : EpicStore.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-48a-15** EpicStore.uninstall_game — error handling

ASYNC

Function : [test_epicstore_uninstall_game_handles_error](#)

Covers : EpicStore.uninstall_game

Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-48a-16** EpicStore.update_game — happy path

ASYNC

Function : [test_epicstore_update_game_happy_path](#)

Covers : EpicStore.update_game

Purpose : update game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-48a-17** EpicStore.update_game — error handling

ASYNC

Function : [test_epicstore_update_game_handles_error](#)

Covers : EpicStore.update_game

Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-48a-18** EpicStore.check_for_updates — happy path

ASYNC

Function : [test_epicstore_check_for_updates_returns_true_on_valid_input](#)

Covers : EpicStore.check_for_updates

Purpose : check for updates returns True for a valid input.

Fixtures : pytest-asyncio

⇒ **T-48a-19** EpicStore.check_for_updates — error handling

ASYNC

Function : [test_epicstore_check_for_updates_handles_error](#)

Covers : EpicStore.check_for_updates

Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-48a store.py (cont.)

Tests to write (21) — cont.

⇒ T-48a-20

EpicStore.get_game_size — happy path

ASYNC

Function : test_epicstore_get_game_size_returns_value_on_success

Covers : EpicStore.get_game_size

Purpose : get game size returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-48a-21

EpicStore.get_game_size — error handling

ASYNC

Function : test_epicstore_get_game_size_handles_error

Covers : EpicStore.get_game_size

Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-05 uses __init__.py
- ← OP-07 uses __init__.py
- ← OP-09a uses event_bus.py

● PRIORITY HIGH

TIER 2

MOCKED

5 TESTS

OP-48b

auth.py

Source : `py_modules/unifideck/stores/epic/auth.py` | Lignes : 179 | Cible : 85%
Test file : `tests/unit/stores/epic/test_auth.py`

Public surface

[class]

EpicAuthFlow

(`__init__`, `start_auth`, `logout`)

Tests to write (5)

⇒ T-48b-01

EpicAuthFlow.`__init__` — construction

PURE

Function : `test_epicauthflow_init_constructs_with_valid_args`

Covers : `EpicAuthFlow.__init__`

Purpose : EpicAuthFlow stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-48b-02

EpicAuthFlow.`start_auth` — happy path

MOCKED HTTP

Function : `test_epicauthflow_start_auth_spawns_target_action`

Covers : `EpicAuthFlow.start_auth`

Purpose : `start_auth` spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-48b-03

EpicAuthFlow.`start_auth` — error handling

MOCKED HTTP

Function : `test_epicauthflow_start_auth_raises_on_network_failure`

Covers : `EpicAuthFlow.start_auth`

Purpose : `start_auth` surfaces network failures cleanly (`timeout`, `ClientError`) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-48b-04

EpicAuthFlow.`logout` — happy path

MOCKED SUBPROCESS

Function : `test_epicauthflow_logout_happy_path`

Covers : `EpicAuthFlow.logout`

Purpose : `logout` resolves to the expected value on success.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

⇒ T-48b-05

EpicAuthFlow.`logout` — error handling

MOCKED SUBPROCESS

Function : `test_epicauthflow_logout_raises_on_non_zero_exit`

Covers : `EpicAuthFlow.logout`

Purpose : `logout` reports a non-zero subprocess exit as a typed failure.

Fixtures : `pytest-asyncio`, `monkeypatch` (`asyncio.create_subprocess_exec`)

OP-48b auth.py (cont.)

Mocking dependencies

- aioresponses
- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-23 uses __init__.py
- ← OP-28b uses orchestrator.py
- OP-48a used by store.py

PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-48c

library.py

Source : py_modules/unifideck/stores/epic/library.py | Lignes : 163 | Cible : 95%

Test file : tests/unit/stores/epic/test_library.py

Public surface

[class]	EpicLibraryReader	(__init__, read_owned_games, read_installed,...)
[func]	merge_install_status	(pure)

Tests to write (8)

⇒ T-48c-01 merge_install_status — happy path

PURE

Function : test_merge_install_status_happy_path
Covers : merge_install_status
Purpose : merge install status performs the setup steps end-to-end.
Fixtures : —

⇒ T-48c-02 merge_install_status — edge cases

PURE

Function : test_merge_install_status_edge_cases
Covers : merge_install_status
Purpose : merge install status stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-48c-03 EpicLibraryReader.__init__ — construction

PURE

Function : test_epiclibraryreader_init_constructs_with_valid_args
Covers : EpicLibraryReader.__init__
Purpose : EpicLibraryReader stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-48c-04 EpicLibraryReader.read_owned_games — happy path

ASYNC

Function : test_epiclibraryreader_read_owned_games_returns_value_on_success
Covers : EpicLibraryReader.read_owned_games
Purpose : read owned games returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-48c-05 EpicLibraryReader.read_owned_games — error handling

ASYNC

Function : test_epiclibraryreader_read_owned_games_handles_error
Covers : EpicLibraryReader.read_owned_games
Purpose : read owned games surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

OP-48c library.py (cont.)

Tests to write (8) — cont.

⇒ T-48c-06

EpicLibraryReader.read_installed_map — happy path

ASYNC

Function : test_epiclibraryreader_read_installed_map_returns_value_on_success

Covers : EpicLibraryReader.read_installed_map

Purpose : read installed map returns the expected payload on a normal response.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-48c-07

EpicLibraryReader.read_installed_map — error handling

ASYNC

Function : test_epiclibraryreader_read_installed_map_handles_error

Covers : EpicLibraryReader.read_installed_map

Purpose : read installed map surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-48c-08

EpicLibraryReader.invalidate_installed_cache — happy path

PURE

Function : test_epiclibraryreader_invalidate_installed_cache_happy_path

Covers : EpicLibraryReader.invalidate_installed_cache

Purpose : invalidate installed cache performs the setup steps end-to-end.

Fixtures : —

Mocking dependencies

• monkeypatch (time.time)

• pytest-asyncio

Linked fiches

← OP-05 uses __init__.py

← OP-48f uses filter.py

→ OP-48a used by store.py

→ OP-48d used by install.py

→ OP-48e used by updates.py

● PRIORITY HIGH

TIER 2

MOCKED

5 TESTS

OP-48d

install.py

Source : py_modules/unifideck/stores/epic/install.py | Lignes : 230 | Cible : 85%

Test file : tests/unit/stores/epic/test_install.py

Public surface

[class]

EpicInstaller

(__init__, install_game, uninstall_game)

Tests to write (5)

⇒ T-48d-01

EpicInstaller.__init__ — construction

PURE

Function : test_epicinstaller_init_constructs_with_valid_args

Covers : EpicInstaller.__init__

Purpose : EpicInstaller stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-48d-02

EpicInstaller.install_game — happy path

MOCKED FS

Function : test_epicinstaller_install_game_completes_setup_steps

Covers : EpicInstaller.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio, tmp_path

⇒ T-48d-03

EpicInstaller.install_game — error handling

MOCKED FS

Function : test_epicinstaller_install_game_handles_missing_or_corrupt_file

Covers : EpicInstaller.install_game

Purpose : install game handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-48d-04

EpicInstaller.uninstall_game — happy path

MOCKED SUBPROCESS

Function : test_epicinstaller_uninstall_game_happy_path

Covers : EpicInstaller.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-48d-05

EpicInstaller.uninstall_game — error handling

MOCKED SUBPROCESS

Function : test_epicinstaller_uninstall_game_raises_on_non_zero_exit

Covers : EpicInstaller.uninstall_game

Purpose : uninstall game reports a non-zero subprocess exit as a typed failure.

Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

OP-48d *install.py* (cont.)

Mocking dependencies

- monkeypatch (asyncio.create_subprocess_exec)
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-04e uses manifest.py
- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-47c uses dlc.py
- OP-48a used by store.py

PRIORITY HIGH

TIER 2

MOCKED

7 TESTS

OP-48e

updates.py

Source : py_modules/unifideck/stores/epic/updates.py | Lignes : 151 | Cible : 85%

Test file : tests/unit/stores/epic/test_updates.py

Public surface

[class] EpicUpdateChecker (__init__, check_for_updates, update_game, ge...)

Tests to write (7)

⇒ T-48e-01 EpicUpdateChecker.__init__ — construction PURE

Function : test_epicupdatechecker_init_constructs_with_valid_args
Covers : EpicUpdateChecker.__init__
Purpose : EpicUpdateChecker stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-48e-02 EpicUpdateChecker.check_for_updates — happy path MOCKED SUBPROCESS

Function : test_epicupdatechecker_check_for_updates_returns_true_on_valid_input
Covers : EpicUpdateChecker.check_for_updates
Purpose : check for updates returns True for a valid input.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-48e-03 EpicUpdateChecker.check_for_updates — error handling MOCKED SUBPROCESS

Function : test_epicupdatechecker_check_for_updates_raises_on_non_zero_exit
Covers : EpicUpdateChecker.check_for_updates
Purpose : check for updates reports a non-zero subprocess exit as a typed failure.
Fixtures : pytest-asyncio, monkeypatch (asyncio.create_subprocess_exec)

⇒ T-48e-04 EpicUpdateChecker.update_game — happy path MOCKED FS

Function : test_epicupdatechecker_update_game_happy_path
Covers : EpicUpdateChecker.update_game
Purpose : update game resolves to the expected value on success.
Fixtures : pytest-asyncio, tmp_path

⇒ T-48e-05 EpicUpdateChecker.update_game — error handling MOCKED FS

Function : test_epicupdatechecker_update_game_handles_missing_or_corrupt_file
Covers : EpicUpdateChecker.update_game
Purpose : update game handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

OP-48e updates.py (cont.)

Tests to write (7) — cont.

⇒ T-48e-06

EpicUpdateChecker.get_game_size — happy path

ASYNC

Function :

test_epicupdatechecker_get_game_size_returns_value_on_success

Covers :

EpicUpdateChecker.get_game_size

Purpose :

get game size returns the expected payload on a normal response.

Fixtures :

pytest-asyncio, monkeypatch (time.time)

⇒ T-48e-07

EpicUpdateChecker.get_game_size — error handling

ASYNC

Function :

test_epicupdatechecker_get_game_size_handles_error

Covers :

EpicUpdateChecker.get_game_size

Purpose :

get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio, monkeypatch (time.time)

Mocking dependencies

Linked fiches

- monkeypatch (asyncio.create_subprocess_exec)
- monkeypatch (time.time)
- pytest-asyncio
- tmp_path

← OP-05 uses __init__.py

← OP-09a uses event_bus.py

← OP-48c uses library.py

← OP-48h uses legendary.py

→ OP-48a used by store.py

PRIORITY HIGH

TIER 1

PURE

10 TESTS

OP-48f

filter.py

Source : py_modules/unifideck/stores/epic/filter.py | Lignes : 67 | Cible : 95%

Test file : tests/unit/stores/epic/test_filter.py

Public surface

[func]	has_ue_namespace	(pure)
[func]	has_asset_category	(pure)
[func]	has_mod_category	(pure)
[func]	is_mobile_only	(pure)
[func]	should_filter_epic_item	(pure)

Tests to write (10)

⇒ T-48f-01 has_ue_namespace — happy path

PURE

Function : test_has_ue_namespace_returns_true_on_valid_input
Covers : has_ue_namespace
Purpose : has ue namespace returns True for a valid input.
Fixtures : —

⇒ T-48f-02 has_ue_namespace — edge cases

PURE

Function : test_has_ue_namespace_edge_cases
Covers : has_ue_namespace
Purpose : has ue namespace stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-48f-03 has_asset_category — happy path

PURE

Function : test_has_asset_category_returns_true_on_valid_input
Covers : has_asset_category
Purpose : has asset category returns True for a valid input.
Fixtures : —

⇒ T-48f-04 has_asset_category — edge cases

PURE

Function : test_has_asset_category_edge_cases
Covers : has_asset_category
Purpose : has asset category stays correct on empty / boundary inputs.
Fixtures : —

OP-48f filter.py (cont.)

Tests to write (10) — cont.

⇒ T-48f-05 has_mod_category — happy path

PURE

Function : [test_has_mod_category_returns_true_on_valid_input](#)
Covers : has_mod_category
Purpose : has mod category returns True for a valid input.
Fixtures : —

⇒ T-48f-06 has_mod_category — edge cases

PURE

Function : [test_has_mod_category_edge_cases](#)
Covers : has_mod_category
Purpose : has mod category stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-48f-07 is_mobile_only — happy path

PURE

Function : [test_is_mobile_only_returns_true_on_valid_input](#)
Covers : is_mobile_only
Purpose : is mobile only returns True for a valid input.
Fixtures : —

⇒ T-48f-08 is_mobile_only — edge cases

PURE

Function : [test_is_mobile_only_edge_cases](#)
Covers : is_mobile_only
Purpose : is mobile only stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-48f-09 should_filter_epic_item — happy path

PURE

Function : [test_should_filter_epic_item_happy_path](#)
Covers : should_filter_epic_item
Purpose : should filter epic item returns True for the documented happy-path input.
Fixtures : —

⇒ T-48f-10 should_filter_epic_item — edge cases

PURE

Function : [test_should_filter_epic_item_edge_cases](#)
Covers : should_filter_epic_item
Purpose : should filter epic item stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

→ OP-48c used by library.py

PRIORITY HIGH

TIER 2

MOCKED

3 TESTS

OP-48g

exe_resolver.py

Source : py_modules/unifideck/stores/epic/exe_resolver.py | Lignes : 89 | Cible : 85%

Test file : tests/unit/stores/epic/test_exe_resolver.py

Public surface

[class]

EpicExeResolver

(__init__, resolve)

Tests to write (3)

⇒ T-48g-01

EpicExeResolver.__init__ — construction

PURE

Function : test_epicxeresolver_init_constructs_with_valid_args

Covers : EpicExeResolver.__init__

Purpose : EpicExeResolver stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-48g-02

EpicExeResolver.resolve — happy path

MOCKED HTTP

Function : test_epicxeresolver_resolve_returns_target_when_present

Covers : EpicExeResolver.resolve

Purpose : resolve returns the located target when it exists.

Fixtures : pytest-asyncio, aioresponses

⇒ T-48g-03

EpicExeResolver.resolve — error handling

MOCKED HTTP

Function : test_epicxeresolver_resolve_raises_on_network_failure

Covers : EpicExeResolver.resolve

Purpose : resolve surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

Mocking dependencies

- aioresponses
- pytest-asyncio

Linked fiches

- ← OP-48h uses legendary.py
- OP-48a used by store.py
- OP-48d used by install.py

● PRIORITY HIGH

TIER 2

MOCKED

2 TESTS

OP-48h

legendary.py

Source : `py_modules/unifideck/stores/epic/legendary.py` | Lignes : 39 | Cible : 85%
Test file : `tests/unit/stores/epic/test_legendary.py`

Public surface

[**async**]

fetch_info

(*async + I/O*)

Tests to write (2)

⇒ **T-48h-01** **fetch_info — happy path**

MOCKED SUBPROCESS

Function : `test_fetch_info_returns_value_on_success`

Covers : `fetch_info`

Purpose : fetch info returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `aioreponses`, `monkeypatch` (`asyncio.create_subprocess_exec`)

⇒ **T-48h-02** **fetch_info — error handling**

MOCKED SUBPROCESS

Function : `test_fetch_info_raises_on_network_failure`

Covers : `fetch_info`

Purpose : fetch info surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`, `monkeypatch` (`asyncio.create_subprocess_exec`)

Mocking dependencies

- `aioreponses`
- `monkeypatch` (`asyncio.create_subprocess_exec`)
- `pytest-asyncio`

Linked fiches

- OP-48e used by `updates.py`
- OP-48g used by `exe_resolver.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

34 TESTS

OP-50a

store.py

Source : py_modules/unifideck/stores/gog/store.py | Lignes : 328 | Cible : 65%

Test file : tests/unit/stores/gog/test_store.py

Public surface

[class]

GOGStore

(__init__, is_available, start_auth, complete_auth...)

Tests to write (34)

⇒ T-50a-01

GOGStore.__init__ — construction

PURE

Function : test_gogstore_init_constructs_with_valid_args

Covers : GOGStore.__init__

Purpose : GOGStore stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-50a-02

GOGStore.is_available — happy path

ASYNC

Function : test_gogstore_is_available_returns_true_on_valid_input

Covers : GOGStore.is_available

Purpose : is available returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-50a-03

GOGStore.is_available — error handling

ASYNC

Function : test_gogstore_is_available_handles_error

Covers : GOGStore.is_available

Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-04

GOGStore.start_auth — happy path

ASYNC

Function : test_gogstore_start_auth_spawns_target_action

Covers : GOGStore.start_auth

Purpose : start auth spawns the target action and returns its handle.

Fixtures : pytest-asyncio

⇒ T-50a-05

GOGStore.start_auth — error handling

ASYNC

Function : test_gogstore_start_auth_handles_error

Covers : GOGStore.start_auth

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-50a store.py (cont.)

Tests to write (34) — cont.

⇒ T-50a-06 GOGStore.complete_auth — happy path

ASYNC

Function : [test_gogstore_complete_auth_happy_path](#)
Covers : GOGStore.complete_auth
Purpose : complete auth resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-50a-07 GOGStore.complete_auth — error handling

ASYNC

Function : [test_gogstore_complete_auth_handles_error](#)
Covers : GOGStore.complete_auth
Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-50a-08 GOGStore.logout — happy path

MOCKED FS

Function : [test_gogstore_logout_happy_path](#)
Covers : GOGStore.logout
Purpose : logout resolves to the expected value on success.
Fixtures : pytest-asyncio, tmp_path

⇒ T-50a-09 GOGStore.logout — error handling

MOCKED FS

Function : [test_gogstore_logout_handles_missing_or_corrupt_file](#)
Covers : GOGStore.logout
Purpose : logout handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

⇒ T-50a-10 GOGStore.get_library — happy path

MOCKED HTTP

Function : [test_gogstore_get_library_returns_value_on_success](#)
Covers : GOGStore.get_library
Purpose : get library returns the expected payload on a normal response.
Fixtures : pytest-asyncio, aioresponses

⇒ T-50a-11 GOGStore.get_library — error handling

MOCKED HTTP

Function : [test_gogstore_get_library_raises_on_network_failure](#)
Covers : GOGStore.get_library
Purpose : get library surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : pytest-asyncio, aioresponses

⇒ T-50a-12 GOGStore.install_game — happy path

ASYNC

Function : [test_gogstore_install_game_completes_setup_steps](#)
Covers : GOGStore.install_game
Purpose : install game performs the setup steps end-to-end.
Fixtures : pytest-asyncio

OP-50a store.py (cont.)

Tests to write (34) — cont.

⇒ T-50a-13 GOGStore.install_game — error handling

ASYNC

Function : [test_gogstore_install_game_handles_error](#)

Covers : GOGStore.install_game

Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-14 GOGStore.uninstall_game — happy path

ASYNC

Function : [test_gogstore_uninstall_game_happy_path](#)

Covers : GOGStore.uninstall_game

Purpose : uninstall game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-50a-15 GOGStore.uninstall_game — error handling

ASYNC

Function : [test_gogstore_uninstall_game_handles_error](#)

Covers : GOGStore.uninstall_game

Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-16 GOGStore.update_game — happy path

ASYNC

Function : [test_gogstore_update_game_happy_path](#)

Covers : GOGStore.update_game

Purpose : update game resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-50a-17 GOGStore.update_game — error handling

ASYNC

Function : [test_gogstore_update_game_handles_error](#)

Covers : GOGStore.update_game

Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-18 GOGStore.check_for_updates — happy path

ASYNC

Function : [test_gogstore_check_for_updates_returns_true_on_valid_input](#)

Covers : GOGStore.check_for_updates

Purpose : check for updates returns True for a valid input.

Fixtures : pytest-asyncio

⇒ T-50a-19 GOGStore.check_for_updates — error handling

ASYNC

Function : [test_gogstore_check_for_updates_handles_error](#)

Covers : GOGStore.check_for_updates

Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-50a store.py (cont.)

Tests to write (34) — cont.

⇒ T-50a-20 GOGStore.get_game_size — happy path

ASYNC

Function : [test_gogstore_get_game_size_returns_value_on_success](#)

Covers : GOGStore.get_game_size

Purpose : get game size returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-50a-21 GOGStore.get_game_size — error handling

ASYNC

Function : [test_gogstore_get_game_size_handles_error](#)

Covers : GOGStore.get_game_size

Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-22 GOGStore.get_game_dlc — happy path

ASYNC

Function : [test_gogstore_get_game_dlc_returns_value_on_success](#)

Covers : GOGStore.get_game_dlc

Purpose : get game dlc returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-50a-23 GOGStore.get_game_dlc — error handling

ASYNC

Function : [test_gogstore_get_game_dlc_handles_error](#)

Covers : GOGStore.get_game_dlc

Purpose : get game dlc surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-24 GOGStore.get_available_languages — happy path

ASYNC

Function : [test_gogstore_get_available_languages_returns_value_on_success](#)

Covers : GOGStore.get_available_languages

Purpose : get available languages returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-50a-25 GOGStore.get_available_languages — error handling

ASYNC

Function : [test_gogstore_get_available_languages_handles_error](#)

Covers : GOGStore.get_available_languages

Purpose : get available languages surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-26 GOGStore.install_dlc — happy path

ASYNC

Function : [test_gogstore_install_dlc_completes_setup_steps](#)

Covers : GOGStore.install_dlc

Purpose : install dlc performs the setup steps end-to-end.

Fixtures : pytest-asyncio

OP-50a store.py (cont.)

Tests to write (34) — cont.

⇒ T-50a-27 GOGStore.install_dlc — error handling

ASYNC

Function : [test_gogstore_install_dlc_handles_error](#)

Covers : GOGStore.install_dlc

Purpose : install dlc surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-28 GOGStore.get_game_store_url — happy path

ASYNC

Function : [test_gogstore_get_game_store_url_returns_value_on_success](#)

Covers : GOGStore.get_game_store_url

Purpose : get game store url returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-50a-29 GOGStore.get_game_store_url — error handling

ASYNC

Function : [test_gogstore_get_game_store_url_handles_error](#)

Covers : GOGStore.get_game_store_url

Purpose : get game store url surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-30 GOGStore.get_game_slug — happy path

ASYNC

Function : [test_gogstore_get_game_slug_returns_value_on_success](#)

Covers : GOGStore.get_game_slug

Purpose : get game slug returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-50a-31 GOGStore.get_game_slug — error handling

ASYNC

Function : [test_gogstore_get_game_slug_handles_error](#)

Covers : GOGStore.get_game_slug

Purpose : get game slug surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-50a-32 GOGStore.get_installed — happy path

PURE

Function : [test_gogstore_get_installed_returns_value_on_success](#)

Covers : GOGStore.get_installed

Purpose : get installed returns the expected payload on a normal response.

Fixtures : —

⇒ T-50a-33 GOGStore.get_installed_game_info — happy path

PURE

Function : [test_gogstore_get_installed_game_info_returns_value_on_success](#)

Covers : GOGStore.get_installed_game_info

Purpose : get installed game info returns the expected payload on a normal response.

Fixtures : —

OP-50a store.py (cont.)

Tests to write (34) — cont.

⇒ T-50a-34

GOGStore.migrate_old_markers — happy path

PURE

Function :

test_gogstore_migrate_old_markers_happy_path

Covers :

GOGStore.migrate_old_markers

Purpose :

migrate old markers produces the expected output for a typical input.

Fixtures :

—

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

← OP-04a uses cache_manager.py

← OP-05 uses __init__.py

← OP-09a uses event_bus.py

← OP-11 uses __init__.py

● PRIORITY HIGH

TIER 1

PURE

5 TESTS

OP-50b

config.py

Source : py_modules/unifideck/stores/gog/config.py | Lignes : 120 | Cible : 95%

Test file : tests/unit/stores/gog/test_config.py

Public surface

[class] GOGConfig (from_config_manager, is_valid, auth_config_pa...)

Tests to write (5)

⇒ T-50b-01 GOGConfig.from_config_manager — happy path

PURE

Function : test_gogconfig_from_config_manager_happy_path
Covers : GOGConfig.from_config_manager
Purpose : from config manager returns the expected list of items.
Fixtures : —

⇒ T-50b-02 GOGConfig.is_valid — happy path

PURE

Function : test_gogconfig_is_valid_returns_true_on_valid_input
Covers : GOGConfig.is_valid
Purpose : is valid returns True for a valid input.
Fixtures : —

⇒ T-50b-03 GOGConfig.auth_config_path — happy path

MOCKED FS

Function : test_gogconfig_auth_config_path_happy_path
Covers : GOGConfig.auth_config_path
Purpose : auth config path produces the expected output for a typical input.
Fixtures : tmp_path

⇒ T-50b-04 GOGConfig.auth_config_path — error handling

MOCKED FS

Function : test_gogconfig_auth_config_path_handles_missing_or_corrupt_file
Covers : GOGConfig.auth_config_path
Purpose : auth config path handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-50b-05 GOGConfig.describe — happy path

PURE

Function : test_gogconfig_describe_happy_path
Covers : GOGConfig.describe
Purpose : describe produces the expected output for a typical input.
Fixtures : —

OP-50b config.py (cont.)

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-33c uses config_helpers.py
- OP-50a used by store.py
- OP-50c used by library.py
- OP-50f used by dlc.py
- OP-50g used by updates.py

● PRIORITY HIGH

TIER 2

MOCKED

12 TESTS

OP-50c

library.py

Source : `py_modules/unifideck/stores/gog/library.py` | Lignes : 306 | Cible : 85%

Test file : `tests/unit/stores/gog/test_library.py`

Public surface

[class]

GOLibrary

(`__init__`, `migrate_old_markers`, `is_available`, `fet...`)

Tests to write (12)

⇒ T-50c-01

GOLibrary.__init__ — construction

PURE

Function : `test_goglibrary_init_constructs_with_valid_args`

Covers : `GOLibrary.__init__`

Purpose : GOLibrary stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-50c-02

GOLibrary.migrate_old_markers — happy path

PURE

Function : `test_goglibrary_migrate_old_markers_happy_path`

Covers : `GOLibrary.migrate_old_markers`

Purpose : migrate old markers produces the expected output for a typical input.

Fixtures : —

⇒ T-50c-03

GOLibrary.is_available — happy path

ASYNC

Function : `test_goglibrary_is_available_returns_true_on_valid_input`

Covers : `GOLibrary.is_available`

Purpose : is available returns True for a valid input.

Fixtures : `pytest-asyncio`

⇒ T-50c-04

GOLibrary.is_available — error handling

ASYNC

Function : `test_goglibrary_is_available_raises_on_http_401`

Covers : `GOLibrary.is_available`

Purpose : is available surfaces a typed error on HTTP 401, not a swallowed exception.

Fixtures : `pytest-asyncio`

⇒ T-50c-05

GOLibrary.fetch_library — happy path

MOCKED HTTP

Function : `test_goglibrary_fetch_library_returns_value_on_success`

Covers : `GOLibrary.fetch_library`

Purpose : fetch library returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `aioreponses`

OP-50c library.py (cont.)

Tests to write (12) — cont.

⇒ T-50c-06 GOGLibrary.fetch_library — error handling

MOCKED HTTP

Function : [test_goglibrary_fetch_library_raises_on_network_failure](#)

Covers : GOGLibrary.fetch_library

Purpose : fetch library surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

⇒ T-50c-07 GOGLibrary.get_game_slug — happy path

MOCKED HTTP

Function : [test_goglibrary_get_game_slug_returns_value_on_success](#)

Covers : GOGLibrary.get_game_slug

Purpose : get game slug returns the expected payload on a normal response.

Fixtures : pytest-asyncio, aioresponses

⇒ T-50c-08 GOGLibrary.get_game_slug — error handling

MOCKED HTTP

Function : [test_goglibrary_get_game_slug_raises_on_network_failure](#)

Covers : GOGLibrary.get_game_slug

Purpose : get game slug surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

⇒ T-50c-09 GOGLibrary.get_installed — happy path

MOCKED FS

Function : [test_goglibrary_get_installed_returns_value_on_success](#)

Covers : GOGLibrary.get_installed

Purpose : get installed returns the expected payload on a normal response.

Fixtures : tmp_path

⇒ T-50c-10 GOGLibrary.get_installed — error handling

MOCKED FS

Function : [test_goglibrary_get_installed_handles_missing_or_corrupt_file](#)

Covers : GOGLibrary.get_installed

Purpose : get installed handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-50c-11 GOGLibrary.get_installed_game_info — happy path

MOCKED FS

Function : [test_goglibrary_get_installed_game_info_returns_value_on_success](#)

Covers : GOGLibrary.get_installed_game_info

Purpose : get installed game info returns the expected payload on a normal response.

Fixtures : tmp_path

⇒ T-50c-12 GOGLibrary.get_installed_game_info — error handling

MOCKED FS

Function : [test_goglibrary_get_installed_game_info_handles_missing_or_corrupt_file](#)

Covers : GOGLibrary.get_installed_game_info

Purpose : get installed game info handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

OP-50c library.py (cont.)

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-50b uses config.py
- ← OP-50d uses library_migration.py
- ← OP-50i uses http.py
- OP-50a used by store.py
- OP-50d used by library_migration.py

PRIORITY HIGH

TIER 1

PURE

6 TESTS

OP-50e

exe_resolver.py

Source : py_modules/unifideck/stores/gog/exe_resolver.py | Lignes : 316 | Cible : 95%

Test file : tests/unit/stores/gog/test_exe_resolver.py

Public surface

[class]	GOGExeResolver	(find, find_with_workdir)
[func]	parse_size_string	(pure)
[func]	get_game_id_from_goggame_filename	(pure)

Tests to write (6)

⇒ T-50e-01 parse_size_string — happy path

Function : test_parse_size_string_parses_well_formed_input

Covers : parse_size_string

Purpose : parse size string parses a well-formed input into the expected value.

Fixtures : —

PURE

⇒ T-50e-02 parse_size_string — edge cases

Function : test_parse_size_string_edge_cases

Covers : parse_size_string

Purpose : parse size string handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

PURE

⇒ T-50e-03 get_game_id_from_goggame_filename — happy path

Function : test_get_game_id_from_goggame_filename_returns_value_on_success

Covers : get_game_id_from_goggame_filename

Purpose : get game id from goggame filename returns the expected payload on a normal response.

Fixtures : —

PURE

⇒ T-50e-04 get_game_id_from_goggame_filename — edge cases

Function : test_get_game_id_from_goggame_filename_returns_none_on_missing_input

Covers : get_game_id_from_goggame_filename

Purpose : get game id from goggame filename returns None on missing or invalid input rather than raising.

Fixtures : —

PURE

⇒ T-50e-05 GOGExeResolver.find — happy path

Function : test_gogexeresolver_find_returns_target_when_present

Covers : GOGExeResolver.find

Purpose : find returns the located target when it exists.

Fixtures : —

PURE

OP-50e exe_resolver.py (cont.)

Tests to write (6) — cont.

⇒ T-50e-06

GOGExeResolver.find_with_workdir — happy path

PURE

Function :

test_gogexeresolver_find_with_workdir_returns_target_when_present

Covers :

GOGExeResolver.find_with_workdir

Purpose :

find with workdir returns the located target when it exists.

Fixtures :

—

Mocking dependencies

Linked fiches

• (none — pure tests)

→ OP-50a used by store.py

● PRIORITY HIGH

TIER 2

MOCKED

9 TESTS

OP-50f

dlc.py

Source : `py_modules/unifideck/stores/gog/dlc.py` | Lignes : 354 | Cible : 85%
Test file : `tests/unit/stores/gog/test_dlc.py`

Public surface

[class]

GOGDlcManager

(`__init__`, `get_game_dlc`s, `get_available_langua...`)

Tests to write (9)

⇒ T-50f-01

GOGDlcManager.`__init__` — construction

PURE

Function :

`test_gogdlcmanager_init_constructs_with_valid_args`

Covers :

`GOGDlcManager.__init__`

Purpose :

GOGDlcManager stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-50f-02

GOGDlcManager.`get_game_dlc`s — happy path

MOCKED HTTP

Function :

`test_gogdlcmanager_get_game_dlc`s_returns_value_on_success

Covers :

`GOGDlcManager.get_game_dlc`s

Purpose :

`get_game_dlc`s returns the expected payload on a normal response.

Fixtures :

`pytest-asyncio`, `aioreponses`

⇒ T-50f-03

GOGDlcManager.`get_game_dlc`s — error handling

MOCKED HTTP

Function :

`test_gogdlcmanager_get_game_dlc`s_raises_on_network_failure

Covers :

`GOGDlcManager.get_game_dlc`s

Purpose :

`get_game_dlc`s surfaces network failures cleanly (`timeout`, `ClientError`) instead of swallowing them.

Fixtures :

`pytest-asyncio`, `aioreponses`

⇒ T-50f-04

GOGDlcManager.`get_available_languages` — happy path

ASYNC

Function :

`test_gogdlcmanager_get_available_languages_returns_value_on_success`

Covers :

`GOGDlcManager.get_available_languages`

Purpose :

`get_available_languages` returns the expected payload on a normal response.

Fixtures :

`pytest-asyncio`

⇒ T-50f-05

GOGDlcManager.`get_available_languages` — error handling

ASYNC

Function :

`test_gogdlcmanager_get_available_languages_handles_error`

Covers :

`GOGDlcManager.get_available_languages`

Purpose :

`get_available_languages` surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

`pytest-asyncio`

OP-50f dlc.py (cont.)

Tests to write (9) — cont.

⇒ T-50f-06

GOGDlcManager.install_dlc — happy path

ASYNC

Function :

test_gogdlcmanager_install_dlc_completes_setup_steps

Covers :

GOGDlcManager.install_dlc

Purpose :

install dlc performs the setup steps end-to-end.

Fixtures :

pytest-asyncio

⇒ T-50f-07

GOGDlcManager.install_dlc — error handling

ASYNC

Function :

test_gogdlcmanager_install_dlc_handles_error

Covers :

GOGDlcManager.install_dlc

Purpose :

install dlc surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-50f-08

GOGDlcManager.get_game_store_url — happy path

MOCKED HTTP

Function :

test_gogdlcmanager_get_game_store_url_returns_value_on_success

Covers :

GOGDlcManager.get_game_store_url

Purpose :

get game store url returns the expected payload on a normal response.

Fixtures :

pytest-asyncio, aioresponses

⇒ T-50f-09

GOGDlcManager.get_game_store_url — error handling

MOCKED HTTP

Function :

test_gogdlcmanager_get_game_store_url_raises_on_network_failure

Covers :

GOGDlcManager.get_game_store_url

Purpose :

get game store url surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures :

pytest-asyncio, aioresponses

Mocking dependencies

• aioresponses

• pytest-asyncio

Linked fiches

← OP-05 uses __init__.py

← OP-50b uses config.py

← OP-50i uses http.py

← OP-52 uses __init__.py

→ OP-50a used by store.py

● PRIORITY HIGH

TIER 2

MOCKED

9 TESTS

OP-50g

updates.py

Source : py_modules/unifideck/stores/gog/updates.py | Lignes : 288 | Cible : 85%

Test file : tests/unit/stores/gog/test_updates.py

Public surface

[class]

GOGUpdatesChecker

(__init__, get_local_build_id, check_for_game...)

Tests to write (9)

- ⇒ T-50g-01

GOGUpdatesChecker.__init__ — construction

PURE

Function : test_gogupdateschecker_init_constructs_with_valid_args

Covers : GOGUpdatesChecker.__init__

Purpose : GOGUpdatesChecker stores its constructor arguments on the expected instance attributes.

Fixtures : —
- ⇒ T-50g-02

GOGUpdatesChecker.get_local_build_id — happy path

MOCKED FS

Function : test_gogupdateschecker_get_local_build_id_returns_value_on_success

Covers : GOGUpdatesChecker.get_local_build_id

Purpose : get local build id returns the expected payload on a normal response.

Fixtures : tmp_path
- ⇒ T-50g-03

GOGUpdatesChecker.get_local_build_id — error handling

MOCKED FS

Function : test_gogupdateschecker_get_local_build_id_handles_missing_or_corrupt_file

Covers : GOGUpdatesChecker.get_local_build_id

Purpose : get local build id handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path
- ⇒ T-50g-04

GOGUpdatesChecker.check_for_game_update — happy path

MOCKED HTTP

Function : test_gogupdateschecker_check_for_game_update_returns_true_on_valid_input

Covers : GOGUpdatesChecker.check_for_game_update

Purpose : check for game update returns True for a valid input.

Fixtures : pytest-asyncio, aioresponses
- ⇒ T-50g-05

GOGUpdatesChecker.check_for_game_update — error handling

MOCKED HTTP

Function : test_gogupdateschecker_check_for_game_update_raises_on_network_failure

Covers : GOGUpdatesChecker.check_for_game_update

Purpose : check for game update surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

OP-50g *updates.py* (cont.)

Tests to write (9) — cont.

⇒ T-50g-06 GOGUpdatesChecker.check_for_updates — happy path

ASYNC

Function : [test_gogupdateschecker_check_for_updates_returns_true_on_valid_input](#)
Covers : GOGUpdatesChecker.check_for_updates
Purpose : check for updates returns True for a valid input.
Fixtures : pytest-asyncio

⇒ T-50g-07 GOGUpdatesChecker.check_for_updates — error handling

ASYNC

Function : [test_gogupdateschecker_check_for_updates_handles_error](#)
Covers : GOGUpdatesChecker.check_for_updates
Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-50g-08 GOGUpdatesChecker.update_game — happy path

MOCKED FS

Function : [test_gogupdateschecker_update_game_happy_path](#)
Covers : GOGUpdatesChecker.update_game
Purpose : update game resolves to the expected value on success.
Fixtures : pytest-asyncio, tmp_path

⇒ T-50g-09 GOGUpdatesChecker.update_game — error handling

MOCKED FS

Function : [test_gogupdateschecker_update_game_handles_missing_or_corrupt_file](#)
Covers : GOGUpdatesChecker.update_game
Purpose : update game handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : pytest-asyncio, tmp_path

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-50b uses `config.py`
- ← OP-50i uses `http.py`
- ← OP-52 uses `__init__.py`
- OP-50a used by `store.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

5 TESTS

OP-50h

auth.py

Source : `py_modules/unifideck/stores/gog/auth.py` | Lignes : 92 | Cible : 65%

Test file : `tests/unit/stores/gog/test_auth.py`

Public surface

`[class]` `GGOBrowserAuth` `(__init__, start_auth, logout)`

Tests to write (5)

⇒ **T-50h-01** **GGOBrowserAuth.__init__ — construction** PURE

Function : `test_gogbrowserauth_init_constructs_with_valid_args`

Covers : `GGOBrowserAuth.__init__`

Purpose : GGOBrowserAuth stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ **T-50h-02** **GGOBrowserAuth.start_auth — happy path** ASYNC

Function : `test_gogbrowserauth_start_auth_spawns_target_action`

Covers : `GGOBrowserAuth.start_auth`

Purpose : start auth spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ **T-50h-03** **GGOBrowserAuth.start_auth — error handling** ASYNC

Function : `test_gogbrowserauth_start_auth_handles_error`

Covers : `GGOBrowserAuth.start_auth`

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ **T-50h-04** **GGOBrowserAuth.logout — happy path** ASYNC

Function : `test_gogbrowserauth_logout_happy_path`

Covers : `GGOBrowserAuth.logout`

Purpose : logout resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ **T-50h-05** **GGOBrowserAuth.logout — error handling** ASYNC

Function : `test_gogbrowserauth_logout_handles_error`

Covers : `GGOBrowserAuth.logout`

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-50h auth.py (cont.)

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-23 uses `__init__.py`
- ← OP-28b uses `orchestrator.py`
- OP-50a used by `store.py`

PRIORITY HIGH

TIER 1

PURE

4 TESTS

OP-50i

http.py

Source : py_modules/unifideck/stores/gog/http.py | Lignes : 49 | Cible : 95%

Test file : tests/unit/stores/gog/test_http.py

Public surface

[func]	build_ssl_context	(pure)
[async]	fetch_json_get	(async + I/O)

Tests to write (4)

⇒ T-50i-01	build_ssl_context — happy path	PURE
Function :	test_build_ssl_context_happy_path	
Covers :	build_ssl_context	
Purpose :	build ssl context produces the expected object from valid arguments.	
Fixtures :	—	

⇒ T-50i-02	build_ssl_context — edge cases	PURE
Function :	test_build_ssl_context_edge_cases	
Covers :	build_ssl_context	
Purpose :	build ssl context stays correct on empty / boundary inputs.	
Fixtures :	—	

⇒ T-50i-03	fetch_json_get — happy path	MOCKED HTTP
Function :	test_fetch_json_get_returns_value_on_success	
Covers :	fetch_json_get	
Purpose :	fetch json get returns the expected payload on a normal response.	
Fixtures :	pytest-asyncio, aioresponses, tmp_path	

⇒ T-50i-04	fetch_json_get — error handling	MOCKED HTTP
Function :	test_fetch_json_get_raises_on_http_200	
Covers :	fetch_json_get	
Purpose :	fetch json get surfaces a typed error on HTTP 200, not a swallowed exception.	
Fixtures :	pytest-asyncio, aioresponses, tmp_path	

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-08 uses __init__.py
- OP-50c used by library.py
- OP-50f used by dlc.py
- OP-50g used by updates.py
- OP-52c used by oauth.py

● PRIORITY HIGH

TIER 3

INTEGRATION

5 TESTS

OP-51a

installer.py

Source : `py_modules/unifideck/stores/gog/install/installer.py` | Lignes : 378 | Cible : 65%

Test file : `tests/unit/stores/gog/install/test_installer.py`

Public surface

`[class]` GOGInstaller

`(__init__, uninstall_game, install_game)`

Tests to write (5)

⇒ T-51a-01 GOGInstaller.__init__ — construction

PURE

Function : `test_goginstaller_init_constructs_with_valid_args`

Covers : `GOGInstaller.__init__`

Purpose : GOGInstaller stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-51a-02 GOGInstaller.uninstall_game — happy path

ASYNC

Function : `test_goginstaller_uninstall_game_happy_path`

Covers : `GOGInstaller.uninstall_game`

Purpose : uninstall game resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-51a-03 GOGInstaller.uninstall_game — error handling

ASYNC

Function : `test_goginstaller_uninstall_game_handles_error`

Covers : `GOGInstaller.uninstall_game`

Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-51a-04 GOGInstaller.install_game — happy path

ASYNC

Function : `test_goginstaller_install_game_completes_setup_steps`

Covers : `GOGInstaller.install_game`

Purpose : install game performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`

⇒ T-51a-05 GOGInstaller.install_game — error handling

ASYNC

Function : `test_goginstaller_install_game_handles_error`

Covers : `GOGInstaller.install_game`

Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-51a *installer.py* (cont.)

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-50b uses `config.py`
- ← OP-51d uses `planner.py`
- ← OP-51e uses `uninstall_pipeline.py`
- OP-51e used by `uninstall_pipeline.py`
- OP-51f used by `progress.py`
- OP-51g used by `marker.py`
- OP-51h used by `helpers.py`

● PRIORITY HIGH

TIER 2

MOCKED

6 TESTS

OP-51b

primitives.py

Source : py_modules/unifideck/stores/gog/install/primitives.py | Lignes : 81 | Cible : 85%
Test file : tests/unit/stores/gog/install/test_primitives.py

Public surface

[class]

GOGFolderOps

(folder_size, count_files, has_goggame_info, for...)

Tests to write (6)

- ⇒ T-51b-01

GOGFolderOps.folder_size — happy path

MOCKED FS

Function : test_gogfolderops_folder_size_happy_path

Covers : GOGFolderOps.folder_size

Purpose : folder size returns the correct count for a populated input.

Fixtures : tmp_path
- ⇒ T-51b-02

GOGFolderOps.folder_size — error handling

MOCKED FS

Function : test_gogfolderops_folder_size_handles_missing_or_corrupt_file

Covers : GOGFolderOps.folder_size

Purpose : folder size handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path
- ⇒ T-51b-03

GOGFolderOps.count_files — happy path

PURE

Function : test_gogfolderops_count_files_returns_correct_count

Covers : GOGFolderOps.count_files

Purpose : count files returns the correct count for a populated input.

Fixtures : —
- ⇒ T-51b-04

GOGFolderOps.has_goggame_info — happy path

PURE

Function : test_gogfolderops_has_goggame_info_returns_true_on_valid_input

Covers : GOGFolderOps.has_goggame_info

Purpose : has goggame info returns True for a valid input.

Fixtures : —
- ⇒ T-51b-05

GOGFolderOps.force_cleanup_folder — happy path

MOCKED FS

Function : test_gogfolderops_force_cleanup_folder_happy_path

Covers : GOGFolderOps.force_cleanup_folder

Purpose : force cleanup folder normalises the input as documented.

Fixtures : pytest-asyncio, tmp_path

OP-51b primitives.py (cont.)

Tests to write (6) — cont.

⇒ T-51b-06

GOGFolderOps.force_cleanup_folder — error handling

MOCKED FS

Function : test_gogfolderops_force_cleanup_folder_handles_missing_or_corrupt_file

Covers : GOGFolderOps.force_cleanup_folder

Purpose : force cleanup folder handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

Mocking dependencies

Linked fiches

- pytest-asyncio
- tmp_path

- OP-51d used by planner.py
- OP-51e used by uninstall_pipeline.py
- OP-51f used by progress.py
- OP-51g used by marker.py

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-51c

languages.py

Source : `py_modules/unifideck/stores/gog/install/languages.py` | Lignes : 15 | Cible : 95%
Test file : `tests/unit/stores/gog/install/test_languages.py`

Public surface

[func]

smart_match_language

(pure)

Tests to write (2)

⇒ T-51c-01

smart_match_language — happy path

PURE

Function : `test_smart_match_language_happy_path`

Covers : `smart_match_language`

Purpose : smart match language performs the side-effect without raising.

Fixtures : —

⇒ T-51c-02

smart_match_language — edge cases

PURE

Function : `test_smart_match_language_returns_none_on_missing_input`

Covers : `smart_match_language`

Purpose : smart match language returns None on missing or invalid input rather than raising.

Fixtures : —

Mocking dependencies

Linked fiches

• (none — pure tests)

→ OP-51h used by helpers.py

● PRIORITY HIGH

TIER 3

INTEGRATION

8 TESTS

OP-51d

planner.py

Source : `py_modules/unifideck/stores/gog/install/planner.py` | Lignes : 323 | Cible : 65%

Test file : `tests/unit/stores/gog/install/test_planner.py`

Public surface

[class]

GOGInstallPlanner

(`__init__`, `determine_install_mode`, `verify_install...`)

Tests to write (8)

- ⇒ T-51d-01

GOGInstallPlanner.__init__ — construction

PURE

Function : `test_goginstallplanner_init_constructs_with_valid_args`

Covers : `GOGInstallPlanner.__init__`

Purpose : GOGInstallPlanner stores its constructor arguments on the expected instance attributes.

Fixtures : —
- ⇒ T-51d-02

GOGInstallPlanner.determine_install_mode — happy path

MOCKED FS

Function : `test_goginstallplanner_determine_install_mode_happy_path`

Covers : `GOGInstallPlanner.determine_install_mode`

Purpose : determine install mode performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`, `tmp_path`
- ⇒ T-51d-03

GOGInstallPlanner.determine_install_mode — error handling

MOCKED FS

Function : `test_goginstallplanner_determine_install_mode_handles_missing_or_corrupt_file`

Covers : `GOGInstallPlanner.determine_install_mode`

Purpose : determine install mode handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`
- ⇒ T-51d-04

GOGInstallPlanner.verify_installation — happy path

ASYNC

Function : `test_goginstallplanner_verify_installation_happy_path`

Covers : `GOGInstallPlanner.verify_installation`

Purpose : verify installation performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`
- ⇒ T-51d-05

GOGInstallPlanner.verify_installation — error handling

ASYNC

Function : `test_goginstallplanner_verify_installation_handles_error`

Covers : `GOGInstallPlanner.verify_installation`

Purpose : verify installation surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-51d planner.py (cont.)

Tests to write (8) — cont.

⇒ T-51d-06 GOGInstallPlanner.get_expected_disk_size — happy path **ASYNC**

Function : [test_goginstallplanner_get_expected_disk_size_returns_value_on_success](#)
Covers : GOGInstallPlanner.get_expected_disk_size
Purpose : get expected disk size returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-51d-07 GOGInstallPlanner.get_expected_disk_size — error handling **ASYNC**

Function : [test_goginstallplanner_get_expected_disk_size_handles_error](#)
Covers : GOGInstallPlanner.get_expected_disk_size
Purpose : get expected disk size surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-51d-08 GOGInstallPlanner.set_gogdl_bin — happy path **PURE**

Function : [test_goginstallplanner_set_gogdl_bin_happy_path](#)
Covers : GOGInstallPlanner.set_gogdl_bin
Purpose : set gogdl bin produces the expected output for a typical input.
Fixtures : —

Mocking dependencies

- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-50b uses config.py
- ← OP-51b uses primitives.py
- ← OP-52 uses __init__.py
- OP-51a used by installer.py

● PRIORITY HIGH

TIER 3

INTEGRATION

21 TESTS

OP-52a

manager.py

Source : `py_modules/unifideck/stores/gog/tokens/manager.py` | Lignes : 134 | Cible : 65%

Test file : `tests/unit/stores/gog/tokens/test_manager.py`

Public surface

`[class]` GOGTokenManager

`(__init__, access_token, refresh_token, user_inf...)`

Tests to write (21)

⇒ T-52a-01 GOGTokenManager.__init__ — construction

PURE

Function : `test_gogtokenmanager_init_constructs_with_valid_args`
Covers : `GOGTokenManager.__init__`
Purpose : GOGTokenManager stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-52a-02 GOGTokenManager.access_token — happy path

PURE

Function : `test_gogtokenmanager_access_token_happy_path`
Covers : `GOGTokenManager.access_token`
Purpose : access token produces the expected output for a typical input.
Fixtures : —

⇒ T-52a-03 GOGTokenManager.refresh_token — happy path

PURE

Function : `test_gogtokenmanager_refresh_token_happy_path`
Covers : `GOGTokenManager.refresh_token`
Purpose : refresh token produces the expected output for a typical input.
Fixtures : —

⇒ T-52a-04 GOGTokenManager.user_info — happy path

PURE

Function : `test_gogtokenmanager_user_info_happy_path`
Covers : `GOGTokenManager.user_info`
Purpose : user info produces the expected output for a typical input.
Fixtures : —

⇒ T-52a-05 GOGTokenManager.has_tokens — happy path

PURE

Function : `test_gogtokenmanager_has_tokens_returns_true_on_valid_input`
Covers : `GOGTokenManager.has_tokens`
Purpose : has tokens returns True for a valid input.
Fixtures : —

OP-52a *manager.py* (cont.)

Tests to write (21) — cont.

⇒ **T-52a-06** **GOGTokenManager.get_token_age_seconds — happy path** **MOCKED FS**Function : **test_gogtokenmanager_get_token_age_seconds_returns_value_on_success**Covers : `GOGTokenManager.get_token_age_seconds`

Purpose : get token age seconds returns the expected payload on a normal response.

Fixtures : `tmp_path`, `monkeypatch (time.time)`⇒ **T-52a-07** **GOGTokenManager.get_token_age_seconds — error handling** **MOCKED FS**Function : **test_gogtokenmanager_get_token_age_seconds_handles_missing_or_corrupt_file**Covers : `GOGTokenManager.get_token_age_seconds`

Purpose : get token age seconds handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`, `monkeypatch (time.time)`⇒ **T-52a-08** **GOGTokenManager.load — happy path** **ASYNC**Function : **test_gogtokenmanager_load_returns_value_on_success**Covers : `GOGTokenManager.load`

Purpose : load returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-52a-09** **GOGTokenManager.load — error handling** **ASYNC**Function : **test_gogtokenmanager_load_handles_error**Covers : `GOGTokenManager.load`

Purpose : load surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-52a-10** **GOGTokenManager.save — happy path** **MOCKED HTTP**Function : **test_gogtokenmanager_save_persists_value_to_disk**Covers : `GOGTokenManager.save`

Purpose : save persists the input correctly to disk.

Fixtures : `pytest-asyncio`, `aioreponses`⇒ **T-52a-11** **GOGTokenManager.save — error handling** **MOCKED HTTP**Function : **test_gogtokenmanager_save_raises_on_network_failure**Covers : `GOGTokenManager.save`Purpose : save surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.Fixtures : `pytest-asyncio`, `aioreponses`⇒ **T-52a-12** **GOGTokenManager.clear — happy path** **ASYNC**Function : **test_gogtokenmanager_clear_removes_target_and_reports_success**Covers : `GOGTokenManager.clear`

Purpose : clear removes the target and reports success.

Fixtures : `pytest-asyncio`

OP-52a *manager.py* (cont.)

Tests to write (21) — cont.

⇒ T-52a-13 GOGTokenManager.clear — error handling

ASYNC

Function : [test_gogtokenmanager_clear_handles_error](#)

Covers : GOGTokenManager.clear

Purpose : clear surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-52a-14 GOGTokenManager.exchange_code — happy path

ASYNC

Function : [test_gogtokenmanager_exchange_code_happy_path](#)

Covers : GOGTokenManager.exchange_code

Purpose : exchange code resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-52a-15 GOGTokenManager.exchange_code — error handling

ASYNC

Function : [test_gogtokenmanager_exchange_code_handles_error](#)

Covers : GOGTokenManager.exchange_code

Purpose : exchange code surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-52a-16 GOGTokenManager.refresh_if_stale — happy path

ASYNC

Function : [test_gogtokenmanager_refresh_if_stale_happy_path](#)

Covers : GOGTokenManager.refresh_if_stale

Purpose : refresh if stale resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-52a-17 GOGTokenManager.refresh_if_stale — error handling

ASYNC

Function : [test_gogtokenmanager_refresh_if_stale_handles_error](#)

Covers : GOGTokenManager.refresh_if_stale

Purpose : refresh if stale surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-52a-18 GOGTokenManager.gogdl_credentials — happy path

ASYNC

Function : [test_gogtokenmanager_gogdl_credentials_happy_path](#)

Covers : GOGTokenManager.gogdl_credentials

Purpose : gogdl credentials resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-52a-19 GOGTokenManager.gogdl_credentials — error handling

ASYNC

Function : [test_gogtokenmanager_gogdl_credentials_handles_error](#)

Covers : GOGTokenManager.gogdl_credentials

Purpose : gogdl credentials surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

*OP-52a manager.py (cont.)***Tests to write (21) — cont.****⇒ T-52a-20 GOGTokenManager.acquire_gogdl_creds — happy path****ASYNC**Function : `test_gogtokenmanager_acquire_gogdl_creds_happy_path`Covers : `GOGTokenManager.acquire_gogdl_creds`

Purpose : acquire gogdl creds resolves to the expected value on success.

Fixtures : `pytest-asyncio`**⇒ T-52a-21 GOGTokenManager.acquire_gogdl_creds — error handling****ASYNC**Function : `test_gogtokenmanager_acquire_gogdl_creds_raises_runtime_error_on_failure`Covers : `GOGTokenManager.acquire_gogdl_creds`Purpose : acquire gogdl creds raises `RuntimeError` when the input or upstream call fails.Fixtures : `pytest-asyncio`**Mocking dependencies**

- `aioresponses`
- `monkeypatch (time.time)`
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-23 uses `__init__.py`
- ← OP-50b uses `config.py`
- ← OP-52b uses `storage.py`
- ← OP-52c uses `oauth.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

24 TESTS

OP-53a

microsoft_store.py

Source : `py_modules/unifideck/stores/microsoft/microsoft_store.py` | Lignes : 343 | Cible : 65%

Test file : `tests/unit/stores/microsoft/test_microsoft_store.py`

Public surface

`[class]` MicrosoftStore

`(__init__, is_available, start_auth, complete_auth...)`

Tests to write (24)

- ⇒ T-53a-01

MicrosoftStore.__init__ — construction

PURE

Function : `test_microsoftstore_init_constructs_with_valid_args`

Covers : `MicrosoftStore.__init__`

Purpose : MicrosoftStore stores its constructor arguments on the expected instance attributes.

Fixtures : —
- ⇒ T-53a-02

MicrosoftStore.is_available — happy path

ASYNC

Function : `test_microsoftstore_is_available_returns_true_on_valid_input`

Covers : `MicrosoftStore.is_available`

Purpose : is available returns True for a valid input.

Fixtures : `pytest-asyncio`
- ⇒ T-53a-03

MicrosoftStore.is_available — error handling

ASYNC

Function : `test_microsoftstore_is_available_handles_error`

Covers : `MicrosoftStore.is_available`

Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`
- ⇒ T-53a-04

MicrosoftStore.start_auth — happy path

ASYNC

Function : `test_microsoftstore_start_auth_spawns_target_action`

Covers : `MicrosoftStore.start_auth`

Purpose : start auth spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`
- ⇒ T-53a-05

MicrosoftStore.start_auth — error handling

ASYNC

Function : `test_microsoftstore_start_auth_handles_error`

Covers : `MicrosoftStore.start_auth`

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-53a microsoft_store.py (cont.)

Tests to write (24) — cont.

⇒ T-53a-06 MicrosoftStore.complete_auth — happy path

ASYNC

Function : test_microsoftstore_complete_auth_happy_path

Covers : MicrosoftStore.complete_auth

Purpose : complete auth resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-53a-07 MicrosoftStore.complete_auth — error handling

ASYNC

Function : test_microsoftstore_complete_auth_handles_error

Covers : MicrosoftStore.complete_auth

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-53a-08 MicrosoftStore.logout — happy path

MOCKED FS

Function : test_microsoftstore_logout_happy_path

Covers : MicrosoftStore.logout

Purpose : logout resolves to the expected value on success.

Fixtures : pytest-asyncio, tmp_path

⇒ T-53a-09 MicrosoftStore.logout — error handling

MOCKED FS

Function : test_microsoftstore_logout_handles_missing_or_corrupt_file

Covers : MicrosoftStore.logout

Purpose : logout handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path

⇒ T-53a-10 MicrosoftStore.get_library — happy path

MOCKED HTTP

Function : test_microsoftstore_get_library_returns_value_on_success

Covers : MicrosoftStore.get_library

Purpose : get library returns the expected payload on a normal response.

Fixtures : pytest-asyncio, aioresponses

⇒ T-53a-11 MicrosoftStore.get_library — error handling

MOCKED HTTP

Function : test_microsoftstore_get_library_raises_on_network_failure

Covers : MicrosoftStore.get_library

Purpose : get library surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : pytest-asyncio, aioresponses

⇒ T-53a-12 MicrosoftStore.install_game — happy path

ASYNC

Function : test_microsoftstore_install_game_completes_setup_steps

Covers : MicrosoftStore.install_game

Purpose : install game performs the setup steps end-to-end.

Fixtures : pytest-asyncio

OP-53a microsoft_store.py (cont.)

Tests to write (24) — cont.

⇒ T-53a-13 MicrosoftStore.install_game — error handling

ASYNC

Function : [test_microsoftstore_install_game_handles_error](#)
Covers : MicrosoftStore.install_game
Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-53a-14 MicrosoftStore.uninstall_game — happy path

ASYNC

Function : [test_microsoftstore_uninstall_game_happy_path](#)
Covers : MicrosoftStore.uninstall_game
Purpose : uninstall game resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-53a-15 MicrosoftStore.uninstall_game — error handling

ASYNC

Function : [test_microsoftstore_uninstall_game_handles_error](#)
Covers : MicrosoftStore.uninstall_game
Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-53a-16 MicrosoftStore.update_game — happy path

ASYNC

Function : [test_microsoftstore_update_game_happy_path](#)
Covers : MicrosoftStore.update_game
Purpose : update game resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-53a-17 MicrosoftStore.update_game — error handling

ASYNC

Function : [test_microsoftstore_update_game_handles_error](#)
Covers : MicrosoftStore.update_game
Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-53a-18 MicrosoftStore.check_for_updates — happy path

ASYNC

Function : [test_microsoftstore_check_for_updates_returns_true_on_valid_input](#)
Covers : MicrosoftStore.check_for_updates
Purpose : check for updates returns True for a valid input.
Fixtures : pytest-asyncio

⇒ T-53a-19 MicrosoftStore.check_for_updates — error handling

ASYNC

Function : [test_microsoftstore_check_for_updates_handles_error](#)
Covers : MicrosoftStore.check_for_updates
Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

OP-53a microsoft_store.py (cont.)

Tests to write (24) — cont.

⇒ T-53a-20 MicrosoftStore.get_game_size — happy path

ASYNC

Function : [test_microsoftstore_get_game_size_returns_value_on_success](#)

Covers : MicrosoftStore.get_game_size

Purpose : get game size returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-53a-21 MicrosoftStore.get_game_size — error handling

ASYNC

Function : [test_microsoftstore_get_game_size_handles_error](#)

Covers : MicrosoftStore.get_game_size

Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-53a-22 MicrosoftStore.install_edge — happy path

ASYNC

Function : [test_microsoftstore_install_edge_completes_setup_steps](#)

Covers : MicrosoftStore.install_edge

Purpose : install edge performs the setup steps end-to-end.

Fixtures : pytest-asyncio

⇒ T-53a-23 MicrosoftStore.install_edge — error handling

ASYNC

Function : [test_microsoftstore_install_edge_handles_error](#)

Covers : MicrosoftStore.install_edge

Purpose : install edge surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-53a-24 MicrosoftStore.is_edge_installed — happy path

PURE

Function : [test_microsoftstore_is_edge_installed_returns_true_on_valid_input](#)

Covers : MicrosoftStore.is_edge_installed

Purpose : is edge installed returns True for a valid input.

Fixtures : —

Mocking dependencies

- aioresponses
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-05 uses __init__.py
- ← OP-09a uses event_bus.py
- ← OP-11 uses __init__.py

● PRIORITY HIGH

TIER 2

MOCKED

3 TESTS

OP-53b

microsoft_catalog.py

Source : `py_modules/unifideck/stores/microsoft/microsoft_catalog.py` | Lignes : 208 | Cible : 85%

Test file : `tests/unit/stores/microsoft/test_microsoft_catalog.py`

Public surface

`[class]` MicrosoftCatalogReader

`(__init__, fetch_games)`

Tests to write (3)

⇒ T-53b-01 MicrosoftCatalogReader.__init__ — construction

PURE

Function : `test_microsoftcatalogreader_init_constructs_with_valid_args`

Covers : MicrosoftCatalogReader.__init__

Purpose : MicrosoftCatalogReader stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-53b-02 MicrosoftCatalogReader.fetch_games — happy path

MOCKED HTTP

Function : `test_microsoftcatalogreader_fetch_games_returns_value_on_success`

Covers : MicrosoftCatalogReader.fetch_games

Purpose : fetch games returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-53b-03 MicrosoftCatalogReader.fetch_games — error handling

MOCKED HTTP

Function : `test_microsoftcatalogreader_fetch_games_raises_on_network_failure`

Covers : MicrosoftCatalogReader.fetch_games

Purpose : fetch games surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`

Mocking dependencies

- `aioreponses`
- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-33b uses `locale.py`
- ← OP-53d uses `microsoft_config.py`
- ← OP-53e uses `microsoft_auth.py`
- OP-53a used by `microsoft_store.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

5 TESTS

OP-53c

microsoft_browser_auth.py

Source : `py_modules/unifideck/stores/microsoft/microsoft_browser_auth.py` | Lignes : 85 | Cible : 65%

Test file : `tests/unit/stores/microsoft/test_microsoft_browser_auth.py`

Public surface

`[class]` MicrosoftBrowserAuth

`(__init__, start_auth, logout)`

Tests to write (5)

⇒ T-53c-01 MicrosoftBrowserAuth.__init__ — construction

PURE

Function : `test_microsoftbrowserauth_init_constructs_with_valid_args`

Covers : MicrosoftBrowserAuth.__init__

Purpose : MicrosoftBrowserAuth stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-53c-02 MicrosoftBrowserAuth.start_auth — happy path

ASYNC

Function : `test_microsoftbrowserauth_start_auth_spawns_target_action`

Covers : MicrosoftBrowserAuth.start_auth

Purpose : start auth spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

⇒ T-53c-03 MicrosoftBrowserAuth.start_auth — error handling

ASYNC

Function : `test_microsoftbrowserauth_start_auth_handles_error`

Covers : MicrosoftBrowserAuth.start_auth

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-53c-04 MicrosoftBrowserAuth.logout — happy path

ASYNC

Function : `test_microsoftbrowserauth_logout_happy_path`

Covers : MicrosoftBrowserAuth.logout

Purpose : logout resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-53c-05 MicrosoftBrowserAuth.logout — error handling

ASYNC

Function : `test_microsoftbrowserauth_logout_handles_error`

Covers : MicrosoftBrowserAuth.logout

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-53c `microsoft_browser_auth.py` (cont.)

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-23 uses `__init__.py`
- ← OP-28b uses `orchestrator.py`
- OP-53a used by `microsoft_store.py`

PRIORITY HIGH

TIER 2

MOCKED

4 TESTS

OP-53d

microsoft_config.py

Source : py_modules/unifideck/stores/microsoft/microsoft_config.py | Lignes : 125 | Cible : 85%

Test file : tests/unit/stores/microsoft/test_microsoft_config.py

Public surface

[class] MicrosoftConfig (from_config_manager, is_valid, describe)

Tests to write (4)

⇒ T-53d-01 MicrosoftConfig.from_config_manager — happy path

MOCKED HTTP

Function : test_microsoftconfig_from_config_manager_happy_path
Covers : MicrosoftConfig.from_config_manager
Purpose : from config manager returns the expected list of items.
Fixtures : aioresponses

⇒ T-53d-02 MicrosoftConfig.from_config_manager — error handling

MOCKED HTTP

Function : test_microsoftconfig_from_config_manager_raises_on_network_failure
Covers : MicrosoftConfig.from_config_manager
Purpose : from config manager surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : aioresponses

⇒ T-53d-03 MicrosoftConfig.is_valid — happy path

PURE

Function : test_microsoftconfig_is_valid_returns_true_on_valid_input
Covers : MicrosoftConfig.is_valid
Purpose : is valid returns True for a valid input.
Fixtures : —

⇒ T-53d-04 MicrosoftConfig.describe — happy path

PURE

Function : test_microsoftconfig_describe_happy_path
Covers : MicrosoftConfig.describe
Purpose : describe produces the expected output for a typical input.
Fixtures : —

Mocking dependencies

- aioresponses

Linked fiches

- ← OP-11 uses __init__.py
- ← OP-33c uses config_helpers.py
- OP-53a used by microsoft_store.py
- OP-53b used by microsoft_catalog.py
- OP-53c used by microsoft_browser_auth.py
- OP-54a used by manager.py

● PRIORITY HIGH

TIER 2

MOCKED

10 TESTS

OP-53e

microsoft_auth.py

Source : `py_modules/unifideck/stores/microsoft/microsoft_auth.py` | Lignes : 231 | Cible : 85%

Test file : `tests/unit/stores/microsoft/test_microsoft_auth.py`

Public surface

[func]	<code>http_post</code>	(pure)
[func]	<code>http_post_json</code>	(pure)
[func]	<code>http_get</code>	(pure)
[func]	<code>build_xbl_chain</code>	(pure)
[func]	<code>request_xsts_token</code>	(pure)

Tests to write (10)

⇒ T-53e-01 **http_post — happy path**

Function : `test_http_post_happy_path`

Covers : `http_post`

Purpose : http post produces the expected output for a typical input.

Fixtures : `aioresponses`, `tmp_path`

MOCKED HTTP

⇒ T-53e-02 **http_post — error handling**

Function : `test_http_post_raises_on_network_failure`

Covers : `http_post`

Purpose : http post surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `aioresponses`, `tmp_path`

MOCKED HTTP

⇒ T-53e-03 **http_post_json — happy path**

Function : `test_http_post_json_happy_path`

Covers : `http_post_json`

Purpose : http post json produces the expected output for a typical input.

Fixtures : `aioresponses`, `tmp_path`

MOCKED HTTP

⇒ T-53e-04 **http_post_json — error handling**

Function : `test_http_post_json_raises_on_network_failure`

Covers : `http_post_json`

Purpose : http post json surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `aioresponses`, `tmp_path`

MOCKED HTTP

OP-53e microsoft_auth.py (cont.)

Tests to write (10) — cont.

⇒ T-53e-05 http_get — happy path

MOCKED HTTP

Function : [test_http_get_happy_path](#)
Covers : http_get
Purpose : http get produces the expected output for a typical input.
Fixtures : aioresponses, tmp_path

⇒ T-53e-06 http_get — error handling

MOCKED HTTP

Function : [test_http_get_raises_on_network_failure](#)
Covers : http_get
Purpose : http get surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : aioresponses, tmp_path

⇒ T-53e-07 build_xbl_chain — happy path

MOCKED HTTP

Function : [test_build_xbl_chain_happy_path](#)
Covers : build_xbl_chain
Purpose : build xbl chain produces the expected object from valid arguments.
Fixtures : aioresponses

⇒ T-53e-08 build_xbl_chain — error handling

MOCKED HTTP

Function : [test_build_xbl_chain_raises_on_network_failure](#)
Covers : build_xbl_chain
Purpose : build xbl chain surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.
Fixtures : aioresponses

⇒ T-53e-09 request_xsts_token — happy path

PURE

Function : [test_request_xsts_token_happy_path](#)
Covers : request_xsts_token
Purpose : request xsts token produces the expected output for a typical input.
Fixtures : —

⇒ T-53e-10 request_xsts_token — edge cases

PURE

Function : [test_request_xsts_token_edge_cases](#)
Covers : request_xsts_token
Purpose : request xsts token stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- aioresponses
- tmp_path

Linked fiches

- ← OP-08 uses `__init__.py`
- OP-53b used by `microsoft_catalog.py`
- OP-53f used by `microsoft_subscription.py`
- OP-54c used by `oauth.py`
- OP-54d used by `xbl_chain.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

2 TESTS

OP-53f

microsoft_subscription.py

Source : py_modules/unifideck/stores/microsoft/microsoft_subscription.py | Lignes : 162 | Cible : 65%

Test file : tests/unit/stores/microsoft/test_microsoft_subscription.py

Public surface

[class]

SubscriptionProbeResult

()

[async]

probe_subscription

(*async + I/O*)

Tests to write (2)

⇒ T-53f-01probe_subscription — happy pathASYNC

Function : test_probe_subscription_happy_path

Covers : probe_subscription

Purpose : probe subscription resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-53f-02probe_subscription — error handlingASYNC

Function : test_probe_subscription_handles_error

Covers : probe_subscription

Purpose : probe subscription surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-05 uses __init__.py
- ← OP-53e uses microsoft_auth.py
- OP-22c used by probe_emission.py

● PRIORITY HIGH

TIER 1

PURE

3 TESTS

OP-54a

manager.py

Source : `py_modules/unifideck/stores/microsoft/tokens/manager.py` | Lignes : 43 | Cible : 95%
Test file : `tests/unit/stores/microsoft/tokens/test_manager.py`

Public surface

[class]

MicrosoftTokenManager

(`__init__`, `access_token`, `has_refresh_token`)

Tests to write (3)

⇒ T-54a-01

MicrosoftTokenManager.__init__ — construction

PURE

Function : `test_microsofttokenmanager_init_constructs_with_valid_args`

Covers : `MicrosoftTokenManager.__init__`

Purpose : MicrosoftTokenManager stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-54a-02

MicrosoftTokenManager.access_token — happy path

PURE

Function : `test_microsofttokenmanager_access_token_happy_path`

Covers : `MicrosoftTokenManager.access_token`

Purpose : access token produces the expected output for a typical input.

Fixtures : —

⇒ T-54a-03

MicrosoftTokenManager.has_refresh_token — happy path

PURE

Function : `test_microsofttokenmanager_has_refresh_token_returns_true_on_valid_input`

Covers : `MicrosoftTokenManager.has_refresh_token`

Purpose : has refresh token returns True for a valid input.

Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-09a uses `event_bus.py`
- ← OP-23 uses `__init__.py`
- ← OP-53d uses `microsoft_config.py`
- ← OP-54b uses `persistence.py`

● PRIORITY HIGH

TIER 2

MOCKED

6 TESTS

OP-54b

persistence.py

Source : `py_modules/unifideck/stores/microsoft/tokens/persistence.py` | Lignes : 182 | Cible : 85%

Test file : `tests/unit/stores/microsoft/tokens/test_persistence.py`

Public surface

`[class]` PersistenceMixin

(load, save, clear)

Tests to write (6)

⇒ T-54b-01 PersistenceMixin.load — happy path

MOCKED FS

Function : `test_persistence_mixin_load_returns_value_on_success`

Covers : `PersistenceMixin.load`

Purpose : load returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-54b-02 PersistenceMixin.load — error handling

MOCKED FS

Function : `test_persistence_mixin_load_handles_missing_or_corrupt_file`

Covers : `PersistenceMixin.load`

Purpose : load handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-54b-03 PersistenceMixin.save — happy path

MOCKED FS

Function : `test_persistence_mixin_save_persists_value_to_disk`

Covers : `PersistenceMixin.save`

Purpose : save persists the input correctly to disk.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-54b-04 PersistenceMixin.save — error handling

MOCKED FS

Function : `test_persistence_mixin_save_handles_missing_or_corrupt_file`

Covers : `PersistenceMixin.save`

Purpose : save handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ T-54b-05 PersistenceMixin.clear — happy path

MOCKED FS

Function : `test_persistence_mixin_clear_removes_target_and_reports_success`

Covers : `PersistenceMixin.clear`

Purpose : clear removes the target and reports success.

Fixtures : `pytest-asyncio`, `tmp_path`

OP-54b persistence.py (cont.)

Tests to write (6) — cont.

⇒ T-54b-06

PersistenceMixin.clear — error handling

MOCKED FS

Function :

Covers :

Purpose :

Fixtures :

test_persistencemixin_clear_handles_missing_or_corrupt_file

PersistenceMixin.clear

clear handles missing or corrupt files gracefully — empty result, never crash.

pytest-asyncio, tmp_path

Mocking dependencies

Linked fiches

- pytest-asyncio
- tmp_path

← OP-09a uses event_bus.py

← OP-23 uses __init__.py

← OP-53d uses microsoft_config.py

→ OP-54a used by manager.py

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-54c

oauth.py

Source : `py_modules/unifideck/stores/microsoft/tokens/oauth.py` | Lignes : 88 | Cible : 65%

Test file : `tests/unit/stores/microsoft/tokens/test_oauth.py`

Public surface

`[class]` OAuthMixin

(exchange_code, refresh_if_stale)

Tests to write (4)

⇒ T-54c-01 OAuthMixin.exchange_code — happy path

ASYNC

Function : `test_oauthmixin_exchange_code_happy_path`

Covers : OAuthMixin.exchange_code

Purpose : exchange code resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-54c-02 OAuthMixin.exchange_code — error handling

ASYNC

Function : `test_oauthmixin_exchange_code_handles_error`

Covers : OAuthMixin.exchange_code

Purpose : exchange code surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-54c-03 OAuthMixin.refresh_if_stale — happy path

ASYNC

Function : `test_oauthmixin_refresh_if_stale_happy_path`

Covers : OAuthMixin.refresh_if_stale

Purpose : refresh if stale returns True for the documented happy-path input.

Fixtures : pytest-asyncio, monkeypatch (time.time)

⇒ T-54c-04 OAuthMixin.refresh_if_stale — error handling

ASYNC

Function : `test_oauthmixin_refresh_if_stale_handles_error`

Covers : OAuthMixin.refresh_if_stale

Purpose : refresh if stale surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio, monkeypatch (time.time)

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio

Linked fiches

- ← OP-53d uses microsoft_config.py
- ← OP-53e uses microsoft_auth.py
- OP-54a used by manager.py

● PRIORITY HIGH

TIER 3

INTEGRATION

4 TESTS

OP-54d

xbl_chain.py

Source : `py_modules/unifideck/stores/microsoft/tokens/xbl_chain.py` | Lignes : 138 | Cible : 65%
Test file : `tests/unit/stores/microsoft/tokens/test_xbl_chain.py`

Public surface

[class]

XBLTokenChain

()

[class]

XBLChainMixin

(*build_chain, build_gssv_chain*)

Tests to write (4)

⇒ T-54d-01XBLChainMixin.build_chain — happy pathASYNC

Function : `test_xblchainmixin_build_chain_happy_path`

Covers : XBLChainMixin.build_chain

Purpose : build chain produces the expected object from valid arguments.

Fixtures : pytest-asyncio

⇒ T-54d-02XBLChainMixin.build_chain — error handlingASYNC

Function : `test_xblchainmixin_build_chain_handles_error`

Covers : XBLChainMixin.build_chain

Purpose : build chain surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-54d-03XBLChainMixin.build_gssv_chain — happy pathASYNC

Function : `test_xblchainmixin_build_gssv_chain_happy_path`

Covers : XBLChainMixin.build_gssv_chain

Purpose : build gssv chain produces the expected object from valid arguments.

Fixtures : pytest-asyncio

⇒ T-54d-04XBLChainMixin.build_gssv_chain — error handlingASYNC

Function : `test_xblchainmixin_build_gssv_chain_handles_error`

Covers : XBLChainMixin.build_gssv_chain

Purpose : build gssv chain surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-53d uses `microsoft_config.py`
- ← OP-53e uses `microsoft_auth.py`
- OP-54a used by `manager.py`

● PRIORITY HIGH

TIER 1

PURE

16 TESTS

OP-47a

store_registry.py

Source : `py_modules/unifideck/stores/shared/store_registry.py` | Lignes : 307 | Cible : 95%
Test file : `tests/unit/stores/shared/test_store_registry.py`

Public surface

[class]

StoreRegistry

(`__init__`, `register`, `auto_discover`, `get`, `get_store...`)

Tests to write (16)

⇒ T-47a-01

StoreRegistry.__init__ — construction

PURE

Function : `test_storeregistry_init_constructs_with_valid_args`

Covers : `StoreRegistry.__init__`

Purpose : StoreRegistry stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-47a-02

StoreRegistry.register — happy path

PURE

Function : `test_storeregistry_register_completes_setup_steps`

Covers : `StoreRegistry.register`

Purpose : register performs the setup steps end-to-end.

Fixtures : —

⇒ T-47a-03

StoreRegistry.auto_discover — happy path

PURE

Function : `test_storeregistry_auto_discover_happy_path`

Covers : `StoreRegistry.auto_discover`

Purpose : auto discover produces the expected output for a typical input.

Fixtures : —

⇒ T-47a-04

StoreRegistry.get — happy path

PURE

Function : `test_storeregistry_get_happy_path`

Covers : `StoreRegistry.get`

Purpose : get produces the expected output for a typical input.

Fixtures : —

⇒ T-47a-05

StoreRegistry.get_store — happy path

PURE

Function : `test_storeregistry_get_store_returns_value_on_success`

Covers : `StoreRegistry.get_store`

Purpose : get store returns the expected payload on a normal response.

Fixtures : —

OP-47a store_registry.py (cont.)

Tests to write (16) — cont.

⇒ T-47a-06 StoreRegistry.all — happy path

PURE

Function : `test_storeregistry_all_happy_path`
Covers : `StoreRegistry.all`
Purpose : all produces the expected output for a typical input.
Fixtures : —

⇒ T-47a-07 StoreRegistry.available — happy path

PURE

Function : `test_storeregistry_available_happy_path`
Covers : `StoreRegistry.available`
Purpose : available produces the expected output for a typical input.
Fixtures : —

⇒ T-47a-08 StoreRegistry.store_ids — happy path

PURE

Function : `test_storeregistry_store_ids_persists_value_to_disk`
Covers : `StoreRegistry.store_ids`
Purpose : store ids persists the input correctly to disk.
Fixtures : —

⇒ T-47a-09 StoreRegistry.has — happy path

PURE

Function : `test_storeregistry_has_happy_path`
Covers : `StoreRegistry.has`
Purpose : has produces the expected output for a typical input.
Fixtures : —

⇒ T-47a-10 StoreRegistry.get_store_infos — happy path

PURE

Function : `test_storeregistry_get_store_infos_returns_value_on_success`
Covers : `StoreRegistry.get_store_infos`
Purpose : get store infos returns the expected payload on a normal response.
Fixtures : —

⇒ T-47a-11 StoreRegistry.auth_action — happy path

ASYNC

Function : `test_storeregistry_auth_action_happy_path`
Covers : `StoreRegistry.auth_action`
Purpose : auth action resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-47a-12 StoreRegistry.auth_action — error handling

ASYNC

Function : `test_storeregistry_auth_action_handles_error`
Covers : `StoreRegistry.auth_action`
Purpose : auth action surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-47a store_registry.py (cont.)

Tests to write (16) — cont.

⇒ **T-47a-13** StoreRegistry.check_all_status — happy path

ASYNC

Function : [test_storeregistry_check_all_status_returns_true_on_valid_input](#)

Covers : StoreRegistry.check_all_status

Purpose : check all status returns True for a valid input.

Fixtures : pytest-asyncio

⇒ **T-47a-14** StoreRegistry.check_all_status — error handling

ASYNC

Function : [test_storeregistry_check_all_status_handles_error](#)

Covers : StoreRegistry.check_all_status

Purpose : check all status surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ **T-47a-15** StoreRegistry.logout_all — happy path

ASYNC

Function : [test_storeregistry_logout_all_happy_path](#)

Covers : StoreRegistry.logout_all

Purpose : logout all resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ **T-47a-16** StoreRegistry.logout_all — error handling

ASYNC

Function : [test_storeregistry_logout_all_handles_error](#)

Covers : StoreRegistry.logout_all

Purpose : logout all surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-05 uses __init__.py
- ← OP-09 uses __init__.py
- ← OP-47b uses store_base.py
- OP-25a used by base.py

● PRIORITY HIGH

TIER 3

INTEGRATION

22 TESTS

OP-47b

store_base.py

Source : `py_modules/unifideck/stores/shared/store_base.py` | Lignes : 156 | Cible : 65%

Test file : `tests/unit/stores/shared/test_store_base.py`

Public surface

[class]

StoreBase

(`__init__`, `store_name`, `is_available`, `start_auth`, ...)

Tests to write (22)

⇒ T-47b-01

StoreBase.__init__ — construction

PURE

Function : `test_storebase_init_constructs_with_valid_args`

Covers : `StoreBase.__init__`

Purpose : StoreBase stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-47b-02

StoreBase.store_name — happy path

PURE

Function : `test_storebase_store_name_persists_value_to_disk`

Covers : `StoreBase.store_name`

Purpose : store name persists the input correctly to disk.

Fixtures : —

⇒ T-47b-03

StoreBase.is_available — happy path

ASYNC

Function : `test_storebase_is_available_returns_true_on_valid_input`

Covers : `StoreBase.is_available`

Purpose : is available returns True for a valid input.

Fixtures : `pytest-asyncio`

⇒ T-47b-04

StoreBase.is_available — error handling

ASYNC

Function : `test_storebase_is_available_handles_error`

Covers : `StoreBase.is_available`

Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-47b-05

StoreBase.start_auth — happy path

ASYNC

Function : `test_storebase_start_auth_spawns_target_action`

Covers : `StoreBase.start_auth`

Purpose : start auth spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

OP-47b store_base.py (cont.)

Tests to write (22) — cont.

⇒ T-47b-06 StoreBase.start_auth — error handling

ASYNC

Function : [test_storebase_start_auth_handles_error](#)

Covers : StoreBase.start_auth

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-47b-07 StoreBase.complete_auth — happy path

ASYNC

Function : [test_storebase_complete_auth_happy_path](#)

Covers : StoreBase.complete_auth

Purpose : complete auth resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-47b-08 StoreBase.complete_auth — error handling

ASYNC

Function : [test_storebase_complete_auth_handles_error](#)

Covers : StoreBase.complete_auth

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-47b-09 StoreBase.logout — happy path

ASYNC

Function : [test_storebase_logout_happy_path](#)

Covers : StoreBase.logout

Purpose : logout resolves to the expected value on success.

Fixtures : pytest-asyncio

⇒ T-47b-10 StoreBase.logout — error handling

ASYNC

Function : [test_storebase_logout_handles_error](#)

Covers : StoreBase.logout

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

⇒ T-47b-11 StoreBase.get_library — happy path

ASYNC

Function : [test_storebase_get_library_returns_value_on_success](#)

Covers : StoreBase.get_library

Purpose : get library returns the expected payload on a normal response.

Fixtures : pytest-asyncio

⇒ T-47b-12 StoreBase.get_library — error handling

ASYNC

Function : [test_storebase_get_library_handles_error](#)

Covers : StoreBase.get_library

Purpose : get library surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : pytest-asyncio

OP-47b store_base.py (cont.)

Tests to write (22) — cont.

⇒ T-47b-13 StoreBase.install_game — happy path

ASYNC

Function : [test_storebase_install_game_completes_setup_steps](#)
Covers : StoreBase.install_game
Purpose : install game performs the setup steps end-to-end.
Fixtures : pytest-asyncio

⇒ T-47b-14 StoreBase.install_game — error handling

ASYNC

Function : [test_storebase_install_game_handles_error](#)
Covers : StoreBase.install_game
Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-47b-15 StoreBase.uninstall_game — happy path

ASYNC

Function : [test_storebase_uninstall_game_happy_path](#)
Covers : StoreBase.uninstall_game
Purpose : uninstall game resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-47b-16 StoreBase.uninstall_game — error handling

ASYNC

Function : [test_storebase_uninstall_game_handles_error](#)
Covers : StoreBase.uninstall_game
Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-47b-17 StoreBase.update_game — happy path

ASYNC

Function : [test_storebase_update_game_happy_path](#)
Covers : StoreBase.update_game
Purpose : update game resolves to the expected value on success.
Fixtures : pytest-asyncio

⇒ T-47b-18 StoreBase.update_game — error handling

ASYNC

Function : [test_storebase_update_game_handles_error](#)
Covers : StoreBase.update_game
Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-47b-19 StoreBase.check_for_updates — happy path

ASYNC

Function : [test_storebase_check_for_updates_returns_true_on_valid_input](#)
Covers : StoreBase.check_for_updates
Purpose : check for updates returns True for a valid input.
Fixtures : pytest-asyncio

OP-47b store_base.py (cont.)

Tests to write (22) — cont.

⇒ T-47b-20 StoreBase.check_for_updates — error handling

ASYNC

Function : [test_storebase_check_for_updates_handles_error](#)
Covers : StoreBase.check_for_updates
Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

⇒ T-47b-21 StoreBase.get_game_size — happy path

ASYNC

Function : [test_storebase_get_game_size_returns_value_on_success](#)
Covers : StoreBase.get_game_size
Purpose : get game size returns the expected payload on a normal response.
Fixtures : pytest-asyncio

⇒ T-47b-22 StoreBase.get_game_size — error handling

ASYNC

Function : [test_storebase_get_game_size_handles_error](#)
Covers : StoreBase.get_game_size
Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : pytest-asyncio

Mocking dependencies

- pytest-asyncio

Linked fiches

- ← OP-04a uses cache_manager.py
- ← OP-04c uses exe_finder.py
- ← OP-05 uses __init__.py
- ← OP-07a uses binary_resolver.py
- OP-04d used by sync_service.py
- OP-47a used by store_registry.py
- OP-48a used by store.py
- OP-49a used by amazon_store.py

● PRIORITY HIGH

TIER 1

PURE

4 TESTS

OP-47c

dlc.py
Source : `py_modules/unifideck/stores/shared/dlc.py` | Lignes : 11 | Cible : 95%
Test file : `tests/unit/stores/shared/test_dlc.py`

Public surface

[func] `get_dlc_flags` (pure)

[func] `store_supports_dlc` (pure)

Tests to write (4)

⇒ T-47c-01 **get_dlc_flags — happy path** PURE

Function : `test_get_dlc_flags_returns_value_on_success`

Covers : `get_dlc_flags`

Purpose : `get dlc flags returns the expected payload on a normal response.`

Fixtures : —

⇒ T-47c-02 **get_dlc_flags — edge cases** PURE

Function : `test_get_dlc_flags_returns_empty_list_on_empty_input`

Covers : `get_dlc_flags`

Purpose : `get dlc flags returns an empty list on empty input.`

Fixtures : —

⇒ T-47c-03 **store_supports_dlc — happy path** PURE

Function : `test_store_supports_dlc_persists_value_to_disk`

Covers : `store_supports_dlc`

Purpose : `store supports dlc persists the input correctly to disk.`

Fixtures : —

⇒ T-47c-04 **store_supports_dlc — edge cases** PURE

Function : `test_store_supports_dlc_edge_cases`

Covers : `store_supports_dlc`

Purpose : `store supports dlc stays correct on empty / boundary inputs.`

Fixtures : —

Mocking dependencies

• (none — pure tests)

Linked fiches

→ OP-48d used by `install.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

6 TESTS

OP-47d

cli_install_helpers.py

Source : py_modules/unifideck/stores/shared/cli_install_helpers.py | Lignes : 55 | Cible : 65%

Test file : tests/unit/stores/shared/test_cli_install_helpers.py

Public surface

[async]

drain_install_output

(async + I/O)

[async]

wait_with_timeout

(async + I/O)

[func]

parse_progress_line

(pure)

Tests to write (6)

⇒ T-47d-01

drain_install_output — happy path

ASYNC

Function :

test_drain_install_output_happy_path

Covers :

drain_install_output

Purpose :

drain install output performs the setup steps end-to-end.

Fixtures :

pytest-asyncio

⇒ T-47d-02

drain_install_output — error handling

ASYNC

Function :

test_drain_install_output_handles_error

Covers :

drain_install_output

Purpose :

drain install output surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-47d-03

wait_with_timeout — happy path

ASYNC

Function :

test_wait_with_timeout_happy_path

Covers :

wait_with_timeout

Purpose :

wait with timeout resolves to the expected value on success.

Fixtures :

pytest-asyncio

⇒ T-47d-04

wait_with_timeout — error handling

ASYNC

Function :

test_wait_with_timeout_handles_error

Covers :

wait_with_timeout

Purpose :

wait with timeout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

pytest-asyncio

⇒ T-47d-05

parse_progress_line — happy path

PURE

Function :

test_parse_progress_line_parses_well_formed_input

Covers :

parse_progress_line

Purpose :

parse progress line parses a well-formed input into the expected value.

Fixtures :

—

OP-47d `cli_install_helpers.py` (cont.)

Tests to write (6) — cont.

⇒ T-47d-06 `parse_progress_line` — edge cases

PURE

Function : `test_parse_progress_line_returns_none_on_missing_input`

Covers : `parse_progress_line`

Purpose : `parse_progress_line` handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- OP-48d used by `install.py`
- OP-49d used by `amazon_install.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

46 TESTS

OP-55a

store.py

Source : `py_modules/unifideck/stores/ubisoft/store.py` | Lignes : 225 | Cible : 65%

Test file : `tests/unit/stores/ubisoft/test_store.py`

Public surface

`[class]` `UbisoftStore` *(`__init__`, `is_available`, `start_auth`, `complete_auth...`)*

Tests to write (46)

⇒ **T-55a-01** **UbisoftStore.__init__ — construction** PURE

Function : `test_ubisoftstore_init_constructs_with_valid_args`
Covers : `UbisoftStore.__init__`
Purpose : `UbisoftStore` stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ **T-55a-02** **UbisoftStore.is_available — happy path** ASYNC

Function : `test_ubisoftstore_is_available_returns_true_on_valid_input`
Covers : `UbisoftStore.is_available`
Purpose : `is_available` returns `True` for a valid input.
Fixtures : `pytest-asyncio`

⇒ **T-55a-03** **UbisoftStore.is_available — error handling** ASYNC

Function : `test_ubisoftstore_is_available_handles_error`
Covers : `UbisoftStore.is_available`
Purpose : `is_available` surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ **T-55a-04** **UbisoftStore.start_auth — happy path** ASYNC

Function : `test_ubisoftstore_start_auth_spawns_target_action`
Covers : `UbisoftStore.start_auth`
Purpose : `start_auth` spawns the target action and returns its handle.
Fixtures : `pytest-asyncio`

⇒ **T-55a-05** **UbisoftStore.start_auth — error handling** ASYNC

Function : `test_ubisoftstore_start_auth_handles_error`
Covers : `UbisoftStore.start_auth`
Purpose : `start_auth` surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ **T-55a-06** **UbisoftStore.complete_auth — happy path**

ASYNC

Function : [test_ubisoftstore_complete_auth_happy_path](#)Covers : `UbisoftStore.complete_auth`

Purpose : complete auth resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-55a-07** **UbisoftStore.complete_auth — error handling**

ASYNC

Function : [test_ubisoftstore_complete_auth_handles_error](#)Covers : `UbisoftStore.complete_auth`

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55a-08** **UbisoftStore.logout — happy path**

ASYNC

Function : [test_ubisoftstore_logout_happy_path](#)Covers : `UbisoftStore.logout`

Purpose : logout resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-55a-09** **UbisoftStore.logout — error handling**

ASYNC

Function : [test_ubisoftstore_logout_handles_error](#)Covers : `UbisoftStore.logout`

Purpose : logout surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55a-10** **UbisoftStore.get_library — happy path**

ASYNC

Function : [test_ubisoftstore_get_library_returns_value_on_success](#)Covers : `UbisoftStore.get_library`

Purpose : get library returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ **T-55a-11** **UbisoftStore.get_library — error handling**

ASYNC

Function : [test_ubisoftstore_get_library_handles_error](#)Covers : `UbisoftStore.get_library`

Purpose : get library surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55a-12** **UbisoftStore.install_game — happy path**

ASYNC

Function : [test_ubisoftstore_install_game_completes_setup_steps](#)Covers : `UbisoftStore.install_game`

Purpose : install game performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ T-55a-13 **UbisoftStore.install_game — error handling**

ASYNC

Function : [test_ubisoftstore_install_game_handles_error](#)
Covers : `UbisoftStore.install_game`
Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-55a-14 **UbisoftStore.uninstall_game — happy path**

ASYNC

Function : [test_ubisoftstore_uninstall_game_happy_path](#)
Covers : `UbisoftStore.uninstall_game`
Purpose : uninstall game resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-55a-15 **UbisoftStore.uninstall_game — error handling**

ASYNC

Function : [test_ubisoftstore_uninstall_game_handles_error](#)
Covers : `UbisoftStore.uninstall_game`
Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-55a-16 **UbisoftStore.update_game — happy path**

ASYNC

Function : [test_ubisoftstore_update_game_happy_path](#)
Covers : `UbisoftStore.update_game`
Purpose : update game resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-55a-17 **UbisoftStore.update_game — error handling**

ASYNC

Function : [test_ubisoftstore_update_game_handles_error](#)
Covers : `UbisoftStore.update_game`
Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-55a-18 **UbisoftStore.check_for_updates — happy path**

ASYNC

Function : [test_ubisoftstore_check_for_updates_returns_true_on_valid_input](#)
Covers : `UbisoftStore.check_for_updates`
Purpose : check for updates returns True for a valid input.
Fixtures : `pytest-asyncio`

⇒ T-55a-19 **UbisoftStore.check_for_updates — error handling**

ASYNC

Function : [test_ubisoftstore_check_for_updates_handles_error](#)
Covers : `UbisoftStore.check_for_updates`
Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ T-55a-20 **UbisoftStore.get_game_size — happy path**

ASYNC

Function : [test_ubisoftstore_get_game_size_returns_value_on_success](#)Covers : `UbisoftStore.get_game_size`

Purpose : get game size returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ T-55a-21 **UbisoftStore.get_game_size — error handling**

ASYNC

Function : [test_ubisoftstore_get_game_size_handles_error](#)Covers : `UbisoftStore.get_game_size`

Purpose : get game size surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-22 **UbisoftStore.get_installed — happy path**

ASYNC

Function : [test_ubisoftstore_get_installed_returns_value_on_success](#)Covers : `UbisoftStore.get_installed`

Purpose : get installed returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ T-55a-23 **UbisoftStore.get_installed — error handling**

ASYNC

Function : [test_ubisoftstore_get_installed_handles_error](#)Covers : `UbisoftStore.get_installed`

Purpose : get installed surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-24 **UbisoftStore.get_installed_game_info — happy path**

PURE

Function : [test_ubisoftstore_get_installed_game_info_returns_value_on_success](#)Covers : `UbisoftStore.get_installed_game_info`

Purpose : get installed game info returns the expected payload on a normal response.

Fixtures : —

⇒ T-55a-25 **UbisoftStore.write_install_marker — happy path**

ASYNC

Function : [test_ubisoftstore_write_install_marker_persists_value_to_disk](#)Covers : `UbisoftStore.write_install_marker`

Purpose : write install marker persists the input correctly to disk.

Fixtures : `pytest-asyncio`⇒ T-55a-26 **UbisoftStore.write_install_marker — error handling**

ASYNC

Function : [test_ubisoftstore_write_install_marker_handles_error](#)Covers : `UbisoftStore.write_install_marker`

Purpose : write install marker surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ T-55a-27 **UbisoftStore.find_game_executable — happy path**

PURE

Function : [test_ubisoftstore_find_game_executable_returns_target_when_present](#)Covers : `UbisoftStore.find_game_executable`

Purpose : find game executable returns the located target when it exists.

Fixtures : —

⇒ T-55a-28 **UbisoftStore.is_install_session_active — happy path**

PURE

Function : [test_ubisoftstore_is_install_session_active_returns_true_on_valid_input](#)Covers : `UbisoftStore.is_install_session_active`

Purpose : is install session active returns True for a valid input.

Fixtures : —

⇒ T-55a-29 **UbisoftStore.cancel_install_session — happy path**

ASYNC

Function : [test_ubisoftstore_cancel_install_session_happy_path](#)Covers : `UbisoftStore.cancel_install_session`

Purpose : cancel install session performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`⇒ T-55a-30 **UbisoftStore.cancel_install_session — error handling**

ASYNC

Function : [test_ubisoftstore_cancel_install_session_handles_error](#)Covers : `UbisoftStore.cancel_install_session`

Purpose : cancel install session surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-31 **UbisoftStore.open_launcher_for_install — happy path**

ASYNC

Function : [test_ubisoftstore_open_launcher_for_install_happy_path](#)Covers : `UbisoftStore.open_launcher_for_install`

Purpose : open launcher for install performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`⇒ T-55a-32 **UbisoftStore.open_launcher_for_install — error handling**

ASYNC

Function : [test_ubisoftstore_open_launcher_for_install_handles_error](#)Covers : `UbisoftStore.open_launcher_for_install`

Purpose : open launcher for install surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-33 **UbisoftStore.resolve_install_id — happy path**

PURE

Function : [test_ubisoftstore_resolve_install_id_returns_target_when_present](#)Covers : `UbisoftStore.resolve_install_id`

Purpose : resolve install id returns the located target when it exists.

Fixtures : —

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ T-55a-34 **UbisoftStore.resolve_launch_id — happy path**

PURE

Function : [test_ubisoftstore_resolve_launch_id_returns_target_when_present](#)Covers : `UbisoftStore.resolve_launch_id`

Purpose : resolve launch id returns the located target when it exists.

Fixtures : —

⇒ T-55a-35 **UbisoftStore.get_auth_shortcut_context — happy path**

ASYNC

Function : [test_ubisoftstore_get_auth_shortcut_context_returns_value_on_success](#)Covers : `UbisoftStore.get_auth_shortcut_context`

Purpose : get auth shortcut context returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ T-55a-36 **UbisoftStore.get_auth_shortcut_context — error handling**

ASYNC

Function : [test_ubisoftstore_get_auth_shortcut_context_handles_error](#)Covers : `UbisoftStore.get_auth_shortcut_context`

Purpose : get auth shortcut context surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-37 **UbisoftStore.start_auth_session_monitor — happy path**

ASYNC

Function : [test_ubisoftstore_start_auth_session_monitor_spawns_target_action](#)Covers : `UbisoftStore.start_auth_session_monitor`

Purpose : start auth session monitor spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`⇒ T-55a-38 **UbisoftStore.start_auth_session_monitor — error handling**

ASYNC

Function : [test_ubisoftstore_start_auth_session_monitor_handles_error](#)Covers : `UbisoftStore.start_auth_session_monitor`

Purpose : start auth session monitor surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-55a-39 **UbisoftStore.check_auth_session_status — happy path**

PURE

Function : [test_ubisoftstore_check_auth_session_status_returns_true_on_valid_input](#)Covers : `UbisoftStore.check_auth_session_status`

Purpose : check auth session status returns True for a valid input.

Fixtures : —

⇒ T-55a-40 **UbisoftStore.connect_ubisoft_account — happy path**

ASYNC

Function : [test_ubisoftstore_connect_ubisoft_account_happy_path](#)Covers : `UbisoftStore.connect_ubisoft_account`

Purpose : connect ubisoft account resolves to the expected value on success.

Fixtures : `pytest-asyncio`

OP-55a store.py (cont.)

Tests to write (46) — cont.

⇒ **T-55a-41** **UbisoftStore.connect_ubisoft_account — error handling**

ASYNC

Function : [test_ubisoftstore_connect_ubisoft_account_handles_error](#)Covers : `UbisoftStore.connect_ubisoft_account`

Purpose : connect ubisoft account surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55a-42** **UbisoftStore.sync_ubisoft_credentials — happy path**

PURE

Function : [test_ubisoftstore_sync_ubisoft_credentials_happy_path](#)Covers : `UbisoftStore.sync_ubisoft_credentials`

Purpose : sync ubisoft credentials produces the expected output for a typical input.

Fixtures : —

⇒ **T-55a-43** **UbisoftStore.repair_prefix — happy path**

ASYNC

Function : [test_ubisoftstore_repair_prefix_happy_path](#)Covers : `UbisoftStore.repair_prefix`

Purpose : repair prefix resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-55a-44** **UbisoftStore.repair_prefix — error handling**

ASYNC

Function : [test_ubisoftstore_repair_prefix_handles_error](#)Covers : `UbisoftStore.repair_prefix`

Purpose : repair prefix surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55a-45** **UbisoftStore.get_game_official_url — happy path**

PURE

Function : [test_ubisoftstore_get_game_official_url_returns_value_on_success](#)Covers : `UbisoftStore.get_game_official_url`

Purpose : get game official url returns the expected payload on a normal response.

Fixtures : —

⇒ **T-55a-46** **UbisoftStore.kill_upc_processes — happy path**

PURE

Function : [test_ubisoftstore_kill_upc_processes_happy_path](#)Covers : `UbisoftStore.kill_upc_processes`

Purpose : kill upc processes produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- `pytest-asyncio`

Linked fiches

- ← OP-04a uses `cache_manager.py`
- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-11 uses `__init__.py`

PRIORITY HIGH

TIER 2

MOCKED

24 TESTS

OP-55b

config.py

Source : py_modules/unifideck/stores/ubisoft/config.py | Lignes : 332 | Cible : 85%

Test file : tests/unit/stores/ubisoft/test_config.py

Public surface

[class] UbisoftConfig (data_dir_expanded, id_map_file_expanded, vis...)

Tests to write (24)

⇒ T-55b-01 UbisoftConfig.data_dir_expanded — happy path

MOCKED FS

Function : test_ubisoftconfig_data_dir_expanded_happy_path
Covers : UbisoftConfig.data_dir_expanded
Purpose : data dir expanded produces the expected output for a typical input.
Fixtures : tmp_path

⇒ T-55b-02 UbisoftConfig.data_dir_expanded — error handling

MOCKED FS

Function : test_ubisoftconfig_data_dir_expanded_handles_missing_or_corrupt_file
Covers : UbisoftConfig.data_dir_expanded
Purpose : data dir expanded handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-55b-03 UbisoftConfig.id_map_file_expanded — happy path

MOCKED FS

Function : test_ubisoftconfig_id_map_file_expanded_happy_path
Covers : UbisoftConfig.id_map_file_expanded
Purpose : id map file expanded produces the expected output for a typical input.
Fixtures : tmp_path

⇒ T-55b-04 UbisoftConfig.id_map_file_expanded — error handling

MOCKED FS

Function : test_ubisoftconfig_id_map_file_expanded_handles_missing_or_corrupt_file
Covers : UbisoftConfig.id_map_file_expanded
Purpose : id map file expanded handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

⇒ T-55b-05 UbisoftConfig.visible_games_file_expanded — happy path

MOCKED FS

Function : test_ubisoftconfig_visible_games_file_expanded_happy_path
Covers : UbisoftConfig.visible_games_file_expanded
Purpose : visible games file expanded produces the expected output for a typical input.
Fixtures : tmp_path

OP-55b config.py (cont.)

Tests to write (24) — cont.

⇒ **T-55b-06** **UbisoftConfig.visible_games_file_expanded — error handling** MOCKED FS

Function : [test_ubisoftconfig_visible_games_file_expanded_handles_missing_or_corrupt_file](#)

Covers : UbisoftConfig.visible_games_file_expanded

Purpose : visible games file expanded handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ **T-55b-07** **UbisoftConfig.prefixes_dir_expanded — happy path** MOCKED FS

Function : [test_ubisoftconfig_prefixes_dir_expanded_happy_path](#)

Covers : UbisoftConfig.prefixes_dir_expanded

Purpose : prefixes dir expanded produces the expected output for a typical input.

Fixtures : tmp_path

⇒ **T-55b-08** **UbisoftConfig.prefixes_dir_expanded — error handling** MOCKED FS

Function : [test_ubisoftconfig_prefixes_dir_expanded_handles_missing_or_corrupt_file](#)

Covers : UbisoftConfig.prefixes_dir_expanded

Purpose : prefixes dir expanded handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ **T-55b-09** **UbisoftConfig.template_dir_expanded — happy path** MOCKED FS

Function : [test_ubisoftconfig_template_dir_expanded_happy_path](#)

Covers : UbisoftConfig.template_dir_expanded

Purpose : template dir expanded produces the expected output for a typical input.

Fixtures : tmp_path

⇒ **T-55b-10** **UbisoftConfig.template_dir_expanded — error handling** MOCKED FS

Function : [test_ubisoftconfig_template_dir_expanded_handles_missing_or_corrupt_file](#)

Covers : UbisoftConfig.template_dir_expanded

Purpose : template dir expanded handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ **T-55b-11** **UbisoftConfig.auth_prefix_dir_expanded — happy path** MOCKED FS

Function : [test_ubisoftconfig_auth_prefix_dir_expanded_happy_path](#)

Covers : UbisoftConfig.auth_prefix_dir_expanded

Purpose : auth prefix dir expanded produces the expected output for a typical input.

Fixtures : tmp_path

⇒ **T-55b-12** **UbisoftConfig.auth_prefix_dir_expanded — error handling** MOCKED FS

Function : [test_ubisoftconfig_auth_prefix_dir_expanded_handles_missing_or_corrupt_file](#)

Covers : UbisoftConfig.auth_prefix_dir_expanded

Purpose : auth prefix dir expanded handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

OP-55b config.py (cont.)

Tests to write (24) — cont.

⇒ **T-55b-13** **UbisoftConfig.installer_cache_dir_expanded — happy path** **MOCKED FS**

Function : [test_ubisoftconfig_installer_cache_dir_expanded_completes_setup_steps](#)
Covers : `UbisoftConfig.installer_cache_dir_expanded`
Purpose : installer cache dir expanded performs the setup steps end-to-end.
Fixtures : `tmp_path`

⇒ **T-55b-14** **UbisoftConfig.installer_cache_dir_expanded — error handling** **MOCKED FS**

Function : [test_ubisoftconfig_installer_cache_dir_expanded_handles_missing_or_corrupt_file](#)
Covers : `UbisoftConfig.installer_cache_dir_expanded`
Purpose : installer cache dir expanded handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ **T-55b-15** **UbisoftConfig.upc_session_file_expanded — happy path** **MOCKED FS**

Function : [test_ubisoftconfig_upc_session_file_expanded_happy_path](#)
Covers : `UbisoftConfig.upc_session_file_expanded`
Purpose : upc session file expanded produces the expected output for a typical input.
Fixtures : `tmp_path`

⇒ **T-55b-16** **UbisoftConfig.upc_session_file_expanded — error handling** **MOCKED FS**

Function : [test_ubisoftconfig_upc_session_file_expanded_handles_missing_or_corrupt_file](#)
Covers : `UbisoftConfig.upc_session_file_expanded`
Purpose : upc session file expanded handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ **T-55b-17** **UbisoftConfig.game_id_db_file_expanded — happy path** **MOCKED FS**

Function : [test_ubisoftconfig_game_id_db_file_expanded_happy_path](#)
Covers : `UbisoftConfig.game_id_db_file_expanded`
Purpose : game id db file expanded produces the expected output for a typical input.
Fixtures : `tmp_path`

⇒ **T-55b-18** **UbisoftConfig.game_id_db_file_expanded — error handling** **MOCKED FS**

Function : [test_ubisoftconfig_game_id_db_file_expanded_handles_missing_or_corrupt_file](#)
Covers : `UbisoftConfig.game_id_db_file_expanded`
Purpose : game id db file expanded handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ **T-55b-19** **UbisoftConfig.default_install_base_expanded — happy path** **MOCKED FS**

Function : [test_ubisoftconfig_default_install_base_expanded_happy_path](#)
Covers : `UbisoftConfig.default_install_base_expanded`
Purpose : default install base expanded performs the setup steps end-to-end.
Fixtures : `tmp_path`

OP-55b config.py (cont.)

Tests to write (24) — cont.

⇒ **T-55b-20** **UbisoftConfig.default_install_base_expanded — error handling** MOCKED FS

Function : [test_ubisoftconfig_default_install_base_expanded_handles_missing_or_corrupt_file](#)

Covers : `UbisoftConfig.default_install_base_expanded`

Purpose : default install base expanded handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

⇒ **T-55b-21** **UbisoftConfig.iter_game_prefix_paths — happy path** MOCKED FS

Function : [test_ubisoftconfig_iter_game_prefix_paths_happy_path](#)

Covers : `UbisoftConfig.iter_game_prefix_paths`

Purpose : iter game prefix paths returns the expected list of items.

Fixtures : `tmp_path`

⇒ **T-55b-22** **UbisoftConfig.iter_game_prefix_paths — error handling** MOCKED FS

Function : [test_ubisoftconfig_iter_game_prefix_paths_handles_missing_or_corrupt_file](#)

Covers : `UbisoftConfig.iter_game_prefix_paths`

Purpose : iter game prefix paths handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

⇒ **T-55b-23** **UbisoftConfig.from_config_manager — happy path** PURE

Function : [test_ubisoftconfig_from_config_manager_happy_path](#)

Covers : `UbisoftConfig.from_config_manager`

Purpose : from config manager produces the expected output for a typical input.

Fixtures : —

⇒ **T-55b-24** **UbisoftConfig.describe — happy path** PURE

Function : [test_ubisoftconfig_describe_happy_path](#)

Covers : `UbisoftConfig.describe`

Purpose : describe produces the expected output for a typical input.

Fixtures : —

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- OP-55c used by `paths.py`
- OP-55d used by `binaries.py`
- OP-55g used by `id_map.py`
- OP-55j used by `specialists.py`

● PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-55c

paths.py

Source : py_modules/unifideck/stores/ubisoft/paths.py | Lignes : 72 | Cible : 95%

Test file : tests/unit/stores/ubisoft/test_paths.py

Public surface

[class]

UbisoftPrefixPaths

(__init__, find_upc_exe, find_connect_exe, find...)

Tests to write (8)

⇒ T-55c-01

UbisoftPrefixPaths.__init__ — construction

PURE

Function : test_ubisoftprefixpaths_init_constructs_with_valid_args

Covers : UbisoftPrefixPaths.__init__

Purpose : UbisoftPrefixPaths can be instantiated with the documented arguments.

Fixtures : —

⇒ T-55c-02

UbisoftPrefixPaths.find_upc_exe — happy path

PURE

Function : test_ubisoftprefixpaths_find_upc_exe_returns_target_when_present

Covers : UbisoftPrefixPaths.find_upc_exe

Purpose : find upc exe returns the located target when it exists.

Fixtures : —

⇒ T-55c-03

UbisoftPrefixPaths.find_connect_exe — happy path

PURE

Function : test_ubisoftprefixpaths_find_connect_exe_returns_target_when_present

Covers : UbisoftPrefixPaths.find_connect_exe

Purpose : find connect exe returns the located target when it exists.

Fixtures : —

⇒ T-55c-04

UbisoftPrefixPaths.find_configurations — happy path

PURE

Function : test_ubisoftprefixpaths_find_configurations_returns_target_when_present

Covers : UbisoftPrefixPaths.find_configurations

Purpose : find configurations returns the located target when it exists.

Fixtures : —

⇒ T-55c-05

UbisoftPrefixPaths.iter_user_homes — happy path

WINE PREFIX

Function : test_ubisoftprefixpaths_iter_user_homes_happy_path

Covers : UbisoftPrefixPaths.iter_user_homes

Purpose : iter user homes produces the expected output for a typical input.

Fixtures : tmp_path, fake_prefix (conftest.py)

OP-55c *paths.py* (cont.)

Tests to write (8) — cont.

⇒ T-55c-06 **UbisoftPrefixPaths.iter_user_homes — error handling**

WINE PREFIX

Function : [test_ubisoftprefixpaths_iter_user_homes_handles_missing_or_corrupt_file](#)Covers : `UbisoftPrefixPaths.iter_user_homes`

Purpose : iter user homes handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`, `fake_prefix` (conftest.py)⇒ T-55c-07 **UbisoftPrefixPaths.get_prefix_path — happy path**

MOCKED FS

Function : [test_ubisoftprefixpaths_get_prefix_path_returns_value_on_success](#)Covers : `UbisoftPrefixPaths.get_prefix_path`

Purpose : get prefix path returns the expected payload on a normal response.

Fixtures : `tmp_path`⇒ T-55c-08 **UbisoftPrefixPaths.get_prefix_path — error handling**

MOCKED FS

Function : [test_ubisoftprefixpaths_get_prefix_path_handles_missing_or_corrupt_file](#)Covers : `UbisoftPrefixPaths.get_prefix_path`

Purpose : get prefix path handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

Mocking dependencies

- `fake_prefix` (conftest.py)
- `tmp_path`

Linked fiches

- ← OP-55b uses `config.py`
- OP-55g used by `id_map.py`
- OP-55j used by `specialists.py`
- OP-56a used by `installer.py`
- OP-56h used by `update_op.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

11 TESTS

OP-55d

binaries.py

Source : py_modules/unifideck/stores/ubisoft/binaries.py | Lignes : 295 | Cible : 65%

Test file : tests/unit/stores/ubisoft/test_binaries.py

Public surface

[class]

UbisoftBinaryResolver

(__init__, find_umu_run, find_proton_path, find_...)

Tests to write (11)

⇒ T-55d-01

UbisoftBinaryResolver.__init__ — construction

PURE

Function :

test_ubisoftbinaryresolver_init_constructs_with_valid_args

Covers :

UbisoftBinaryResolver.__init__

Purpose :

UbisoftBinaryResolver stores its constructor arguments on the expected instance attributes.

Fixtures :

—

⇒ T-55d-02

UbisoftBinaryResolver.find_umu_run — happy path

WINE PREFIX

Function :

test_ubisoftbinaryresolver_find_umu_run_returns_target_when_present

Covers :

UbisoftBinaryResolver.find_umu_run

Purpose :

find umu run returns the located target when it exists.

Fixtures :

tmp_path, fake_prefix (conftest.py)

⇒ T-55d-03

UbisoftBinaryResolver.find_umu_run — error handling

WINE PREFIX

Function :

test_ubisoftbinaryresolver_find_umu_run_handles_missing_or_corrupt_file

Covers :

UbisoftBinaryResolver.find_umu_run

Purpose :

find umu run handles missing or corrupt files gracefully — empty result, never crash.

Fixtures :

tmp_path, fake_prefix (conftest.py)

⇒ T-55d-04

UbisoftBinaryResolver.find_proton_path — happy path

WINE PREFIX

Function :

test_ubisoftbinaryresolver_find_proton_path_returns_target_when_present

Covers :

UbisoftBinaryResolver.find_proton_path

Purpose :

find proton path returns the located target when it exists.

Fixtures :

fake_prefix (conftest.py)

⇒ T-55d-05

UbisoftBinaryResolver.find_proton_path — error handling

WINE PREFIX

Function :

test_ubisoftbinaryresolver_find_proton_path_handles_error

Covers :

UbisoftBinaryResolver.find_proton_path

Purpose :

find proton path surfaces failures cleanly (typed result, no swallowed exception).

Fixtures :

fake_prefix (conftest.py)

OP-55d binaries.py (cont.)

Tests to write (11) — cont.

⇒ T-55d-06 **UbisoftBinaryResolver.find_python — happy path**

MOCKED FS

Function : [test_ubisoftbinaryresolver_find_python_returns_target_when_present](#)
 Covers : `UbisoftBinaryResolver.find_python`
 Purpose : find python returns the located target when it exists.
 Fixtures : `tmp_path`

⇒ T-55d-07 **UbisoftBinaryResolver.find_python — error handling**

MOCKED FS

Function : [test_ubisoftbinaryresolver_find_python_handles_missing_or_corrupt_file](#)
 Covers : `UbisoftBinaryResolver.find_python`
 Purpose : find python handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : `tmp_path`

⇒ T-55d-08 **UbisoftBinaryResolver.proton_family — happy path**

PURE

Function : [test_ubisoftbinaryresolver_proton_family_happy_path](#)
 Covers : `UbisoftBinaryResolver.proton_family`
 Purpose : proton family produces the expected output for a typical input.
 Fixtures : —

⇒ T-55d-09 **UbisoftBinaryResolver.build_umu_env — happy path**

WINE PREFIX

Function : [test_ubisoftbinaryresolver_build_umu_env_happy_path](#)
 Covers : `UbisoftBinaryResolver.build_umu_env`
 Purpose : build umu env produces the expected object from valid arguments.
 Fixtures : `tmp_path`, `monkeypatch` (env vars), `fake_prefix` (conftest.py)

⇒ T-55d-10 **UbisoftBinaryResolver.build_umu_env — error handling**

WINE PREFIX

Function : [test_ubisoftbinaryresolver_build_umu_env_handles_missing_or_corrupt_file](#)
 Covers : `UbisoftBinaryResolver.build_umu_env`
 Purpose : build umu env handles missing or corrupt files gracefully — empty result, never crash.
 Fixtures : `tmp_path`, `monkeypatch` (env vars), `fake_prefix` (conftest.py)

⇒ T-55d-11 **UbisoftBinaryResolver.detect_display_env — happy path**

PURE

Function : [test_ubisoftbinaryresolver_detect_display_env_happy_path](#)
 Covers : `UbisoftBinaryResolver.detect_display_env`
 Purpose : detect display env produces the expected output for a typical input.
 Fixtures : —

Mocking dependencies

- `fake_prefix` (conftest.py)
- `monkeypatch` (env vars)
- `tmp_path`

Linked fiches

- ← OP-55b uses `config.py`
- OP-55j used by `specialists.py`
- OP-56a used by `installer.py`
- OP-58a used by `facade.py`
- OP-58e used by `direct_signin.py`

● PRIORITY HIGH

TIER 1

PURE

9 TESTS

OP-55e

parser.py

Source : py_modules/unifideck/stores/ubisoft/parser.py | Lignes : 303 | Cible : 95%

Test file : tests/unit/stores/ubisoft/test_parser.py

Public surface

[class]	GameConfig	(__init__)
[func]	parse_configurations	(pure)
[func]	parse_ownership	(pure)
[func]	check_install_state	(pure)
[func]	build_id_map_from_configurations	(pure)

Tests to write (9)

⇒ T-55e-01 parse_configurations — happy path

PURE

Function : test_parse_configurations_parses_well_formed_input

Covers : parse_configurations

Purpose : parse configurations parses a well-formed input into the expected value.

Fixtures : —

⇒ T-55e-02 parse_configurations — edge cases

PURE

Function : test_parse_configurations_returns_empty_list_on_empty_input

Covers : parse_configurations

Purpose : parse configurations handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

⇒ T-55e-03 parse_ownership — happy path

PURE

Function : test_parse_ownership_parses_well_formed_input

Covers : parse_ownership

Purpose : parse ownership parses a well-formed input into the expected value.

Fixtures : —

⇒ T-55e-04 parse_ownership — edge cases

PURE

Function : test_parse_ownership_returns_empty_list_on_empty_input

Covers : parse_ownership

Purpose : parse ownership handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

OP-55e parser.py (cont.)

Tests to write (9) — cont.

⇒ T-55e-05 check_install_state — happy path

MOCKED FS

Function : [test_check_install_state_returns_true_on_valid_input](#)

Covers : check_install_state

Purpose : check install state returns True for a valid input.

Fixtures : tmp_path

⇒ T-55e-06 check_install_state — error handling

MOCKED FS

Function : [test_check_install_state_handles_missing_or_corrupt_file](#)

Covers : check_install_state

Purpose : check install state handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-55e-07 build_id_map_from_configurations — happy path

PURE

Function : [test_build_id_map_from_configurations_happy_path](#)

Covers : build_id_map_from_configurations

Purpose : build id map from configurations produces the expected object from valid arguments.

Fixtures : —

⇒ T-55e-08 build_id_map_from_configurations — edge cases

PURE

Function : [test_build_id_map_from_configurations_edge_cases](#)

Covers : build_id_map_from_configurations

Purpose : build id map from configurations stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-55e-09 GameConfig.__init__ — construction

PURE

Function : [test_gameconfig_init_constructs_with_valid_args](#)

Covers : GameConfig.__init__

Purpose : GameConfig stores its constructor arguments on the expected instance attributes.

Fixtures : —

Mocking dependencies

- tmp_path

Linked fiches

- ← OP-55f uses parser_binary.py
- OP-57b used by fetch.py
- OP-57c used by data_loader.py
- OP-57d used by game_builder.py
- OP-57f used by detection.py

● PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-55f

parser_binary.py

Source : `py_modules/unifideck/stores/ubisoft/parser_binary.py` | Lignes : 87 | Cible : 95%

Test file : `tests/unit/stores/ubisoft/test_parser_binary.py`

Public surface

[func]	parse_record_size	(pure)
[func]	parse_install_id	(pure)
[func]	parse_launch_id	(pure)
[func]	parse_ownership_record	(pure)

Tests to write (8)

⇒ T-55f-01

parse_record_size — happy path

PURE

Function :

`test_parse_record_size_pares_well_formed_input`

Covers :

`parse_record_size`

Purpose :

parse record size parses a well-formed input into the expected value.

Fixtures :

—

⇒ T-55f-02

parse_record_size — edge cases

PURE

Function :

`test_parse_record_size_edge_cases`

Covers :

`parse_record_size`

Purpose :

parse record size handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures :

—

⇒ T-55f-03

parse_install_id — happy path

PURE

Function :

`test_parse_install_id_pares_well_formed_input`

Covers :

`parse_install_id`

Purpose :

parse install id parses a well-formed input into the expected value.

Fixtures :

—

⇒ T-55f-04

parse_install_id — edge cases

PURE

Function :

`test_parse_install_id_edge_cases`

Covers :

`parse_install_id`

Purpose :

parse install id handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures :

—

⇒ T-55f-05

parse_launch_id — happy path

PURE

Function :

`test_parse_launch_id_pares_well_formed_input`

Covers :

`parse_launch_id`

Purpose :

parse launch id parses a well-formed input into the expected value.

Fixtures :

—

OP-55f parser_binary.py (cont.)

Tests to write (8) — cont.

⇒ T-55f-06

parse_launch_id — edge cases

PURE

Function : test_parse_launch_id_edge_cases

Covers : parse_launch_id

Purpose : parse launch id handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

⇒ T-55f-07

parse_ownership_record — happy path

PURE

Function : test_parse_ownership_record_parses_well_formed_input

Covers : parse_ownership_record

Purpose : parse ownership record parses a well-formed input into the expected value.

Fixtures : —

⇒ T-55f-08

parse_ownership_record — edge cases

PURE

Function : test_parse_ownership_record_returns_none_on_missing_input

Covers : parse_ownership_record

Purpose : parse ownership record handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

Mocking dependencies

• (none — pure tests)

Linked fiches

→ OP-55e used by parser.py

● PRIORITY HIGH

TIER 1

PURE

17 TESTS

OP-55g

id_map.py

Source : py_modules/unifideck/stores/ubisoft/id_map.py | Lignes : 198 | Cible : 95%

Test file : tests/unit/stores/ubisoft/test_id_map.py

Public surface

[class]

UbisoftIdMap

(__init__, resolve_install_id, resolve_launch_id, ...)

Tests to write (17)

⇒ T-55g-01

UbisoftIdMap.__init__ — construction

PURE

Function : test_ubisoftidmap_init_constructs_with_valid_args

Covers : UbisoftIdMap.__init__

Purpose : UbisoftIdMap stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-55g-02

UbisoftIdMap.resolve_install_id — happy path

PURE

Function : test_ubisoftidmap_resolve_install_id_returns_target_when_present

Covers : UbisoftIdMap.resolve_install_id

Purpose : resolve install id returns the located target when it exists.

Fixtures : —

⇒ T-55g-03

UbisoftIdMap.resolve_launch_id — happy path

PURE

Function : test_ubisoftidmap_resolve_launch_id_returns_target_when_present

Covers : UbisoftIdMap.resolve_launch_id

Purpose : resolve launch id returns the located target when it exists.

Fixtures : —

⇒ T-55g-04

UbisoftIdMap.update — happy path

PURE

Function : test_ubisoftidmap_update_happy_path

Covers : UbisoftIdMap.update

Purpose : update produces the expected output for a typical input.

Fixtures : —

⇒ T-55g-05

UbisoftIdMap.update_bulk — happy path

PURE

Function : test_ubisoftidmap_update_bulk_happy_path

Covers : UbisoftIdMap.update_bulk

Purpose : update bulk produces the expected output for a typical input.

Fixtures : —

OP-55g id_map.py (cont.)

Tests to write (17) — cont.

⇒ T-55g-06 **UbisoftIdMap.merge_entry — happy path**

PURE

Function : [test_ubisoftidmap_merge_entry_happy_path](#)
Covers : `UbisoftIdMap.merge_entry`
Purpose : merge entry returns True for the documented happy-path input.
Fixtures : —

⇒ T-55g-07 **UbisoftIdMap.get_entry — happy path**

PURE

Function : [test_ubisoftidmap_get_entry_returns_value_on_success](#)
Covers : `UbisoftIdMap.get_entry`
Purpose : get entry returns the expected payload on a normal response.
Fixtures : —

⇒ T-55g-08 **UbisoftIdMap.in_cache — happy path**

PURE

Function : [test_ubisoftidmap_in_cache_happy_path](#)
Covers : `UbisoftIdMap.in_cache`
Purpose : in cache produces the expected output for a typical input.
Fixtures : —

⇒ T-55g-09 **UbisoftIdMap.refresh_from_configurations — happy path**

ASYNC

Function : [test_ubisoftidmap_refresh_from_configurations_happy_path](#)
Covers : `UbisoftIdMap.refresh_from_configurations`
Purpose : refresh from configurations resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-55g-10 **UbisoftIdMap.refresh_from_configurations — error handling**

ASYNC

Function : [test_ubisoftidmap_refresh_from_configurations_handles_error](#)
Covers : `UbisoftIdMap.refresh_from_configurations`
Purpose : refresh from configurations surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

⇒ T-55g-11 **UbisoftIdMap.fetch_game_id_database — happy path**

MOCKED HTTP

Function : [test_ubisoftidmap_fetch_game_id_database_returns_value_on_success](#)
Covers : `UbisoftIdMap.fetch_game_id_database`
Purpose : fetch game id database returns the expected payload on a normal response.
Fixtures : `pytest-asyncio`, `aioreponses`

⇒ T-55g-12 **UbisoftIdMap.fetch_game_id_database — error handling**

MOCKED HTTP

Function : [test_ubisoftidmap_fetch_game_id_database_raises_on_network_failure](#)
Covers : `UbisoftIdMap.fetch_game_id_database`
Purpose : fetch game id database surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.
Fixtures : `pytest-asyncio`, `aioreponses`

OP-55g *id_map.py* (cont.)

Tests to write (17) — cont.

⇒ **T-55g-13** **UbisoftIdMap.lookup_game_id_by_name — happy path**

ASYNC

Function : [test_ubisoftidmap_lookup_game_id_by_name_happy_path](#)Covers : `UbisoftIdMap.lookup_game_id_by_name`

Purpose : lookup game id by name returns the located target when it exists.

Fixtures : `pytest-asyncio`⇒ **T-55g-14** **UbisoftIdMap.lookup_game_id_by_name — error handling**

ASYNC

Function : [test_ubisoftidmap_lookup_game_id_by_name_handles_error](#)Covers : `UbisoftIdMap.lookup_game_id_by_name`

Purpose : lookup game id by name surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-55g-15** **UbisoftIdMap.extract_game_id_from_registry — happy path**

PURE

Function : [test_ubisoftidmap_extract_game_id_from_registry_happy_path](#)Covers : `UbisoftIdMap.extract_game_id_from_registry`

Purpose : extract game id from registry produces the expected output for a typical input.

Fixtures : —

⇒ **T-55g-16** **UbisoftIdMap.get_steam_library_titles — happy path**

PURE

Function : [test_ubisoftidmap_get_steam_library_titles_returns_value_on_success](#)Covers : `UbisoftIdMap.get_steam_library_titles`

Purpose : get steam library titles returns the expected payload on a normal response.

Fixtures : —

⇒ **T-55g-17** **UbisoftIdMap.normalize_for_matching — happy path**

PURE

Function : [test_ubisoftidmap_normalize_for_matching_normalises_input](#)Covers : `UbisoftIdMap.normalize_for_matching`

Purpose : normalize for matching normalises the input as documented.

Fixtures : —

Mocking dependencies

- `aioresponses`
- `pytest-asyncio`

Linked fiches

- ← OP-32b uses `library.py`
- ← OP-55b uses `config.py`
- ← OP-55c uses `paths.py`
- ← OP-55h uses `id_map_sources.py`
- OP-55h used by `id_map_sources.py`
- OP-55i used by `steam_filter.py`
- OP-55j used by `specialists.py`
- OP-56a used by `installer.py`

● PRIORITY HIGH

TIER 2

MOCKED

8 TESTS

OP-55h

id_map_sources.py

Source : `py_modules/unifideck/stores/ubisoft/id_map_sources.py` | Lignes : 300 | Cible : 85%

Test file : `tests/unit/stores/ubisoft/test_id_map_sources.py`

Public surface

[func]	<code>extract_game_id_from_registry</code>	(pure)
[func]	<code>read_reg_file</code>	(pure)
[func]	<code>scan_system_reg_installs</code>	(pure)
[func]	<code>extract_id_from_user_reg_sibling</code>	(pure)

Tests to write (8)

⇒ T-55h-01 **extract_game_id_from_registry — happy path**

MOCKED FS

Function : `test_extract_game_id_from_registry_happy_path`

Covers : `extract_game_id_from_registry`

Purpose : `extract game id from registry performs the side-effect without raising.`

Fixtures : `tmp_path`

⇒ T-55h-02 **extract_game_id_from_registry — error handling**

MOCKED FS

Function : `test_extract_game_id_from_registry_handles_missing_or_corrupt_file`

Covers : `extract_game_id_from_registry`

Purpose : `extract game id from registry handles missing or corrupt files gracefully — empty result, never crash.`

Fixtures : `tmp_path`

⇒ T-55h-03 **read_reg_file — happy path**

MOCKED FS

Function : `test_read_reg_file_returns_value_on_success`

Covers : `read_reg_file`

Purpose : `read reg file returns the expected payload on a normal response.`

Fixtures : `tmp_path`

⇒ T-55h-04 **read_reg_file — error handling**

MOCKED FS

Function : `test_read_reg_file_handles_missing_or_corrupt_file`

Covers : `read_reg_file`

Purpose : `read reg file handles missing or corrupt files gracefully — empty result, never crash.`

Fixtures : `tmp_path`

⇒ T-55h-05 **scan_system_reg_installs — happy path**

PURE

Function : `test_scan_system_reg_installs_happy_path`

Covers : `scan_system_reg_installs`

Purpose : `scan system reg installs performs the setup steps end-to-end.`

Fixtures : `—`

OP-55h id_map_sources.py (cont.)

Tests to write (8) — cont.

⇒ T-55h-06

scan_system_reg_installs — edge cases

PURE

Function : test_scan_system_reg_installs_returns_none_on_missing_input

Covers : scan_system_reg_installs

Purpose : scan system reg installs returns None on missing or invalid input rather than raising.

Fixtures : —

⇒ T-55h-07

extract_id_from_user_reg_sibling — happy path

MOCKED FS

Function : test_extract_id_from_user_reg_sibling_happy_path

Covers : extract_id_from_user_reg_sibling

Purpose : extract id from user reg sibling performs the side-effect without raising.

Fixtures : tmp_path

⇒ T-55h-08

extract_id_from_user_reg_sibling — error handling

MOCKED FS

Function : test_extract_id_from_user_reg_sibling_handles_missing_or_corrupt_file

Covers : extract_id_from_user_reg_sibling

Purpose : extract id from user reg sibling handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

Mocking dependencies

• tmp_path

Linked fiches

← OP-08 uses __init__.py

← OP-55g uses id_map.py

→ OP-55g used by id_map.py

PRIORITY HIGH

TIER 1

PURE

8 TESTS

OP-55i

steam_filter.py

Source : py_modules/unifideck/stores/ubisoft/steam_filter.py | Lignes : 73 | Cible : 95%

Test file : tests/unit/stores/ubisoft/test_steam_filter.py

Public surface

[func]	filter_steam_linked_configs	(pure)
[func]	load_steam_titles_for_cross_ref	(pure)
[func]	classify_steam_linked	(pure)
[func]	yaml_has_steam_markers	(pure)

Tests to write (8)

⇒ T-55i-01

filter_steam_linked_configs — happy path

PURE

Function :

test_filter_steam_linked_configs_happy_path

Covers :

filter_steam_linked_configs

Purpose :

filter steam linked configs produces the expected output for a typical input.

Fixtures :

—

⇒ T-55i-02

filter_steam_linked_configs — edge cases

PURE

Function :

test_filter_steam_linked_configs_edge_cases

Covers :

filter_steam_linked_configs

Purpose :

filter steam linked configs stays correct on empty / boundary inputs.

Fixtures :

—

⇒ T-55i-03

load_steam_titles_for_cross_ref — happy path

PURE

Function :

test_load_steam_titles_for_cross_ref_returns_value_on_success

Covers :

load_steam_titles_for_cross_ref

Purpose :

load steam titles for cross ref returns the expected payload on a normal response.

Fixtures :

—

⇒ T-55i-04

load_steam_titles_for_cross_ref — edge cases

PURE

Function :

test_load_steam_titles_for_cross_ref_edge_cases

Covers :

load_steam_titles_for_cross_ref

Purpose :

load steam titles for cross ref stays correct on empty / boundary inputs.

Fixtures :

—

⇒ T-55i-05

classify_steam_linked — happy path

PURE

Function :

test_classify_steam_linked_happy_path

Covers :

classify_steam_linked

Purpose :

classify steam linked produces the expected output for a typical input.

Fixtures :

—

OP-55i steam_filter.py (cont.)

Tests to write (8) — cont.

⇒ T-55i-06

classify_steam_linked — edge cases

PURE

Function :

Covers :

Purpose :

Fixtures :

test_classify_steam_linked_returns_none_on_missing_input

classify_steam_linked

classify steam linked returns None on missing or invalid input rather than raising.

—

⇒ T-55i-07

yaml_has_steam_markers — happy path

PURE

Function :

Covers :

Purpose :

Fixtures :

test_yaml_has_steam_markers_happy_path

yaml_has_steam_markers

yaml has steam markers returns True for a valid input.

—

⇒ T-55i-08

yaml_has_steam_markers — edge cases

PURE

Function :

Covers :

Purpose :

Fixtures :

test_yaml_has_steam_markers_edge_cases

yaml_has_steam_markers

yaml has steam markers stays correct on empty / boundary inputs.

—

Mocking dependencies

Linked fiches

• (none — pure tests)

← OP-55g uses id_map.py

→ OP-57d used by game_builder.py

PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-55j

specialists.py

Source : `py_modules/unifideck/stores/ubisoft/specialists.py` | Lignes : 156 | Cible : 95%

Test file : `tests/unit/stores/ubisoft/test_specialists.py`

Public surface

<code>[class]</code>	<code>UbisoftSpecialists</code>	<code>()</code>
<code>[func]</code>	<code>build_ubisoft_specialists</code>	<code>(pure)</code>

Tests to write (2)

⇒ T-55j-01

build_ubisoft_specialists — happy path

PURE

Function : `test_build_ubisoft_specialists_happy_path`
Covers : `build_ubisoft_specialists`
Purpose : build ubisoft specialists produces the expected object from valid arguments.
Fixtures : —

⇒ T-55j-02

build_ubisoft_specialists — edge cases

PURE

Function : `test_build_ubisoft_specialists_edge_cases`
Covers : `build_ubisoft_specialists`
Purpose : build ubisoft specialists stays correct on empty / boundary inputs.
Fixtures : —

Mocking dependencies

- (none — pure tests)

Linked fiches

- ← OP-55b uses `config.py`
- ← OP-55c uses `paths.py`
- ← OP-55d uses `binaries.py`
- ← OP-55g uses `id_map.py`
- OP-55a used by `store.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

22 TESTS

OP-58a

facade.py

Source : `py_modules/unifideck/stores/ubisoft/auth/facade.py` | Lignes : 164 | Cible : 65%
Test file : `tests/unit/stores/ubisoft/auth/test_facade.py`

Public surface

[class]	UbisoftAuthState	()
[class]	UbisoftAuthServices	()
[class]	UbisoftAuth	(<code>__init__</code> , <code>ensure_auth_shortcut</code> , <code>auth_shortcut...</code>)

Tests to write (22)

⇒ T-58a-01 **UbisoftAuth.__init__ — construction** PURE

Function : `test_ubisoftauth_init_constructs_with_valid_args`

Covers : `UbisoftAuth.__init__`

Purpose : UbisoftAuth stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-58a-02 **UbisoftAuth.ensure_auth_shortcut — happy path** ASYNC

Function : `test_ubisoftauth_ensure_auth_shortcut_happy_path`

Covers : `UbisoftAuth.ensure_auth_shortcut`

Purpose : ensure auth shortcut resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-58a-03 **UbisoftAuth.ensure_auth_shortcut — error handling** ASYNC

Function : `test_ubisoftauth_ensure_auth_shortcut_handles_error`

Covers : `UbisoftAuth.ensure_auth_shortcut`

Purpose : ensure auth shortcut surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

⇒ T-58a-04 **UbisoftAuth.auth_shortcut_exists_in_vdf — happy path** ASYNC

Function : `test_ubisoftauth_auth_shortcut_exists_in_vdf_happy_path`

Covers : `UbisoftAuth.auth_shortcut_exists_in_vdf`

Purpose : auth shortcut exists in vdf resolves to the expected value on success.

Fixtures : `pytest-asyncio`

⇒ T-58a-05 **UbisoftAuth.auth_shortcut_exists_in_vdf — error handling** ASYNC

Function : `test_ubisoftauth_auth_shortcut_exists_in_vdf_handles_error`

Covers : `UbisoftAuth.auth_shortcut_exists_in_vdf`

Purpose : auth shortcut exists in vdf surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-58a facade.py (cont.)

Tests to write (22) — cont.

⇒ T-58a-06 **UbisoftAuth.fetch_auth_shortcut_artwork — happy path**

MOCKED HTTP

Function : [test_ubisoftauth_fetch_auth_shortcut_artwork_returns_value_on_success](#)Covers : `UbisoftAuth.fetch_auth_shortcut_artwork`

Purpose : fetch auth shortcut artwork returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `aioresponses`⇒ T-58a-07 **UbisoftAuth.fetch_auth_shortcut_artwork — error handling**

MOCKED HTTP

Function : [test_ubisoftauth_fetch_auth_shortcut_artwork_raises_on_network_failure](#)Covers : `UbisoftAuth.fetch_auth_shortcut_artwork`Purpose : fetch auth shortcut artwork surfaces network failures cleanly (timeout, `ClientError`) instead of swallowing them.Fixtures : `pytest-asyncio`, `aioresponses`⇒ T-58a-08 **UbisoftAuth.get_auth_shortcut_context — happy path**

ASYNC

Function : [test_ubisoftauth_get_auth_shortcut_context_returns_value_on_success](#)Covers : `UbisoftAuth.get_auth_shortcut_context`

Purpose : get auth shortcut context returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`⇒ T-58a-09 **UbisoftAuth.get_auth_shortcut_context — error handling**

ASYNC

Function : [test_ubisoftauth_get_auth_shortcut_context_handles_error](#)Covers : `UbisoftAuth.get_auth_shortcut_context`

Purpose : get auth shortcut context surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-58a-10 **UbisoftAuth.is_available — happy path**

ASYNC

Function : [test_ubisoftauth_is_available_returns_true_on_valid_input](#)Covers : `UbisoftAuth.is_available`

Purpose : is available returns True for a valid input.

Fixtures : `pytest-asyncio`⇒ T-58a-11 **UbisoftAuth.is_available — error handling**

ASYNC

Function : [test_ubisoftauth_is_available_handles_error](#)Covers : `UbisoftAuth.is_available`

Purpose : is available surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-58a-12 **UbisoftAuth.start_auth — happy path**

ASYNC

Function : [test_ubisoftauth_start_auth_spawns_target_action](#)Covers : `UbisoftAuth.start_auth`

Purpose : start auth spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`

OP-58a facade.py (cont.)

Tests to write (22) — cont.

⇒ T-58a-13 **UbisoftAuth.start_auth — error handling**

ASYNC

Function : [test_ubisoftauth_start_auth_handles_error](#)Covers : `UbisoftAuth.start_auth`

Purpose : start auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-58a-14 **UbisoftAuth.complete_auth — happy path**

ASYNC

Function : [test_ubisoftauth_complete_auth_happy_path](#)Covers : `UbisoftAuth.complete_auth`

Purpose : complete auth resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ T-58a-15 **UbisoftAuth.complete_auth — error handling**

ASYNC

Function : [test_ubisoftauth_complete_auth_handles_error](#)Covers : `UbisoftAuth.complete_auth`

Purpose : complete auth surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-58a-16 **UbisoftAuth.logout — happy path**

MOCKED FS

Function : [test_ubisoftauth_logout_happy_path](#)Covers : `UbisoftAuth.logout`

Purpose : logout resolves to the expected value on success.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ T-58a-17 **UbisoftAuth.logout — error handling**

MOCKED FS

Function : [test_ubisoftauth_logout_handles_missing_or_corrupt_file](#)Covers : `UbisoftAuth.logout`

Purpose : logout handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ T-58a-18 **UbisoftAuth.start_auth_session_monitor — happy path**

ASYNC

Function : [test_ubisoftauth_start_auth_session_monitor_spawns_target_action](#)Covers : `UbisoftAuth.start_auth_session_monitor`

Purpose : start auth session monitor spawns the target action and returns its handle.

Fixtures : `pytest-asyncio`⇒ T-58a-19 **UbisoftAuth.start_auth_session_monitor — error handling**

ASYNC

Function : [test_ubisoftauth_start_auth_session_monitor_handles_error](#)Covers : `UbisoftAuth.start_auth_session_monitor`

Purpose : start auth session monitor surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-58a facade.py (cont.)

Tests to write (22) — cont.

⇒ T-58a-20 **UbisoftAuth.check_auth_session_status — happy path**

PURE

Function : [test_ubisoftauth_check_auth_session_status_returns_true_on_valid_input](#)
Covers : `UbisoftAuth.check_auth_session_status`
Purpose : check auth session status returns True for a valid input.
Fixtures : —

⇒ T-58a-21 **UbisoftAuth.connect_ubisoft_account — happy path**

ASYNC

Function : [test_ubisoftauth_connect_ubisoft_account_happy_path](#)
Covers : `UbisoftAuth.connect_ubisoft_account`
Purpose : connect ubisoft account resolves to the expected value on success.
Fixtures : `pytest-asyncio`

⇒ T-58a-22 **UbisoftAuth.connect_ubisoft_account — error handling**

ASYNC

Function : [test_ubisoftauth_connect_ubisoft_account_handles_error](#)
Covers : `UbisoftAuth.connect_ubisoft_account`
Purpose : connect ubisoft account surfaces failures cleanly (typed result, no swallowed exception).
Fixtures : `pytest-asyncio`

Mocking dependencies

- `aioresponses`
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-09a uses `event_bus.py`
- ← OP-14 uses `__init__.py`
- ← OP-23 uses `__init__.py`
- OP-58b used by `context.py`
- OP-58c used by `shortcut.py`

● PRIORITY HIGH

TIER 3

INTEGRATION

17 TESTS

OP-56a

installer.py

Source : `py_modules/unifideck/stores/ubisoft/installer/installer.py` | Lignes : 288 | Cible : 65%

Test file : `tests/unit/stores/ubisoft/installer/test_installer.py`

Public surface

`[class]` `UbisoftInstaller` `(__init__, uninstall_game, open_launcher_for_in...)`

Tests to write (17)

- ⇒ T-56a-01

UbisoftInstaller.__init__ — construction

PURE

Function : `test_ubisoftinstaller_init_constructs_with_valid_args`

Covers : `UbisoftInstaller.__init__`

Purpose : UbisoftInstaller stores its constructor arguments on the expected instance attributes.

Fixtures : —
- ⇒ T-56a-02

UbisoftInstaller.uninstall_game — happy path

ASYNC

Function : `test_ubisoftinstaller_uninstall_game_happy_path`

Covers : `UbisoftInstaller.uninstall_game`

Purpose : uninstall game resolves to the expected value on success.

Fixtures : `pytest-asyncio`
- ⇒ T-56a-03

UbisoftInstaller.uninstall_game — error handling

ASYNC

Function : `test_ubisoftinstaller_uninstall_game_handles_error`

Covers : `UbisoftInstaller.uninstall_game`

Purpose : uninstall game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`
- ⇒ T-56a-04

UbisoftInstaller.open_launcher_for_install — happy path

ASYNC

Function : `test_ubisoftinstaller_open_launcher_for_install_happy_path`

Covers : `UbisoftInstaller.open_launcher_for_install`

Purpose : open launcher for install performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`
- ⇒ T-56a-05

UbisoftInstaller.open_launcher_for_install — error handling

ASYNC

Function : `test_ubisoftinstaller_open_launcher_for_install_handles_error`

Covers : `UbisoftInstaller.open_launcher_for_install`

Purpose : open launcher for install surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-56a *installer.py* (cont.)

Tests to write (17) — cont.

⇒ T-56a-06 **UbisoftInstaller.install_game — happy path**

ASYNC

Function : [test_ubisoftinstaller_install_game_completes_setup_steps](#)Covers : `UbisoftInstaller.install_game`

Purpose : install game performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`⇒ T-56a-07 **UbisoftInstaller.install_game — error handling**

ASYNC

Function : [test_ubisoftinstaller_install_game_handles_error](#)Covers : `UbisoftInstaller.install_game`

Purpose : install game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-56a-08 **UbisoftInstaller.is_install_session_active — happy path**

PURE

Function : [test_ubisoftinstaller_is_install_session_active_returns_true_on_valid_input](#)Covers : `UbisoftInstaller.is_install_session_active`

Purpose : is install session active returns True for a valid input.

Fixtures : —

⇒ T-56a-09 **UbisoftInstaller.cancel_install_session — happy path**

MOCKED FS

Function : [test_ubisoftinstaller_cancel_install_session_happy_path](#)Covers : `UbisoftInstaller.cancel_install_session`

Purpose : cancel install session performs the setup steps end-to-end.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ T-56a-10 **UbisoftInstaller.cancel_install_session — error handling**

MOCKED FS

Function : [test_ubisoftinstaller_cancel_install_session_handles_missing_or_corrupt_file](#)Covers : `UbisoftInstaller.cancel_install_session`

Purpose : cancel install session handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ T-56a-11 **UbisoftInstaller.check_for_updates — happy path**

ASYNC

Function : [test_ubisoftinstaller_check_for_updates_returns_true_on_valid_input](#)Covers : `UbisoftInstaller.check_for_updates`

Purpose : check for updates returns True for a valid input.

Fixtures : `pytest-asyncio`⇒ T-56a-12 **UbisoftInstaller.check_for_updates — error handling**

ASYNC

Function : [test_ubisoftinstaller_check_for_updates_handles_error](#)Covers : `UbisoftInstaller.check_for_updates`

Purpose : check for updates surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-56a *installer.py* (cont.)

Tests to write (17) — cont.

⇒ **T-56a-13** **UbisoftInstaller.update_game — happy path**

ASYNC

Function : [test_ubisoftinstaller_update_game_happy_path](#)Covers : `UbisoftInstaller.update_game`

Purpose : update game resolves to the expected value on success.

Fixtures : `pytest-asyncio`⇒ **T-56a-14** **UbisoftInstaller.update_game — error handling**

ASYNC

Function : [test_ubisoftinstaller_update_game_handles_error](#)Covers : `UbisoftInstaller.update_game`

Purpose : update game surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ **T-56a-15** **UbisoftInstaller.inject_install_registry — happy path**

PURE

Function : [test_ubisoftinstaller_inject_install_registry_happy_path](#)Covers : `UbisoftInstaller.inject_install_registry`

Purpose : inject install registry performs the setup steps end-to-end.

Fixtures : —

⇒ **T-56a-16** **UbisoftInstaller.kill_upc_processes — happy path**

MOCKED SUBPROCESS

Function : [test_ubisoftinstaller_kill_upc_processes_happy_path](#)Covers : `UbisoftInstaller.kill_upc_processes`

Purpose : kill upc processes produces the expected output for a typical input.

Fixtures : `monkeypatch (asyncio.create_subprocess_exec)`⇒ **T-56a-17** **UbisoftInstaller.kill_upc_processes — error handling**

MOCKED SUBPROCESS

Function : [test_ubisoftinstaller_kill_upc_processes_raises_on_non_zero_exit](#)Covers : `UbisoftInstaller.kill_upc_processes`

Purpose : kill upc processes reports a non-zero subprocess exit as a typed failure.

Fixtures : `monkeypatch (asyncio.create_subprocess_exec)`

Mocking dependencies

- `monkeypatch (asyncio.create_subprocess_exec)`
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-55b uses `config.py`
- ← OP-55c uses `paths.py`
- ← OP-55d uses `binaries.py`
- OP-56d used by `launcher.py`
- OP-56g used by `uninstall.py`

● PRIORITY HIGH

TIER 2

MOCKED

3 TESTS

OP-56b

cache.py

Source : `py_modules/unifideck/stores/ubisoft/installer/cache.py` | Lignes : 114 | Cible : 85%
Test file : `tests/unit/stores/ubisoft/installer/test_cache.py`

Public surface

`[class]` `UbisoftInstallerCache` `(__init__, ensure_cached)`

Tests to write (3)

⇒ **T-56b-01** **UbisoftInstallerCache.__init__ — construction**

PURE

Function : `test_ubisoftinstallercache_init_constructs_with_valid_args`

Covers : `UbisoftInstallerCache.__init__`

Purpose : UbisoftInstallerCache can be instantiated with the documented arguments.

Fixtures : —

⇒ **T-56b-02** **UbisoftInstallerCache.ensure_cached — happy path**

MOCKED FS

Function : `test_ubisoftinstallercache_ensure_cached_happy_path`

Covers : `UbisoftInstallerCache.ensure_cached`

Purpose : ensure cached performs the side-effect without raising.

Fixtures : `pytest-asyncio`, `tmp_path`

⇒ **T-56b-03** **UbisoftInstallerCache.ensure_cached — error handling**

MOCKED FS

Function : `test_ubisoftinstallercache_ensure_cached_handles_missing_or_corrupt_file`

Covers : `UbisoftInstallerCache.ensure_cached`

Purpose : ensure cached handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-08 uses `__init__.py`
- ← OP-55b uses `config.py`
- OP-55j used by `specialists.py`
- OP-59a used by `manager.py`
- OP-59c used by `template_builder.py`
- OP-59d used by `auth_builder.py`

● PRIORITY HIGH

TIER 2

MOCKED

14 TESTS

OP-56f

registry.py

Source : py_modules/unifideck/stores/ubisoft/installer/registry.py | Lignes : 252 | Cible : 85%

Test file : tests/unit/stores/ubisoft/installer/test_registry.py

Public surface

[func]	resolve_active_prefix_dir	(pure)
[func]	read_system_reg	(pure)
[func]	find_install_registry_section_bounds	(pure)
[func]	inject_install_registry	(pure)
[func]	clean_install_registry	(pure)
[func]	get_directory_size	(pure)
[func]	parse_positive_int	(pure)

Tests to write (14)

⇒ T-56f-01 resolve_active_prefix_dir — happy path

MOCKED FS

Function : test_resolve_active_prefix_dir_returns_target_when_present

Covers : resolve_active_prefix_dir

Purpose : resolve active prefix dir returns the located target when it exists.

Fixtures : tmp_path

⇒ T-56f-02 resolve_active_prefix_dir — error handling

MOCKED FS

Function : test_resolve_active_prefix_dir_handles_missing_or_corrupt_file

Covers : resolve_active_prefix_dir

Purpose : resolve active prefix dir handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-56f-03 read_system_reg — happy path

MOCKED FS

Function : test_read_system_reg_returns_value_on_success

Covers : read_system_reg

Purpose : read system reg returns the expected payload on a normal response.

Fixtures : tmp_path

⇒ T-56f-04 read_system_reg — error handling

MOCKED FS

Function : test_read_system_reg_handles_missing_or_corrupt_file

Covers : read_system_reg

Purpose : read system reg handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

OP-56f registry.py (cont.)

Tests to write (14) — cont.

⇒ T-56f-05 find_install_registry_section_bounds — happy path

PURE

Function : [test_find_install_registry_section_bounds_returns_target_when_present](#)

Covers : find_install_registry_section_bounds

Purpose : find install registry section bounds returns the located target when it exists.

Fixtures : —

⇒ T-56f-06 find_install_registry_section_bounds — edge cases

PURE

Function : [test_find_install_registry_section_bounds_returns_none_on_missing_input](#)

Covers : find_install_registry_section_bounds

Purpose : find install registry section bounds returns None on missing or invalid input rather than raising.

Fixtures : —

⇒ T-56f-07 inject_install_registry — happy path

MOCKED FS

Function : [test_inject_install_registry_happy_path](#)

Covers : inject_install_registry

Purpose : inject install registry performs the setup steps end-to-end.

Fixtures : tmp_path

⇒ T-56f-08 inject_install_registry — error handling

MOCKED FS

Function : [test_inject_install_registry_handles_missing_or_corrupt_file](#)

Covers : inject_install_registry

Purpose : inject install registry handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-56f-09 clean_install_registry — happy path

MOCKED FS

Function : [test_clean_install_registry_normalises_input](#)

Covers : clean_install_registry

Purpose : clean install registry performs the setup steps end-to-end.

Fixtures : tmp_path

⇒ T-56f-10 clean_install_registry — error handling

MOCKED FS

Function : [test_clean_install_registry_handles_missing_or_corrupt_file](#)

Covers : clean_install_registry

Purpose : clean install registry handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-56f-11 get_directory_size — happy path

MOCKED FS

Function : [test_get_directory_size_returns_value_on_success](#)

Covers : get_directory_size

Purpose : get directory size returns the expected payload on a normal response.

Fixtures : tmp_path

OP-56f registry.py (cont.)

Tests to write (14) — cont.

⇒ T-56f-12 **get_directory_size — error handling**

MOCKED FS

Function : [test_get_directory_size_handles_missing_or_corrupt_file](#)Covers : `get_directory_size`Purpose : `get_directory_size` handles missing or corrupt files gracefully — empty result, never crash.Fixtures : `tmp_path`⇒ T-56f-13 **parse_positive_int — happy path**

PURE

Function : [test_parse_positive_int_parses_well_formed_input](#)Covers : `parse_positive_int`Purpose : `parse_positive_int` parses a well-formed input into the expected value.

Fixtures : —

⇒ T-56f-14 **parse_positive_int — edge cases**

PURE

Function : [test_parse_positive_int_returns_none_on_missing_input](#)Covers : `parse_positive_int`Purpose : `parse_positive_int` handles boundary inputs (empty, out-of-range) with a documented behaviour.

Fixtures : —

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-55b uses `config.py`
- OP-56a used by `installer.py`
- OP-56e used by `manual_ui.py`
- OP-56g used by `uninstall.py`

● PRIORITY HIGH

TIER 1

PURE

10 TESTS

OP-57a

facade.py

Source : `py_modules/unifideck/stores/ubisoft/library/facade.py` | Lignes : 114 | Cible : 95%
Test file : `tests/unit/stores/ubisoft/library/test_facade.py`

Public surface

[class]

UbisoftLibrary

(`__init__`, `get_library`, `get_installed`, `get_installed...`)

Tests to write (10)

⇒ T-57a-01

UbisoftLibrary.__init__ — construction

PURE

Function : `test_ubisoftlibrary_init_constructs_with_valid_args`

Covers : `UbisoftLibrary.__init__`

Purpose : UbisoftLibrary stores its constructor arguments on the expected instance attributes.

Fixtures : —

⇒ T-57a-02

UbisoftLibrary.get_library — happy path

MOCKED HTTP

Function : `test_ubisoftlibrary_get_library_returns_value_on_success`

Covers : `UbisoftLibrary.get_library`

Purpose : get library returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

⇒ T-57a-03

UbisoftLibrary.get_library — error handling

MOCKED HTTP

Function : `test_ubisoftlibrary_get_library_raises_on_network_failure`

Covers : `UbisoftLibrary.get_library`

Purpose : get library surfaces network failures cleanly (timeout, ClientError) instead of swallowing them.

Fixtures : `pytest-asyncio`, `aioreponses`, `tmp_path`

⇒ T-57a-04

UbisoftLibrary.get_installed — happy path

ASYNC

Function : `test_ubisoftlibrary_get_installed_returns_value_on_success`

Covers : `UbisoftLibrary.get_installed`

Purpose : get installed returns the expected payload on a normal response.

Fixtures : `pytest-asyncio`

⇒ T-57a-05

UbisoftLibrary.get_installed — error handling

ASYNC

Function : `test_ubisoftlibrary_get_installed_handles_error`

Covers : `UbisoftLibrary.get_installed`

Purpose : get installed surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`

OP-57a facade.py (cont.)

Tests to write (10) — cont.

⇒ T-57a-06 **UbisoftLibrary.get_installed_game_info — happy path**

PURE

Function : [test_ubisoftlibrary_get_installed_game_info_returns_value_on_success](#)Covers : `UbisoftLibrary.get_installed_game_info`

Purpose : get installed game info returns the expected payload on a normal response.

Fixtures : —

⇒ T-57a-07 **UbisoftLibrary.find_game_executable — happy path**

PURE

Function : [test_ubisoftlibrary_find_game_executable_returns_target_when_present](#)Covers : `UbisoftLibrary.find_game_executable`

Purpose : find game executable returns the located target when it exists.

Fixtures : —

⇒ T-57a-08 **UbisoftLibrary.write_install_marker — happy path**

ASYNC

Function : [test_ubisoftlibrary_write_install_marker_persists_value_to_disk](#)Covers : `UbisoftLibrary.write_install_marker`

Purpose : write install marker persists the input correctly to disk.

Fixtures : `pytest-asyncio`⇒ T-57a-09 **UbisoftLibrary.write_install_marker — error handling**

ASYNC

Function : [test_ubisoftlibrary_write_install_marker_handles_error](#)Covers : `UbisoftLibrary.write_install_marker`

Purpose : write install marker surfaces failures cleanly (typed result, no swallowed exception).

Fixtures : `pytest-asyncio`⇒ T-57a-10 **UbisoftLibrary.get_game_official_url — happy path**

PURE

Function : [test_ubisoftlibrary_get_game_official_url_returns_value_on_success](#)Covers : `UbisoftLibrary.get_game_official_url`

Purpose : get game official url returns the expected payload on a normal response.

Fixtures : —

Mocking dependencies

- `aioresponses`
- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-05 uses `__init__.py`
- ← OP-55b uses `config.py`
- ← OP-55c uses `paths.py`
- ← OP-55g uses `id_map.py`

● PRIORITY HIGH

TIER 2

MOCKED

14 TESTS

OP-57h

detection_helpers.py

Source : py_modules/unifideck/stores/ubisoft/library/detection_helpers.py | Lignes : 256 | Cible : 85%

Test file : tests/unit/stores/ubisoft/library/test_detection_helpers.py

Public surface

[func]	load_json_file_safe	(pure)
[func]	walk_install_candidates	(pure)
[func]	in_prefix_game_roots	(pure)
[func]	find_game_executable	(pure)
[func]	looks_like_game_install	(pure)
[async]	write_install_marker	(async + I/O)
[func]	write_marker_sync	(pure)

Tests to write (14)

⇒ T-57h-01load_json_file_safe — happy pathMOCKED FS

Function : test_load_json_file_safe_returns_value_on_success

Covers : load_json_file_safe

Purpose : load json file safe returns the expected payload on a normal response.

Fixtures : tmp_path

⇒ T-57h-02load_json_file_safe — error handlingMOCKED FS

Function : test_load_json_file_safe_handles_missing_or_corrupt_file

Covers : load_json_file_safe

Purpose : load json file safe handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-57h-03walk_install_candidates — happy pathMOCKED FS

Function : test_walk_install_candidates_happy_path

Covers : walk_install_candidates

Purpose : walk install candidates performs the setup steps end-to-end.

Fixtures : tmp_path

⇒ T-57h-04walk_install_candidates — error handlingMOCKED FS

Function : test_walk_install_candidates_handles_missing_or_corrupt_file

Covers : walk_install_candidates

Purpose : walk install candidates handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

OP-57h *detection_helpers.py* (cont.)

Tests to write (14) — cont.

⇒ T-57h-05 in_prefix_game_roots — happy path

MOCKED FS

Function : test_in_prefix_game_roots_happy_path

Covers : in_prefix_game_roots

Purpose : in prefix game roots returns the expected list of items.

Fixtures : tmp_path

⇒ T-57h-06 in_prefix_game_roots — error handling

MOCKED FS

Function : test_in_prefix_game_roots_handles_missing_or_corrupt_file

Covers : in_prefix_game_roots

Purpose : in prefix game roots handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-57h-07 find_game_executable — happy path

MOCKED FS

Function : test_find_game_executable_returns_target_when_present

Covers : find_game_executable

Purpose : find game executable returns the located target when it exists.

Fixtures : tmp_path

⇒ T-57h-08 find_game_executable — error handling

MOCKED FS

Function : test_find_game_executable_handles_missing_or_corrupt_file

Covers : find_game_executable

Purpose : find game executable handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-57h-09 looks_like_game_install — happy path

MOCKED FS

Function : test_looks_like_game_install_happy_path

Covers : looks_like_game_install

Purpose : looks like game install performs the setup steps end-to-end.

Fixtures : tmp_path

⇒ T-57h-10 looks_like_game_install — error handling

MOCKED FS

Function : test_looks_like_game_install_handles_missing_or_corrupt_file

Covers : looks_like_game_install

Purpose : looks like game install handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

⇒ T-57h-11 write_install_marker — happy path

MOCKED FS

Function : test_write_install_marker_persists_value_to_disk

Covers : write_install_marker

Purpose : write install marker persists the input correctly to disk.

Fixtures : pytest-asyncio, tmp_path, monkeypatch (time.time)

OP-57h *detection_helpers.py* (cont.)

Tests to write (14) — cont.

⇒ T-57h-12 write_install_marker — error handling

MOCKED FS

Function : [test_write_install_marker_handles_missing_or_corrupt_file](#)

Covers : write_install_marker

Purpose : write install marker handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : pytest-asyncio, tmp_path, monkeypatch (time.time)

⇒ T-57h-13 write_marker_sync — happy path

MOCKED FS

Function : [test_write_marker_sync_persists_value_to_disk](#)

Covers : write_marker_sync

Purpose : write marker sync persists the input correctly to disk.

Fixtures : tmp_path

⇒ T-57h-14 write_marker_sync — error handling

MOCKED FS

Function : [test_write_marker_sync_handles_missing_or_corrupt_file](#)

Covers : write_marker_sync

Purpose : write marker sync handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : tmp_path

Mocking dependencies

- monkeypatch (time.time)
- pytest-asyncio
- tmp_path

Linked fiches

- ← OP-57f uses detection.py
- OP-56e used by manual_ui.py
- OP-57f used by detection.py
- OP-57g used by detection_cascade.py

● PRIORITY HIGH

TIER 1

PURE

2 TESTS

OP-57i

wine_path.py

Source : `py_modules/unifideck/stores/ubisoft/library/wine_path.py` | Lignes : 43 | Cible : 95%
Test file : `tests/unit/stores/ubisoft/library/test_wine_path.py`

Public surface

[func]

wine_path_to_linux

(pure)

Tests to write (2)

⇒ T-57i-01

wine_path_to_linux — happy path

PURE

Function : `test_wine_path_to_linux_happy_path`

Covers : `wine_path_to_linux`

Purpose : wine path to linux produces the converted value for a typical input.

Fixtures : —

⇒ T-57i-02

wine_path_to_linux — edge cases

PURE

Function : `test_wine_path_to_linux_returns_none_on_missing_input`

Covers : `wine_path_to_linux`

Purpose : wine path to linux returns None on missing or invalid input rather than raising.

Fixtures : —

Mocking dependencies

Linked fiches

• (none — pure tests)

→ OP-57g used by `detection_cascade.py`

● PRIORITY HIGH

TIER 1

PURE

16 TESTS

OP-59a

manager.py

Source : `py_modules/unifideck/stores/ubisoft/prefix/manager.py` | Lignes : 117 | Cible : 95%

Test file : `tests/unit/stores/ubisoft/prefix/test_manager.py`

Public surface

`[class]` `UbisoftPrefixManager` `(__init__, template_exists, is_prefix_version_sta...)`

Tests to write (16)

⇒ **T-59a-01** **UbisoftPrefixManager.__init__ — construction** **PURE**

Function : `test_ubisoftprefixmanager_init_constructs_with_valid_args`
Covers : `UbisoftPrefixManager.__init__`
Purpose : UbisoftPrefixManager stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ **T-59a-02** **UbisoftPrefixManager.template_exists — happy path** **PURE**

Function : `test_ubisoftprefixmanager_template_exists_happy_path`
Covers : `UbisoftPrefixManager.template_exists`
Purpose : template exists produces the expected output for a typical input.
Fixtures : —

⇒ **T-59a-03** **UbisoftPrefixManager.is_prefix_version_stale — happy path** **PURE**

Function : `test_ubisoftprefixmanager_is_prefix_version_stale_returns_true_on_valid_input`
Covers : `UbisoftPrefixManager.is_prefix_version_stale`
Purpose : is prefix version stale returns True for a valid input.
Fixtures : —

⇒ **T-59a-04** **UbisoftPrefixManager.read_machine_guid — happy path** **PURE**

Function : `test_ubisoftprefixmanager_read_machine_guid_returns_value_on_success`
Covers : `UbisoftPrefixManager.read_machine_guid`
Purpose : read machine guid returns the expected payload on a normal response.
Fixtures : —

⇒ **T-59a-05** **UbisoftPrefixManager.queue_template_creation — happy path** **PURE**

Function : `test_ubisoftprefixmanager_queue_template_creation_happy_path`
Covers : `UbisoftPrefixManager.queue_template_creation`
Purpose : queue template creation produces the expected output for a typical input.
Fixtures : —

OP-59a manager.py (cont.)

Tests to write (16) — cont.

⇒ **T-59a-06** **UbisoftPrefixManager.regenerate_template_if_stale — happy** **ASYNC**

Function : [test_ubisoftprefixmanager_regenerate_template_if_stale_happy_path](#)
 Covers : `UbisoftPrefixManager.regenerate_template_if_stale`
 Purpose : regenerate template if stale resolves to the expected value on success.
 Fixtures : `pytest-asyncio`

⇒ **T-59a-07** **UbisoftPrefixManager.regenerate_template_if_stale — error** **ASYNC**

Function : [test_ubisoftprefixmanager_regenerate_template_if_stale_handles_error](#)
 Covers : `UbisoftPrefixManager.regenerate_template_if_stale`
 Purpose : regenerate template if stale surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ **T-59a-08** **UbisoftPrefixManager.ensure_template_prefix — happy path** **ASYNC**

Function : [test_ubisoftprefixmanager_ensure_template_prefix_happy_path](#)
 Covers : `UbisoftPrefixManager.ensure_template_prefix`
 Purpose : ensure template prefix resolves to the expected value on success.
 Fixtures : `pytest-asyncio`

⇒ **T-59a-09** **UbisoftPrefixManager.ensure_template_prefix — error handling** **ASYNC**

Function : [test_ubisoftprefixmanager_ensure_template_prefix_handles_error](#)
 Covers : `UbisoftPrefixManager.ensure_template_prefix`
 Purpose : ensure template prefix surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ **T-59a-10** **UbisoftPrefixManager.ensure_auth_prefix — happy path** **ASYNC**

Function : [test_ubisoftprefixmanager_ensure_auth_prefix_happy_path](#)
 Covers : `UbisoftPrefixManager.ensure_auth_prefix`
 Purpose : ensure auth prefix resolves to the expected value on success.
 Fixtures : `pytest-asyncio`

⇒ **T-59a-11** **UbisoftPrefixManager.ensure_auth_prefix — error handling** **ASYNC**

Function : [test_ubisoftprefixmanager_ensure_auth_prefix_handles_error](#)
 Covers : `UbisoftPrefixManager.ensure_auth_prefix`
 Purpose : ensure auth prefix surfaces failures cleanly (typed result, no swallowed exception).
 Fixtures : `pytest-asyncio`

⇒ **T-59a-12** **UbisoftPrefixManager.queue_auth_assets_ensure — happy** **PURE**

Function : [test_ubisoftprefixmanager_queue_auth_assets_ensure_happy_path](#)
 Covers : `UbisoftPrefixManager.queue_auth_assets_ensure`
 Purpose : queue auth assets ensure produces the expected output for a typical input.
 Fixtures : —

OP-59a manager.py (cont.)

Tests to write (16) — cont.

⇒ **T-59a-13** **UbisoftPrefixManager.bootstrap_game_prefix — happy path**

MOCKED FS

Function : [test_ubisoftprefixmanager_bootstrap_game_prefix_happy_path](#)Covers : `UbisoftPrefixManager.bootstrap_game_prefix`

Purpose : bootstrap game prefix returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ **T-59a-14** **UbisoftPrefixManager.bootstrap_game_prefix — error handling**

MOCKED FS

Function : [test_ubisoftprefixmanager_bootstrap_game_prefix_handles_missing_or_corrupt_file](#)Covers : `UbisoftPrefixManager.bootstrap_game_prefix`

Purpose : bootstrap game prefix handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ **T-59a-15** **UbisoftPrefixManager.repair_prefix — happy path**

MOCKED FS

Function : [test_ubisoftprefixmanager_repair_prefix_happy_path](#)Covers : `UbisoftPrefixManager.repair_prefix`

Purpose : repair prefix returns True for the documented happy-path input.

Fixtures : `pytest-asyncio`, `tmp_path`⇒ **T-59a-16** **UbisoftPrefixManager.repair_prefix — error handling**

MOCKED FS

Function : [test_ubisoftprefixmanager_repair_prefix_handles_missing_or_corrupt_file](#)Covers : `UbisoftPrefixManager.repair_prefix`

Purpose : repair prefix handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `pytest-asyncio`, `tmp_path`

Mocking dependencies

- `pytest-asyncio`
- `tmp_path`

Linked fiches

- ← OP-55b uses `config.py`
- ← OP-55c uses `paths.py`
- ← OP-55d uses `binaries.py`
- ← OP-56b uses `cache.py`
- OP-59b used by `helpers.py`

PRIORITY HIGH

TIER 1

PURE

14 TESTS

OP-60a

facade.py

Source : py_modules/unifideck/stores/ubisoft/session/facade.py | Lignes : 161 | Cible : 95%

Test file : tests/unit/stores/ubisoft/session/test_facade.py

Public surface

[class]

UbisoftSession

(__init__, has_valid_credentials, get_credential...)

Tests to write (14)

⇒ T-60a-01

UbisoftSession.__init__ — construction

PURE

Function : test_ubisoftsession_init_constructs_with_valid_args
Covers : UbisoftSession.__init__
Purpose : UbisoftSession stores its constructor arguments on the expected instance attributes.
Fixtures : —

⇒ T-60a-02

UbisoftSession.has_valid_credentials — happy path

PURE

Function : test_ubisoftsession_has_valid_credentials_returns_true_on_valid_input
Covers : UbisoftSession.has_valid_credentials
Purpose : has valid credentials returns True for a valid input.
Fixtures : —

⇒ T-60a-03

UbisoftSession.get_credential_mtime — happy path

PURE

Function : test_ubisoftsession_get_credential_mtime_returns_value_on_success
Covers : UbisoftSession.get_credential_mtime
Purpose : get credential mtime returns the expected payload on a normal response.
Fixtures : —

⇒ T-60a-04

UbisoftSession.find_best_credential_source — happy path

PURE

Function : test_ubisoftsession_find_best_credential_source_returns_target_when_present
Covers : UbisoftSession.find_best_credential_source
Purpose : find best credential source returns the located target when it exists.
Fixtures : —

⇒ T-60a-05

UbisoftSession.propagate_credentials_to_all — happy path

PURE

Function : test_ubisoftsession_propagate_credentials_to_all_happy_path
Covers : UbisoftSession.propagate_credentials_to_all
Purpose : propagate credentials to all produces the converted value for a typical input.
Fixtures : —

OP-60a facade.py (cont.)

Tests to write (14) — cont.

⇒ **T-60a-06** **UbisoftSession.propagate_auth_artifacts_to_all — happy path** **PURE**

Function : [test_ubisoftsession_propagate_auth_artifacts_to_all_happy_path](#)
Covers : `UbisoftSession.propagate_auth_artifacts_to_all`
Purpose : propagate auth artifacts to all produces the converted value for a typical input.
Fixtures : —

⇒ **T-60a-07** **UbisoftSession.propagate_all_to_all — happy path** **PURE**

Function : [test_ubisoftsession_propagate_all_to_all_happy_path](#)
Covers : `UbisoftSession.propagate_all_to_all`
Purpose : propagate all to all produces the converted value for a typical input.
Fixtures : —

⇒ **T-60a-08** **UbisoftSession.inject_into_prefix — happy path** **PURE**

Function : [test_ubisoftsession_inject_into_prefix_happy_path](#)
Covers : `UbisoftSession.inject_into_prefix`
Purpose : inject into prefix produces the expected output for a typical input.
Fixtures : —

⇒ **T-60a-09** **UbisoftSession.ensure_auth_state_in_prefixes — happy path** **PURE**

Function : [test_ubisoftsession_ensure_auth_state_in_prefixes_happy_path](#)
Covers : `UbisoftSession.ensure_auth_state_in_prefixes`
Purpose : ensure auth state in prefixes produces the expected output for a typical input.
Fixtures : —

⇒ **T-60a-10** **UbisoftSession.retroactive_sync — happy path** **PURE**

Function : [test_ubisoftsession_retroactive_sync_happy_path](#)
Covers : `UbisoftSession.retroactive_sync`
Purpose : retroactive sync produces the expected output for a typical input.
Fixtures : —

⇒ **T-60a-11** **UbisoftSession.capture — happy path** **MOCKED FS**

Function : [test_ubisoftsession_capture_happy_path](#)
Covers : `UbisoftSession.capture`
Purpose : capture performs the side-effect without raising.
Fixtures : `tmp_path`

⇒ **T-60a-12** **UbisoftSession.capture — error handling** **MOCKED FS**

Function : [test_ubisoftsession_capture_handles_missing_or_corrupt_file](#)
Covers : `UbisoftSession.capture`
Purpose : capture handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

OP-60a facade.py (cont.)

Tests to write (14) — cont.

⇒ T-60a-13

UbisoftSession.clear_session_file — happy path

MOCKED FS

Function :

Covers :

Purpose :

Fixtures :

test_ubisoftsession_clear_session_file_removes_target_and_reports_success

UbisoftSession.clear_session_file

clear session file removes the target and reports success.

tmp_path

⇒ T-60a-14

UbisoftSession.clear_session_file — error handling

MOCKED FS

Function :

Covers :

Purpose :

Fixtures :

test_ubisoftsession_clear_session_file_handles_missing_or_corrupt_file

UbisoftSession.clear_session_file

clear session file handles missing or corrupt files gracefully — empty result, never crash.

tmp_path

Mocking dependencies

Linked fiches

• tmp_path

← OP-55b uses config.py

← OP-55c uses paths.py

← OP-60b uses payload.py

← OP-60c uses reader.py

→ OP-60b used by payload.py

PRIORITY LOW

TIER 2

MOCKED

10 TESTS

OP-33a

paths.py

Source : py_modules/unifideck/utils/paths.py | Lignes : 111 | Cible : 70%

Test file : tests/unit/units/test_paths.py

Public surface

[func]	expand	(pure)
[func]	dedupe_paths	(pure)
[func]	get_all_game_directories	(pure)
[func]	get_games_map_path	(pure)
[func]	ensure_games_map_dir	(pure)

Tests to write (10)

T-33a-01 expand — happy path

MOCKED FS

Function : test_expand_happy_path
Covers : expand
Purpose : expand produces the expected output for a typical input.
Fixtures : tmp_path

T-33a-02 expand — error handling

MOCKED FS

Function : test_expand_handles_missing_or_corrupt_file
Covers : expand
Purpose : expand handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

T-33a-03 dedupe_paths — happy path

MOCKED FS

Function : test_dedupe_paths_happy_path
Covers : dedupe_paths
Purpose : dedupe_paths produces the expected output for a typical input.
Fixtures : tmp_path

T-33a-04 dedupe_paths — error handling

MOCKED FS

Function : test_dedupe_paths_handles_missing_or_corrupt_file
Covers : dedupe_paths
Purpose : dedupe_paths handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : tmp_path

OP-33a *paths.py* (cont.)

Tests to write (10) — cont.

⇒ T-33a-05 **get_all_game_directories — happy path**

MOCKED FS

Function : [test_get_all_game_directories_returns_value_on_success](#)
Covers : `get_all_game_directories`
Purpose : get all game directories returns the expected payload on a normal response.
Fixtures : `tmp_path`

⇒ T-33a-06 **get_all_game_directories — error handling**

MOCKED FS

Function : [test_get_all_game_directories_handles_missing_or_corrupt_file](#)
Covers : `get_all_game_directories`
Purpose : get all game directories handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

⇒ T-33a-07 **get_games_map_path — happy path**

PURE

Function : [test_get_games_map_path_returns_value_on_success](#)
Covers : `get_games_map_path`
Purpose : get games map path returns the expected payload on a normal response.
Fixtures : —

⇒ T-33a-08 **get_games_map_path — edge cases**

PURE

Function : [test_get_games_map_path_edge_cases](#)
Covers : `get_games_map_path`
Purpose : get games map path stays correct on empty / boundary inputs.
Fixtures : —

⇒ T-33a-09 **ensure_games_map_dir — happy path**

MOCKED FS

Function : [test_ensure_games_map_dir_happy_path](#)
Covers : `ensure_games_map_dir`
Purpose : ensure games map dir produces the expected output for a typical input.
Fixtures : `tmp_path`

⇒ T-33a-10 **ensure_games_map_dir — error handling**

MOCKED FS

Function : [test_ensure_games_map_dir_handles_missing_or_corrupt_file](#)
Covers : `ensure_games_map_dir`
Purpose : ensure games map dir handles missing or corrupt files gracefully — empty result, never crash.
Fixtures : `tmp_path`

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- ← OP-33c uses `config_helpers.py`
- OP-04e used by `manifest.py`

PRIORITY LOW

TIER 1

PURE

6 TESTS

OP-33b

locale.py

Source : py_modules/unifideck/utils/locale.py | Lignes : 126 | Cible : 80%

Test file : tests/unit/utils/test_locale.py

Public surface

[func]	get_locale_config	(pure)
[func]	get_unifideck_locale	(pure)
[func]	get_unifideck_market	(pure)

Tests to write (6)

⇒ T-33b-01

get_locale_config — happy path

PURE

Function : test_get_locale_config_returns_value_on_success

Covers : get_locale_config

Purpose : get locale config returns the expected payload on a normal response.

Fixtures : —

⇒ T-33b-02

get_locale_config — edge cases

PURE

Function : test_get_locale_config_returns_none_on_missing_input

Covers : get_locale_config

Purpose : get locale config returns None on missing or invalid input rather than raising.

Fixtures : —

⇒ T-33b-03

get_unifideck_locale — happy path

PURE

Function : test_get_unifideck_locale_returns_value_on_success

Covers : get_unifideck_locale

Purpose : get unifideck locale returns the expected payload on a normal response.

Fixtures : —

⇒ T-33b-04

get_unifideck_locale — edge cases

PURE

Function : test_get_unifideck_locale_edge_cases

Covers : get_unifideck_locale

Purpose : get unifideck locale stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-33b-05

get_unifideck_market — happy path

PURE

Function : test_get_unifideck_market_returns_value_on_success

Covers : get_unifideck_market

Purpose : get unifideck market returns the expected payload on a normal response.

Fixtures : —

OP-33b locale.py (cont.)

Tests to write (6) — cont.

⇒ T-33b-06

get_unifideck_market — edge cases

PURE

Function :

Covers :

Purpose :

Fixtures :

test_get_unifideck_market_edge_cases

get_unifideck_market

get unifideck market stays correct on empty / boundary inputs.

—

Mocking dependencies

Linked fiches

• (none — pure tests)

← OP-11 uses __init__.py

← OP-33c uses config_helpers.py

→ OP-45a used by resolver.py

→ OP-50a used by store.py

→ OP-53a used by microsoft_store.py

→ OP-53b used by microsoft_catalog.py

PRIORITY LOW

TIER 1

PURE

4 TESTS

OP-33c

config_helpers.py

Source : `py_modules/unifideck/utils/config_helpers.py` | Lignes : 51 | Cible : 80%

Test file : `tests/unit/utils/test_config_helpers.py`

Public surface

[func] `get_cfg` (pure)

[func] `read_config_int_cold_start` (pure)

Tests to write (4)

⇒ T-33c-01 **get_cfg — happy path** PURE

Function : `test_get_cfg_returns_value_on_success`

Covers : `get_cfg`

Purpose : `get_cfg` returns the expected payload on a normal response.

Fixtures : —

⇒ T-33c-02 **get_cfg — edge cases** PURE

Function : `test_get_cfg_edge_cases`

Covers : `get_cfg`

Purpose : `get_cfg` stays correct on empty / boundary inputs.

Fixtures : —

⇒ T-33c-03 **read_config_int_cold_start — happy path** MOCKED FS

Function : `test_read_config_int_cold_start_returns_value_on_success`

Covers : `read_config_int_cold_start`

Purpose : `read_config_int_cold_start` returns the expected payload on a normal response.

Fixtures : `tmp_path`

⇒ T-33c-04 **read_config_int_cold_start — error handling** MOCKED FS

Function : `test_read_config_int_cold_start_handles_missing_or_corrupt_file`

Covers : `read_config_int_cold_start`

Purpose : `read_config_int_cold_start` handles missing or corrupt files gracefully — empty result, never crash.

Fixtures : `tmp_path`

Mocking dependencies

- `tmp_path`

Linked fiches

- ← OP-11 uses `__init__.py`
- OP-04e used by `manifest.py`
- OP-16a used by `service.py`
- OP-17a used by `service.py`
- OP-28a used by `browser.py`

Annex A1 — Coverage heatmap

Average coverage target per sub-package, weighted by fiche count.


Coverage target legend :

< 60%
 60-69
 70-79
 80-89
 ≥ 90%

75%	actions/	2 fiches · 6 tests	90%	security/	5 fiches · 32 tests
90%	auth/	2 fiches · 18 tests	72%	services/	5 fiches · 23 tests
82%	auth/edge_browser/	8 fiches · 67 tests	70%	services/artwork/	2 fiches · 11 tests
67%	bootstrap/	4 fiches · 8 tests	76%	services/bootstrap/	5 fiches · 12 tests
72%	cdp/	4 fiches · 48 tests	82%	services/cloud_save/	4 fiches · 22 tests
75%	compatibility/	2 fiches · 62 tests	75%	services/download/	4 fiches · 22 tests
77%	config/	7 fiches · 32 tests	86%	services/launch_history/	3 fiches · 14 tests
83%	core/	7 fiches · 55 tests	71%	services/launcher/	6 fiches · 35 tests
88%	core/bin/	3 fiches · 11 tests	65%	services/microsoft_subscription/	1 fiches · 7 tests
90%	core/io/	2 fiches · 32 tests	80%	services/playtime/	2 fiches · 20 tests
95%	core/net/	1 fiches · 4 tests	90%	services/security/	6 fiches · 31 tests
91%	event_bus/	8 fiches · 54 tests	80%	services/shortcut/	4 fiches · 18 tests
95%	event_bus/supervision/	2 fiches · 16 tests	80%	steam/	4 fiches · 33 tests
82%	launcher/	5 fiches · 21 tests	78%	stores/amazon/	6 fiches · 57 tests
60%	launcher/cdp/	5 fiches · 26 tests	85%	stores/epic/	8 fiches · 61 tests
86%	launcher/cloud/	3 fiches · 19 tests	83%	stores/gog/	8 fiches · 84 tests
86%	launcher/diagnostics/	3 fiches · 21 tests	77%	stores/gog/install/	4 fiches · 21 tests
66%	launcher/flows/	3 fiches · 6 tests	65%	stores/gog/tokens/	1 fiches · 21 tests
60%	launcher/proton/	1 fiches · 2 tests	75%	stores/microsoft/	6 fiches · 48 tests
76%	launcher/proton/fixes/	5 fiches · 22 tests	77%	stores/microsoft/tokens/	4 fiches · 17 tests
72%	launcher/proton/handlers/	4 fiches · 16 tests	80%	stores/shared/	4 fiches · 48 tests
70%	launcher/proton/infrastructure/	4 fiches · 26 tests	87%	stores/ubisoft/	10 fiches · 141 tests
88%	launcher/proton/language_setup/	5 fiches · 12 tests	65%	stores/ubisoft/auth/	1 fiches · 22 tests
77%	launcher/types/	4 fiches · 15 tests	78%	stores/ubisoft/installer/	3 fiches · 34 tests
90%	metadata/	2 fiches · 32 tests	91%	stores/ubisoft/library/	3 fiches · 26 tests
95%	rpc/	3 fiches · 6 tests	95%	stores/ubisoft/prefix/	1 fiches · 16 tests
68%	rpc/handlers/	8 fiches · 101 tests	95%	stores/ubisoft/session/	1 fiches · 14 tests
65%	rpc/mixins/	11 fiches · 98 tests	76%	utils/	3 fiches · 20 tests

Annex A2 — Test pyramid

Distribution of the 1700+ tests across tiers. Read top-to-bottom: faster, more numerous tests live at the bottom.

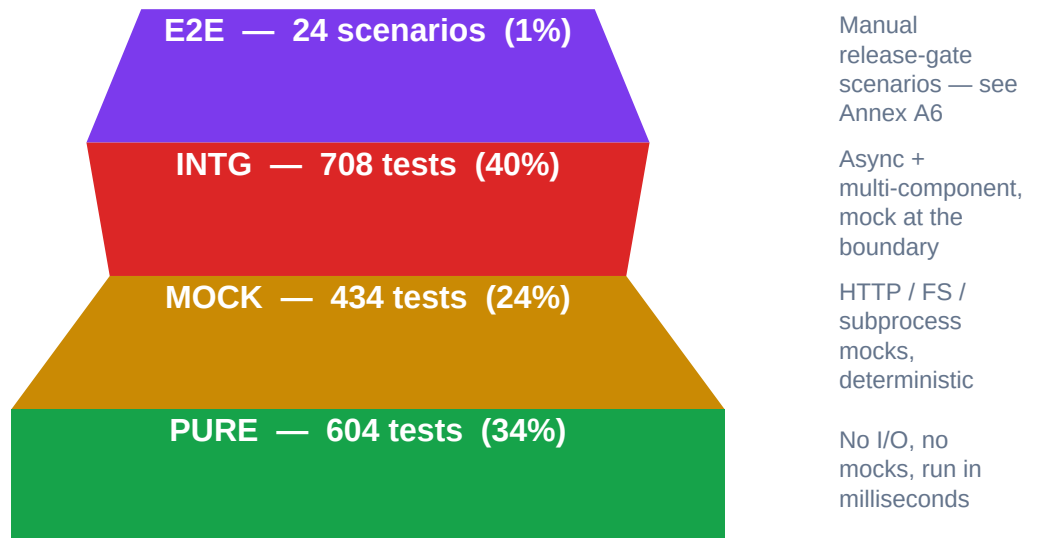

Target shape

Aim for a wide PURE base and a thinner INTG top. If INTG ever overtakes MOCK we have a coupling problem — re-extract pure logic.

E2E layer holds 24 manual release-gate scenarios listed in Annex A6 — they are release gates, not part of the unit-test suite.

Annex A3 — Roadmap by priority

Suggested implementation order — write HIGH-priority fiches first, then MEDIUM, then LOW.

Phase 1 — Priority HIGH

Critical path : core, stores, services, RPC layers

118 fiches · 1060 tests

TOP FICHES IN THIS PHASE

- OP-55a store.py (46 tests)
- OP-50a store.py (34 tests)
- OP-06a async_file_ops.py (30 tests)
- OP-25g store.py (28 tests)

Phase 2 — Priority MEDIUM

Infrastructure : auth, launcher, compatibility, metadata

107 fiches · 651 tests

TOP FICHES IN THIS PHASE

- OP-34a proton_helpers.py (31 tests)
- OP-34b library.py (31 tests)
- OP-29a edge.py (22 tests)
- OP-30b cdp_inject.py (21 tests)

Phase 3 — Priority LOW

Nice-to-have : utils, types, i18n shims

7 fiches · 35 tests

TOP FICHES IN THIS PHASE

- OP-33a paths.py (10 tests)
- OP-36c context.py (6 tests)
- OP-33b locale.py (6 tests)
- OP-36b errors.py (4 tests)

Annex A4 — Fixtures catalog

Every fixture referenced in this document, with usage count and where to declare it.

FIXTURE	USES	WHERE TO DECLARE
pytest-asyncio	× 862	Plug-in (install via requirements-dev.txt). Add <code>`asyncio_mode = auto`</code> to <code>pytest.ini</code> .
tmp_path	× 340	Built-in pytest fixture. No setup required.
aioresponses	× 122	Plug-in (install via requirements-dev.txt). Use as context manager : <code>`with aioresponses() as m: m.get(url, ...)`</code> .
monkeypatch (asyncio.create_subpr...	× 52	Built-in monkeypatch. Patch the symbol with an async stub returning a fake process.
monkeypatch (time.time)	× 48	Built-in monkeypatch. <code>`monkeypatch.setattr('time.time', lambda: 1000.0)`</code> .
fake_prefix (conftest.py)	× 44	Custom fixture in <code>tests/conftest.py</code> — yields a <code>tmp_path</code> with the Wine prefix layout pre-built (<code>drive_c/ProgramData/...</code>).
fake_cdp_target (conftest.py)	× 36	Custom fixture in <code>tests/conftest.py</code> — yields a stubbed CDP websocket that records sent commands and replies with canned responses.
monkeypatch (env vars)	× 20	Built-in monkeypatch. <code>`monkeypatch.setenv('VAR', 'val')`</code> .

Annex A5 — Store coverage matrix

Quick visual of which StoreBase methods are covered by tests across each store implementation.

STORE	is_available	start_auth	complete_auth	logout	get_library	install_game	launch_game
Amazon	2 tests	4 tests	2 tests	4 tests	2 tests	4 tests	—
Epic	2 tests	4 tests	2 tests	4 tests	2 tests	4 tests	—
Gog	4 tests	4 tests	2 tests	4 tests	2 tests	4 tests	—
Microsoft	2 tests	4 tests	2 tests	4 tests	2 tests	2 tests	—
Ubisoft	4 tests	4 tests	4 tests	4 tests	4 tests	4 tests	—

Legend :

1 test

2-3

4+ tests

— method not exposed

Annex A6 — E2E scenarios

End-to-end tests are flow-based, not file-based, so they cannot be auto-generated from per-file AST. Every scenario below is a manual release-gate check performed on a real Steam Deck before each release. A few low-frequency scenarios are flagged as quarterly. Run them with live network and real CLI binaries — no automation.

Authentication (5)

E2E-01 Epic Games — full OAuth + sync trigger

[MANUAL · pre-release](#)

Steps : Connect → start_auth → OAuth in legendary → token saved → SYNC_COMPLETE
Verify : Epic library appears in the unified view with metadata + artwork

E2E-02 GOG — direct OAuth + library sync

[MANUAL · pre-release](#)

Steps : Connect → browser OAuth → refresh token saved → library fetched (paginated)
Verify : Owned games visible, large libraries (>50) paginate correctly

E2E-03 Amazon Games — nile CLI login + sync

[MANUAL · pre-release](#)

Steps : Connect → nile auth → token persisted → SYNC_COMPLETE
Verify : Amazon library renders with correct artwork

E2E-04 Ubisoft — UPC session capture + 2FA

[MANUAL · pre-release](#)

Steps : Connect → modal asks email/2FA → Wine prefix UPC session captured → id_map built
Verify : Owned Ubisoft games visible, including those without artwork on UPC

E2E-05 Microsoft xCloud — XBL/XSTS chain + catalog

[MANUAL · pre-release](#)

Steps : Edge installed → OAuth → XBL → XSTS → xCloud catalog fetched
Verify : xCloud catalog renders, streaming launch URL is reachable

Account management (2)

E2E-06 Logout single store — others unaffected

[MANUAL · pre-release](#)

Steps : 3 stores authed → logout Epic → check GOG / Amazon still authenticated
Verify : Epic library cleared, shortcuts preserved, other stores untouched

E2E-07 Account switch — re-auth with a different account

[MANUAL · pre-release](#)

Steps : Logged in as A → logout → login as B → trigger sync
Verify : Library matches account B, no leftover entries from A's library

Library sync (2)

Annex A6 — E2E scenarios

E2E-08 Full sync with all 5 stores connected

[MANUAL · pre-release](#)

Steps : All stores authed → trigger sync → progress per store → SYNC_COMPLETE
Verify : All libraries merged, no duplicates, ordering stable

E2E-09 Multi-store unified library — cross-store dedup

[MANUAL · quarterly](#)

Steps : Own a same game on Epic + GOG → sync → check unified library view
Verify : Game shown once, store priority respected, no double entry

Install (5)

E2E-10 Epic — install via legendary

[MANUAL · pre-release](#)

Steps : Pick game → DownloadService.add → legendary CLI streams progress → done
Verify : Shortcut created, ProtonDB rating fetched, grid downloaded

E2E-11 GOG — install via gogdl with language selection

[MANUAL · pre-release](#)

Steps : Pick game → language modal → gogdl downloads → install marker written
Verify : Game launches in chosen locale, no language fallback

E2E-12 Amazon — install via nile

[MANUAL · pre-release](#)

Steps : Pick game → nile install → progress streamed → completion event
Verify : Shortcut + artwork present, Proton compat tool wired

E2E-13 Ubisoft — Wine prefix + UPC install via uplay://

[MANUAL · pre-release](#)

Steps : Pick game → ensure prefix → inject UPC session → uplay:// install URI → exe found
Verify : Game executable detected by ExeFinder, shortcut created, gamepad config OK

E2E-14 Custom install path — SD card

[MANUAL · pre-release](#)

Steps : Insert SD card → set custom path → install game → verify file location
Verify : Files on SD, games.map points to /run/media, launch works as expected

Uninstall (2)

E2E-15 Epic / GOG / Amazon — CLI uninstall cleanup

[MANUAL · pre-release](#)

Steps : Install → uninstall via UI → CLI removes files → shortcut deleted
Verify : Game files removed, shortcut gone, games.map updated, no orphan entries

E2E-16 Ubisoft — uninstall preserves Wine prefix

[MANUAL · pre-release](#)

Steps : Install in Wine prefix → uninstall game → check prefix integrity
Verify : Game gone, UPC session + other Ubisoft games intact

Annex A6 — E2E scenarios

Launch (4)

E2E-17 Epic launch via Proton

[MANUAL · pre-release](#)

Steps : Click shortcut in Steam → unifideck-launcher → games.map → umu-run + Proton
Verify : Game starts, controller detected, no Wine errors

E2E-18 GOG launch via Proton

[MANUAL · pre-release](#)

Steps : Click shortcut → games.map resolves exe → Proton compat tool selected
Verify : Game starts, save folder mapped, Steam Overlay attaches

E2E-19 Ubisoft launch via Wine + UPC

[MANUAL · pre-release](#)

Steps : Click shortcut → UPC session ensured → uplay:// run URI → game spawn
Verify : Game starts within UPC, UPC stays signed in across launches

E2E-20 Microsoft xCloud streaming launch

[MANUAL · pre-release](#)

Steps : Click shortcut → Edge starts → XSTS still valid → stream URL opened
Verify : xCloud session loads, virtual keyboard injection works

Cloud save (1)

E2E-21 Conflict resolution (local vs remote diverged)

[MANUAL · quarterly](#)

Steps : Modify local save offline → start game → conflict modal → choose remote
Verify : Chosen direction applied, opposite side backed up, no data loss

Plugin lifecycle (3)

E2E-22 Steam restart with shortcuts intact

[MANUAL · pre-release](#)

Steps : Add 50 shortcuts → restart Steam → verify all present + artwork loads
Verify : All shortcuts persist, no Steam crash, grid images intact

E2E-23 Locale switch — UI updates correctly

[MANUAL · pre-release](#)

Steps : Change UI language to FR → close / reopen plugin → check visible text
Verify : All UI strings translated, no English fallbacks except known dev keys

E2E-24 Plugin uninstall + reinstall — persistence

[MANUAL · quarterly](#)

Steps : Uninstall plugin → reinstall → check existing shortcuts + tokens
Verify : Auth tokens preserved or cleanly re-asked, shortcuts persist