

Introduction to OOP (cont.)



Vũ Thị Hồng Nhạn

(vthnhan@vnu.edu.vn)

Dept. of software engineering, FIT

UET, VNU HN

Contents

- ❖ Java programming language
- ❖ Classes
- ❖ Fields/attributes
- ❖ Methods
- ❖ Access modifiers
- ❖ Constructors

Why you need to learn java

- ❖ Top 3 most popular languages
- ❖ Extremely flexible (business, web apps, android apps, games)
- ❖ Easy to find a job as a developer


Brief history

- ❖ 1991: developed by Sun Microsoft as a programming language for embedded environments
 - Oak was the first name of Java
- ❖ Java 1.0.2, 1.1
 - “Write ONCE, run ANYWHERE”
 - Slow
 - Used in web applications (applets)
- ❖ Java 2 (version 1.2 – 1.4)
 - Fast & more powerful
 - 3 platforms: J2ME, J2SE, J2EE
- ❖ Java 5,6,7 (version 1.5...)
 - Much more upgraded!

Structure of a java program


- ❖ A set of object classes
- ❖ Usually **each class** is **a source code file** named **the same as** the class name
 - Increase the independence
 - Easy to modify, save compilation time

Compile

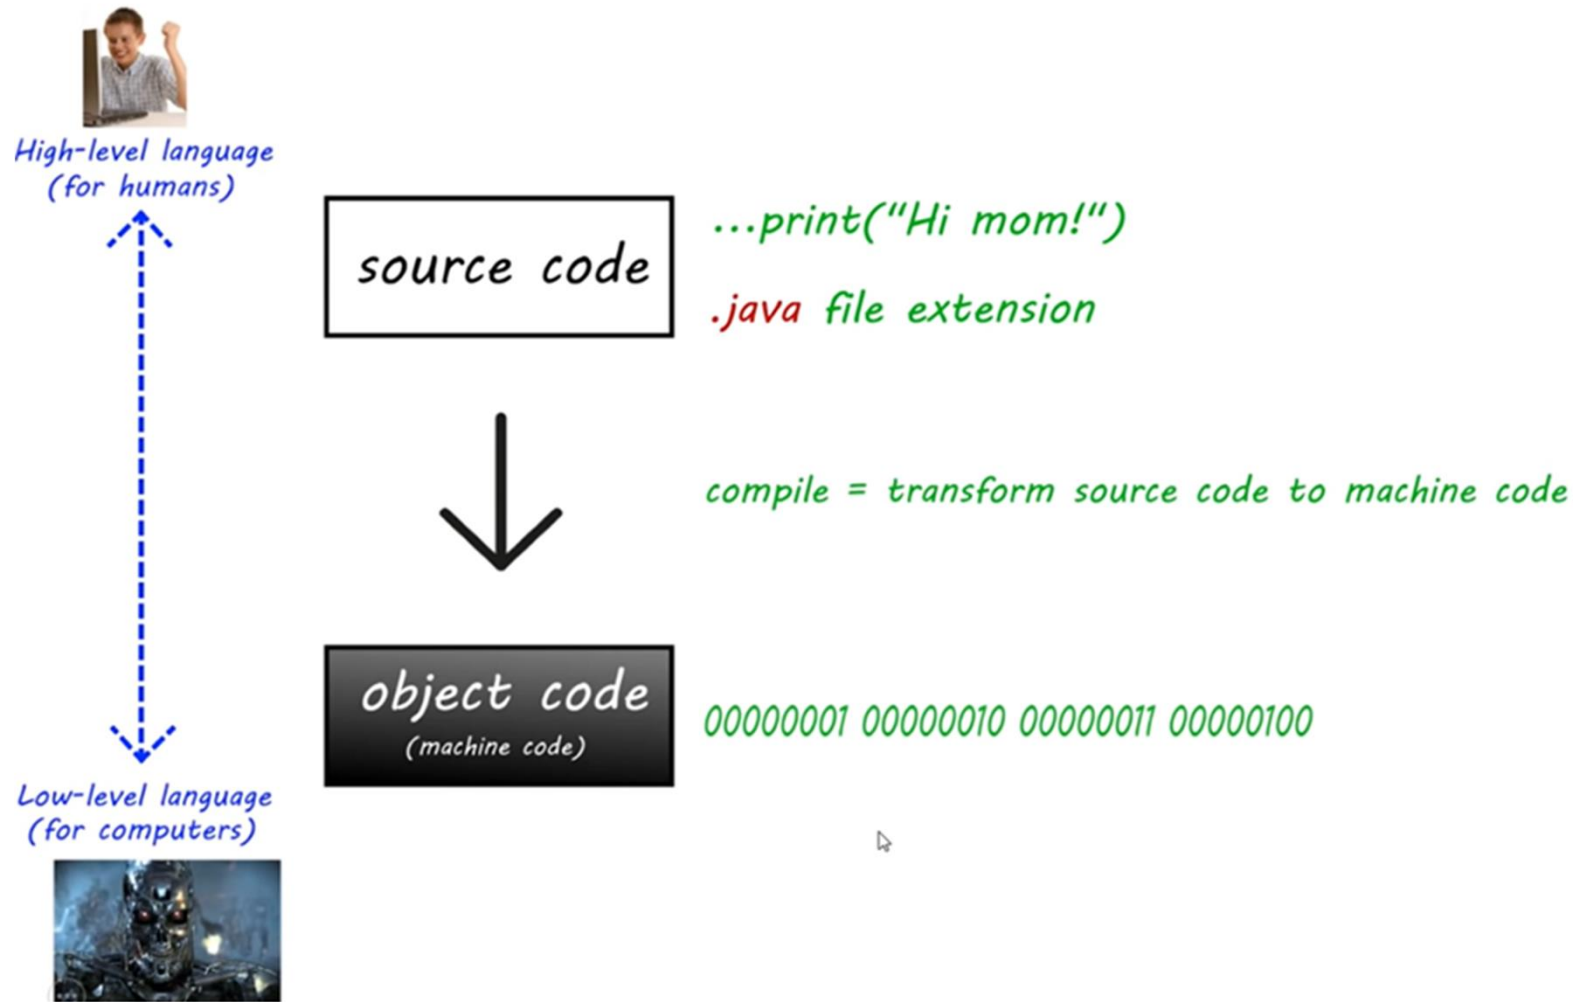


Compile

- ❖ Java source code is compiled into **bytecode**
- ❖ Bytecode is **platform independent**
- ❖ Bytecode is executed by JVM (Java **V**irtual **M**achine)

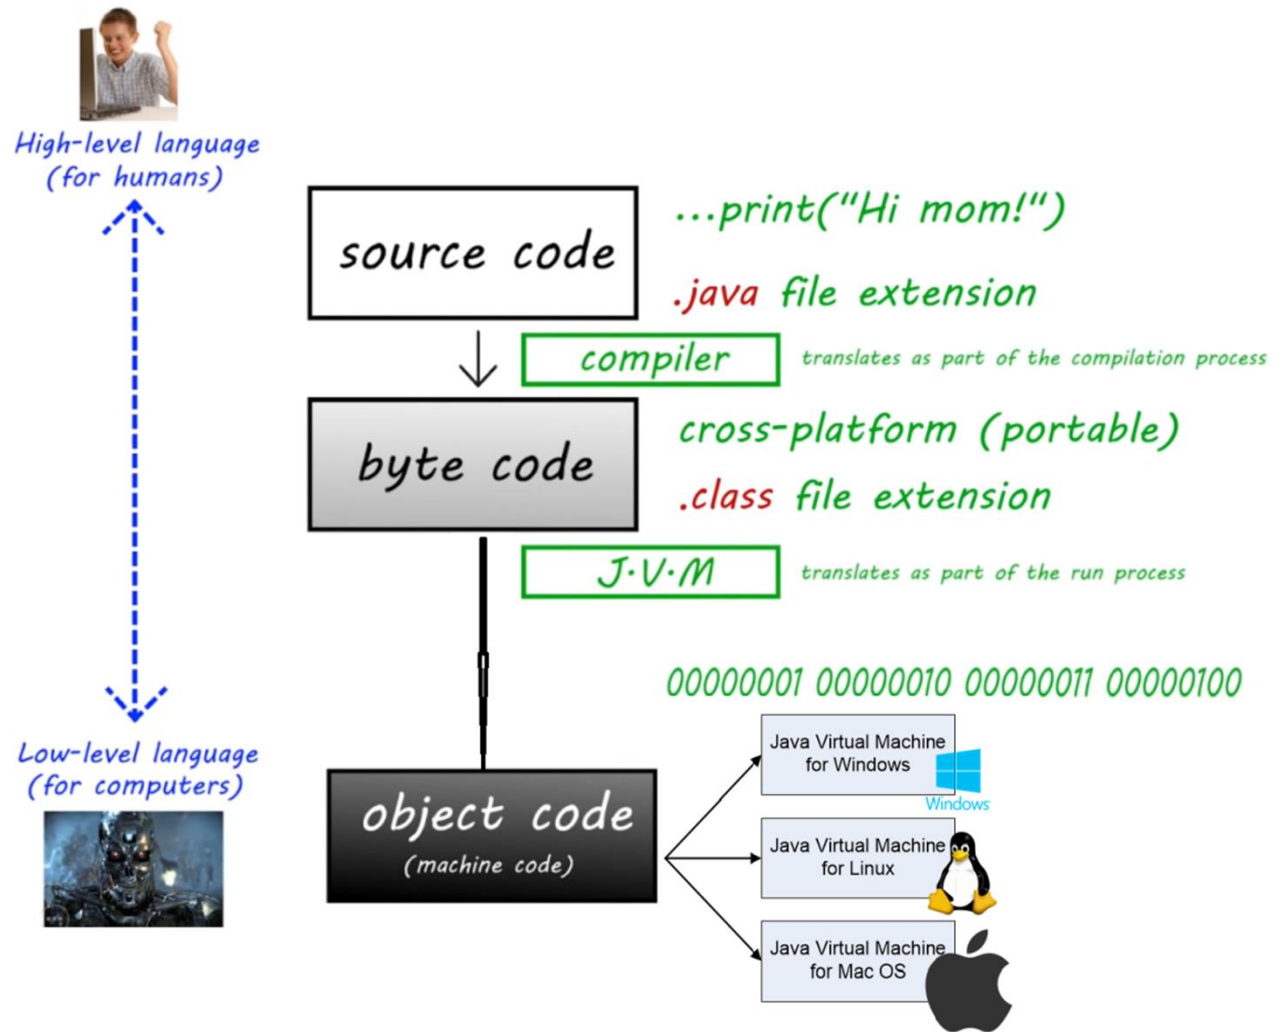

JVM

- ❖ JVM is **platform dependent** (hardware, OS)
- ❖ Ensure java program (bytecode) can execute on different platforms (i.e. platform independent)
- ❖ Guarantee security
- ❖ It's included in JDK (Java Development Kit)

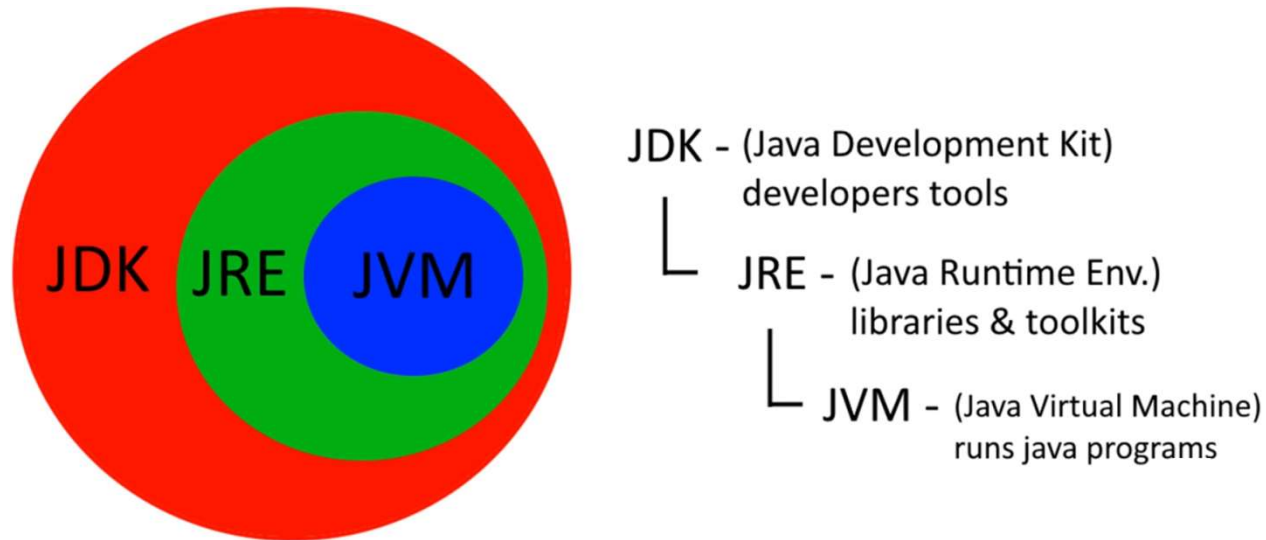

Java applications

- ❖ Desktop applications – Java standard edition
- ❖ Distributed application, host application – Java Enterprise Edition
- ❖ Mobile applications
- ❖ Card applications

Example

HelloWorld.java:

*Same as class
name*

Class

Class name

public **class** HelloWorld {

main() method

public static void **main** (String[] args) {

System.out.println("Hello, world");

*Statement in
method*

}

}

**Public: access
modifier**

Compile & run

- ❖ Compile HelloWorld.java

javac HelloWorld.java

- ❖ Run

java HelloWorld

```
public class HelloWorld {  
    public static void main (String[] args)  
    {  
        System.out.println("Hello, world");  
    }  
}
```

compiler



HelloWorld.class

```
%> javac HelloWorld.java  
%> java HelloWorld  
Hello, world
```

More than two classes

2 classes in different files

TestGreeting.java:

```
public class TestGreeting {  
    public static void main(String[] args) {  
        Greeting gr = new Greeting();  
        gr.greet();  
    }  
}
```

Greeting.java

```
public class Greeting {  
    public void greet() {  
        System.out.print("Hi there!");  
    }  
}
```

Compile & run

❖ Compile

javac TestGreeting.java

Greeting.java automatically translated

❖ Run

java TestGreeting

```
%> javac TestGreeting.java
%> java TestGreeting
Hi there!
```

JDK – Java Development Kit

- ❖ Java application development environment
- ❖ Main components
 - **javac** compiler, converts source code into Java bytecode
 - **java** interpreter and application loader
 - **javadoc** documentation generator, automatically generates documentation from source code comments
 - **jdb** debugger
 - ...

main() Method

- ❖ In Java, everything has to be in a class
- ❖ When executing a program, we execute a class
 - Load class and execute **main()** method
 - Class must have **main()** method

Define a class

❖ Syntax

```
[public] class class_name {  
    ...  
}
```

❖ E.g.,

```
class MyDate {  
    ....  
}
```


Constructors

- **Default constructor**
- **Parameterized constructor**
- **Copy constructor**
- **Accessing constructor**
- **Multiple constructors & self-reference**

Constructors

- ❖ Constructors are **special types of methods** that are responsible for **creating** & **initializing** an object of that class
- ❖ Constructor is very much like creating a method, except that
 - Constructors **don't** have **any return types**
 - Constructors have **the same name** as **the class** itself
- ❖ They can take **input parameters** like a normal method
- ❖ **Multiple constructors** are allowed

Default constructor

- ❖ is one that does **not takes** any **input parameters**
- ❖ it's **optional**, which means **if you don't** create *a default constructor* Java will automatically assume there's one by default that doesn't really do anything
 - it is called **empty constructor**
- ❖ E.g., a class **Game** defined as follows...

```
class Game {  
  
}
```

```
Game o = new Game();
```

Default constructor...

- ❖ However, if the class has **fields** that **need to be initialized** before the object can be used, then you **should create one** that does so

- ❖ E.g.,

```
class Game {  
    int score;  
    //default constructor  
    Game() { score=0; //initialize the score; or you can let it empty }  
}
```

Parameterized constructor

- ❖ A constructor can also take input parameters
- ❖ e.g., assume that some games starts with a positive score value and not just 0, that means we need another constructor that takes an integer parameter as an input, and uses it to initialize the score variable

```
class Game {  
    int score;  
    //default constructor  
    Game(){  
        score=0;//initialize the score  
    }  
    Game(int startingScore){  
        score=startingScore;  
    }  
}
```

Parameterized constructor...

❖ However....

```
class Game {  
    int score;  
    //default constructor  
    Game(int startingScore){  
        score=startingScore;  
    }  
}
```

```
Game g1 = new Game (); //error  
Game d2 = new Game(10);
```

Constructors

Accessing constructor

- ❖ Unlike normal methods, constructors **cannot** be called using the dot '.' modifier, instead *every time* you create **an object variable** of a class type *the appropriate **constructor is called***
- ❖ To create an object of a certain class, we use the **new keyword** followed by the constructor we want to use
- ❖ E.g.
 - `Game 01 = new Game();`
 - ❖ this will create an object called *01* using the default constructor
 - `Game 02= new Game(200)`
 - ❖ this calls the 2nd constructor

Constructors

Accessing constructor...

- ❖ If you **don't** initialize an object using the **new** keyword, then its value will be set to something called **null**
 - Game o = **null**;
- ❖ **null object** means “empty” object
 - an object has **no** fields or methods
- ❖ In some case, you want to set an object to **null** to indicate that *such object is **invalid** or **yet to be set***

Why multiple constructors

- ❖ **WHY** still need to keep the **default constructor** now that we have another constructor that can create, say a game object with ***any starting score value*** (including **0**)?
- ❖ It's considered a good practice to always include a **default constructor** that initializes **all the fields** with values that correspond to **typical scenarios**
- ❖ Then, you can add extra **parameterized constructors** that allow more customization when dealing with **less common cases**

Self reference

- ❖ Sometimes you need *to refer to an object within one of its methods or constructors*, to do so we use the keyword **this**
- ❖ The most common reason for using **this** keyword is because a field has the same name as a parameter in the method or constructor
- ❖ e.g., a Position class is defined as

```
class Position {  
    int row=0;  
    int column=0;  
    Position(int r,int c){  
        row=r; column=c;  
    }  
}
```

Self reference...

❖ *A more readable way* would be use **the same names** for *the constructor parameters*

- ➔ Need to use the **this** keyword to separate the fields and the parameters

❖ e.g., a **Position** class is defined as

```
class Position {  
    int row=0;  
    int column=0;  
    Position(int row, int column){  
        this.row=row; this.column=column;  
    }  
}
```

Example

Contact manager

```
class Contact{  
    String name;  
    String email;  
    String phoneNumber;  
}
```

❖ **no methods**, since a contact object itself won't be "doing" much attention

❖ Next, create **the class** that store an array of contacts and is in charge of **adding** or **searching** for contacts

```
class ContactsManager{  
    Contact[] myFriends;  
    int friendCount;  
    // constructor  
    // add a contract  
    // search a contact  
}
```

Example

Contact manager...

```
class ContactsManager{  
    Contact[] myFriends;  
    int friendCount;  
    ContactsManager() {  
        this.FriendCount=0;  
        this.myFriends = new Contact[100];  
    }  
    ....  
}
```

- ❖ The **friendCount** starts from **0** and will **increment** every time we add a new contact later

Example of Contact manager...

Class methods

❖ The method `addContact()` will add a **Contact object** to **the Contact array**
myFriends

- Takes a **Contact object** as an input parameter
- Use **friendCount** value to fill **that slot** in the array with the contact that was passed into the method

```
void addContact(Contact contact){  
    myFriend[friendCount]=contact  
    friendCount++;  
}
```

Example of Contact manager...

Class methods

- ❖ Now, add another method `searchContact ()` that will search through the array using a `name String` and `return a Contact object` once a match is found

```
Contact searchContact(String searchName){  
    for(int i=0;i<friendCount;i++)  
        if(myFriend[i].name.equals(searchName))  
            return myFriend[i]  
    return null;  
}
```

run the program

```
class Main{  
    public static void main(String [] args){  
        ContactManager myContactManager= new ContactManager();  
  
        Contact x=new Contact();  
        x.name="Minh";  
        x.phoneNumber="01287761990";  
        x.email="nnt@gmail.com";  
        myContactManager.addContact(x);  
        //...add some more contacts;  
        Contact found=myContactManager.searchContact("Minh");  
        System.out.println(found.phoneNumber);  
    }  
}
```

❖ If you go ahead and run this program, and see what appear!

Copy constructor

- ❖ Besides two types of constructors introduced, a **class object** can be initialized with **another previously created object** of the same class

```
public class Game {  
    private int score;  
    public Game() {score=0;}  
  
    public Game(Game g) {  
        score = g.score;  
    }  
}
```



Access modifiers



- **public vs. private fields**
- **public vs. private methods**
- **public vs. private classes**

Access modifiers

- ❖ Think of it as if you're loading photos to the cloud
 - some of them you'd like to make **public** and share with others
 - while other photos are more of a personal nature and you'd like to keep them **private**
- ❖ In java, a field or method can be labeled as **public** or **private**

```
class Account{  
    public string name;  
    private String password;  
    public boolean login(){  
        return checkPasswrd(password)  
    }  
}
```

- ❖ **Public** field or method can be accessed by other classes

Access modifiers

Fields (public or private)

- ❖ Depending on the purpose of the field you'd label it as **public** or **private** simply add the modifier just before the field type when declaring it

- ❖ E.g.,

```
class Book{  
    private String title  
    private String author  
    public Book(String title, String author){  
        this.title = title; this.author=author;  
    }  
}
```

- All fields are **private** and initialized in a **constructor**
- This guarantee that **once a book object has been created**, the **title** and **author** will **never be changed!**

Access modifiers

Fields (public or private)...

- ❖ if we want to keep track of **whether a Book is being borrowed or not**, we can add a **public boolean** field to do so

```
class Book{  
    private String title  
    private String author  
    public boolean isBorrowed;  
    public Book(String title, String author){  
        this.title = title; this.author=author;  
    }  
}
```

- ❖ We can do `book.isBorrowed = true` anywhere in the project
- ❖ However, it's still risky, we may end up **mistakenly setting the boolean to true** when **we only mean to check if it is true or false**

Fields (public or private)...

- ❖ A better design would be **to declare** that field **as private**
- ❖ & Create **public methods** that return the value of such hidden field and **public methods** to **set or change its value**

```
class Book{  
    private String title  
    private String author  
    private boolean isBorrowed;  
    public Book(String title, String author){  
        this.title = title; this.author=author;  
    }  
    public void setTitle(String title){ this.title = title;} //setter  
    public String getTitle(){ return title;} //getter  
    ....  
}
```

Access modifiers

Fields (public or private)...

```
class Book{  
    private String title  
    private String author  
    private boolean isBorrowed;  
    public Book(String title, String author){  
        this.title = title; this.author=author;  
    }  
    ...  
    public void borrowBook(){ isBorrowed=true;}  
    ...  
}
```

Access modifiers

Fields (public or private)...

```
class Book{  
    ....  
    public void returnBook(){ isBorrowed=false;  
    }  
    public boolean isBookBorrowed(){ return isBorrowed;  
    }  
}
```


Methods (public vs private)

- ❖ **Private** methods are usually known as **helper methods**
 - since they can only be **seen** and **called** by the **same class**
 - used to **organize your code** and keep it simple and more readable
- ❖ **Public** methods are the **actual actions** that the class can perform
 - and the **rest of the program** can **see** and **call**

Methods (public vs private)

```
class Person{  
    private String userName;  
    private String SSN;  
    private string getID(){return SSN + "-" + userName;}  
    public getUserName(){return userName;}  
    public boolean isSamePerson(Person p){  
        if(p.getID().equals(this.getId()) return true;  
        else return false;  
    }  
}
```

- ❖ Method **getID()** was set to **private** so that **no other class can know** the social security number of any person
 - can use it internally only to compare this person with another person
- ❖ 2 public methods can be called by **any other class**!

public classes

- ❖ Classes can be labeled **public** or **private**
- ❖ if you don't use any label, it will **default** to something called “package public”
 - that means, you've labeled them **public** but only to **the classes** that are in the **same package/folder**

Conclusion

- ❖ Always try to declare all fields as **private**
- ❖ Create a **constructor** that accepts those **private fields** as inputs
- ❖ Create a **public method** that **set** each private field, this way you will know when you are changing a field
 - these methods are called **setters**
- ❖ Create a public method that returns each private field, so you can read the value without mistakenly changing it
 - these methods are called **getters**
- ❖ Set all your classes to **public**