

TRƯỜNG ĐẠI HỌC BÁCH KHOA HÀ NỘI  
Khoa Công nghệ thông tin

## BÁO CÁO BÀI TẬP 01

Môn: Phát triển phần mềm theo chuẩn kỹ năng ITSS

Sinh viên: Trần Đăng Sinh  
MSSV: 20235821  
Mã học phần: IT4549  
Mã lớp: 166155  
Nhóm: 15  
Ngày nộp: Ngày 4 tháng 3 năm 2026

## Mục lục

---

|          |                                                                     |           |
|----------|---------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Task 1: HelloWorld.java</b>                                      | <b>3</b>  |
| 1.1      | Mô tả yêu cầu . . . . .                                             | 3         |
| 1.2      | Mã nguồn . . . . .                                                  | 3         |
| 1.3      | Kết quả chạy . . . . .                                              | 3         |
| <b>2</b> | <b>Task 2: MVCTutorial – Ví dụ về mô hình MVC</b>                   | <b>3</b>  |
| 2.1      | Mã nguồn . . . . .                                                  | 4         |
| 2.1.1    | Model – CalculatorModel.java . . . . .                              | 4         |
| 2.1.2    | View – CalculatorView.java . . . . .                                | 5         |
| 2.1.3    | Controller – CalculatorController.java . . . . .                    | 6         |
| 2.1.4    | Entry point – MVCCalculator.java . . . . .                          | 8         |
| 2.2      | Kết quả chạy . . . . .                                              | 8         |
| <b>3</b> | <b>Task 3: MVCCalculatorSwing</b>                                   | <b>8</b>  |
| 3.1      | Mã nguồn . . . . .                                                  | 8         |
| 3.1.1    | Model – CalculatorModelSwing.java . . . . .                         | 8         |
| 3.1.2    | View – CalculatorViewSwing.java . . . . .                           | 9         |
| 3.1.3    | Controller – CalculatorControllerSwing.java . . . . .               | 10        |
| 3.1.4    | Entry point – MVCCalculatorSwing.java . . . . .                     | 12        |
| 3.2      | Kết quả chạy . . . . .                                              | 12        |
| <b>4</b> | <b>Task 4: MVCCalculatorJFX (JavaFX + Scene Builder)</b>            | <b>12</b> |
| 4.1      | Cấu hình Maven (pom.xml) . . . . .                                  | 13        |
| 4.2      | Mã nguồn . . . . .                                                  | 14        |
| 4.2.1    | View – calculator-view.fxml (thiết kế bằng Scene Builder) . . . . . | 14        |
| 4.2.2    | Model – CalculatorModelJFX.java . . . . .                           | 14        |
| 4.2.3    | Controller – CalculatorControllerJFX.java . . . . .                 | 15        |
| 4.2.4    | Entry point – Main.java . . . . .                                   | 17        |
| 4.3      | Kết quả chạy . . . . .                                              | 18        |

|          |                                                           |           |
|----------|-----------------------------------------------------------|-----------|
| <b>5</b> | <b>Task 5: Các thao tác Git</b>                           | <b>18</b> |
| 5.1      | Tổng quan . . . . .                                       | 18        |
| 5.2      | git add – Thêm file . . . . .                             | 18        |
| 5.3      | git commit – Commit thay đổi . . . . .                    | 19        |
| 5.4      | git push – Đẩy code lên remote . . . . .                  | 19        |
| 5.5      | git pull – Kéo code mới nhất về . . . . .                 | 20        |
| 5.6      | Tạo và chuyển nhánh (git branch / git checkout) . . . . . | 20        |
| 5.7      | git merge – Merge nhánh . . . . .                         | 21        |
| 5.8      | Giải quyết xung đột (git merge conflict) . . . . .        | 21        |

## 1. Task 1: HelloWorld.java

---

### 1.1. Mô tả yêu cầu


Chương trình yêu cầu người dùng nhập vào tên của mình, sau đó in ra câu chào dạng “Hello,  $\$ \{name\}$ ” ra màn hình console.

### 1.2. Mã nguồn

```
1 import java.util.Scanner;  
2  
3 public class HelloWorld {  
4     public static void main(String[] args) {  
5         Scanner scanner = new Scanner(System.in);  
6         System.out.print("Enter your name: ");  
7         String name = scanner.nextLine();  
8         System.out.println("Hello, " + name + "!");  
9         scanner.close();  
10    }  
11 }
```

Listing 1: HelloWorld.java

### 1.3. Kết quả chạy

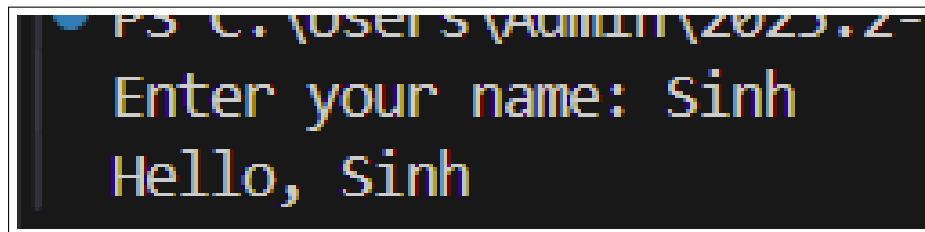

Hình 1: Kết quả chạy chương trình HelloWorld.java

Khi chạy chương trình, người dùng nhập tên (ví dụ: Sinh), chương trình in ra Hello, Sinh.

## 2. Task 2: MVCTutorial – Ví dụ về mô hình MVC

---

## 2.1. Mã nguồn

### 2.1.1. Model – CalculatorModel.java

Model thực hiện phép tính và lưu kết quả. Không tham chiếu đến View hay Controller.

```
1 // The Model performs all the calculations needed
2 // and that is it. It doesn't know the View exists
3
4 public class CalculatorModel {
5
6     // Holds the value of the sum of the numbers
7     // entered in the view
8     private double calculationValue;
9
10    public void calculate(int firstNumber, int secondNumber, String
operator){
11
12        if("+".equals(operator)){
13            calculationValue = firstNumber + secondNumber;
14        } else if("-".equals(operator)){
15            calculationValue = firstNumber - secondNumber;
16        } else if(".".equals(operator)){
17            calculationValue = firstNumber * secondNumber;
18        } else if("/".equals(operator)){
19            // simple check to avoid division by zero
20            if(secondNumber == 0){
21                throw new ArithmeticException("Division by zero");
22            }
23            calculationValue = (double) firstNumber / (double)
secondNumber;
24        } else {
25            throw new IllegalArgumentException("Unknown operator: " +
operator);
26        }
27    }
28
29    public double getCalculationValue(){
30        return calculationValue;
31    }
32 }
```

Listing 2: CalculatorModel.java

### 2.1.2. View – CalculatorView.java

View kế thừa JFrame, chứa các thành phần giao diện (text field, combo box, nút bấm). View chỉ cung cấp getter/setter và phương thức đăng ký listener – không chứa logic tính toán.

```
1 // This is the View
2 // Its only job is to display what the user sees
3 // It performs no calculations
4
5 import java.awt.event.ActionListener;
6 import javax.swing.*.*;
7
8 public class CalculatorView extends JFrame{
9
10     private JTextField firstNumber = new JTextField(10);
11     private JComboBox<String> operatorBox =
12         new JComboBox<String>(new String[]{"+", "-", "*", "/"});
13     private JTextField secondNumber = new JTextField(10);
14     private JButton calculateButton = new JButton("Calculate");
15     private JTextField calcSolution = new JTextField(10);
16
17     CalculatorView(){
18         calcSolution.setEditable(false);
19
20         JPanel calcPanel = new JPanel();
21         this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
22         this.setSize(600, 200);
23
24         calcPanel.add(firstNumber);
25         calcPanel.add(operatorBox);
26         calcPanel.add(secondNumber);
27         calcPanel.add(calculateButton);
28         calcPanel.add(calcSolution);
29         this.add(calcPanel);
30     }
31
32     public int getFirstNumber(){
33         return Integer.parseInt(firstNumber.getText());
34     }
35     public int getSecondNumber(){
36         return Integer.parseInt(secondNumber.getText());
37     }
38     public String getFirstNumberText(){
39         return firstNumber.getText();
40     }
41     public String getSecondNumberText(){
```

```

42         return secondNumber.getText();
43     }
44     public int getCalcSolution(){
45         return Integer.parseInt(calcSolution.getText());
46     }
47     public String getSelectedOperator(){
48         return (String) operatorBox.getSelectedItem();
49     }
50     public void setCalcSolution(int solution){
51         calcSolution.setText(Integer.toString(solution));
52     }
53
54     // Cho phép Controller đang ký lắng nghe sự kiện nút bấm
55     void addCalculateListener(ActionListener listenForCalcButton){
56         calculateButton.addActionListener(listenForCalcButton);
57     }
58
59     void displayErrorMessage(String errorMessage){
60         JOptionPane.showMessageDialog(this, errorMessage);
61     }
62 }

```

Listing 3: CalculatorView.java

### 2.1.3. Controller – CalculatorController.java

Controller giữ tham chiếu đến cả View và Model. Khi nút “Calculate” được nhấn, lớp nội CalculateListener lấy dữ liệu từ View, gọi `model.calculate()`, và trả kết quả về View.

```

1  import java.awt.event.ActionEvent;
2  import java.awt.event.ActionListener;
3
4  // The Controller coordinates interactions
5  // between the View and Model
6
7  public class CalculatorController {
8
9      private CalculatorView theView;
10     private CalculatorModel theModel;
11
12     public CalculatorController(CalculatorView theView,
13                                CalculatorModel theModel) {
14         this.theView = theView;
15         this.theModel = theModel;
16     }
17 }

```

```
16         // Tell the View that when the calculate button
17         // is clicked, execute actionPerformed in CalculateListener
18         this.theView.addCalculateListener(new CalculateListener());
19     }
20
21     class CalculateListener implements ActionListener{
22
23         public void actionPerformed(ActionEvent e) {
24             int firstNumber, secondNumber = 0;
25             try{
26                 String firstText  = theView.getFirstNumberText();
27                 String secondText = theView.getSecondNumberText();
28
29                 // Validate: chỉ chấp nhận số nguyên (có thể âm)
30                 if(!firstText.matches("-?\\d+") || !secondText.
matches("-?\\d+")){
31                     throw new NumberFormatException("Not an integer")
32                 };
33                 // Kiểm tra tràn số
34                 if((firstText.replace("-", "").length() > 10
35                     || secondText.replace("-", "").length() > 10){
36                     theView.displayErrorMessage("overflow");
37                     return;
38                 }
39
40                 firstNumber  = Integer.parseInt(firstText);
41                 secondNumber = Integer.parseInt(secondText);
42                 String operator = theView.getSelectedOperator();
43
44                 theModel.calculate(firstNumber, secondNumber,
operator);
45                 double result = theModel.getCalculationValue();
46
47                 if(Double.isInfinite(result)
48                     || result > Integer.MAX_VALUE
49                     || result < Integer.MIN_VALUE){
50                     theView.displayErrorMessage("overflow");
51                     return;
52                 }
53                 theView.setCalcSolution((int) Math.round(result));
54
55             } catch(NumberFormatException ex){
56                 System.out.println(ex);
57                 theView.displayErrorMessage("You Need to Enter 2
Integers");
58             } catch(ArithmeticException ex){
```

```
59         System.out.println(ex);
60         theView.displayErrorMessage(ex.getMessage());
61     }
62 }
63 }
64 }
```


Listing 4: CalculatorController.java

#### 2.1.4. Entry point – MVCCalculator.java

```
1 public class MVCCalculator {
2
3     public static void main(String[] args) {
4         CalculatorView theView      = new CalculatorView();
5         CalculatorModel theModel     = new CalculatorModel();
6         CalculatorController theController =
7             new CalculatorController(theView, theModel);
8         theView.setVisible(true);
9     }
10 }
```

Listing 5: MVCCalculator.java

## 2.2. Kết quả chạy

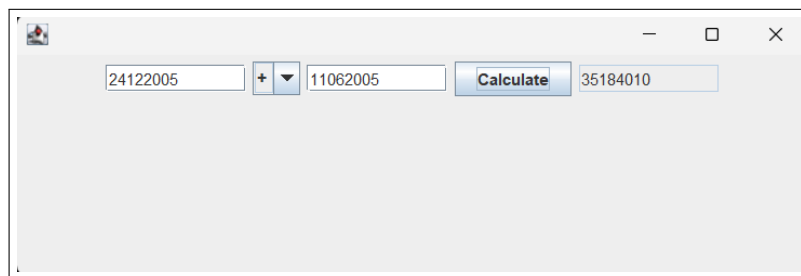

Hình 2: Giao diện MVCTutorial đang chạy

## 3. Task 3: MVCCalculatorSwing

### 3.1. Mã nguồn

#### 3.1.1. Model – CalculatorModelSwing.java

```
1 public class CalculatorModelSwing {
2
3     private double calculationValue;
4
5     public void calculate(int firstNumber, int secondNumber, String
operator){
6
7         if("+".equals(operator)){
8             calculationValue = firstNumber + secondNumber;
9         } else if("-".equals(operator)){
10             calculationValue = firstNumber - secondNumber;
11         } else if(".".equals(operator)){
12             calculationValue = firstNumber * secondNumber;
13         } else if("/".equals(operator)){
14             if(secondNumber == 0){
15                 throw new ArithmeticException("Division by zero");
16             }
17             calculationValue = (double) firstNumber / (double)
secondNumber;
18         } else {
19             throw new IllegalArgumentException("Unknown operator: " +
operator);
20         }
21     }
22
23     public double getCalculationValue(){
24         return calculationValue;
25     }
26 }
```

Listing 6: CalculatorModelSwing.java

### 3.1.2. View – CalculatorViewSwing.java

```
1 import java.awt.event.ActionListener;
2 import javax.swing.*.*;
3
4 public class CalculatorViewSwing extends JFrame{
5
6     private JTextField firstNumber = new JTextField(10);
7     private JComboBox<String> operatorBox =
8         new JComboBox<String>(new String[]{"+", "-", "*", "/"});
9     private JTextField secondNumber = new JTextField(10);
10    private JButton calculateButton = new JButton("Calculate");
11    private JTextField calcSolution = new JTextField(10);
12 }
```

```
13     CalculatorViewSwing(){
14         JPanel calcPanel = new JPanel();
15         this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
16         this.setSize(600, 200);
17
18         calcPanel.add(firstNumber);
19         calcPanel.add(operatorBox);
20         calcPanel.add(secondNumber);
21         calcPanel.add(calculateButton);
22         calcPanel.add(calcSolution);
23         this.add(calcPanel);
24     }
25
26     public int getFirstNumber(){
27         return Integer.parseInt(firstNumber.getText());
28     }
29     public int getSecondNumber(){
30         return Integer.parseInt(secondNumber.getText());
31     }
32     public String getFirstNumberText(){
33         return firstNumber.getText();
34     }
35     public String getSecondNumberText(){
36         return secondNumber.getText();
37     }
38     public String getSelectedOperator(){
39         return (String) operatorBox.getSelectedItem();
40     }
41     public void setCalcSolution(int solution){
42         calcSolution.setText(Integer.toString(solution));
43     }
44
45     void addCalculateListener(ActionListener listenForCalcButton){
46         calculateButton.addActionListener(listenForCalcButton);
47     }
48
49     void displayErrorMessage(String errorMessage){
50         JOptionPane.showMessageDialog(this, errorMessage);
51     }
52 }
```

Listing 7: CalculatorViewSwing.java

### 3.1.3. Controller – CalculatorControllerSwing.java

```
1 import java.awt.event.ActionEvent;
```

```
2 import java.awt.event.ActionListener;
3
4 public class CalculatorControllerSwing {
5
6     private CalculatorViewSwing theView;
7     private CalculatorModelSwing theModel;
8
9     public CalculatorControllerSwing(CalculatorViewSwing theView,
10                                     CalculatorModelSwing theModel) {
11         this.theView = theView;
12         this.theModel = theModel;
13         this.theView.addCalculateListener(new CalculateListener());
14     }
15
16     class CalculateListener implements ActionListener{
17
18         public void actionPerformed(ActionEvent e) {
19             int firstNumber, secondNumber = 0;
20             try{
21                 String firstText = theView.getFirstNumberText();
22                 String secondText = theView.getSecondNumberText();
23
24                 if(!firstText.matches("-?\\d+") || !secondText.
matches("-?\\d+")){
25                     throw new NumberFormatException("Not an integer")
;
26                 }
27                 if(firstText.replace("-", "").length() > 10
|| secondText.replace("-", "").length() > 10){
28                     theView.displayErrorMessage("overflow");
29                     return;
30                 }
31
32                 firstNumber = Integer.parseInt(firstText);
33                 secondNumber = Integer.parseInt(secondText);
34                 String operator = theView.getSelectedOperator();
35
36                 theModel.calculate(firstNumber, secondNumber,
operator);
37
38                 double result = theModel.getCalculationValue();
39
40                 if(Double.isInfinite(result)
|| result > Integer.MAX_VALUE
|| result < Integer.MIN_VALUE){
41                     theView.displayErrorMessage("overflow");
42                     return;
43                 }
44             }
45         }
```

```

46         theView.setCalcSolution(((int) Math.round(result)));
47
48     } catch (NumberFormatException ex){
49         System.out.println(ex);
50         theView.displayErrorMessage("You Need to Enter 2
Integers");
51     } catch (ArithmeticException ex){
52         System.out.println(ex);
53         theView.displayErrorMessage(ex.getMessage());
54     }
55 }
56 }
57 }

```

Listing 8: CalculatorControllerSwing.java

### 3.1.4. Entry point – MVCCalculatorSwing.java


```

1 public class MVCCalculatorSwing {
2
3     public static void main(String[] args) {
4         CalculatorViewSwing theView = new CalculatorViewSwing();
5         CalculatorModelSwing theModel = new CalculatorModelSwing();
6         new CalculatorControllerSwing(theView, theModel);
7         theView.setVisible(true);
8     }
9 }

```

Listing 9: MVCCalculatorSwing.java

## 3.2. Kết quả chạy

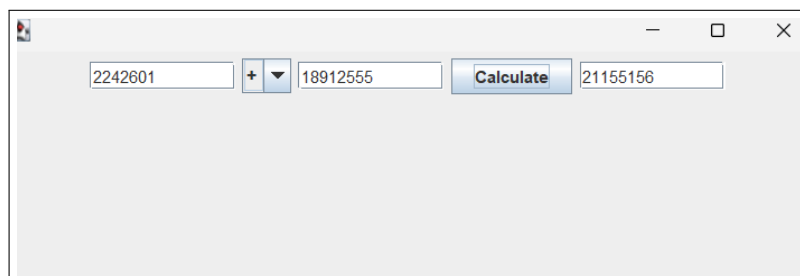

Hình 3: Giao diện MVCCalculatorSwing đang chạy

## 4. Task 4: MVCCalculatorJFX (JavaFX + Scene Builder)

#### 4.1. Cấu hình Maven (pom.xml)

```
1 <project>
2   <groupId>group15</groupId>
3   <artifactId>MVCCalculatorJFX</artifactId>
4   <version>1.0-SNAPSHOT</version>
5
6   <properties>
7     <maven.compiler.source>21</maven.compiler.source>
8     <maven.compiler.target>21</maven.compiler.target>
9     <javafx.version>21.0.2</javafx.version>
10  </properties>
11
12  <dependencies>
13    <dependency>
14      <groupId>org.openjfx</groupId>
15      <artifactId>javafx-controls</artifactId>
16      <version>${javafx.version}</version>
17    </dependency>
18    <dependency>
19      <groupId>org.openjfx</groupId>
20      <artifactId>javafx-fxml</artifactId>
21      <version>${javafx.version}</version>
22    </dependency>
23  </dependencies>
24
25  <build>
26    <plugins>
27      <plugin>
28        <groupId>org.openjfx</groupId>
29        <artifactId>javafx-maven-plugin</artifactId>
30        <version>0.0.8</version>
31        <configuration>
32          <mainClass>group15.Main</mainClass>
33        </configuration>
34      </plugin>
35    </plugins>
36  </build>
37 </project>
```

Listing 10: pom.xml – cấu hình JavaFX Maven

## 4.2. Mã nguồn

### 4.2.1. View – calculator-view.fxml (thiết kế bằng Scene Builder)

Tệp FXML được tạo bởi Scene Builder. Thành phần gốc là một VBox chứa các nhãn, ô nhập liệu (TextField), hộp chọn toán tử (ComboBox), nút bấm và nhãn lỗi.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <?import javafx.scene.control.*?>
3  <?import javafx.scene.layout.*?>
4
5  <VBox xmlns="http://javafx.com/javafx"
6        xmlns:fx="http://javafx.com/fxml"
7        fx:controller="group15.CalculatorControllerJFX"
8        spacing="8">
9    <children>
10        <Label text="First number:"/>
11        <TextField fx:id="txtFirst"/>
12
13        <Label text="Operator:"/>
14        <ComboBox fx:id="cbOperator" prefWidth="80.0"/>
15
16        <Label text="Second number:"/>
17        <TextField fx:id="txtSecond" promptText="Second number"/>
18
19        <Label text="Result:"/>
20        <TextField fx:id="txtResult" editable="false"/>
21
22        <HBox spacing="10">
23            <children>
24                <Button fx:id="btnCalculate" text="Calculate"
25                        onAction="#onCalculate"/>
26                <Label fx:id="lblError" textFill="red"/>
27            </children>
28        </HBox>
29    </children>
30 </VBox>

```

Listing 11: calculator-view.fxml

### 4.2.2. Model – CalculatorModelJFX.java

```

1  package group15;
2
3  public class CalculatorModelJFX {
4

```

```
5     private double calculationValue;
6
7     public void calculate(int firstNumber, int secondNumber, String
operator){
8
9         if("+".equals(operator)){
10             calculationValue = firstNumber + secondNumber;
11         } else if("-".equals(operator)){
12             calculationValue = firstNumber - secondNumber;
13         } else if(".".equals(operator)){
14             calculationValue = firstNumber * secondNumber;
15         } else if("/".equals(operator)){
16             if(secondNumber == 0){
17                 throw new ArithmeticException("Division by zero");
18             }
19             calculationValue = (double) firstNumber / (double)
secondNumber;
20         } else {
21             throw new IllegalArgumentException("Unknown operator: " +
operator);
22         }
23     }
24
25     public double getCalculationValue(){
26         return calculationValue;
27     }
28 }
```

Listing 12: CalculatorModelJFX.java

#### 4.2.3. Controller – CalculatorControllerJFX.java

Trong JavaFX, Controller được FXML tự động khởi tạo. Các thành phần giao diện được tiêm vào qua annotation `@FXML`. Phương thức `initialize()` được gọi sau khi FXML nạp xong.

```
1 package group15;
2
3 import javafx.event.ActionEvent;
4 import javafx.fxml.FXML;
5 import javafx.scene.control.ComboBox;
6 import javafx.scene.control.Label;
7 import javafx.scene.control.TextField;
8
9 public class CalculatorControllerJFX {
10
```

```

11    @FXML private TextField txtFirst;
12    @FXML private TextField txtSecond;
13    @FXML private ComboBox<String> cbOperator;
14    @FXML private TextField txtResult;
15    @FXML private Label lblError;
16
17    private final CalculatorModelJFX model = new CalculatorModelJFX()
18    ;
19
20    @FXML
21    private void initialize() {
22        // Khởi tạo danh sách toán tử
23        cbOperator.getItems().setAll("+", "-", "*", "/");
24        cbOperator.getSelectionModel().selectFirst();
25    }
26
27    @FXML
28    private void onCalculate(ActionEvent event) {
29        lblError.setText("");
30        txtResult.clear();
31
32        try {
33            String firstText = txtFirst.getText();
34            String secondText = txtSecond.getText();
35
36            // Kiểm tra định dạng số nguyên
37            if(!firstText.matches("-?\\d+") || !secondText.matches("
38            -?\\d+")){
39                throw new NumberFormatException("Not an integer");
40            }
41            // Kiểm tra tràn
42            if(firstText.replace("-", "").length() > 10
43                || secondText.replace("-", "").length() > 10){
44                lblError.setText("overflow");
45                return;
46            }
47
48            int firstNumber = Integer.parseInt(firstText);
49            int secondNumber = Integer.parseInt(secondText);
50            String operator = cbOperator.getSelectionModel().
51            getSelectedItem();
52
53            model.calculate(firstNumber, secondNumber, operator);
54            double result = model.getCalculationValue();
55
56            if(Double.isInfinite(result)
57                || result > Integer.MAX_VALUE

```

```
55         || result < Integer.MIN_VALUE){
56             lblError.setText("overflow");
57             return;
58         }
59         txtResult.setText(Integer.toString((int) Math.round(
60             result)));
61     } catch (NumberFormatException ex) {
62         lblError.setText("You need to enter 2 integers");
63     } catch (ArithmeticException ex) {
64         lblError.setText(ex.getMessage());
65     }
66 }
67 }
```

Listing 13: CalculatorControllerJFX.java

#### 4.2.4. Entry point – Main.java


```
1 package group15;
2
3 import javafx.application.Application;
4 import javafx.fxml.FXMLLoader;
5 import javafx.scene.Scene;
6 import javafx.stage.Stage;
7
8 public class Main extends Application {
9
10     @Override
11     public void start(Stage stage) throws Exception {
12         FXMLLoader fxmlLoader =
13             new FXMLLoader(getClass().getResource("/calculator-view.
14             fxml"));
15         Scene scene = new Scene(fxmlLoader.load(), 400, 300);
16         stage.setTitle("Calculator");
17         stage.setScene(scene);
18         stage.show();
19     }
20
21     public static void main(String[] args) {
22         launch();
23     }
24 }
```

Listing 14: Main.java

### 4.3. Kết quả chạy



Hình 4: Giao diện MVCCalculatorJFX đang chạy

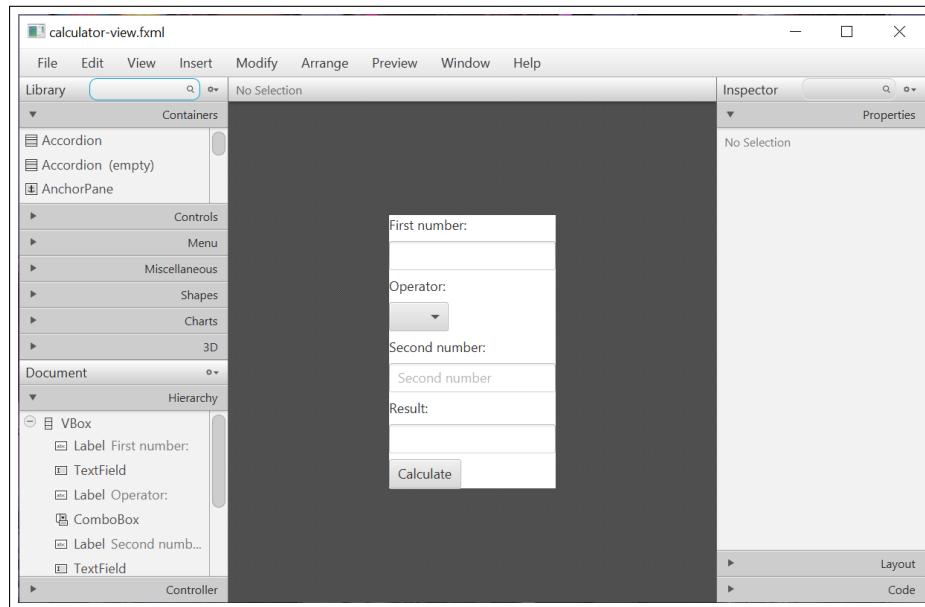

Hình 5: Giao diện thiết kế FXML trong Scene Builder

## 5. Task 5: Các thao tác Git

### 5.1. Tổng quan

Dự án được quản lý trên **GitHub**, nhánh chính là **main**. Repository: <https://github.com/nqd2/2025.2-166155-15>

Dưới đây liệt kê toàn bộ các thao tác Git đã thực hiện kèm ảnh chụp màn hình minh chứng.

### 5.2. git add – Thêm file

Thêm các file mới vào staging area trước khi commit:

```
1 git add Homework01/20235821-TranDangSinh/HelloWorld.java
2 git add Homework01/20235682-TranDangSinh/MVCTutorial/
3 git add Homework01/20235682-TranDangSinh/MVCCalculatorSwing/
4 git add Homework01/20235682-TranDangSinh/MVCCalculatorJFX/
```

Listing 15: git add

```
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git commit -m "Add Test.txt"
[hw1/20235821-TranDangSinh 7dad47e] Add Test.txt
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Homework01/20235821-TranDangSinh/Test.txt
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git push
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 20 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 471 bytes | 471.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/nqd2/2025.2-166155-15
90715cf..7dad47e hw1/20235821-TranDangSinh -> hw1/20235821-TranDangSinh
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh>
```

Hình 6: Minh chứng thao tác git add

### 5.3. git commit – Commit thay đổi

```
1 git commit -m "feat: add HelloWorld, MVCTutorial, MVCCalculatorSwing,
MVCCalculatorJFX"
```

Listing 16: git commit

```
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git commit -m "Add Test.txt"
[hw1/20235821-TranDangSinh 7dad47e] Add Test.txt
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Homework01/20235821-TranDangSinh/Test.txt
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git push
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 20 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 471 bytes | 471.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/nqd2/2025.2-166155-15
90715cf..7dad47e hw1/20235821-TranDangSinh -> hw1/20235821-TranDangSinh
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh>
```

Hình 7: Minh chứng thao tác git commit

### 5.4. git push – Đẩy code lên remote

```
1 git push origin main
```

Listing 17: git push

```
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git push
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 20 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 471 bytes | 471.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/nqd2/2025.2-166155-15
90715cf..7dad47e hw1/20235821-TranDangSinh -> hw1/20235821-TranDangSinh
```

Hình 8: Minh chứng thao tác git push

### 5.5. git pull – Kéo code mới nhất về

```
1 git pull origin main
```

Listing 18: git pull

```
PS C:\Users\Admin\2025.2-166155-15\Homework01\20235821-TranDangSinh> git pull
remote: Enumerating objects: 141, done.
remote: Counting objects: 100% (42/42), done.
remote: Compressing objects: 100% (24/24), done.
remote: Total 141 (delta 22), reused 31 (delta 16), pack-reused 99 (from 1)
Receiving objects: 100% (141/141), 3.09 MiB | 1.06 MiB/s, done.
Resolving deltas: 100% (64/64), completed with 5 local objects.
From https://github.com/nqd2/2025.2-166155-15
* [new branch]      1 -> origin/1
* [new branch]      demo/conflict -> origin/demo/conflict
* [new branch]      demo/git-demo -> origin/demo/git-demo
* [new branch]      hw1/20235754-LuongQuocKhanh -> origin/hw1/20235754-LuongQuocKhanh
* [new branch]      hw1/conflictA -> origin/hw1/conflictA
* [new branch]      hw1/conflictB -> origin/hw1/conflictB
* [new branch]      f5b74e8..b10658b main -> origin/main
* [new branch]      test/hw1/20235682-NguyenQuyDuc -> origin/test/hw1/20235682-NguyenQuyDuc
Already up to date.
```

Hình 9: Minh chứng thao tác git pull

### 5.6. Tạo và chuyển nhánh (git branch / git checkout)

```
1 git checkout -b test/hw1/20235821-TranDangSinh
2
3 git add .
4 git commit -m "test"
```

Listing 19: Tạo nhánh mới

```
(base) PS C:\Users\Admin\2025.2-166155-15> git checkout -b test/hw1/20235821-TranDangSinh
Switched to a new branch 'test/hw1/20235821-TranDangSinh'
(base) PS C:\Users\Admin\2025.2-166155-15> git add .
(base) PS C:\Users\Admin\2025.2-166155-15> git commit -m "test"
On branch test/hw1/20235821-TranDangSinh
nothing to commit, working tree clean
(base) PS C:\Users\Admin\2025.2-166155-15>
```


Hình 10: Minh chứng tạo test/hw1/20235821-TranDangSinh

## 5.7. git merge – Merge nhánh

Sau khi hoàn thiện tính năng trên nhánh `test/hw1/20235821-TranDangSinh`, merge về `main`:

```
1 git checkout main
2 git merge test/hw1/20235821-TranDangSinh
```

Listing 20: Merge branch

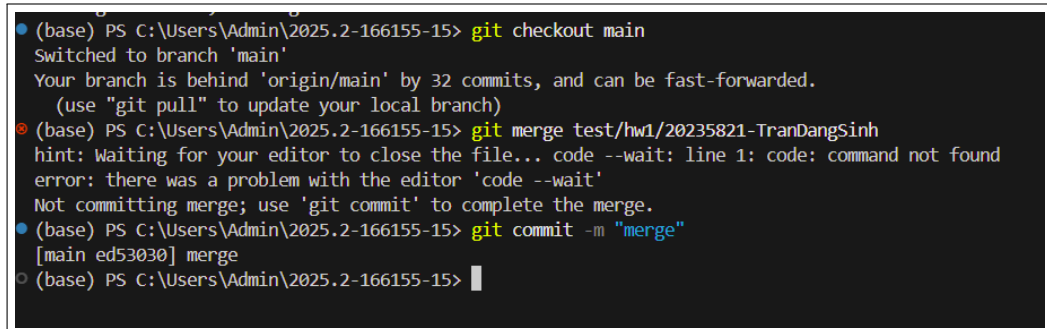


```
(base) PS C:\Users\Admin\2025.2-166155-15> git checkout main
Switched to branch 'main'
Your branch is behind 'origin/main' by 32 commits, and can be fast-forwarded.
(use "git pull" to update your local branch)
(base) PS C:\Users\Admin\2025.2-166155-15> git merge test/hw1/20235821-TranDangSinh
hint: Waiting for your editor to close the file... code --wait: line 1: code: command not found
error: there was a problem with the editor 'code --wait'
Not committing merge; use 'git commit' to complete the merge.
(base) PS C:\Users\Admin\2025.2-166155-15> git commit -m "merge"
[main ed53030] merge
(base) PS C:\Users\Admin\2025.2-166155-15>
```

Hình 11: Minh chứng thao tác merge nhánh

## 5.8. Giải quyết xung đột (git merge conflict)

Khi hai nhánh cùng sửa đổi một file, Git tạo conflict marker. Các bước xử lý:

1. Chạy `git merge` – Git báo conflict.
2. Mở file bị conflict, tìm các dòng `<<<<< HEAD ... ===== ... >>>>>`.
3. Chỉnh sửa thủ công để giữ lại nội dung mong muốn.
4. `git add <file>` rồi `git commit` để hoàn tất merge.

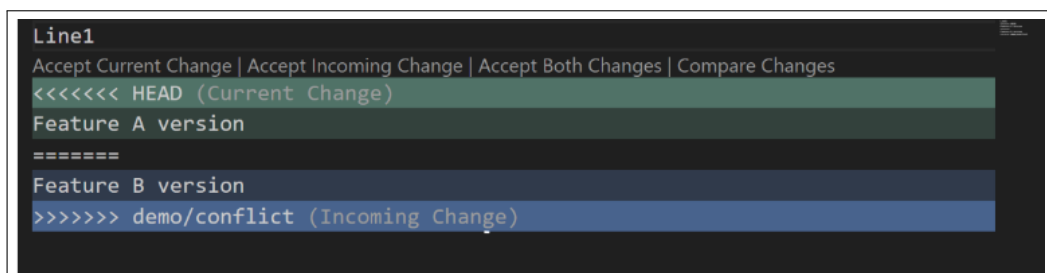

```
Line1
Accept Current Change | Accept Incoming Change | Accept Both Changes | Compare Changes
<<<<<< HEAD (Current Change)
Feature A version
=====
Feature B version
>>>>>> demo/conflict (Incoming Change)
```

Hình 12: Minh chứng giải quyết conflict khi merge