

Kaggle API Setup Requirements

To run the project successfully, users must first configure access to the Kaggle API because the dataset is downloaded directly from Kaggle during execution.


After running the project, you will be asked in step 3 to enter a **username** and **API** for Kaggle, you need to follow as below.

Requirements

- Python environment (Google Colab or Jupyter Notebook recommended)
- Internet connection
- A Kaggle account
- Kaggle API credentials

Steps to Configure Kaggle API

1. Create or log in to a Kaggle account:
 - Visit the Kaggle website and sign in.
2. Generate a Kaggle API Token:
 - Go to **Account Settings** in Kaggle.
 - Scroll to the **API** section.
 - Click **“Create New API Token”**.
 - A file named kaggle.json will be downloaded automatically.

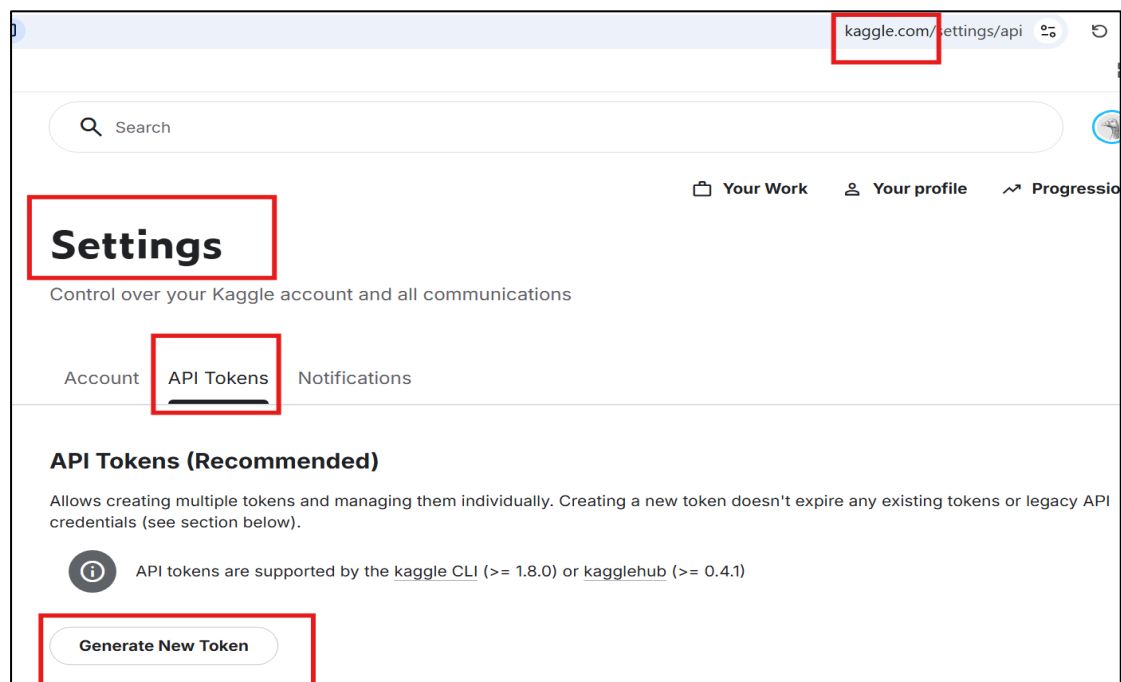

Account API Tokens Notifications

API Tokens (Recommended)

Allows creating multiple tokens and managing them individually. Creating a new token doesn't expire any existing tokens or legacy API credentials (see section below).

 API tokens are supported by the [kaggle CLI](#) ($\geq 1.8.0$) or [kagglehub](#) ($\geq 0.4.1$)

NEW TOKEN NAME

Cancel **Generate**

API Token is now available

 Please copy your API token now. You won't be able to view it again. You can always generate a new one if needed.

API TOKEN



To use this token, set the KAGGLE_API_TOKEN environment variable:

```
export KAGGLE_API_TOKEN=KGAT_c51d0e002b81a16b66ef46b693eaeef83
```

Or save it to ~/.kaggle/access_token, where the client will read it automatically:

```
mkdir -p ~/.kaggle && echo KGAT_c51d0e002b81a16b66ef46b693eaeef83 > ~/.kaggle/access_token && chmod 600 ~/.kaggle/access_token
```

3. Run the notebook cell:

- The code will ask the user to enter:
 - Kaggle Username
 - Kaggle API Key

Copy and paste:

- "username" → Kaggle username
- "key" → Kaggle API key

```
[1] import os
from getpass import getpass

# Take input from user
username = input("Enter your Kaggle username: ")
key = getpass("Enter your Kaggle API key: ")

# Set the environment variable for the Kaggle API
os.environ['KAGGLE_API_TOKEN'] = key

# This part is just to make sure Colab's command-line tool can find it
!mkdir -p ~/.kaggle
!echo '{"username":"{username}","key":"{key}"}' > ~/.kaggle/kaggle.json
!chmod 600 ~/.kaggle/kaggle.json

print("Kaggle Token is set!")

... Enter your Kaggle username: 
```



```
import os
from getpass import getpass

# Take input from user
username = input("Enter your Kaggle username: ")
key = getpass("Enter your Kaggle API key: ")

# Set the environment variable for the Kaggle API
os.environ['KAGGLE_API_TOKEN'] = key

# This part is just to make sure Colab's command-line tool can find it
!mkdir -p ~/.kaggle
!echo '{"username":"{username}","key":"{key}"}' > ~/.kaggle/kaggle.json
!chmod 600 ~/.kaggle/kaggle.json

print("Kaggle Token is set!")

... Enter your Kaggle username: norah
Enter your Kaggle API key: 
```

The script will automatically configure the Kaggle API environment and create the required authentication file.

```
import os
from getpass import getpass

# Take input from user
username = input("Enter your Kaggle username: ")
key = getpass("Enter your Kaggle API key: ")

# Set the environment variable for the Kaggle API
os.environ['KAGGLE_API_TOKEN'] = key

# This part is just to make sure Colab's command-line tool can find it
!mkdir -p ~/.kaggle
!echo '{"username":"{username}","key":"{key}"}' > ~/.kaggle/kaggle.json
!chmod 600 ~/.kaggle/kaggle.json

print("Kaggle Token is set!")

... Enter your Kaggle username: norah
Enter your Kaggle API key: .....
Kaggle Token is set!
```