


mcc_generated_files
/tmr5.h

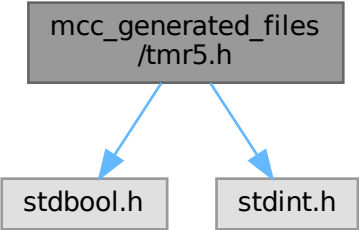

```
graph TD; A["mcc_generated_files<br/>/tmr5.h"] --> B["stdbool.h"]; A --> C["stdint.h"]
```

The diagram illustrates the dependencies of the header file `mcc_generated_files/tmr5.h`. It is represented as a gray rectangular box at the top. Two blue arrows originate from the bottom edge of this box and point downwards to two separate gray rectangular boxes. The left box contains the text `stdbool.h` and the right box contains the text `stdint.h`, indicating that `tmr5.h` depends on these two standard C headers.

`stdbool.h`

`stdint.h`