


current q

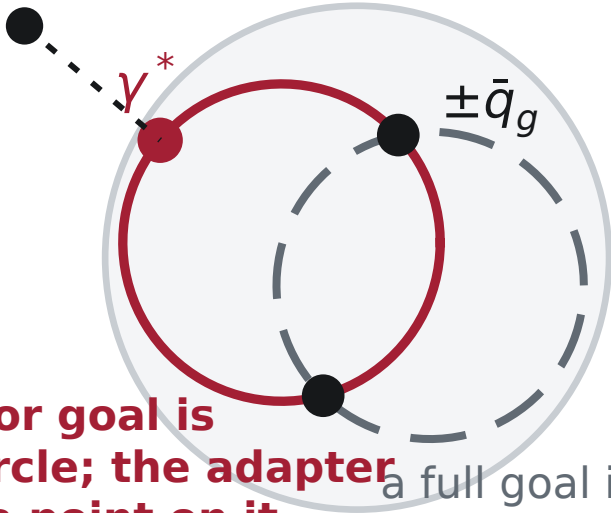

$\pm \bar{q}_g$

**a vector goal is
one circle; the adapter
picks a point on it**

a full goal is two such
circles, meeting only
at the target