

# VIRTUAL HUMANS FOR SERIOUS GAMING ARCHITECTURE DESIGN

Jannelie de Vries  
Harmen Kroon  
Tom Brunner  
Nando Kartoredjo



EEMC  
Delft University of Technology  
Delft June 17, 2016

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Design goals . . . . .	2
1.1.1	Availability . . . . .	2
1.1.2	Manageability . . . . .	2
1.1.3	Performance . . . . .	2
1.1.4	Reliability . . . . .	2
1.1.5	Scalability . . . . .	2
<b>2</b>	<b>Software architecture views</b>	<b>3</b>
2.1	Subsystem decomposition . . . . .	3
2.2	Hardware/software mapping . . . . .	3
2.3	Persistent data management . . . . .	4
2.4	Concurrency . . . . .	4

# 1 Introduction

This document provides a detailed overview sketch of the system that has been built during the context project Virtual Humans. The architecture of the system is explained in the form of high level components of the system. These components are split in to sub components and sub-systems. This document will be continuously updated during the project development.

## 1.1 Design goals

During the development process we define certain goals the project should reach, next to solving the original problem. The following design goals will be maintained throughout the project:

### 1.1.1 Availability

The system will be built by the principle of Scrum, meaning that each week a working version is available for testing and showcasing. By doing this we ensure that we are building what the clients wants; if the client sees features it does not like we will remove them and if the client has altered its requirements we will add the wanted functionality. All code written is available for review via github repositories.

### 1.1.2 Manageability

The services stakeholder uses excel based indicators, which are imported into the Tygron Engine. Other stakeholder related settings can be altered through the Tygron Engine alone and are specific to a game scenario. The code for our connector extension and the GOAL agent are all well commented and documented through commits messages, pull requests and documents. The bot is able to be activated and deactivated during a session at will.

### 1.1.3 Performance

The virtual human is designed for cooperating in a Tygron Engine session. Such a session has to be set-up, by creating a correct game and getting every stakeholder connected. The game requires minimal tweaks during development. The connection does depend on the Tygron servers with which every stakeholder connects and wheron the session is run. The virtual human performs faster than a human would in most situations, but slower when a lot of large computations are necessary.

### 1.1.4 Reliability

As said before, a connection with the Tygron Engine is required. Either due to internet connection problems or server problems this might fail. Another rare reliability problem might occur when the Tygron Engine is updated. There is not an existing version which allows local running of the session without need of the server connection. Game scenarios are stored on the Tygron server as well.

### 1.1.5 Scalability

Our bot will be able to work together with other bots and in theory an infinite amount could be added. In a practical sense if an infinite amount would be added, an error would occur more likely with the tygron engine than with our bot.

## 2 Software architecture views

This chapter discusses the architecture of the system. It is first split into smaller parts and their dependencies on each other. The second paragraph describes the relation between hardware and software is explained. The third paragraph explains the data management. And the fourth paragraph describes the concurrency of the system.

### 2.1 Subsystem decomposition

The component diagram at **figure 1** shows the relations between the Tygron API, the connector and the GOAL agent.

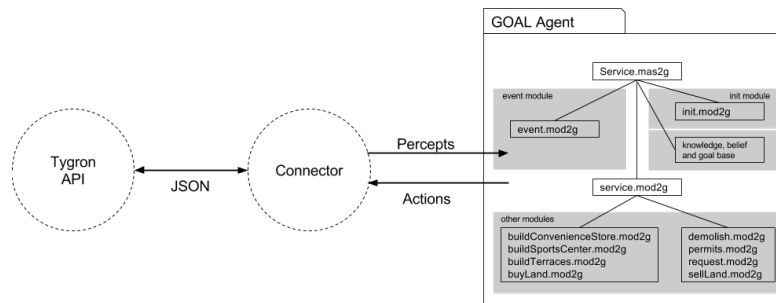


Figure 1: The component diagram

This figure shows the different components the project uses and how they connect to each other. You can see how our bot connects to the connector which in turn will connect to the Tygron API. The Tygron API exists of the module SDK (software development kit) which consists of all the graphics and calculations, basically the Tygron game itself. The Connector uses the environment module, which is everything needed to connect a bot to the game and get and send information from the bot to the game. Finally, the Goal Agent consists of all the modules needed to run the bot.

The bot is started from the `service.mas2g` file, which is more or less the main class from which everything happens (the bot is started here, this is the class which connects to the Tygron engine, the class with the main module is called from here, etc.). This makes use of the `init.mod2g` file to get all data it needs at the start of the game, and events to get data which is changed, added or removed later in the game. Finally it uses `service.mod2g`, which handles the main module the bot does. It uses goals, beliefs, and knowledge as data it can use and the other `mod.2g` as actions it does (for example `build.mod2g` for building).

### 2.2 Hardware/software mapping

Our virtual human uses a different connection approach to the server than a real human user. When a session is created via the server, a user connects through its own client to that session. **figure 2** shows that our virtual human will connect to the session using a connector to connect with the Tygron SDK, which in turn handles the connection to the server. Visualisation of the actions performed by the virtual human are visible through a separate instance of the Tygron Engine.

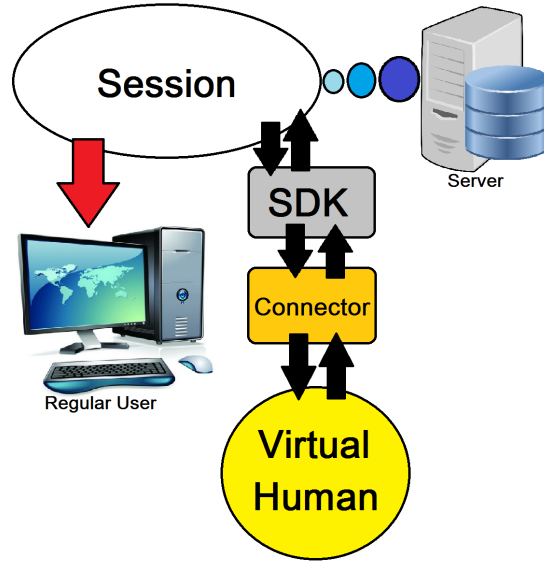


Figure 2: Hardware software mapping

### 2.3 Persistent data management

When our goal connects to the Tygron engine, the engine loads the game session from its data. Everytime when our bot makes changes in the game, those changes are stored in the engine. Our bot will then read those changes from the engine and choose its next actions, which thereafter will be stored again in the engine. When our bot has reached all its goals, and there are no more updates from the game engine, the data will be kept in the Tygron engine. So our GOAL agent is not responsible for storing persistent data and it does not have external files or databases. This is so because just like a regular user would save his progress on the Tygron server, our bot will ensure everything is stored on the database of the Tygron server as well.

### 2.4 Concurrency

In the project, the goal agent is dependent on the Tygron engine. This is because the GOAL agent interacts with the Tygron engine, so if the engine crashes, or bot will not know what to do anymore either. The connection between the Tygron Engine and the Goal Agent is done over the connector, which was partly developed by Tygron and partly by us. The fact that our GOAL agent is dependent on the Tygron engine is something unavoidable, but this causes various problems. The biggest problem is, that for testing the GOAL bot, we also need to use the Tygron engine, and it may happen that the Tygron server which the Tygron engine doesn't work, which then causes the Goal Agent tests to fail.

The goal agent shares resources with other users of the Tygron environment. If a deadlock occurs, this would be on the Tygron environment and not very differently than when a deadlock would occur with human users. That is why our GOAL system won't have issues with deadlocks.