

# Untitled

Nick Spyrison

5/10/2021

```
for (i in 1:2) {  
  pie(c(i %% 2, 6), col = c('red', 'yellow'), labels = NA)  
}
```

## R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:


```
summary(cars)
```

##	speed	dist
----	-------	------

```
## Min.   : 4.0   Min.   : 2
## 1st Qu.:12.0   1st Qu.: 26
## Median :15.0   Median : 36
## Mean   :15.4   Mean   : 43
## 3rd Qu.:19.0   3rd Qu.: 56
## Max.   :25.0   Max.   :120
```

## Including Plots

You can also embed plots, for example:

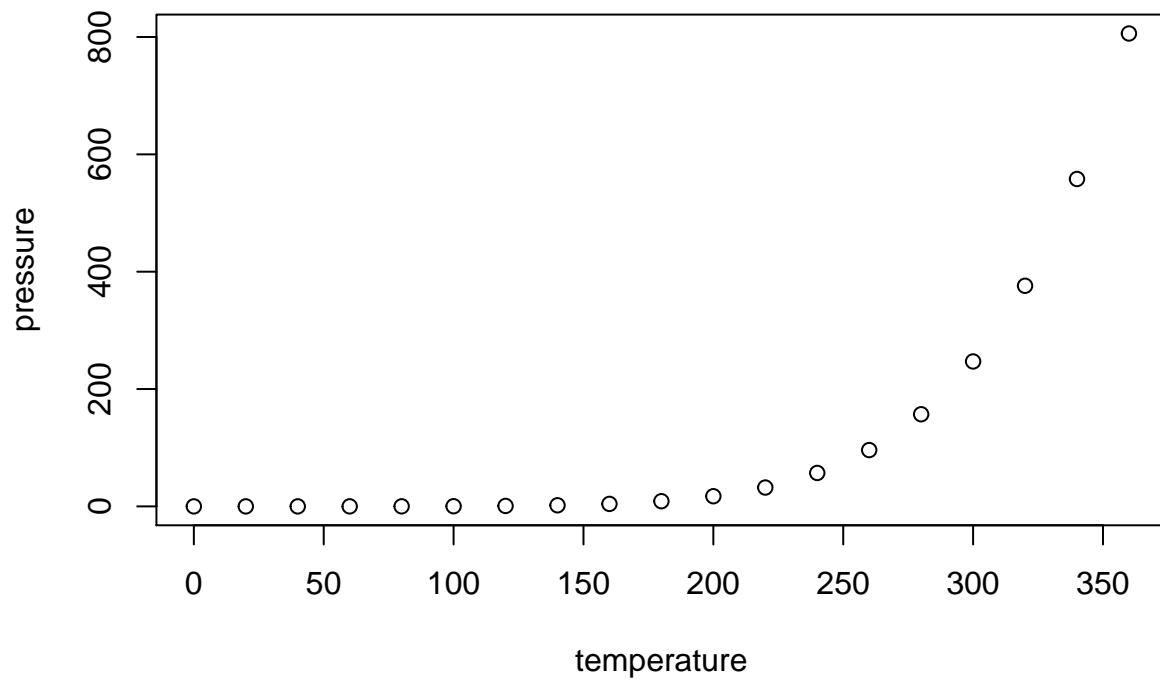

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.