

Air quality measurement and logging in taxi ranks and inside of taxis

Willem Cornelis Rossouw
22823700

Report submitted in partial fulfilment of the requirements of the module
Project (E) 448 for the degree Baccalaureus in Engineering in the Department of
Electrical and Electronic Engineering at Stellenbosch University.

Supervisor: Prof. MJ (Thinus) Booysen

May 2023

Acknowledgements

I would like to thank my supervisor Thinus Booysen for giving me this skripsie topic and for his enthusiasm in his work. I would also like to thank my friend and co-(soon-to-be)-engineer Phillip, for keeping me sane for most of my degree.

Plagiaatverklaring / *Plagiarism Declaration*

1. Plagiaat is die oorneem en gebruik van die idees, materiaal en ander intellektuele eiendom van ander persone asof dit jou eie werk is.

Plagiarism is the use of ideas, material and other intellectual property of another's work and to present it as my own.

2. Ek erken dat die pleeg van plagiaat 'n strafbare oortreding is aangesien dit 'n vorm van diefstal is.

I agree that plagiarism is a punishable offence because it constitutes theft.

3. Ek verstaan ook dat direkte vertalings plagiaat is.


I also understand that direct translations are plagiarism.

4. Dienooreenkomstig is alle aanhalings en bydraes vanuit enige bron (ingesluit die internet) volledig verwys (erken). Ek erken dat die woordelike aanhaal van teks sonder aanhalingstekens (selfs al word die bron volledig erken) plagiaat is.

Accordingly all quotations and contributions from any source whatsoever (including the internet) have been cited fully. I understand that the reproduction of text without quotation marks (even when the source is cited) is plagiarism

5. Ek verklaar dat die werk in hierdie skryfstuk vervat, behalwe waar anders aangedui, my eie oorspronklike werk is en dat ek dit nie vantevore in die geheel of gedeeltelik ingehandig het vir bepunting in hierdie module/werkstuk of 'n ander module/werkstuk nie.

I declare that the work contained in this assignment, except where otherwise stated, is my original work and that I have not previously (in its entirety or in part) submitted it for grading in this module/assignment or another module/assignment.

22823700 Studentenommer / <i>Student number</i>	 Handtekening / <i>Signature</i>
W.C. Rossouw Voorletters en van / <i>Initials and surname</i>	February 17, 2023 Datum / <i>Date</i>

Abstract

English

The English abstract.

Afrikaans

Die Afrikaanse uittreksel.

Contents

Declaration	ii
Abstract	iii
List of Figures	v
List of Tables	vi
Nomenclature	vii
1. Introduction	1
1.1. Section heading	1
2. Summary and Conclusion	3
Bibliography	4
A. Project Planning Schedule	5
B. Outcomes Compliance	6

List of Figures

- 1.1. I am the short caption that appears in the list of figures, without references. 2

List of Tables

1.1. Performance of the unconstrained segmental Bayesian model on TIDigits1 over iterations in which the reference set is refined.	1
1.2. A table with an example of using multiple columns.	1

Nomenclature

Variables and functions

$p(x)$	Probability density function with respect to variable x .
$P(A)$	Probability of event A occurring.
ε	The Bayes error.
ε_u	The Bhattacharyya bound.
B	The Bhattacharyya distance.
s	An HMM state. A subscript is used to refer to a particular state, e.g. s_i refers to the i^{th} state of an HMM.
\mathbf{S}	A set of HMM states.
\mathbf{F}	A set of frames.
\mathbf{o}_f	Observation (feature) vector associated with frame f .
$\gamma_s(\mathbf{o}_f)$	A posteriori probability of the observation vector \mathbf{o}_f being generated by HMM state s .
μ	Statistical mean vector.
Σ	Statistical covariance matrix.
$L(\mathbf{S})$	Log likelihood of the set of HMM states \mathbf{S} generating the training set observation vectors assigned to the states in that set.
$\mathcal{N}(\mathbf{x} \mu, \Sigma)$	Multivariate Gaussian PDF with mean μ and covariance matrix Σ .
a_{ij}	The probability of a transition from HMM state s_i to state s_j .
N	Total number of frames or number of tokens, depending on the context.
D	Number of deletion errors.
I	Number of insertion errors.
S	Number of substitution errors.

Acronyms and abbreviations

AE	Afrikaans English
AID	accent identification
ASR	automatic speech recognition
AST	African Speech Technology
CE	Cape Flats English
DCD	dialect-context-dependent
DNN	deep neural network
G2P	grapheme-to-phoneme
GMM	Gaussian mixture model
HMM	hidden Markov model
HTK	Hidden Markov Model Toolkit
IE	Indian South African English
IPA	International Phonetic Alphabet
LM	language model
LMS	language model scaling factor
MFCC	Mel-frequency cepstral coefficient
MLLR	maximum likelihood linear regression
OOV	out-of-vocabulary
PD	pronunciation dictionary
PDF	probability density function
SAE	South African English
SAMPA	Speech Assessment Methods Phonetic Alphabet

Chapter 1

Introduction

The last few years have seen great advances in speech recognition. Much of this progress is due to the resurgence of neural networks; most speech systems now rely on deep neural networks (DNNs) with millions of parameters [1, 2]. However, as the complexity of these models has grown, so has their reliance on labelled training data. Currently, system development requires large corpora of transcribed speech audio data, texts for language modelling, and pronunciation dictionaries. Despite speech applications becoming available in more languages, it is hard to imagine that resource collection at the required scale would be possible for all 7000 languages spoken in the world today.

I really like apples.

1.1. Section heading

This is some section with two table in it: Table 1.1 and Table 1.2.

Table 1.1: Performance of the unconstrained segmental Bayesian model on TIDigits1 over iterations in which the reference set is refined.

Metric	1	2	3	4	5
WER (%)	35.4	23.5	21.5	21.2	22.9
Average cluster purity (%)	86.5	89.7	89.2	88.5	86.6
Word boundary F -score (%)	70.6	72.2	71.8	70.9	69.4
Clusters covering 90% of data	20	13	13	13	13

Table 1.2: A table with an example of using multiple columns.

Model	Accuracy (%)		Bitrate
	Intermediate	Output	
Baseline	27.5	26.4	116
VQ-VAE	26.0	22.1	190
CatVAE	28.7	24.3	215

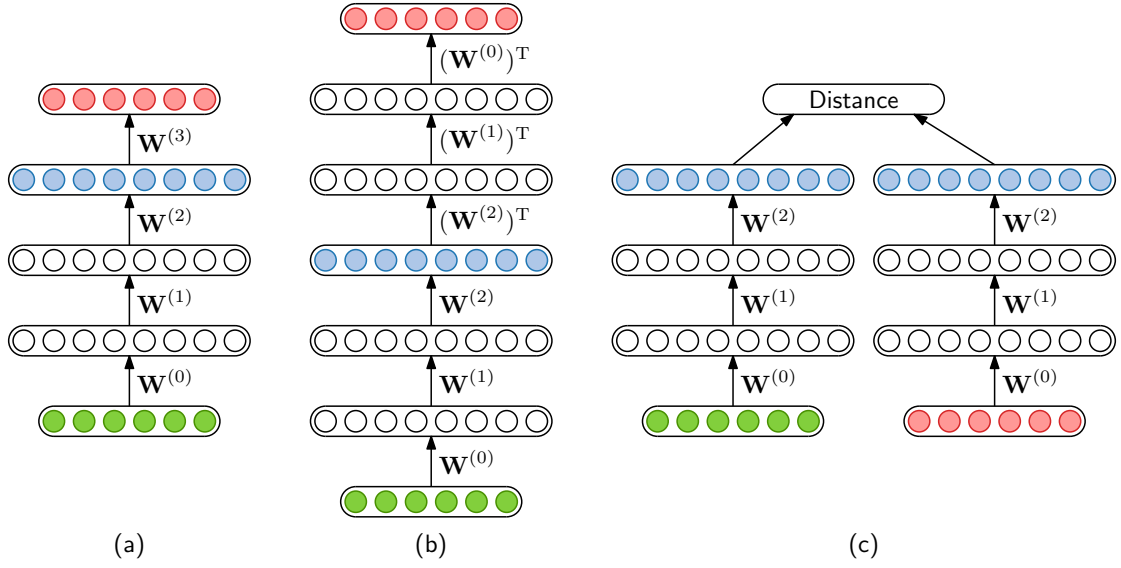


Figure 1.1: (a) The cAE as used in this chapter. The encoding layer (blue) is chosen based on performance on a development set. (b) The cAE with symmetrical tied weights. The encoding from the middle layer (blue) is always used. (c) The siamese DNN. The cosine distance between aligned frames (green and red) is either minimized or maximized depending on whether the frames belong to the same (discovered) word or not. A cAE can be seen as a type of DNN [1].

This is a new page, showing what the page headings looks like, and showing how to refer to a figure like Figure 1.1.

The following is an example of an equation:

$$P(\mathbf{z}|\boldsymbol{\alpha}) = \int_{\boldsymbol{\pi}} P(\mathbf{z}|\boldsymbol{\pi}) p(\boldsymbol{\pi}|\boldsymbol{\alpha}) d\boldsymbol{\pi} = \int_{\boldsymbol{\pi}} \prod_{k=1}^K \pi_k^{N_k} \frac{1}{B(\boldsymbol{\alpha})} \prod_{k=1}^K \pi_k^{\alpha_k-1} d\boldsymbol{\pi} \quad (1.1)$$

which you can subsequently refer to as (1.1) or Equation 1.1. But make sure to consistently use the one or the other (and not mix the two ways of referring to equations).

Chapter 2

Summary and Conclusion

Bibliography

- [1] G. E. Dahl, D. Yu, L. Deng, and A. Acero, “Context-dependent pre-trained deep neural networks for large-vocabulary speech recognition,” *IEEE Trans. Audio, Speech, Language Process.*, vol. 20, no. 1, pp. 30–42, 2012.
- [2] G. Hinton, L. Deng, D. Yu, G. E. Dahl, A.-R. Mohamed, N. Jaitly, A. Senior, V. Vanhoucke, P. Nguyen, T. N. Sainath, and B. Kingsbury, “Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups,” *IEEE Signal Process. Mag.*, vol. 29, no. 6, pp. 82–97, 2012.

Appendix A

Project Planning Schedule

This is an appendix.

Appendix B

Outcomes Compliance

This is another appendix.