Week4Day2: Fine-Tune a Model, Integrate It with a Web Extension, and Validate the Generated Code Against the Training Data.

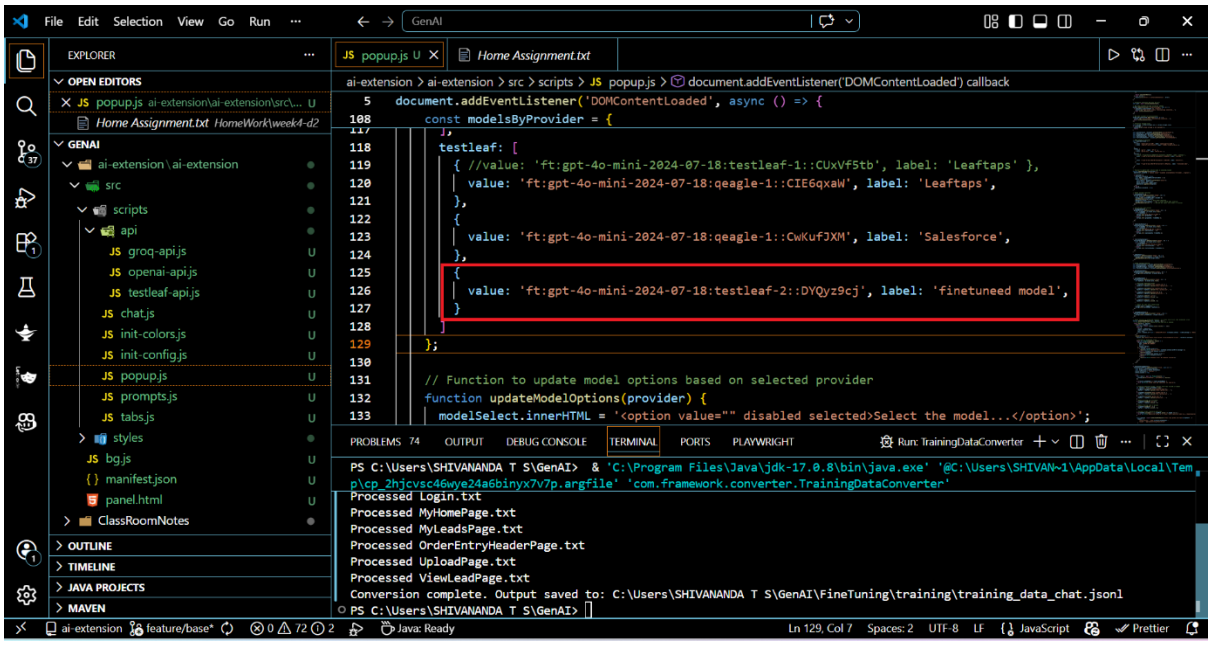

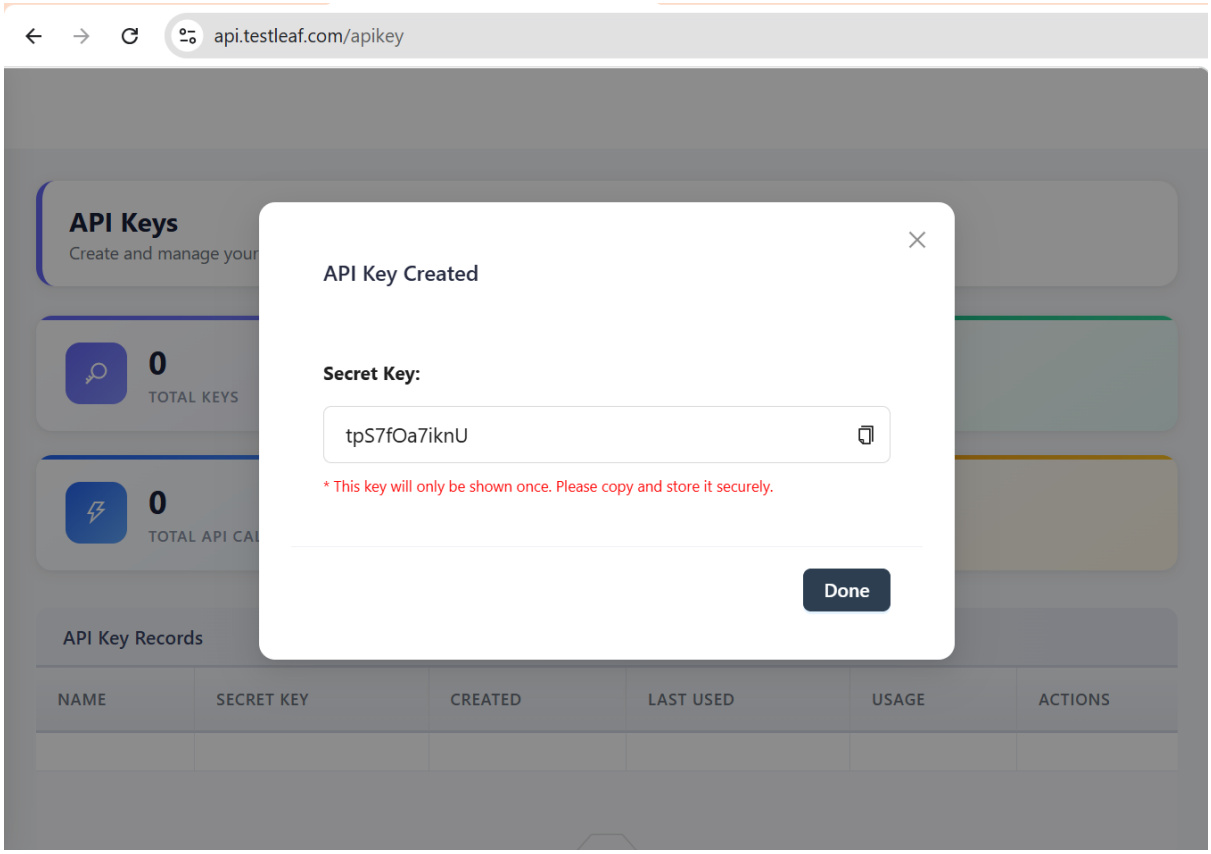

AI Code Generator - Testleaf

Code Generator | Settings

Language Binding

TypeScript

Browser Engine

Playwright

Select LLM Provider

Testleaf

Select Model

finetuneed model

Testleaf API Key

••••••••••••

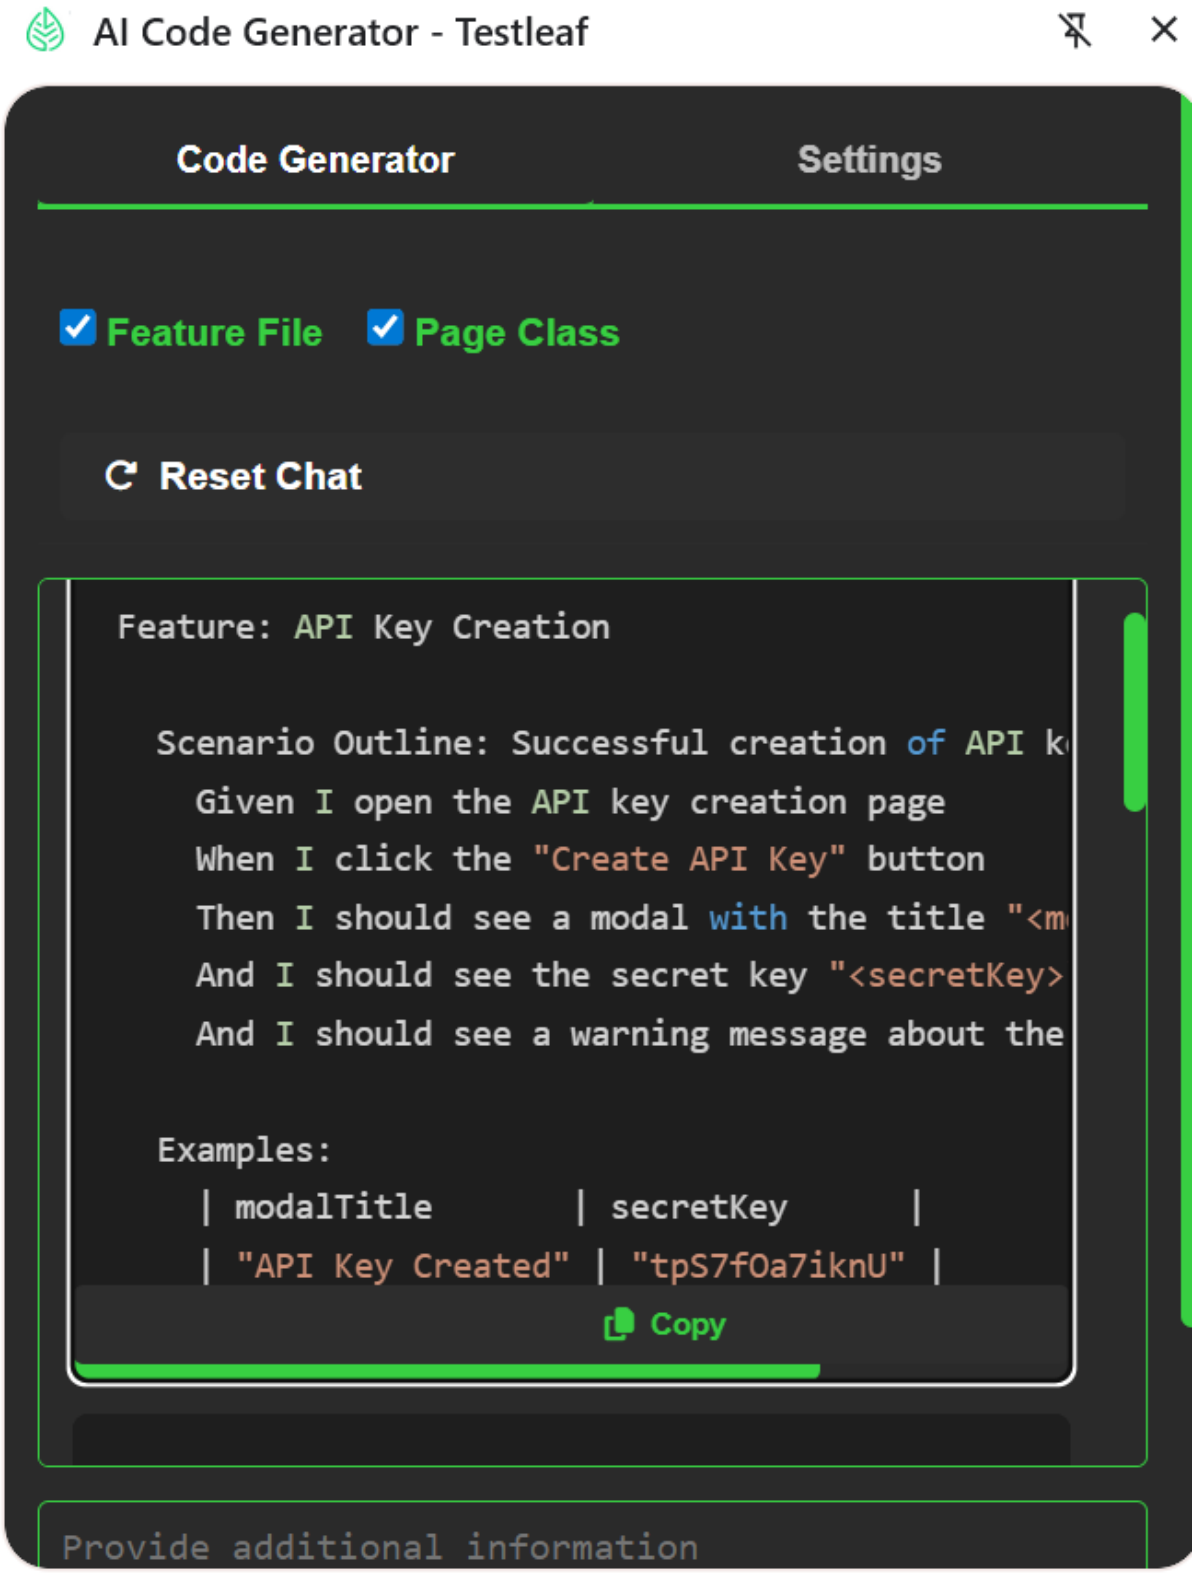

Feature: API Key Creation

```
  Scenario Outline: Successful creation of API key
    Given I open the API key creation page
    When I click the "Create API Key" button
    Then I should see a modal with the title "<modalTitle>"
    And I should see the secret key "<secretKey>"
    And I should see a warning message about the key visibility

  Examples:
    | modalTitle       | secretKey      |
    | "API Key Created" | "tpS7fOa7iknU" |
```

```
import { Given, When, Then, Before, After } from '@cucumber/cucumber';
import { chromium, Browser, BrowserContext, Page } from '@playwright/test';

let browser: Browser;
let context: BrowserContext;
let page: Page;

Before(async () => {
  browser = await chromium.launch();
  context = await browser.newContext();
  page = await context.newPage();
});

After(async () => {
  await context.close();
  await browser.close();
});

Given('I open the API key creation page', async () => {
```

```
  await page.goto('https://api.testleaf.com/apikey');
});

When('I click the {string} button', async (buttonText: string) => {
  await page.click(`button:has-text("${buttonText}")`);
});

Then('I should see a modal with the title {string}', async (modalTitle: string) => {
  const modalHeader = page.locator('.ant-modal-title');
  await modalHeader.waitFor({ state: 'visible' });
  const titleText = await modalHeader.textContent();
  if (titleText !== modalTitle) {
    throw new Error(`Expected modal title to be "${modalTitle}", but got "${titleText}"`);
  }
});

Then('I should see the secret key {string}', async (secretKey: string) => {
  const secretKeyLocator = page.locator('input.ant-input[readonly]');
  await secretKeyLocator.waitFor({ state: 'visible' });
  const keyValue = await secretKeyLocator.inputValue();
  if (keyValue !== secretKey) {
    throw new Error(`Expected secret key to be "${secretKey}", but got "${keyValue}"`);
  }
});

Then('I should see a warning message about the key visibility', async () => {
  const warningMessage = page.locator('small:has-text("* This key will only be shown once. Please
copy and store it securely.")');
  await warningMessage.waitFor({ state: 'visible' });
});
```