

Jenkins Installation

<https://www.jenkins.io/download/>

DATA (D:) > jen				
Name		Date modified	Type	Size
jenkins.war		15-06-2024 21:23	WAR File	91,215 KB

```
C:\Windows\system32>java -jar D:\jen\jenkins.war
```

Running from: D:\jen\jenkins.war

webroot: C:\Users\Admin\.jenkins\war

2024-06-15 15:58:45.253+0000 [id=1] INFO winstone.Logger#logInternal: Beginning extraction from war file

2024-06-15 15:58:52.123+0000 [id=1] WARNING o.e.j.s.handler.ContextHandler#setContextPath: Empty contextPath

2024-06-15 15:58:52.183+0000 [id=1] INFO org.eclipse.jetty.server.Server#doStart: jetty-10.0.20; built: 2024-01-29T20:46:45.278Z; git: 3a745c71c23682146f262b99f4ddc4c1bc41630c; jvm 11.0.10+8-LTS-162

2024-06-15 15:58:52.678+0000 [id=1] INFO o.e.j.w.StandardDescriptorProcessor#visitServlet: NO JSP Support for /, did not find org.eclipse.jetty.jsp.JettyJspServlet

2024-06-15 15:58:52.748+0000 [id=1] INFO o.e.j.s.s.DefaultSessionIdManager#doStart: Session workerName=node0

2024-06-15 15:58:53.257+0000 [id=1] INFO hudson.WebAppMain#contextInitialized: Jenkins home directory: C:\Users\Admin\.jenkins found at: \$user.home/.jenkins

2024-06-15 15:58:53.382+0000 [id=1] INFO o.e.j.s.handler.ContextHandler#doStart: Started w.@1835d3ed{Jenkins v2.452.2/,file:///C:/Users/Admin/.jenkins/war/,AVAILABLE}{C:\Users\Admin\.jenkins\war}

2024-06-15 15:58:53.402+0000 [id=1] INFO o.e.j.server.AbstractConnector#doStart: Started ServerConnector@c35172e{HTTP/1.1, (http/1.1)}{0.0.0.0:8080}

2024-06-15 15:58:53.421+0000 [id=1] INFO org.eclipse.jetty.server.Server#doStart: Started Server@74a6a609{STARTING}[10.0.20,sto=0] @8801ms

2024-06-15 15:58:53.425+0000 [id=26] INFO winstone.Logger#logInternal: Winstone Servlet Engine running: controlPort=disabled

2024-06-15 15:58:53.700+0000 [id=34] INFO jenkins.InitReactorRunner\$1#onAttained: Started initialization

2024-06-15 15:58:53.717+0000 [id=41] INFO jenkins.InitReactorRunner\$1#onAttained: Listed all plugins

2024-06-15 15:58:54.771+0000 [id=47] INFO jenkins.InitReactorRunner\$1#onAttained: Prepared all plugins

2024-06-15 15:58:54.781+0000 [id=34] INFO jenkins.InitReactorRunner\$1#onAttained: Started all plugins

2024-06-15 15:58:54.789+0000 [id=39] INFO jenkins.InitReactorRunner\$1#onAttained: Augmented all extensions

2024-06-15 15:58:55.104+0000 [id=39] INFO jenkins.InitReactorRunner\$1#onAttained: System config loaded

2024-06-15 15:58:55.105+0000 [id=39] INFO jenkins.InitReactorRunner\$1#onAttained: System config adapted

2024-06-15 15:58:55.105+0000 [id=44] INFO jenkins.InitReactorRunner\$1#onAttained: Loaded all jobs

2024-06-15 15:58:55.107+0000 [id=44] INFO jenkins.InitReactorRunner\$1#onAttained: Configuration for all jobs updated

2024-06-15 15:58:55.152+0000 [id=60] INFO hudson.util.Retrier#start: Attempt #1 to do the action check updates server

WARNING: An illegal reflective access operation has occurred

WARNING: Illegal reflective access by org.codehaus.groovy.vmplugin.v7.Java7\$1 (file:/C:/Users/Admin/.jenkins/war/WEB-INF/lib/groovy-all-2.4.21.jar) to constructor java.lang.invoke.MethodHandles\$Lookup(java.lang.Class,int)

WARNING: Please consider reporting this to the maintainers of org.codehaus.groovy.vmplugin.v7.Java7\$1

WARNING: Use --illegal-access=warn to enable warnings of further illegal reflective access operations

WARNING: All illegal access operations will be denied in a future release

2024-06-15 15:58:55.672+0000 [id=44] INFO jenkins.install.SetupWizard#init:

Jenkins initial setup is required. An admin user has been created and a password generated.

Please use the following password to proceed to installation:

db56a995be1f44698e3d1059da9901c7


This may also be found at: C:\Users\Admin\.jenkins\secrets\initialAdminPassword

2024-06-15 15:59:16.123+0000 [id=40] INFO jenkins.InitReactorRunner\$1#onAttained: Completed initialization

2024-06-15 15:59:16.150+0000 [id=25] INFO hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running

2024-06-15 15:59:16.581+0000 [id=60] INFO h.m.DownloadService\$Downloadable#load: Obtained the updated data file for hudson.tasks.Maven.MavenInstaller

2024-06-15 15:59:16.582+0000 [id=60] INFO hudson.util.Retrier#start: Performed the action check updates server successfully at the attempt #1

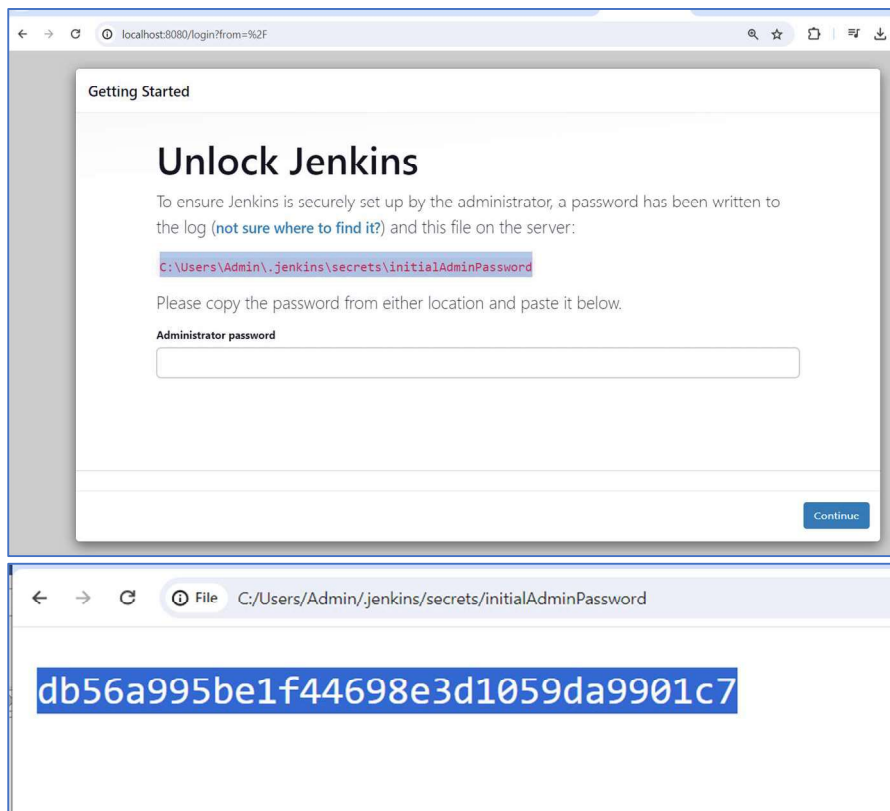

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log ([not sure where to find it?](#)) and this file on the server:

`C:\Users\Admin\.jenkins\secrets\initialAdminPassword`

Please copy the password from either location and paste it below.

Administrator password

Continue

Getting Started

Customize Jenkins

Plugins extend Jenkins with additional features to support many different needs.

Install suggested plugins



Install plugins the Jenkins community finds most useful.

Select plugins to install

Select and install plugins most suitable for your needs.

Getting Started

☒ Folders	☒ OWASP Markup Formatter	☐ Build Timeout	☐ Credentials Binding	** Ionicons API Folders OWASP Markup Formatter ** ASH API ** JSON Path API ** Struts ** Pipeline: Step API
☐ Timestampers	☐ Workspace Cleanup	☐ Ant	☐ Gradle	
☐ Pipeline	☐ GitHub Branch Source	☐ Pipeline: GitHub Groovy Libraries	☐ Pipeline Graph View	
☐ Git	☐ SSH Build Agents	☐ Matrix Authorization Strategy	☐ PAM Authentication	
☐ LDAP	☐ Email Extension	☐ Mailer	☐ Dark Theme	
				** - required dependency

Getting Started

Getting Started

☐ Folders	☐ OWASP Markup Formatter	☐ Build Timeout	☐ Credentials Binding	** Branch API ** Pipeline: Multibranch ** Pipeline: Stage Tags Metadata ** Pipeline: Input Step ** Pipeline: Declarative Pipeline ** Java JSON Web Token (JJWT) ** OkHttp ** GitHub API ** Mina SSHD API :: Common ** Mina SSHD API :: Core ** Gson API ** Git client Git ** GitHub GitHub Branch Source Pipeline: GitHub Groovy Libraries ** Pipeline Graph Analysis ** Metrics Pipeline Graph View Git ** EDDSA API ** Trilead API SSH Build Agents Matrix Authorization Strategy PAM Authentication LDAP Email Extension Mailer ** Theme Manager Dark Theme ** - required dependency
☐ Timestamper	☐ Workspace Cleanup	☐ Ant	☐ Gradle	
☐ Pipeline	☐ GitHub Branch Source	☐ Pipeline: GitHub Groovy Libraries	☐ Pipeline Graph View	
☐ Git	☐ SSH Build Agents	☐ Matrix Authorization Strategy	☐ PAM Authentication	
☐ LDAP	☐ Email Extension	☐ Mailer	☐ Dark Theme	

Jenkins 2.452.2

Getting Started

Create First Admin User

Username

Password

Confirm password

Full name

E-mail address

Jenkins 2.452.2

[Skip and continue as admin](#)

[Save and Continue](#)

Username : admin

Password : admin

Getting Started

Instance Configuration

Jenkins URL:

The Jenkins URL is used to provide the root URL for absolute links to various Jenkins resources. That means this value is required for proper operation of many Jenkins features including email notifications, PR status updates, and the `BUILD_URL` environment variable provided to build steps.

The proposed default value shown is not saved yet and is generated from the current request, if possible. The best practice is to set this value to the URL that users are expected to use. This will avoid confusion when sharing or viewing links.

Jenkins 2.452.2

Not now

Save and Finish

Getting Started

Jenkins is ready!

Your Jenkins setup is complete.

Start using Jenkins

← → ↺ 🌐 localhost:8080 🔍 ☆ 📁 📄 ⬇️ 🔴 ⋮

 **Jenkins** 🔍 Search (CTRL+K) 🔔 🚫 🛡️ 📢 Deeps ▾ 📄 log out

Dashboard >

+ New Item

📄 Build History

⚙️ Manage Jenkins

📁 My Views

Build Queue ▾

No builds in the queue.

Build Executor Status ▾

1 idle

2 idle

Welcome to Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job +

Set up a distributed build

Set up an agent 📄

Configure a cloud ☁️

Learn more about distributed builds ⓘ

Add description

REST API

Jenkins 2.452.2

localhost:8080/user/admin/

Jenkins

Search (CTRL+K)

Deeps

log out

Dashboard

Deeps

Status

Builds

Configure

My Views

Credentials

Deeps

Jenkins User ID: admin

Add description

REST API

Jenkins 2.452.2