



UNIVERSITY OF BRISTOL

DEPARTMENT OF COMPUTER SCIENCE

# **Secure Two Party Computation**

A practical comparison of recent protocols

Nicholas Tutte

---

A dissertation submitted to the University of Bristol in accordance with the requirements of the degree of Master of Engineering in the Faculty of Engineering.

---

Thursday 23<sup>rd</sup> April, 2015

---

# Declaration

This dissertation is submitted to the University of Bristol in accordance with the requirements of the degree of **GG1K** in the Faculty of Engineering. It has not been submitted for any other degree or diploma of any examining body. Except where specifically acknowledged, it is all the work of the Author.

Nicholas Tutte, Thursday 23<sup>rd</sup> April, 2015

---

# Prelude

## Executive Summary

### Abstract

We present implementations of several recently proposed Secure Two Party Computation protocols and perform experiments for the purpose of comparing their performance across a range of computations. Until now we have had only theoretical comparisons of these protocols, making it difficult to know which approach is the most promising.

In particular we have implemented the protocols described in [3], [5] and [6] and additionally we experiment with modifying [5] to use [6] instead of [3] as a sub-protocol.

### Summary of Achievements

- We implemented the protocols described in [3, 5], to the best of our knowledge these are the first implementations of these protocols.
- We implemented the protocol described in [6]. Huang et al. have produced an implementation in Java this cannot be fairly compared to my C implementations of the other protocols. Furthermore they only performed preliminary experiments, we provide more extensive results.
- We experimented with modifying the sub-protocol used for the Secure computation to detect cheating in [5], exchanging the use of [3] for [6].
- We have run practical comparisons of all the implemented protocols on a variety of circuits/computations and provided some analysis of the results.

## Supporting Technologies

- Unless otherwise stated all tests have been run upon the Bristol Cryptography Group's Diffie and Hellman machines. These machines are identical and have dedicated network cards for communications between each other.
- All code is in either C or C++, using the OpenMP library for parallelism in the shared memory paradigm. Furthermore AES-NI support is enabled.
- Extensive use has been made of the GNU Multi Precision Arithmetic Library.
- The net code was provided by my supervisor Prof. Nigel Smart.
- The AES implementation I use was mostly provided by my supervisor Prof. Nigel Smart (coded by Dr. Dan Page). Though I have extended this as it did not provide non-AES-NI decryption.
- The SHA-2 implementation used was taken from [INSERT CITATION HERE].
- For much of the random number generation we have used the implementation of ISAAC provided by [26].

---

## Notational Glossary

$\mathbb{G} = (G, g, q) \leftarrow \zeta(1^n)$  informally speaking this indicates choosing a group such that the ‘security’ of the group is  $n$  bits. We define the group as the tuple  $(G, g, q)$  where  $G$  is the set of all elements of the group,  $g$  is a set that generates  $G$  (we deal primarily in Cyclic groups so usually this will be a single element) and finally  $q$  which is the order of the group.

$\parallel$  indicates concatenation.  $\oplus$  denotes XOR.

---

# Contents

<b>1</b>	<b>Introduction</b>	<b>7</b>
<b>2</b>	<b>Background to Secure Multiparty Computation</b>	<b>8</b>
2.1	Security Properties . . . . .	8
2.2	Security levels . . . . .	8
2.2.1	Semi-honest Adversary . . . . .	8
2.2.2	Malicious Adversary . . . . .	9
2.2.3	Covert Adversary . . . . .	9
2.3	Applications of SMC . . . . .	10
2.3.1	Secret Auctions - Danish Beets . . . . .	10
2.3.2	Distributed secrets . . . . .	10
2.3.3	PROCEED - Computation on encrypted data . . . . .	10
<b>3</b>	<b>Technical Background</b>	<b>12</b>
3.1	Oblivious Transfer . . . . .	12
3.1.1	Naor-Pinkas Oblivious Transfer . . . . .	12
3.1.2	Peikert - Vaikuntanathan - Waters Oblivious Transfer . . . . .	13
3.2	Yao's Protocol . . . . .	17
3.2.1	Overview . . . . .	17
3.2.2	Yao Garbled Circuits . . . . .	17
3.2.3	Security of Yao Garbled Circuits . . . . .	18
3.2.4	Cut and Choose - Security against Malicious and Covert Adversaries . . . . .	19
<b>4</b>	<b>Protocols</b>	<b>21</b>
4.1	Lindell and Pinkas 2011 . . . . .	21
4.2	Lindell 2013 . . . . .	22
4.3	Huang, Katz and Evans 2013 . . . . .	23
4.3.1	Advantages of symmetrical cut-and-choose . . . . .	23
4.4	Merging Lindell 2013 and HKE 2013 . . . . .	24
<b>5</b>	<b>Implementation Details</b>	<b>25</b>
5.1	Yao Garbled Circuits implementation . . . . .	25
5.1.1	Tillich-Smart Circuit Files . . . . .	25
5.1.2	Creating binary circuits . . . . .	26
5.2	Elliptic Curve implementation . . . . .	26
5.3	Verifiable Secret Sharing and Multi-precision Polynomials . . . . .	27
5.3.1	Multi-precision polynomials . . . . .	27
5.4	Peikert, Vaikuntanathan and Waters OT . . . . .	27
5.4.1	Other - AES, SHA-2 . . . . .	28
<b>6</b>	<b>Experiments</b>	<b>29</b>
6.1	Measurement metrics . . . . .	29
6.2	Testing Environment . . . . .	29
6.3	Results . . . . .	29
6.3.1	32-bit addition . . . . .	30

---

6.3.2	32-bit multiplication . . . . .	30
6.3.3	AES encryption . . . . .	30
6.3.4	SHA-256 Hashing . . . . .	30
<b>7</b>	<b>Conclusions</b>	<b>31</b>
<b>A</b>	<b>Benchmarking components</b>	<b>34</b>
A.1	Communications . . . . .	34
A.2	Elliptic Curve Group Operations . . . . .	34
A.3	Oblivious Transfer . . . . .	34
A.3.1	PVW Oblivious Transfer . . . . .	34
A.3.2	Cut and Choose Oblivious Transfer . . . . .	34
A.3.3	Modified Cut and Choose Oblivious Transfer . . . . .	34
A.3.4	Naor Pinkas Oblivious Transfer . . . . .	34
A.4	Circuit Evaluation . . . . .	34

---

# Chapter 1

## Introduction

Secure multi-party computation(SMC) is a long standing problem in Cryptography. We have a set of parties who wish to cooperate to compute some function on inputs distributed across the parties. However, these parties distrust one another and do not wish their inputs to reveal their inputs to the other parties. Using SMC we can perform the desired computation without any party ever knowing the other's inputs.

A commonly used example is the Millionaires problem. A group of rich persons wish to find out who among them is the richest, but do not wish to tell each other how much they are worth. Here the parties are the rich individuals, each party's inputs is their net worth and the function will return the identifier of the individual with the greatest input. Additionally, at the end of the computation no party should be able to divine anything about another party's inputs, apart from what can be inferred from their own input and the output.

For many years Yao's protocol [13] has been the most attractive avenue of theoretical research, mainly due to its conceptual simplicity and constant round nature. In particular recent work has endeavoured to produce variants of Yao's protocol that can provide security in the presence of malicious adversaries ([1], [3], [5], [6], [10], [11], [12]) and to improve the efficiency of the original protocol itself ([8], [9]).

Our contributions are as follows,

- To the best of our knowledge we provide the first implementations of the protocols of [3] and [5].
- We also provide an implementation of the protocol from [6].
- We put forward and implement a modification of [5] using our implementation of [6] for the sub-computation rather than [3] as originally proposed.
- We measure the performance of each protocol on several of the classic SMC benchmark computations and give analysis of the results.

---

## Chapter 2

# Background to Secure Multiparty Computation

### 2.1 Security Properties

There are three main properties that we wish to achieve with any SMC protocol,

- Privacy, the only knowledge parties gain from participating is the output.
- Correctness, the output is indeed that of the intended function.
- Independence of inputs, no party can choose its inputs as the function of other parties inputs.

In this sense we define the goal of an adversary to compromise any one of these properties.

We compare any protocol to the *ideal* execution, in which the parties submit their inputs to a universally trusted and incorruptible external party via secure channels. This trusted party then computes the value of the function and returns the output to the parties.

Informally we say that the protocol is secure if no adversary can attack the protocol with more success than they can achieve than the ideal model. More formally a protocol is secure if it

It is worth noting that some functions inherently leak information about the inputs of the other parties. For example in a two party addition both parties can easily recover the other's input after the computation has been run by subtracting their own input from the result. In these cases SMC is not at fault.

### 2.2 Security levels

Having established the goals of the adversary and how we can measure if said adversary has a valid attack, we next deal with the capabilities of the adversary. We use three main models to describe the capability of the adversary.

#### 2.2.1 Semi-honest Adversary

The Semi-honest adversary is the weakest adversary, with very limited capabilities. The Semi-honest adversary has also been referred to as “honest but curious”, because in this case the adversary is not allowed to deviate from the established protocol (i.e. they are honest), but at the same time they will do their best to compromise one of the aforementioned security properties by examining the data they have legitimate access to. This is in some ways analogous to the classic “passive” adversary.



---

### Example

At first it can be difficult to think of applications where only Semi-Honest security is required, but such applications do exist. Mostly Semi-Honest security can be used in situations where it is not in the interest of either party to cheat.

So take the example of parties who wish to decide whether they should cooperate on a particular project. More concretely maybe two drug companies are considering cooperating in a particular area of research, but first need to establish that they have the combined expertises required. To do this without unnecessarily revealing information about their capabilities to the other company they might run a legally binding Secure Computation.

In this case undetected cheating could lead to the parties committing to a project they do not have the expertises to complete, this is clearly not in the interests of the parties so it is reasonable to assume that both parties will act honestly.

### 2.2.2 Malicious Adversary

The Malicious adversary is allowed to employ any polynomial time strategy and is not bounded by the protocol (they can run arbitrary code instead), furthermore the Malicious adversary does not care if it is caught cheating so long as it achieves its goal in the process. This is in some ways analogous to the classic “active” adversary.

### Example

Security in the presence of malicious adversaries is much sought after, and is useful in many more scenarios. Suppose a pair of persons wish to compute the intersection of sets they each hold but only wish to reveal those elements in both sets, keeping the rest secret.

A malicious adversary might wish to reveal all of the elements in the other party’s set. If the adversary can rig the condition in the computation checking whether an element is in both sets they can get all elements returned. Clearly in this case the adversary has something to gain and so we cannot count on the adversary being honest.

### 2.2.3 Covert Adversary

The Covert adversary model is very similar to the Malicious model, again bounded by polynomial time with freedom to ignore the protocol. However, in this case the adversary is adverse to being caught cheating and is therefore slightly weaker than the Malicious adversary. A Covert adversary will accept a certain probability of detection, this probability represents the point at which the expected benefit of cheating successfully outweighs the expected punishment for getting caught, effectively a game theory problem [15].

We call the probability that a Covert adversary will be caught the “deterrent probability”, usually denoted using  $\epsilon$ . Often protocols providing security against Covert adversaries take a Security parameter which varies the probability of detecting cheating.

### Example

This model can be thought of as a compromise between practicality and malicious security and is usually appropriate when there are tangible consequences to a party

---

being caught cheating. For example consider a consortium of companies who wish to cooperate in some way that benefits participants and that if one is caught cheating in the computations they are publically expelled from the consortium.

In this case then a sufficiently high deterrent probability mean the chance of being caught is so high that the risk of being caught outweighs the benefits to be gained by cheating.

## 2.3 Applications of SMC

Here we take time to motivate the study of SMC by giving several actual or proposed applications.

### 2.3.1 Secret Auctions - Danish Beets

In Denmark a significant number of farmers are contracted to grow sugar beets for Danisco (a Danish bio-products company). Farmers can trade contracts amongst themselves (effectively sub-contracting the production of the beets), bidding for these sub-contracts is done via a “double auction”.

Farmers do not wish to expose their bids as this gives information about their financial state to Danisco and so refused to accept Danisco as a trusted auctioneer. Similarly all other parties (e.g. Farmer union) already involved are in some way disqualified. Rather than rely on a completely uninvolved party like an external auction house (an expensive option) the farmers use an SMC-based approach described in [7]. Since 2008 this auction has been ran multiple times

As far as team behind this auction are aware this was the first large scale application of SMC to a real world problem, this application example in particular is important as it is a concrete practical example of SMC being used to solve a problem demonstrating this is not just a Cryptological gimmick.

### 2.3.2 Distributed secrets

Consider the growing use of physical tokens in user authentication, e.g. the RSA SecurID. When each SecurID token is activated the seed generated for that token is loaded to the relevant server (RSA Authentication Manager), then when authentication is needed both the server and the token compute ‘something’ using the aforementioned seed. However, this means that in the event of the server being breached and the seed being compromised the physical tokens will need to be replaced. Clearly this is undesirable, being both expensive both in terms of up front clean up costs and reputation.

In the above scenario we clearly need to store the secret(the seed) somewhere, but if we can split the seed across multiple servers and then get the servers to perform the computation as a SMC problem (where each server’s input is their share of the secret, the output the value to compare to the token’s input) then we can increase the cost to an attacker, as they will now have to compromise multiple servers. Such a service is in development by Dyadic Security (full disclosure, my supervisor Prof. Nigel Smart is a co-founder of Dyadic).

### 2.3.3 PROCEED - Computation on encrypted data

Recently US Defence Advanced Research Projects Agency (DARPA) ended a programme called PROCEED. The eventual goal being the ability to efficiently perform computations on encrypted data without knowledge of the data. This could be used

---

by companies such as Google to continue to provide services requiring computation on personal data without intruding on the privacy on their users.

---

## Chapter 3

# Technical Background

### 3.1 Oblivious Transfer

Oblivious Transfers are vitally important for SMC and in particular Yao's Protocol that we shall be looking at later. Oblivious Transfers protocols allow for one party (called the receiver) to get exactly one out-of-two (and can be extended to  $k$ -out-of- $n$  for  $k < n$ ) values from another party (called the Sender). The receiver is oblivious to the other value(s), and the Sender is oblivious to which value the receiver received.

Oblivious Transfers were first suggested by Rabin in [16]. We define the functionality of a 1-out-of-2 OT protocol in Figure 3.1. Oblivious Transfers are vital to Yao Garbled Circuits, used to give the circuit Executor data it needs to evaluate the circuit under their input without revealing to the circuit Builder what those inputs were.

Receiver	Sender
Inputs : $b \in \{0, 1\}$	Inputs : $x_0, x_1 \in \{0, 1\}^l$
Outputs : $x_b$	Outputs : $\emptyset$

Figure 3.1: Formal definition of the functionality of a one-out-of-two OT protocol.

The security of Oblivious Transfers is defined in a similar way to that of SMC, the focus is on Semi-honest(passive) and Malicious(active) adversaries. Security against these adversaries is usually either computational or statistical.

A protocol is considered secure with regards to Semi-honest adversaries if neither a Semi-honest adversary in the sender role cannot learn anything about which value the receiver requested, nor can a Semi-honest adversary in the role of the Receiver learn anything about values other than the one it requested. The protocol being secure against Malicious adversaries is defined by the obvious extension of the Semi-honest case.

We primarily use OTs based on the Peikert-Vaikuntanathan-Waters OT (PVW-OT) from [19] or more precisely the modifications of the PVW-OT suggested in [3] and expanded on in [5]. However, we also use the Naor-Pinkas (NP-OT) from [20] for the protocol in [6].

#### 3.1.1 Naor-Pinkas Oblivious Transfer

Here we describe the Naor-Pinkas Oblivious Transfer as put forward in [6] that is used in the Huang, Katz and Evans protocol later implemented, for a full description including proofs of security see [20].

We assume that we have the usual OT inputs and parties. That is a Sender  $S$  who holds two input bit strings denoted  $x_0, x_1 \in \{0, 1\}^*$  and a Receiver who has a  $b \in \{0, 1\}$

representing the input that the Receiver wishes to uncover.

On top of these inputs the parties share a group  $\mathbb{G}$  as an auxiliary input. We denote the group by  $(\mathbb{G}, g, q)$  where  $\langle g \rangle = \mathbb{G}$  and  $q$  is the order of the group.

See Figure 3.2 for the functionality of the Naor-Pinkas OT.

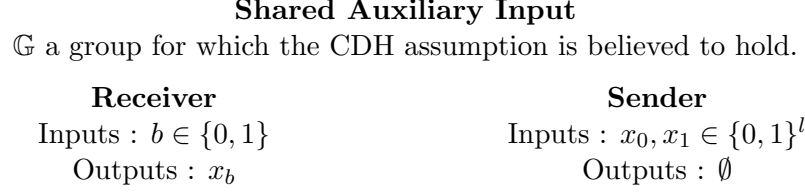


Figure 3.2: Formal definition of the functionality of The Naor-Pinkas Oblivious Transfer.

The Naor-Pinkas OT is known to be simulatable against a malicious Sender assuming the CDH holds in the group  $\mathbb{G}$ . However, it is only known to provide *privacy* against a malicious Receiver, the question of whether it is simulatable against such an adversary is as yet unanswered.

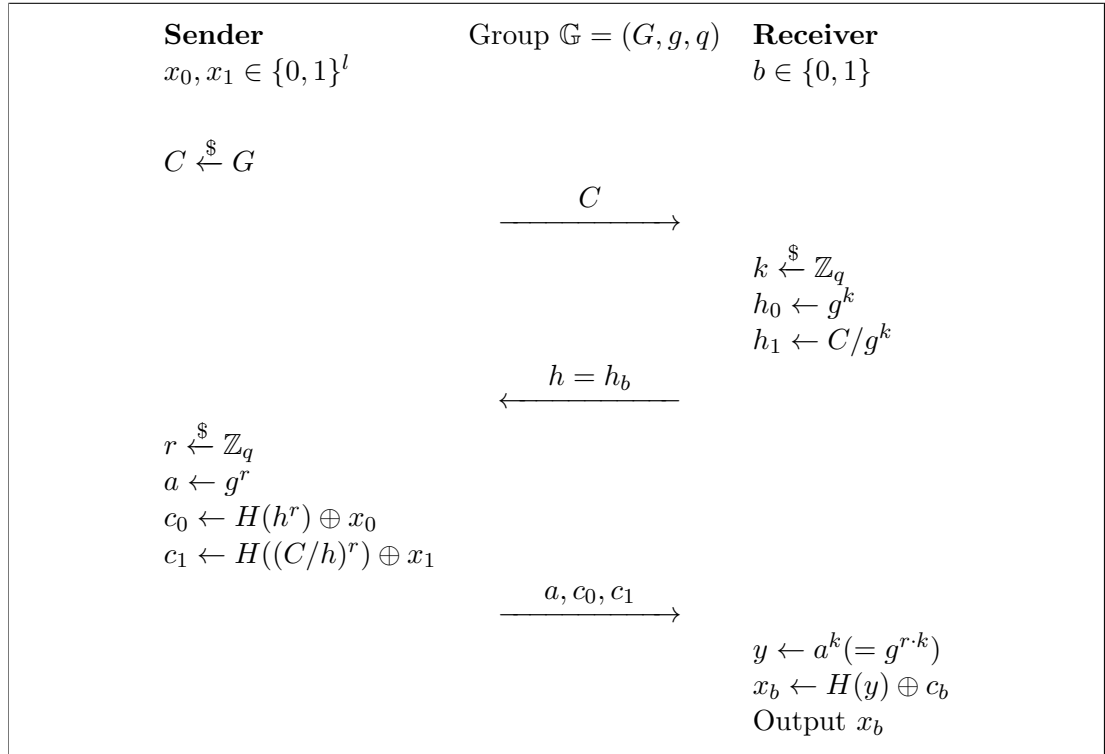


Figure 3.3: The Naor-Pinkas Oblivious Transfer protocol. Note that the same  $C$  can be used for multiple OTs.

### 3.1.2 Peikert - Vaikuntanathan - Waters Oblivious Transfer

The basis of the Oblivious transfer protocol we shall be using comes from [19], in particular we shall be using the realisation of the dual-mode cryptosystem based on Decisional Diffie-Hellman problem. Whilst I shall not go into depth on this protocol we shall give a broad overview of the dual-mode cryptosystem.

---

## High level concepts

The Peikert-Vaikuntanathan-Waters (PVW) OT has at its core the concept of a messy key. This is a key such that under encryption by this key all information about the plaintext is lost, moreover messy keys are indistinguishable from normal valid (*neat*) keys that do not obliterate the plaintext. It does not take much to see how these could be useful for an Oblivious Transfer scheme.

The PVW OT is constructed in such a way we can ensure one of the keys will be a messy key, whilst the other will be a neat key. Furthermore the Receiving party can control which key will be messy and which will be neat, allowing the Receiving party to choose which input to uncover.

## Dual-Mode Encryption

Peikert-Vaikuntanathan and Water's describe a new abstraction, a Dual-mode cryptosystem. This system requires a setup phase in which the parties produce a public *Common Reference String* and potentially a trapdoor. Peikert et al. state that this trapdoor information is only needed for the security proof as such we will mostly ignore these details.

The setup also chooses one of two modes (*messy* and *decryptable*).. Once this setup is complete this cryptosystem is very similar to a normal Public Key system, with one major difference, Peikert et al. introduce the concept of encryption branches.

The key generation algorithm takes a parameter  $\sigma \in \{0,1\}$ , and returns a public/secret key pair. Similarly when encrypting using the public key produced by the key generation one must also specify a  $b \in \{0,1\}$ .

Plaintexts can be decrypted if encrypted with  $b = \sigma$  (the decryptable branch of  $pk$ ), but plaintexts encrypted with  $b \neq \sigma$  cannot be decrypted (we call this the messy branch of  $pk$ ). Additionally when carrying out an encryption using a public key provided by the other party you cannot tell which branch is decryptable.

Depending on which mode is selected during setup the trapdoor returned allows subversion of one of these properties. If the system is in messy mode the trapdoor allows the encrypting party to distinguish when the branch input to the key generation that produced a public key was. If the system is in decryptable mode the trapdoor allows the decryption of both branches.

In Figure 3.4 we more formally define the abstract system and in particular what functions are required.

## Dual-mode encryption using DDH

Having described the abstract form of a Dual-mode cryptosystem we now give a concrete realisation. This realisation requires a group, as usual we define this group as  $\mathbb{G} = (G, g, q)$  where  $g$  generates  $G$  and  $|g| = q$ . Further we require that the the group is chosen such that we believe the Decisional Diffie-Hellman problem be hard for this group.

Before giving concrete definitions of the functions we need a few primitives relating to DDH cryptosystems.

- **Setup**( $1^n, \mu$ ) - This function takes a security parameter  $1^n$  and a bit  $\mu \in \{0, 1\}$  which defines which mode (messy or decryptable). The function should output the CRS and trapdoor information (crs, t). All other functions take this crs as an implicit parameter.

In order to ease notation later we define two separate functions depending on  $\mu$ . **SetupMessy**( $1^n$ ) := **Setup**( $1^n, 0$ ) and **SetupDec**( $1^n$ ) := **Setup**( $1^n, 1$ ).

- **KeyGen**( $\sigma$ ) - This function takes a single input of a bit  $\sigma \in \{0, 1\}$  and outputs  $(pk, sk)$  where  $pk$  is a public key for encryption and  $sk$  is a secret key that allows decryption of plaintexts encrypted using  $pk$  on the branch  $\sigma$ .
- **Enc**( $m, pk, b$ ) - This function takes a message  $m \in \{0, 1\}^l$ , a public key  $pk$  and a bit  $b \in \{0, 1\}$ . It returns the encryption of  $m$  under  $pk$  on branch  $b$ .
- **Dec**( $c, sk$ ) - This function takes a ciphertext  $c$  and a secret key  $sk$ . It outputs a message  $m' \in \{0, 1\}^l$ .
- **FindMessy**( $pk, t$ ) - This function takes a public key  $pk$  and a messy mode trapdoor  $t$ . The function then outputs a bit  $b \in \{0, 1\}$  indicating which branch of  $pk$  is messy.
- **TrapKeyGen**( $t$ ) - This function takes decryptable mode trapdoor  $t$  and is an alternative key generation. The function outputs  $(pk, sk_0, sk_1)$ , note that it outputs two secret keys, one for each branch. These secret keys allow the decryption of both branches of  $pk$ .

Figure 3.4: The abstract functions the define a Dual-mode cryptosystem.

**Randomisation** Take  $G$  to be an arbitrary group, we shall use multiplicative notation, such that the group is of order  $p$  where  $p$  is prime. We then define  $DLOG_G(x) = \{(g, g^x) : g \in G\}$ . Put another way  $DLOG_G(x)$  is the set of all pairs of elements in  $G$  such that the discrete log of the second over the first is  $x$ .

We define a probabilistic algorithm *Randomise* that takes generators  $g, h \in G$  and elements  $g', h' \in G$ . The algorithm then outputs  $(u, v) \in G^2$  such that the following properties hold,

- If  $(g, g'), (h, h') \in DLOG_G(x)$  for some  $x \in \mathbb{Z}_p$  then  $(u, v)$  is chosen from  $DLOG_G(x)$  uniformly at random.
- If  $(g, g') \in DLOG_G(x)$  and  $(h, h') \in DLOG_G(y)$  for some distinct  $x, y \in \mathbb{Z}_p$  then  $(u, v)$  is chosen uniformly at random from  $G^2$ .

In particular we define *Randomise*( $g, h, g', h'$ ) as follows, choose  $s, t \xleftarrow{\$} \mathbb{Z}_p$  independently of one another, then let  $u = g^s \cdot h^t$  and  $v = (g')^s \cdot (h')^t$ .

A full proof that this instantiation of *Randomise* is given in [19], suffice to say the main idea of the proof is to re-write  $h$  as a power of  $g$  which we can do as  $g$  generates  $G$ . Having defined the function *Randomise* Peikert et al. next defined a simple asymmetric cryptosystem based on it.

**DDH-Randomise Cryptosystem** As with all asymmetric cryptosystems we need to define three algorithms namely key generation, encryption and decryption.

**Dual-mode Cryptosystem based on Randomise** Finally Peikert et al. give instantiations of the functions specified in 3.4, using the DDH cryptosystem just defined. These instantiations can be seen in Figure 3.6

- **DDH-KeyGen**( $1^n$ ) - This function takes a security parameter and chooses a group  $\mathbb{G} = (G, g, q) \leftarrow \gamma(1^n)$ , this group  $G$  is the message space. For our purposes this group will be an Elliptic curve group of size  $\sim 2^{2n}$ .  
Then choose another generator of the group  $h \in G$  and an exponent  $x \in \mathbb{Z}_p$ . Then set  $pk = (g, h, g^x, h^x)$  and  $sk = x$ .
- **DDH-Enc**( $pk, m$ ) - This function takes a message  $m \in \{0, 1\}^l$ , a public key  $pk$ . The public key should be parsed as  $(g, h, g', h')$ .  
The function computes  $(u, v) \leftarrow \text{Randomise}(g, h, g', h')$  and then outputs the ciphertext  $(u, v \cdot m)$ .
- **DDH-Dec**( $sk, c$ ) - This function takes a ciphertext  $c$  and a secret key  $sk$ , parse  $c$  as  $(c_0, c_1)$ . Output a decryption  $m' = c_1 / c_0^{sk}$ .

Figure 3.5: A simple asymmetric cryptosystem based on *Randomise* in a DDH group. It is important to note here that this system is messy if

- **Setup**( $1^n, \mu$ ) - Recall that for notational purposes we split this function depending on the value of  $\mu$ . However, both branches of this function begin by choosing a group  $\mathbb{G} = (G, g, p) \leftarrow \zeta(1^n)$ . Then the Decryption and Messy Setup functions diverge.  
**SetupDec**( $1^n$ ) - Choose a random generator  $g_0 \in G$ , a random *non-zero* exponent  $y \in \mathbb{Z}_p$  and let  $g_1 = g_0^y$ . Then take another random *non-zero* exponent  $x \in \mathbb{Z}_p$  and let  $h_b = g_b^x$  for  $b \in \{0, 1\}$ . The outputs are then  $(crs, t) = ((g_0, h_0, g_1, h_1), y)$ .  
**SetupMessy**( $1^n$ ) - Choose a pair of random generators  $g_0, g_1 \in G$  and a pair of random *distinct and non-zero* exponents  $x_0, x_1 \in \mathbb{Z}_p$ . Let  $h_b = g_b^{x_b}$  for  $b \in \{0, 1\}$ . The outputs are then  $(crs, t) = ((g_0, h_0, g_1, h_1), (x_0, x_1))$ .
- **KeyGen**( $\sigma$ ) - Firstly choose  $r \xleftarrow{\$} \mathbb{Z}_p$ . Then set  $g = g_\sigma^r$  and  $h = h_\sigma^r$ . Finally set  $pk = (g, h)$  and  $sk = r$  and output  $(pk, sk)$ .
- **Enc**( $m, pk, b$ ) - Parse  $pk$  as  $(g, h)$ . Let  $pk_b = (g_b, h_b, g, h)$  where  $g_b, h_b$  are taken from the crs. Then output **DDH-ENC**( $pk_b, m$ )
- **Dec**( $sk, c$ ) - This function just outputs **DDH-Dec**( $sk, c$ ).
- **FindMessy**( $pk, t$ ) - Parse  $pk$  as  $(g, h)$  and a messy mode trapdoor  $t$  as  $x_0, x_1$ . If  $h \neq g^{x_0}$  then output 0 (as the  $pk$  provided is for branch 1, so branch 0 is the messy branch). Else output 1.
- **TrapKeyGen**( $t$ ) - Parse  $t$  as  $y \in \mathbb{Z}_p$ , check that  $y$  is indeed non-zero and a member of  $\mathbb{Z}_p$ . Pick a random  $r \xleftarrow{\$} \mathbb{Z}_p$ , compute  $pk = (g_0^r, h_0^r)$  and output  $(pk, r, r/y)$

Figure 3.6: The realisation of the Dual-mode cryptosystem based on the DDH cryptosystem defined.

**Trusted Setup** - Peikert et al. state that the OT they provide requires a trusted setup. They claim this is a reasonable assumption and can be achieved using shared randomness, they suggest sunspots. To understand what the problem and why trusted setup is required consider the following case.



Suppose the Receiving party performs the setup, recall however, that the Sender will not be able to tell if the *crs* they are given by the Receiver is a Messy *crs* or a Decryptable *crs*. Therefore it is then child's play for the Receiver to produce a Decryptable *crs* and to keep the trapdoor, allowing the Receiver to decrypt on both branches giving access to all of the Senders inputs.

One might hope letting the Sending party perform setup might be better, in fact it is much worse. Clearly the clear logical reverse of the Receiver case is possible, where the Sender performs a Messy setup and as such can then, using the resulting trapdoor values, uncover what values the Receiver is requesting.

In short, both parties could potentially craft a malicious *crs* during setup allowing them to subvert the properties of the Dual-mode system, so the solution is to divide the work between the two parties so each provide some of the *crs* in such a way that neither has enough information to create the trapdoor that is worth anything to them.

## 3.2 Yao's Protocol

### 3.2.1 Overview

Yao garbled circuits are one of the primary avenues of research into Secure multi-party computation. Yao first proposed garbled circuits in [13]. The two parties are designated the Builder and the Executor. The Builder then constructs a circuit representing the function the parties wish to compute, this circuit is "garbled" in such a way that it can still be executed.

This garbled circuit, hardcoded with the Builder's input data, is sent to the Executing party who then obtains the data representing its input from the Builder via Oblivious Transfer (for details on OT see Section 3.1). The Executor then evaluates the circuit and obtains the output of the function.

### 3.2.2 Yao Garbled Circuits

As noted above we first represent the function to compute as a binary circuit. Denote the two parties as  $P_1$  and  $P_2$ , we will denote the party building the circuit by  $P_1$  and the executing party by  $P_2$ .

Take a single gate of this circuit with two input wires and a single output wire. Denote the gate as  $G_1$  and the input wires as  $w_1$  and  $w_2$  and let  $w_3$  be the output wire. Let  $b_i \in \{0, 1\}$  be the value of  $w_i$ . Here we will take the case where  $w_i$  is an input wire for which  $P_i$  provides the value. Define the output value of the gate to be  $G(b_1, b_2) \in \{0, 1\}$ . We now garble this gate in order to obscure the inputs and outputs.

$P_1$  garbles each wire by selecting two random keys of length  $l$ , for the wire  $w_i$  call these keys  $k_i^0$  and  $k_i^1$ . The length of these keys ( $l$ ) can be considered a security parameter, and should correspond to the length of the key needed for the symmetric encryption scheme we'll be using later. Further  $P_1$  also generates a random permutation  $\pi_i \in \{0, 1\}$  for each  $w_i$ . We define  $c_i = \pi_i(b_i)$ . The garbled value of the  $i^{th}$  wire is then  $k_i^{b_i} \parallel c_i$ , we then represent our garbled truth table for the gate with the table indexed by the values for the  $c_1$  and  $c_2$ .

$$c_1, c_2 : E_{k_1^{b_1}, k_2^{b_2}}(k_3^{G(b_1, b_2)} \parallel c_3)$$

Where  $E_{k_i, k_j}(m)$  is some encryption function taking the keys  $k_i$  and  $k_j$  and the plaintext  $m$ . Since the advent of AES-NI and the cheapness of using AES we will use

---

AES with 128 bit keys to make this function. Suppose that  $AES_k(m)$  denotes the AES encryption of the plaintext  $m$  under the 128 bit key  $k$  and  $AES_k^{-1}(c)$  denotes the decryption of ciphertext  $c$  under key  $k$ . We define  $E_K$  (and it's inverse  $D_K$ ) as follows,

$$E_K(m) = AES_{k_1}(AES_{k_2}(...AES_{k_n}(m)...)), \text{ where } K = \{k_1, ..., k_n\}$$

$$D_K(m) = AES_{k_n}^{-1}(AES_{k_{n-1}}^{-1}(...AES_{k_1}^{-1}(m)...)), \text{ where } K = \{k_1, ..., k_n\}$$

This is the intuitive extension of AES to multiple keys, chaining the encryption under all of the keys in a set order.

Then  $P_1$  (the builder of the circuit) sends this garbled version of the circuit to  $P_2$  (the executor of the circuit).  $P_1$  should send the garbling key for it's input bit ( $k_1^{b_1}$ ), the full encrypted truth table and  $c_1 = \pi(b_1)$ . Then  $P_2$  needs to get  $k_2^{b_2} \parallel c_2$  from  $P_2$  without revealing the value of  $b_2$ . This is done by an Oblivious Transfer (see Section 3.1) where  $P_1$  inputs  $k_2^0$  and  $k_2^1$  and  $P_2$  inputs  $b_2$ .  $P_2$  receives the output  $k_2^{b_2} \parallel c_2$  from the OT and learns nothing about  $k_2^{(1-b_2)}$ ,  $P_1$  gets no output and learns nothing about the value of  $b_2$ .

$P_2$  can then look up the entry in the encrypted truth table indexed by  $c_1$  and  $c_2$  and decrypt it using  $D_{k_1^{b_1}, k_2^{b_2}}(\cdot)$ . This will give  $P_2$  a value for  $k_3^{G(b_1, b_2)} \parallel c_3$ . Then by using  $\pi_3^{-1}$ ,  $P_2$  can extract a value for  $G(b_1, b_2)$ .

This can be extended to a full circuit, the input wires belonging to the circuits builder are hard coded and their garble keys and permuted values are sent to the executor. The values for the input wires belonging to the executor are obtained by the executor via Oblivious transfer with the builder. The executor is only given the permutations for the output wires, and therefore the intermediate wire bit values are protected.

### Free XOR Improvement

Over the years many improvements have been made to the original Yao Garbled Circuits to make them quicker to evaluate. One of these improvements is called the Free XOR technique and at it's most simple level it reduces the cost of evaluating an XOR gate in the garbled circuit to virtually nil. This is why one of the key measures of a binary circuits optimisation for Yao Garbling is the number of non-XOR gates.

This is done by introducing a relationship between the 0-key( $k_0$ ) and 1-key( $k_1$ ) for each wire. In particular an  $R$  is chosen at random for each Yao Garbled Circuit and then whilst  $k_0$  is generated randomly as usual we take  $k_1 := k_0 \oplus R$ .

### 3.2.3 Security of Yao Garbled Circuits

A naive implementation of a protocol using Yao Garbled Circuits provides only Semi-honest security. For a formal proof of Semi-honest security see [14], we shall briefly give an intuitive explanation of why naive Yao Garbled Circuits are not secure in the presence of Malicious or Covert adversaries.

Consider the case where  $P_1$  is Malicious, at no point does a naive  $P_2$  verify that the garbled circuit provided by the Builder actually computes the function the builder claims it does. Whilst the Executor can check that the garbled circuit has the correct "shape" (number of gates, wires between gates etc.) the Executor cannot verified that each gate has the correct output. This clearly breaks the Correctness requirement and depending on the function being computed and the structure of the circuit corresponding to it, the Builder can craft a garbled circuit to undermine the Privacy or Independence of Input properties.

---

Additionally, the Executor has no way to check that the key it received from the OTs actually corresponds to the request key in the circuit, the Builder could use the same key for both  $X_0$  and  $X_1$  and thus alter the key used by the Executor for a given input wire.

### 3.2.4 Cut and Choose - Security against Malicious and Covert Adversaries

#### Concept

Several extensions of Yao's original protocol have been proposed in order to achieve security against Malicious and Covert adversaries. Mostly depending on an approach dubbed "cut and choose" which provides statistical security (detects cheating with a certain probability).

This relates to the old solution to dividing a cake fairly, one party cuts the cake in two, then the other party chooses a slice. In our case the Builder builds  $s$  many garbled circuits and sends them to the Executor. A subset of these circuits are chosen to be opened for the purpose of checking if they are correct. The remaining circuits are then referred to as Evaluation circuits.

If all check-circuits pass then the Executor evaluates the remaining circuits as usual. If the Executor receives differing outputs from the Evaluation Circuits this indicates cheating, furthermore if any check circuits fail during correctness testing this is also taken to indicate cheating.

The number of garbled circuits built ( $s$ ) acts as a security parameter and the probability of detecting cheating is expressed in terms of  $s$ . For example cheating in the protocol proposed in [5] goes undetected with probability  $2^{-s}$ .

#### Issues

This Cut and Choose seems very simple conceptually, but creates several subtle new problems to be solved.

Firstly whilst evaluating the many circuits we must now also ensure that both parties' provide the same inputs to each circuit, else they might be able learn many outputs, each revealing something they should not have been able to discover.

In [1] the example is given of computing the inner product of two binary strings, in this situation the Executing party could give many different inputs each with a single bit set to 1. The output of the circuit would then give the Executor the value of the Builder's input bit corresponding to the high bit in the Executor's input.

Secondly, in order to open the check circuits the Executor needs obtain both keys for each of its input wires for the check circuits without revealing which circuits have been chosen.

Having obtained its input keys the Executor then prove to the Builder what subset of the circuits it opened as check circuits so that the Builder can provide both keys for each of its input wires allowing for the opening of the whole circuit.

Thirdly, given all keys for the inputs wires how do we check the correctness of a circuit? The obvious method would be to fully decrypt each gate, checking to make sure it is the correct gate type(e.g. AND gate)

---

A simpler alternative though would be for the Builder to seed the randomness used for each circuit differently and then send the seed for each circuit identified as a check circuit. The Executor can then fully re-build each check circuit using this seed and the full inputs sets and check that the resulting circuit is equal to the check circuit.

Fourthly, how should the Executor react to differing outputs from the evaluation circuits? Whilst it is tempting to simply abort immediately this opens the Executor up to an attack referred to as a *selective failure* attack. This is where the Builder crafts one (or more) of the circuits to fail in some way if the Executors input fulfils some condition (e.g. if the first bit is 1). Then the Executor aborting due to differing outputs from Evaluation Circuits leaks information, namely whether the Executor's input satisfies the condition or not.

In the classic protocol the Executor returns the majority output on each output wire. Suppose that we have  $s$  many circuits,  $t$  of which are selected as check circuits. Then clearly the output will only be corrupted if half of the Evaluation circuits are corrupted. This means that the Builder needs to submit at least  $\frac{s-t}{2}$  many corrupted circuits else the bad circuits will certainly be outvoted when it comes to decided the majority output. However, the Builder also requires that none of the corrupted circuits are selected as Check circuits, else their cheating will be detected.

---

## Chapter 4

# Protocols

We now give an overview of each of the protocols we have implemented. This is not intended to be a full blow-by-blow explanation of the protocols, instead we intend on giving the reader a high-level intuition of the key points of each protocol.

### 4.1 Lindell and Pinkas 2011

#### Overview

The protocol proposed in [3] is a significant improvement on their previous proposal [1] both in terms of performance and conceptual simplicity.

Firstly this protocol gives an improved deterrent probability of  $\epsilon = 1 - 2^{-0.311s}$ , further the work in [4] showed how to achieve a slightly improve deterrent probability of  $\epsilon = 1 - 2^{-0.32s}$ . Secondly it removes the need for the very large number of commitments entailed in [1] and thirdly it does not require the preprocessing of the circuit that vastly inflates the number of input wires for the Executor and thus the number of Oblivious transfers needed.

#### Cut and Choose Oblivious Transfer

The main new idea in this protocol is a modification of the PVW-OT from [19]. We refer to this new OT as the “Cut and Choose OT” (CnC OT), the Receiver generates a random  $J \subset [1, \dots, s]$  during the setup such that  $|J| = \frac{s}{2}$ , this set represents a subset of the  $s$  circuits to be opened.

This set  $J$  is then used to generate  $s$  many CRSs, each CRS to be used for the OTs to obtain inputs for a different circuit that the Builder sent. For the  $j^{th}$  CRS if  $j \in J$  then an OT using this CRS will reveal *both* values input by the sender rather than the usual 1-out-of-2 values, otherwise the usual OT functionality holds.

The Executor can then reveal for which circuit it received all inputs, in doing so it commits to a set of check circuits. The Builder can then reveal all information required to fully decrypt the check circuit, allowing the Executor to test the correctness of each check circuit. The keys representing the Builder’s input for each wire for the evaluation circuits are then sent, allowing the Executor to evaluate all the non-check circuits

A subtle detail that may have passed the reader by is that we require the Executing party be able to prove that only  $\frac{s}{2}$  many of the CRSs allow the recovery of both inputs. This is achieved via a Zero Knowledge Proof detailed in Appendix B of [3], we will not dwell upon it other than to say it uses a secret sharing scheme.

---

## Consistency of building party's inputs

Lindell and Pinkas present a conceptually elegant method for ensuring the consistency of the builder's inputs. Before building the circuits the builder takes a group  $\mathbb{G}$  in which the Discrete Log problem is hard. It then generates  $\{a_i^0, a_i^1\}_{i=1}^l$  where  $l$  is the number of builder's input wires and  $\{r_j\}_{j=1}^s$  where  $s$  is the number of circuits.

The builder then computes  $\{g^{a_i^0}, g^{a_i^1}\}_{i=1}^l$  and  $\{g^{r_j}\}_{j=1}^s$  and uses  $H(g^{a_i^{0r_j}})$

## 4.2 Lindell 2013

### Overview

In [5] Lindell proposed further improvements on his work with Pinkas in [3].

Lindell uses a Secure Computation to determine the output that will produce the correct output if even only one of the evaluation circuits produces the correct output.

This means that to successfully cheat a malicious builder will need guess *exactly* which circuits will be selected as check circuits. If the guess made by the malicious builder is wrong on even one circuit the cheating will either be detected (if it corrupts a check circuit) or mitigated (if it fails to corrupt every evaluation circuit).

Lindell suggest this Secure Computation be carried out using the protocol he authored with Pinkas in [3] using a small circuit he provides. The hope is that, especially for large circuits, this small secure computation will be relatively cheap.

In order to take full advantage of this improved output determination Lindell modifies the Cut and Choose Oblivious Transfer in [3]. The modification removes the requirement that exactly half the circuits are selected as check circuits. Instead each circuit is selected with probability  $\frac{1}{2}$ .

This modification of the OT requires a series of Zero knowledge proofs. However, as we shall see it also allows a significant reduction in the number of circuits needed and so the number of OTs needed. One of the purposes of our implementation is to find out if this exchange is worth it.

As each circuit is chosen to be a check-circuit with probability  $\frac{1}{2}$  this is effectively requiring a malicious adversary to guess at a random element in the set  $\{0, 1\}^s$  in order to cheat successfully. Therefore such a builder can only successfully cheat with probability  $2^{-s}$ . (It is worth noting here that as at least one circuit needs to be checked and at least one needs to be evaluated that there are really  $2^{-s+1}$  sets.

### Secure Computation to detect cheating

The builder constructs all the circuits so that the keys for output wires are consistent across all circuits, call these consistent output keys  $\{b_i^0, b_i^1\}_{i=1}^s$ . Further we denote the input of the Builder to the circuit as  $x$ .

Then if any of the circuits evaluated by the Executor give different outputs on any output wire (say output wire  $i$ ) the executor will obtain both  $b_i^0$  and  $b_i^1$ , these will then be used as input to the cheating detection. If all circuits produce the same output then the Executor randomly generates this input to the cheating detection.

The parties then perform a Secure Computation to detect cheating (here on in, the Sub-computation) where the Builder inputs  $x$  (it's original input to the main compu-

---

tation) and the Executor inputs  $b$ . The Secure Computation returns  $x$  to the Executor if it's input  $b$  indicates it knows both  $b_i^0$  and  $b_i^1$  for some  $i$ , otherwise it returns garbage.

Clearly we need to be sure that the Builder inputs the same  $x$  to the Sub-computation as the main computation. This can be done by using the same trick as in the Lindell-Pinkas 2010 protocol.

Lindell suggests using the Lindell-Pinkas protocol for this secure computation and gives several iterations of optimisations for the circuit to compute the function. We shall take these optimisations in one bound, for the full history of optimisation see Lindell's paper.

Firstly let the builder choose  $\{b_i^0, b_i^1\}$  and some  $\delta \in \{0, 1\}^{128}$  such that  $b_i^0 \oplus b_i^1 = \delta$  for all  $i$ . We can then check if the Executor knows  $\delta$  in rather than checking to see if they know  $b_i^0$  and  $b_i^1$ , given only one of the pair the Executor gains no knowledge of  $\delta$ . The executor's input to the sub-computation is then  $\delta$ .

Secondly, as we are aiming for statistical security of  $S$  we only need to check  $S$  many bits of the  $\delta$  the Executor inputs.

Thirdly, we can

## 4.3 Huang, Katz and Evans 2013

### Overview

Concurrently to Lindell's work in [5] Huang, Katz and Evans produced a protocol also based along the same cut and choose paradigm. However, in their protocols the parties symmetrically generate a set of circuits and then evaluate each others circuits.

Output determination for each output wire is such that the value for an output wire is only taken if the partner obtained the same value for that output wire in at least one of their evaluation circuits.

The observant reader might question what one does if a party gets both 0 and 1 on some output wire in different circuits, and the same occurs for our partner. This situation is only possible if both parties cheated, in which case we care little for their plight.

If at least one party is honest then this party will provide honest circuits and will only provide the keys required to get one output from these circuits. As such at least one party will have the correct value for every output wire in all their evaluation circuit.

The probability of a malicious adversary successfully cheating is stated as  $2^{-s+\log(s)}$  where  $s$  is the number of circuits created by *each* party. Note this means that we actually need to create  $\sim 2s$  many circuit so this protocol requires a factor of  $3/2$  less circuits for the same security level as [3].

#### 4.3.1 Advantages of symmetrical cut-and-choose

As the protocol is symmetrical, both parties will be working symmetrically reducing wall clock delays caused by one party having more work to do leaving the other party idle, so depending on how this works out in practise this could mean an improvement in wall clock time of around 3 times quicker.

---

Once again it is difficult to estimate how much of an improvement this will provide when implemented, but given two parties of similar capabilities we would expect high CPU/Wall time ratio, due to the lack of idling.

## **4.4 Merging Lindell 2013 and HKE 2013**

In the Lindell 2013 protocol



---

## Chapter 5

# Implementation Details

### Purpose of Implementation

It should be made abundantly clear that the implementation provided is not intended for real world use with actual confidentiality on the line, instead it is for the purposes of comparing the performance of the protocols under consideration.

Whilst the protocols have been implemented faithfully some of the lower level details not relevant to a comparison of the protocols are ignored, for example we do not establish a secure connection between the two parties.

Where possible we have implemented everything myself and reused the same code across protocols, rather than using available libraries. This maintains a consistent quality of implementation, using libraries where appropriate would improve the quality of the implementation it would do so in an uneven manner as many areas cannot be done using a library. This could potentially give one protocol an unfair advantage over another leading to skewed results.

### 5.1 Yao Garbled Circuits implementation

Clearly we need to implement Yao garbled circuits, but before even that we have an ordinary binary circuit implementation and we need to understand the format of the circuit definition files given by [21].

#### 5.1.1 Tillich-Smart Circuit Files

We are using the circuits provided by [21], these circuits have been crafted with Yao Garbled Circuits in mind, applying some of the optimisations suggested in [8] and trying to minimise the number of AND gates in order to take maximal advantage of the Free-XOR optimisation.

Throughout we shall refer to the format of the files as RTL. The first line of each RTL file saying how many gates and how many wires are in the circuit, the second line tells us how many inputs party 1 and party 2 give to the circuit and how many outputs there are. Note that without modification we can only provide output to either only the Executor or both parties.

From then on each line refers to a single gate of the binary circuit. The first number (call this number  $m$ ) of a gate definition says how many inputs wires go into the gate, the second number (call this  $n$ ) how many outputs. Then the next  $m$  numbers are the input wire IDs, then the last  $n$  number are the IDs of the output wires. Finally the gate type is indicated, either AND, XOR, or INV.

So for example, ‘2 1 0 32 406 XOR’ represents an XOR gate with ID 406 that takes two input wires which have IDs 0 and 32.

### 5.1.2 Creating binary circuits

By creating a binary circuit from the RTL files and then using this binary circuit (here on in the Raw input circuit) as a template for the creation of Yao Circuits we gain three advantages over reading from the RTL file to create a Yao Garbled Circuit directly.

Firstly this reducing the amount of file I/O, we only need read the file once. Secondly this means makes it easier for us to perform further optimisations on the circuits, for example wire switching the inversion gates to reduce the size of the circuits. Thirdly we need to be able to execute the normal binary circuit in the course of the Lindell 2013 protocol.

We then create a Garbled circuit in the usual way using the raw input circuit to define the relations between gate rather than the RTL file.

## 5.2 Elliptic Curve implementation

Throughout unless otherwise stated we have worked in Elliptic Curve groups, in particular on the curve *brainpoolP256r1* specified in [24]. This is a 256-bit curve and as such provides 128-bits of security. I suggest [22] as a high-level primer on ECC and [23] for a more technically detailed introduction.

Elliptic curves groups are preferable over Schnorr groups for cryptographic puposes, they require smaller keys for the same level of security reducing the required size of the group. This is particularly desirable as it reduces the size of the number we are dealing with. This point is illustrated in the Figure 5.1.

Symmetric key size (bits)	RSA/Diffie-Hellman key size (bits)	Elliptic Curve key size (bits)
80	1024	160
112	2048	224
128	3072	256
192	7680	384
256	15360	521

Figure 5.1: A table showing the key sizes needed to achieve levels of security in both the traditional RSA/Diffie-Hellman groups and in Elliptic Curve groups. Taken from [25].

Elliptic Curve Groups are usually represented in Additive notation, differing from the usual Multiplicative notation used for groups in cryptography. We define a curve of the form  $y^2 = x^3 + a \cdot x + b$  modulo some prime  $q$ , call this curve  $C$ . Say  $n$  is the number of bits required to represent  $q$ , then we say this is an  $n$ -bit curve.

We then need to define the group by the set of elements and the group operation. The set of elements is simply defined as,

$$\{(x, y) \in \mathbb{Z}_p^2 : \text{where } y^2 = x^3 + a \cdot x + b\}$$

We will use the most intuitive representation of points on elliptic curves, namely just the  $(x, y)$  coordinates. We denote the identity in the group to be  $(0, 0)$  and the inverse of an element  $(x, y)$  is simply  $(x, -y)$ .

---

This representation is sometimes called the *Affine* representation, other representations exist and mostly exist as their operations reduce the number of modular inversions required for each group operation.

Take  $P = (x_1, y_1)$  and  $Q = (x_2, y_2)$ , then  $(x_3, y_3) = P + Q$  is as follows

$(x_3, y_3) = (@, @)$  if  $x_1 = x_2$  and  $y_1 \neq y_2$

$x_3 = (\frac{y_2 - y_1}{x_2 - x_1})^2 - x_1 - x_2$  and  $y_3 = (x_1 - x_3) * \frac{y_2 - y_1}{x_2 - x_1}$  where  $x_1 \neq x_2$

### 5.3 Verifiable Secret Sharing and Multi-precision Polynomials

For the Zero Knowledge Proof of Knowledge specified in [3] we need a Secret Sharing Scheme. For [6] we need to go one step further and have a Verifiable Secret Sharing Scheme.

A Secret Sharing Scheme is a way of obscuring a secret whilst distributing shares to a set of parties such that only certain combinations of shares will be able to reconstruct the secret. So consider perhaps a bank vault which requires at least 3 out of 10 keys. Here the secret is the vault opening, the shares are the keys and the parties are the bank employees holding the keys. In general we speak of a  $t$ -out-of- $n$  scheme, where there are  $n$  shares and  $t$  of them are required to reveal the secret.

We have implemented Shamir's Secret Scheme (Shamir's) and its extension the Feldman's Scheme. Shamir's scheme is based on how many points are needed to uniquely define a polynomial curve.

Consider a polynomial  $K$  of degree  $n$  over the finite field  $\mathbb{F}_q$ . Then we can denote this polynomial as  $K = \sum_{i=0}^n a_i \cdot x^i$ . Any such polynomial of degree  $n$  can be uniquely defined given  $n + 1$  (or more) points on the curve, given  $n$  or fewer points we gain no information about the polynomial.

#### 5.3.1 Multi-precision polynomials

In order to use Shamir Secret Sharing we need an implementation of polynomials, furthermore in order to deal with the secrets of the size we shall need to be dealing with we shall need Multi-precision polynomials.

While several libraries exist with support for Multi-precision polynomials these are not commonly installed and given the ease of using GMP it was much simpler to implement Multi-Precision polynomials ourselves.

We will not dwell on the details of this as this was quite trivial and is tangential. Suffice to say we have a structure for polynomials in a field, this structure contains a degree and a set of coefficients. We then coded functions to perform addition, multiplication and evaluation. With functions complete we were ready to attempt Shamir Secret Sharing.

### 5.4 Peikert, Vaikuntanathan and Waters OT

.

---

#### 5.4.1 Other - AES, SHA-2

.

---

## Chapter 6

# Experiments

We shall be using the circuits provided in [21] for our experiments with varying randomised inputs, in particular we shall consider

- AES,
- 32-bit Addition,
- 32-bit Multiplication,
- SHA-256 hashing.

### 6.1 Measurement metrics

We shall be focusing on three main metrics for measuring performance of the protocols for both parties, namely CPU time used, wall clock time used and data sent (in terms of bytes).

We shall break these metrics down further so that we can see measure the performance of each part of the protocol for the purpose of identifying the bottlenecks for each protocol.

### 6.2 Testing Environment

All tests were carried out between two test machines each with an i7-3770S CPU clocked at 3.10 GHz with 8096 KB of cache and 32 GB of RAM. These machines both possess dedicated network cards for communications with the other member of the pair. Compilation was performed with g++ version 4.4.7.

### 6.3 Results

We now give results of using each of the Protocol on the test circuits, we have generated a large set of random inputs for each circuit using a simple python script. This allows use to use the same inputs for each Protocol whilst also trying a range of random test inputs.

We give a short précis to each circuit detailing the expected results and a small amount of analysis of the results, further analysis of results comes later. All tests are configured to given a deterrent probability of  $1 - 2^{40}$ , or put in other terms, a statistical security parameter of 40.

---

### 6.3.1 32-bit addition

The 32-bit addition circuit is the smallest circuit we consider, consisting of only 349 gates. Each party inputs 32-bits and the circuit outputs the addition of the inputs considered as 32-bit integers.

We expected to see a poor showing from the Lindell 2013 protocol due to the circuits small size increasing the relative cost of the sub-computation. Addition and Multiplication are both fairly silly examples for Secure Two Party computation as the functions completely leak the other party's input to each party.

### 6.3.2 32-bit multiplication

The 32-bit multiplication circuit is significantly larger than addition yet smaller than AES, providing a good mid-way stepping stone to the AES circuit. Furthermore, as the inputs sizes are the same for both parties the number of OTs is the same as in the Addition circuit, meaning we get to see how much import the 'depth' (size of circuit discounting inputs) of the circuit has with regards to performance.

### 6.3.3 AES encryption

AES encryption is a classic benchmark for Secure two part computations. We will be considering the version without The RTL circuit provided from [21] for this computation has  $\sim 39,000$  gates.

### 6.3.4 SHA-256 Hashing

The SHA-256 Hashing circuit is the largest we shall be testing upon with 236,112 gates (around 6 times larger than AES. The circuit takes a 512 bit input from one of the parties and outputs the SHA-256 hash of this input.

This test should heavily favour Lindell's 2013 protocol over the Lindell-Pinkas 2010 protocol due to the size of the circuit. Of particular interest is the comparison of the HKE protocol versus the both variants of Lindell's 2013 protocol.

---

## Chapter 7

# Conclusions

---

# Bibliography

- [1] Y. Lindell and B. Pinkas. *An Efficient Protocol for Secure Two-Party Computation in the Presence of Malicious Adversaries*. To appear in the Journal of Cryptology. (Extended abstract appeared in EUROCRYPT 2007, Springer (LNCS 4515), pages 52–78, 2007.)
- [2] Y. Lindell, B. Pinkas and N. P. Smart. *Implementing Two-Party Computation Efficiently with Security Against Malicious Adversaries*. Proceedings of the Sixth Conference on Security and Cryptography for Networks (SCN), 2008.
- [3] Y. Lindell and B. Pinkas. *Secure Two-Party Computation via Cut-and-Choose Oblivious Transfer*. In TCC 2011, Springer (LNCS 6597), pages 329–346, 2011
- [4] A. Shelat, C.H. Shen. *Two-Output Secure Computation with Malicious Adversaries*, In EUROCRYPT 2011, Springer (LNCS 6632), pages 386–405, 2011.
- [5] Y. Lindell. *Fast cut-and-choose based protocols for malicious and covert adversaries*, R. Canetti, J.A. Garay, (eds.) CRYPTO 2013, Part II. LNCS, vol. 8043, pages 1–17. Springer, Heidelberg (2013).
- [6] Y. Huang, J. Katz, D. Evans. *Efficient Secure Two-Party Computation Using Symmetric Cut-and-Choose*, In 33rd International Cryptology Conference (CRYPTO 2013), 2013.
- [7] P. Bogetoft, D. Christensen, I. Damgård et al. *Secure Multiparty Computation Goes Live*, In Financial Cryptography and Data Security 2009, Springer LNCS 5628, pages 325–343, 2009.
- [8] B. Pinkas, T. Schneider, N. P. Smart and S. C. Williams. *Secure Two-Party Computation is Practical*, ASIACRYPT 2009, 2009.
- [9] V. Kolesnikov and T. Schneider. *Improved garbled circuit: Free XOR gates and applications*. In Automata, Languages and Programming – ICALP 2008, Springer-Verlag (LNCS 5126), pages 486 - 498, 2008.
- [10] S. Jarecki and V. Shmatikov. *Efficient Two-Party Secure Computation on Committed Inputs*. In EUROCRYPT 2007, Springer (LNCS 4515), pages 97 - 114, 2007.
- [11] J. Nielsen and C. Orlandi. *LEGO for Two-Party Secure Computation*. In TCC 2009, Springer (LNCS 5444), pages 368 - 386, 2009.
- [12] T. Frederiksen, T. Jakobsen, J. Nielsen, et al. *MiniLEGO: Efficient Secure Two-Party Computation from General Assumptions*, In Advances in Cryptology - EUROCRYPT 2013, Springer (LNCS 7881), pages 537 - 556, 2013.
- [13] A. Yao. *How to Generate and Exchange Secrets*. In 27th FOCS, pages 162–167, 1986.
- [14] Y. Lindell, B. Pinkas. *A proof of security of Yao’s protocol for two-party computation*. Journal of Cryptology 22(2), pages 161 - 188 (2009).



- 
- [15] I. Abraham, D. Dolev, R. Gonen and J. Halpern. *Distributed Computing Meets Game Theory: Robust Mechanisms for Rational Secret Sharing and Multiparty Computation*, Proceedings of the Twenty-Fifth Annual ACM Symposium on Principles of Distributed Computing, pages 53 - 62, 2006.
  - [16] M. Rabin. *How to exchange secrets with oblivious transfer*. Technical Report, TR-81, Aiken Computation Lab, Harvard University, 1981.
  - [17] B. Pinkas. *Secure Computation Lecture Series*, Lecture 5 - Oblivious Transfer, 2014.
  - [18] S. Even, O. Goldreich and A. Lempel. *A randomized protocol for signing contracts*, In Communications of the ACM, Vol. 28 Iss. 6, pages 637 - 647 (1985)
  - [19] C. Peikert, V. Vaikuntanathan and B. Waters. *A framework for efficient and composable oblivious transfer*. In: Wagner, D. (ed.) CRYPTO 2008, Springer (LNCS 5157), pages 554–571, 2008.
  - [20] Naor and B. Pinkas, *Efficient Oblivious Transfer Protocols*, Proceedings of SODA 2001 (SIAM Symposium on Discrete Algorithms), 2001.
  - [21] Bristol Cryptography Group. *Circuits of Basic Functions Suitable For MPC and FHE*. <http://www.cs.bris.ac.uk/Research/CryptographySecurity/MPC/>.
  - [22] N. Sullivan, *A (relatively easy to understand) primer on elliptic curve cryptography*, October 2013, <http://arstechnica.com/security/2013/10/a-relatively-easy-to-understand-primer-on-elliptic-curve-cryptography/>.
  - [23] D. McGrew, K. Igoe and M. Salter, *Fundamental Elliptic Curve Cryptography Algorithms*, RFC 6090, February 2011.
  - [24] ECC Brainpool, *ECC Brainpool Standard Curves and Curve Generation*, October 2005, <http://www.ecc-brainpool.org/download/Domain-parameters.pdf>.
  - [25] NSA. *The Case for Elliptic Curve Cryptography*, January 2009, [https://www.nsa.gov/business/programs/elliptic\\_curve.shtml](https://www.nsa.gov/business/programs/elliptic_curve.shtml).
  - [26] Bob Jenkins. *ISAAC: a fast cryptographic random number generator*, <http://burtleburtle.net/bob/rand/isaacafa.html>.

---

# Appendix A

## Benchmarking components

Here I give some benchmarks of key components in my implementation such as communication, ECC encryption and circuit evaluation. I include these measurements so that others intending to implement these protocols with more efficient (e.g. library supplied) components can get a rough idea of what performance improvement they can expect.

### A.1 Communications

We benchmark our communications between Diffie and Hellman. We focus on sending elements of the 256-bit ECC group and sending raw bytes in varying sizes and numbers of blocks.

Communication benchmarks will probably will elicit the most interest from readers intending on implementing these protocols themselves as the nature of our test environment de-emphasise the communication costs due to the close proximity of the two test machines.

### A.2 Elliptic Curve Group Operations

We benchmark point addition, point multiplication and fixed point multiplication. The fixed point multiplication includes the pre-computation of the relevant windows.

### A.3 Oblivious Transfer

We benchmark all the Oblivious transfers we use, in each case we include the setup of the OTs in the measurements and we also state the communication costs (number of bytes exchanged).

#### A.3.1 PVW Oblivious Transfer

#### A.3.2 Cut and Choose Oblivious Transfer

#### A.3.3 Modified Cut and Choose Oblivious Transfer

#### A.3.4 Naor Pinkas Oblivious Transfer

.

### A.4 Circuit Evaluation

Once a party has the inputs for a Yao Garbled Circuit the circuit must be evaluated. We show benchmarks for all the circuit we shall be testing.