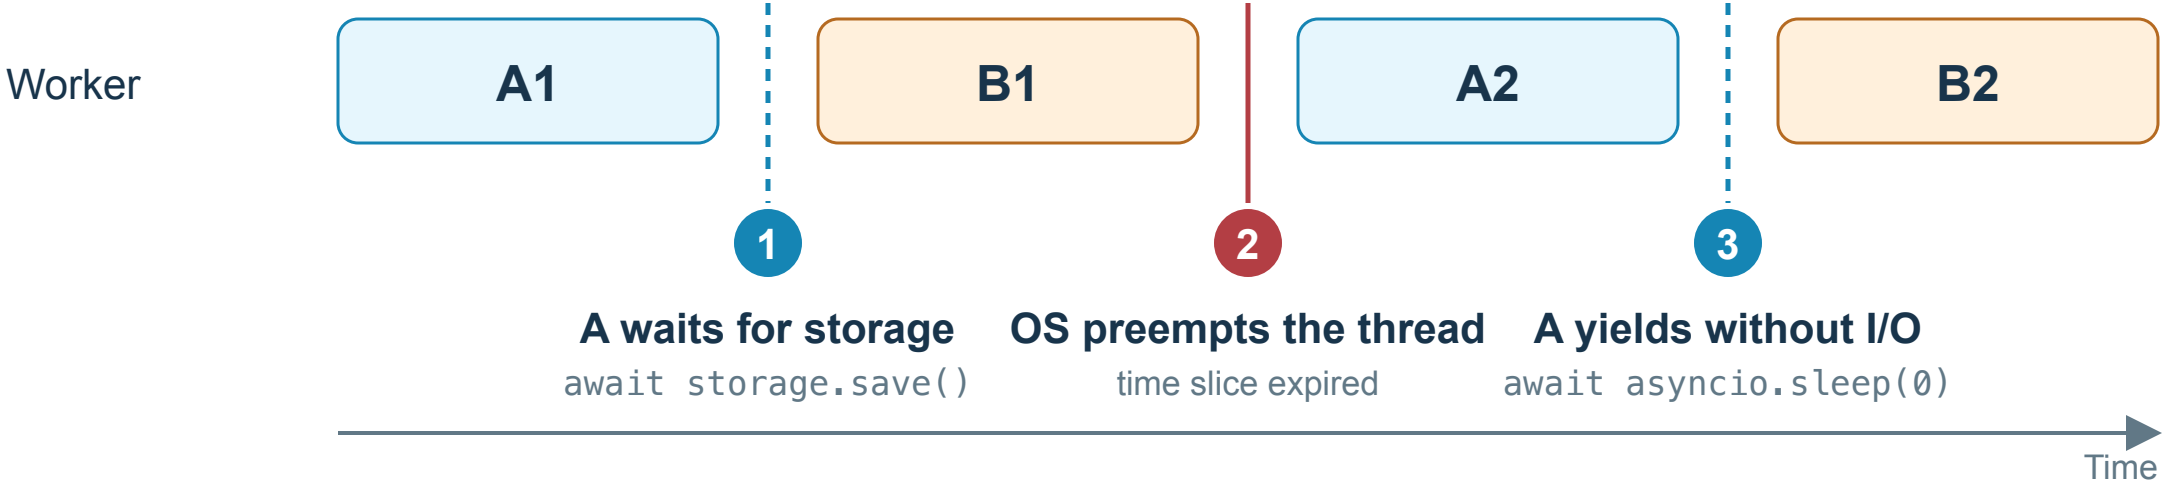

Worker
A1
B1
A2
B2
1
2
3
A waits for storage
await storage.save()
OS preempts the thread
time slice expired
A yields without I/O
await asyncio.sleep(0)
Time
Cooperative (asyncio)
only at await: ① and ③
Preemptive (OS threads)
between any two instructions: ②