

Removing data sources from Cloud Data Sense

Cloud Manager

Tom Onacki, Ben Cammett July 02, 2021

This PDF was generated from https://docs.netapp.com/us-en/occm/task_managing_compliance.html on September 14, 2021. Always check docs.netapp.com for the latest.

Table of Contents

| Removing data sources from Cloud Data Sense | . 1 |
|---|-----|
| Deactivating compliance scans for a working environment | . 1 |
| Removing a database from Cloud Data Sense | . 1 |
| Removing a OneDrive account from Cloud Data Sense | . 2 |
| Removing a group of file shares from Cloud Data Sense | . 2 |
| Reducing the Data Sense scan speed | . 2 |
| Deleting the Cloud Data Sense instance | . 3 |


Removing data sources from Cloud Data Sense

If you need to, you can stop Cloud Data Sense from scanning one or more working environments, databases, file share groups, or OneDrive accounts. You can also delete the Cloud Data Sense instance if you no longer want to use Data Sense with your working environments.

Deactivating compliance scans for a working environment

When you deactivate scans, Cloud Data Sense no longer scans the data on the working environment and it removes the indexed compliance insights from the Data Sense instance (the data from the working environment itself isn't deleted).

1. From the *Configuration* page, click the button in the row for the working environment, and then click **Deactivate Data Sense**.

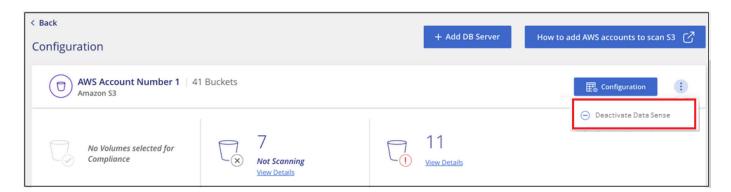




You can also disable compliance scans for a working environment from the Services panel when you select the working environment.

Removing a database from Cloud Data Sense

If you no longer want to scan a certain database, you can delete it from the Cloud Data Sense interface and stop all scans.

1. From the *Configuration* page, click the button in the row for the database, and then click **Remove DB Server**.

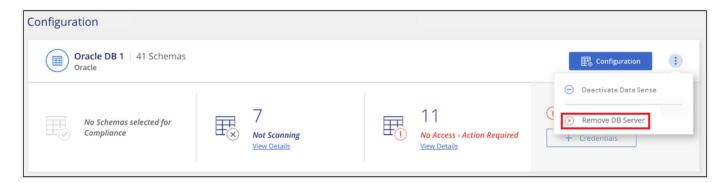

Removing a OneDrive account from Cloud Data Sense

If you no longer want to scan user files from a certain OneDrive account, you can delete the account from the Cloud Data Sense interface and stop all scans.

Steps

1. From the *Configuration* page, click the button in the row for the OneDrive account, and then click **Remove OneDrive Account**.



2. Click Delete Account from the confirmation dialog.

Removing a group of file shares from Cloud Data Sense

If you no longer want to scan user files from a file shares group, you can delete the File Shares Group from the Cloud Data Sense interface and stop all scans.

Steps

1. From the *Configuration* page, click the button in the row for the File Shares Group, and then click **Remove File Shares Group**.



2. Click **Delete Group of Shares** from the confirmation dialog.

Reducing the Data Sense scan speed


Data scans have a negligible impact on your storage systems and on your data. However, if you are concerned with even a very small impact, you can configure Data Sense to perform "slow" scans. When enabled, slow scanning is used on all data sources - you can't configure slow scanning for a single working environment or data source.




The scan speed can't be reduced when scanning databases.

Steps

1. From the bottom of the Configuration page, move the slider to the right to activate slow scanning.

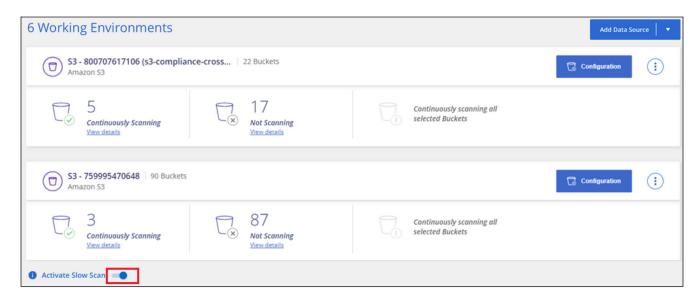

The top of the Configuration page indicates that slow scanning is enabled.

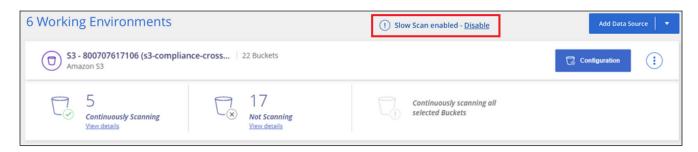

2. You can disable slow scanning by clicking **Disable** from this message.

Deleting the Cloud Data Sense instance

You can delete the Cloud Data Sense instance if you no longer want to use Data Sense. Deleting the instance also deletes the associated disks where the indexed data resides.

1. Go to your cloud provider's console and delete the Cloud Data Sense instance.

The instance is named *CloudCompliance* with a generated hash (UUID) concatenated to it. For example: *CloudCompliance-16bb6564-38ad-4080-9a92-36f5fd2f71c7*

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.