

# Test\_Login

## Execution Environment

Host name	Admin - Admin
Local OS	Windows 10 64bit
Katalon version	9.3.1.212
Browser	

## Summary

ID	Test Suites/Test_Login		
Description			
Total	7		
Passed	2	Failed	5
Error	0	Incomplete	0
Skipped	0		
Start	26-03-2024 13:20:30	End	26-03-2024 13:39:31
Elapsed	19m - 0.546s		

#	ID	Description	Status
1	Test Cases/Login		FAILED
2	Test Cases/Login		PASSED
3	Test Cases/Login		PASSED
4	Test Cases/Login		FAILED
5	Test Cases/Login		FAILED
6	Test Cases/Login		FAILED
7	Test Cases/Login		FAILED

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:22:57	End	26-03-2024 13:23:43
Elapsed	45.558s		
Status	FAILED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	9.768s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	2.223s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	1.432s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.658s	PASSED
5	openBrowser("")  Browser is opened with url: "	10.427s	PASSED
6	closeBrowser()  Browser is closed	6.848s	PASSED

# Login

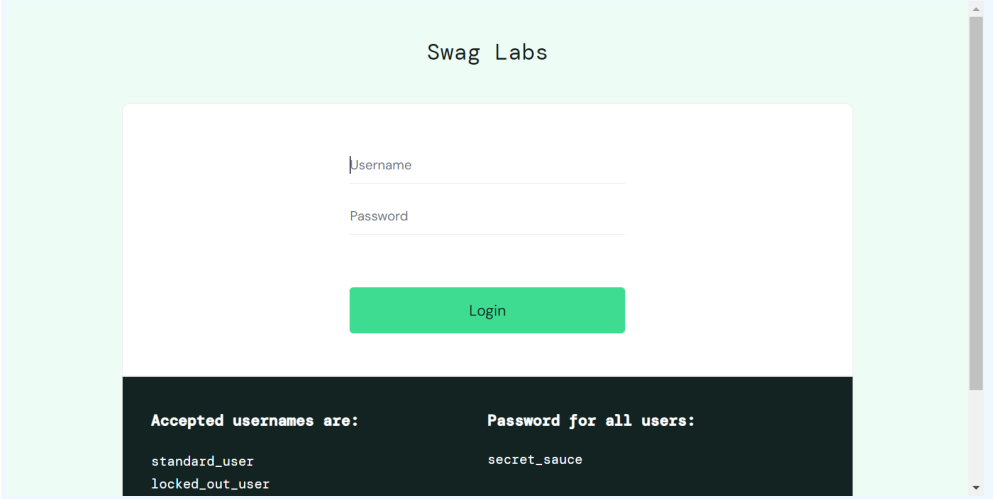
---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.658s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.831s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_user-name"), username)  Text " is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_user-name'	3.035s	PASSED

# Login

#	Description	Elapsed	Status
10	<p>setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", password))</p> <p>Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' (Root cause: com.kms.katalon.core.exception.StepFailedException: Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.stepFailed (WebUIKeywordMain.groovy:64) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:26) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Login.run(Login:38) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:148) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:180) at TempTestSuite1711434005189.run(TempTestSuite1711434005189.groovy:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke (NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke (DelegatingMethodAccessorImpl.java:43) Caused by: javax.crypto.IllegalBlockSizeException: Input length must be multiple of 8 when decrypting with padded cipher at java.base/com.sun.crypto.provider.CipherCore.prepareInputBuffer(CipherCore.java:891)</p>	6.598s	FAILED

# Login

#	Description	Elapsed	Status
	<pre>at java.base/com.sun.crypto.provider.CipherCore.doFinal(CipherCore.java:730) at java.base/com.sun.crypto.provider.PKCS12PBECipherCore.implDoFinal (PKCS12PBECipherCore.java:424) at java.base/com.sun.crypto.provider. PKCS12PBECipherCore\$PBEWithSHA1AndDESede.engineDoFinal (PKCS12PBECipherCore.java:456) at com.kms.katalon.util.CryptoUtil.decode(CryptoUtil.java:86) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.doCall(SetEncryptedTextKeyword. groovy:48) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.call(SetEncryptedTextKeyword. groovy) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:20) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Script1711433094053.run(Script1711433094053.groovy:38) ... 18 more )</pre>		
			

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:23:43	End	26-03-2024 13:24:19
Elapsed	36.082s		
Status	PASSED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	9.304s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.332s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	1.890s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.528s	PASSED
5	openBrowser("")  Browser is opened with url: "	8.912s	PASSED
6	closeBrowser()  Browser is closed	6.906s	PASSED

# Login

---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.509s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.422s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_user-name"), username)  Text 'standard_user' is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_user-name'	2.280s	PASSED
10	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)"), password)  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	0.501s	PASSED
11	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.436s	PASSED

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:24:19	End	26-03-2024 13:24:55
Elapsed	36.467s		
Status	PASSED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	9.306s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.711s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	1.899s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	2.801s	PASSED
5	openBrowser("")  Browser is opened with url: "	5.590s	PASSED
6	closeBrowser()  Browser is closed	7.354s	PASSED



# Login

---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.856s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.376s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_user-name"), username)  Text " is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_user-name'	2.353s	PASSED
10	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)"), password)  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	0.489s	PASSED
11	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.503s	PASSED

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:28:25	End	26-03-2024 13:29:05
Elapsed	40.022s		
Status	FAILED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	9.070s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.952s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	2.306s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.637s	PASSED
5	openBrowser("")  Browser is opened with url: "	11.942s	PASSED
6	closeBrowser()  Browser is closed	6.851s	PASSED

# Login

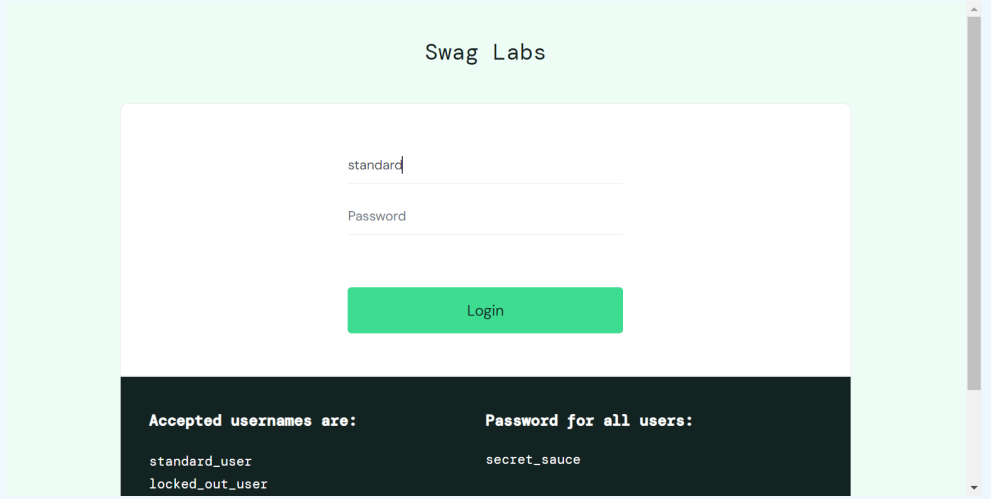
---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.329s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.618s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_username"), username)  Text 'standard' is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_username'	2.999s	PASSED

# Login

#	Description	Elapsed	Status
10	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", password))  Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' (Root cause: com.kms.katalon.core.exception.StepFailedException: Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.stepFailed (WebUIKeywordMain.groovy:64) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:26) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Login.run(Login:38) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:148) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:180) at TempTestSuite1711434005189.run(TempTestSuite1711434005189.groovy:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke (NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke (DelegatingMethodAccessorImpl.java:43) Caused by: javax.crypto.IllegalBlockSizeException: Input length must be multiple of 8 when decrypting with padded cipher at java.base/com.sun.crypto.provider.CipherCore.prepareInputBuffer(CipherCore.java:891)	0.255s	FAILED

# Login

#	Description	Elapsed	Status
	<pre>at java.base/com.sun.crypto.provider.CipherCore.doFinal(CipherCore.java:730) at java.base/com.sun.crypto.provider.PKCS12PBECipherCore.implDoFinal (PKCS12PBECipherCore.java:424) at java.base/com.sun.crypto.provider. PKCS12PBECipherCore\$PBEWithSHA1AndDESede.engineDoFinal (PKCS12PBECipherCore.java:456) at com.kms.katalon.util.CryptoUtil.decode(CryptoUtil.java:86) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.doCall(SetEncryptedTextKeyword. groovy:48) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.call(SetEncryptedTextKeyword. groovy) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:20) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Script1711433094053.run(Script1711433094053.groovy:38) ... 18 more )</pre>		
			

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:32:05	End	26-03-2024 13:32:46
Elapsed	40.542s		
Status	FAILED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	11.144s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.712s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	2.117s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.479s	PASSED
5	openBrowser("")  Browser is opened with url: "	9.405s	PASSED
6	closeBrowser()  Browser is closed	8.262s	PASSED

# Login

---

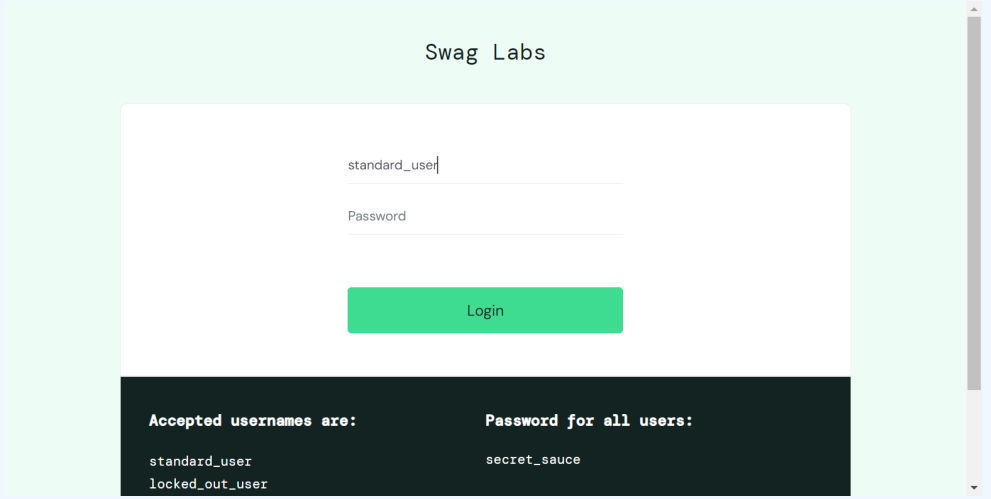
#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.634s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	2.161s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_user-name"), username)  Text 'standard_user' is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_user-name'	2.185s	PASSED

# Login

#	Description	Elapsed	Status
10	<p>setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", password))</p> <p>Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' (Root cause: com.kms.katalon.core.exception.StepFailedException: Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.stepFailed (WebUIKeywordMain.groovy:64) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:26) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Login.run(Login:38) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:148) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:180) at TempTestSuite1711434005189.run(TempTestSuite1711434005189.groovy:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke (NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke (DelegatingMethodAccessorImpl.java:43) Caused by: javax.crypto.IllegalBlockSizeException: Input length must be multiple of 8 when decrypting with padded cipher at java.base/com.sun.crypto.provider.CipherCore.prepareInputBuffer(CipherCore.java:891)</p>	0.414s	FAILED



# Login

#	Description	Elapsed	Status
	<pre>at java.base/com.sun.crypto.provider.CipherCore.doFinal(CipherCore.java:730) at java.base/com.sun.crypto.provider.PKCS12PBECipherCore.implDoFinal (PKCS12PBECipherCore.java:424) at java.base/com.sun.crypto.provider. PKCS12PBECipherCore\$PBEWithSHA1AndDESede.engineDoFinal (PKCS12PBECipherCore.java:456) at com.kms.katalon.util.CryptoUtil.decode(CryptoUtil.java:86) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.doCall(SetEncryptedTextKeyword. groovy:48) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.call(SetEncryptedTextKeyword. groovy) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:20) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Script1711433094053.run(Script1711433094053.groovy:38) ... 18 more )</pre>		
			

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:34:27	End	26-03-2024 13:35:06
Elapsed	38.332s		
Status	FAILED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	10.238s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.663s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	2.177s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.539s	PASSED
5	openBrowser("")  Browser is opened with url: "	9.362s	PASSED
6	closeBrowser()  Browser is closed	7.451s	PASSED

# Login

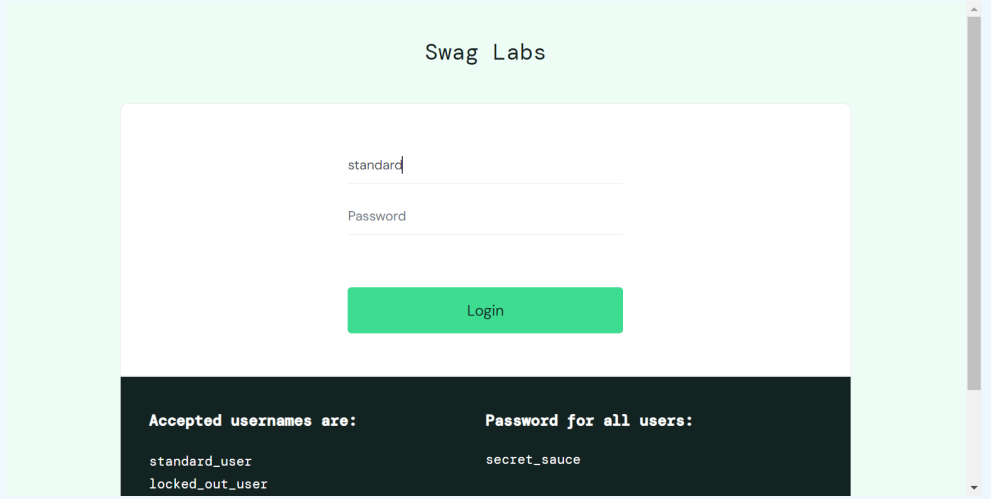
---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	2.422s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.727s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_username"), username)  Text 'standard' is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_username'	2.403s	PASSED

# Login

#	Description	Elapsed	Status
10	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", password))  Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' (Root cause: com.kms.katalon.core.exception.StepFailedException: Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.stepFailed (WebUIKeywordMain.groovy:64) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:26) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Login.run(Login:38) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:148) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:180) at TempTestSuite1711434005189.run(TempTestSuite1711434005189.groovy:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke (NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke (DelegatingMethodAccessorImpl.java:43) Caused by: javax.crypto.IllegalBlockSizeException: Input length must be multiple of 8 when decrypting with padded cipher at java.base/com.sun.crypto.provider.CipherCore.prepareInputBuffer(CipherCore.java:891)	0.281s	FAILED

# Login

#	Description	Elapsed	Status
	<pre>at java.base/com.sun.crypto.provider.CipherCore.doFinal(CipherCore.java:730) at java.base/com.sun.crypto.provider.PKCS12PBECipherCore.implDoFinal (PKCS12PBECipherCore.java:424) at java.base/com.sun.crypto.provider. PKCS12PBECipherCore\$PBEWithSHA1AndDESede.engineDoFinal (PKCS12PBECipherCore.java:456) at com.kms.katalon.util.CryptoUtil.decode(CryptoUtil.java:86) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.doCall(SetEncryptedTextKeyword. groovy:48) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.call(SetEncryptedTextKeyword. groovy) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:20) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Script1711433094053.run(Script1711433094053.groovy:38) ... 18 more )</pre>		
			

# Login

## Information

ID	Test Cases/Login		
Description			
Tag			
Start	26-03-2024 13:38:47	End	26-03-2024 13:39:20
Elapsed	33.299s		
Status	FAILED		

## Details

#	Description	Elapsed	Status
1	openBrowser("")  Browser is opened with url: "	9.225s	PASSED
2	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.422s	PASSED
3	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", "qcu24s4901H9+/lulxVhzg=="))  Text ***** has been set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)'	2.261s	PASSED
4	click(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)"))  Object: 'Object Repository/Page_Swag Labs/input_Swag Labs_login-button (1)' is clicked on	0.602s	PASSED
5	openBrowser("")  Browser is opened with url: "	3.214s	PASSED
6	closeBrowser()  Browser is closed	8.248s	PASSED

# Login

---

#	Description	Elapsed	Status
7	openBrowser("")  Browser is opened with url: "	4.113s	PASSED
8	navigateToUrl("https://www.saucedemo.com/")  Navigate to 'https://www.saucedemo.com/' successfully	1.318s	PASSED
9	setText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_user-name"), username)  Text 'standard_user' is set on object 'Object Repository/Page_Swag Labs/input_Swag Labs_user-name'	2.538s	PASSED

# Login

#	Description	Elapsed	Status
10	setEncryptedText(findTestObject("Object Repository/Page_Swag Labs/input_Swag Labs_password (1)", password))  Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' (Root cause: com.kms.katalon.core.exception.StepFailedException: Unable to set encrypted text for object 'Object Repository/Page_Swag Labs/input_Swag Labs_password (1)' at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.stepFailed (WebUIKeywordMain.groovy:64) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:26) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword.execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor.executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Login.run(Login:38) at com.kms.katalon.core.main.ScriptEngine.run(ScriptEngine.java:194) at com.kms.katalon.core.main.ScriptEngine.runScriptAsRawText(ScriptEngine.java:119) at com.kms.katalon.core.main.TestCaseExecutor.runScript(TestCaseExecutor.java:448) at com.kms.katalon.core.main.TestCaseExecutor.doExecute(TestCaseExecutor.java:439) at com.kms.katalon.core.main.TestCaseExecutor.processExecutionPhase(TestCaseExecutor.java:418) at com.kms.katalon.core.main.TestCaseExecutor.accessMainPhase(TestCaseExecutor.java:410) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:285) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.main.TestCaseExecutor.execute(TestCaseExecutor.java:369) at com.kms.katalon.core.common.CommonExecutor.accessTestCaseMainPhase(CommonExecutor.java:65) at com.kms.katalon.core.main.TestSuiteExecutor.accessTestSuiteMainPhase(TestSuiteExecutor.java:148) at com.kms.katalon.core.main.TestSuiteExecutor.execute(TestSuiteExecutor.java:106) at com.kms.katalon.core.main.TestCaseMain.startTestSuite(TestCaseMain.java:180) at TempTestSuite1711434005189.run(TempTestSuite1711434005189.groovy:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke (NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke (DelegatingMethodAccessorImpl.java:43) Caused by: javax.crypto.IllegalBlockSizeException: Input length must be multiple of 8 when decrypting with padded cipher at java.base/com.sun.crypto.provider.CipherCore.prepareInputBuffer(CipherCore.java:891)	0.305s	FAILED



# Login

#	Description	Elapsed	Status
	<pre>at java.base/com.sun.crypto.provider.CipherCore.doFinal(CipherCore.java:730) at java.base/com.sun.crypto.provider.PKCS12PBECipherCore.implDoFinal (PKCS12PBECipherCore.java:424) at java.base/com.sun.crypto.provider. PKCS12PBECipherCore\$PBEWithSHA1AndDESede.engineDoFinal (PKCS12PBECipherCore.java:456) at com.kms.katalon.util.CryptoUtil.decode(CryptoUtil.java:86) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.doCall(SetEncryptedTextKeyword. groovy:48) at com.kms.katalon.core.webui.keyword.builtin. SetEncryptedTextKeyword\$_setEncryptedText_closure1.call(SetEncryptedTextKeyword. groovy) at com.kms.katalon.core.webui.keyword.internal.WebUIKeywordMain.runKeyword (WebUIKeywordMain.groovy:20) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. setEncryptedText(SetEncryptedTextKeyword.groovy:65) at com.kms.katalon.core.webui.keyword.builtin.SetEncryptedTextKeyword. execute(SetEncryptedTextKeyword.groovy:34) at com.kms.katalon.core.keyword.internal.KeywordExecutor. executeKeywordForPlatform(KeywordExecutor.groovy:74) at com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords.setEncryptedText (WebUiBuiltInKeywords.groovy:1050) at Script1711433094053.run(Script1711433094053.groovy:38) ... 18 more )</pre>		
	