SEW EURODRIVE

# Revision



## (E)DRN.. (IE3) Gearmotors – 60 Hz

DRN.. and EDRN.. Gearmotors in HazLoc-NA®

Edition 01/2018

24772933/EN



# Table of contents

**1 Supplement/revision ..... 4**
1.1 Structure of the selection tables ..... 4
1.2 The new motor size (E)DRN100LM4 ..... 5
1.2.1 Product features ..... 5
1.2.2 Selection tables ..... 6
1.2.3 Technical data (E)DRN100LM4 ..... 18
1.3 Technical data DR63.., DRS71.., 60 Hz, 6-pole, S1 ..... 20
1.3.1 DR63.., DRS71.., 380 V, 60 Hz, 6-pole, S1, IEC ..... 20
1.3.2 DR63.., DRS71.., 440 V, 60 Hz, 6-pole, S1, IEC ..... 21
1.3.3 DR63.., DRS71.., 460 V, 60 Hz, 6-pole, S1, NEMA ..... 22
1.3.4 DR63.., DRS71.., 575 V, 60 Hz, 6-pole, S1, NEMA ..... 23
1.4 Technical data of the DRN.., 460 V, 60 Hz, 4-pole, S1 ..... 24
1.4.1 DRN.., 460 V, 60 Hz, 4-pole, S1 ..... 24
1.5 Technical data of DRS71.., 60 Hz, 4-pole, S1 ..... 26
1.5.1 DRS71.., 380 V ..... 26
1.5.2 DRS71.., 440 V ..... 26
1.5.3 DRS71.., 460 V ..... 26
1.5.4 DRS71.., 575 V ..... 27
1.6 Technical data of HazLoc-NA® EDRS71.., 60 Hz, 4-pole, S1 ..... 28
1.6.1 HazLoc-NA® EDRS71.., 460 V ..... 28
1.6.2 HazLoc-NA® EDRS71.., 575 V ..... 28

24772933/EN – 01/2018

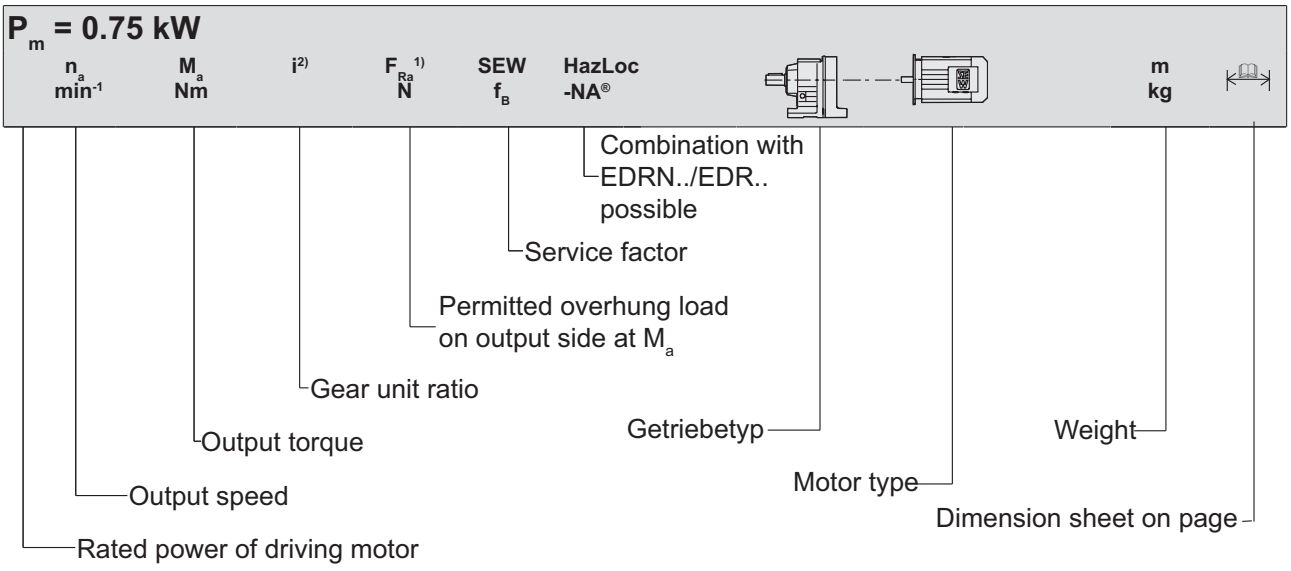
# 1 Supplement/revision

## INFORMATION

This revision contains content that was added to or updated the following contents of the “(E)DRN.. (IE3) Gearmotors – 60 Hz" catalog:

- Revised figure in chapter 7.2.1 "Structure of the selection tables"
- Supplement of the new motor size (E)DRN100LM4: Product features, selection tables, and technical data
- Revision chapter 13 “Technical data of the motors”: Technical data of the 6-pole motors of the DR63.. series
- Revision chapter 13 “Technical data of the motors”: Technical data of the DRN.. motors, 460 V, 60 Hz, 4-pole, S1
- Revision chapter 13 “Technical data of the motors”: Technical data of the 4-pole motors of the DRS71.. series
- Revision chapter 13 “Technical data of the motors”: Technical data of the 4-pole motors of the EDRS71.. series

## 1.1 Structure of the selection tables




*9007217516593163*

[1] Overhung load for foot-mounted gear units with solid shaft; overhung loads for other design types upon request

[2] A value marked with * indicates finite gear unit ratio.

24772933/EN – 01/2018

## 1.2 The new motor size (E)DRN100LM4

### 1.2.1 Product features

The new, optimized design (E)DRN100LM4 with a rated frequency of 60 Hz or 50/60 Hz and a rated power of 2.2 kW replaces all existing designs (E)DRN100L4 of the same power and frequency.

The new size offers the following advantages:

- DRN.. motors of size 100LM have a lower inertia than motors of size 100L.
- Since the rated torque and rated power remain unchanged, the motor's operating behavior is even more dynamic.
- The lower starting current ratio further reduces the load on the system's protection devices.

Approvals, certifications, options, and accessories of the (E)DRN100L4 are also available for the new designs. The price and delivery time remain unchanged.

**INFORMATION**


The dimensions of the motor (E)DRN100LM4 are identical to the (E)DRN100L4 ones. You find the dimensions of the (E)DRN100LM4 gearmotors in the dimension sheets of the respective gearmotors with motor (E)DRN100L4.

24772933/EN – 01/2018

### 1.2.2 Selection tables

**R..(E)DRN100LM4**

**$P_m$ = 2.2 kW**

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **1.1** | 17800 | 1670 | 120000 | 1.00 | X | | | | | |
| **1.2** | 15600 | 1438 | 120000 | 1.15 | X | | | | | |
| **1.4** | 13900 | 1279 | 120000 | 1.30 | X | | | | | |
| **1.6** | 12100 | 1123 | 120000 | 1.50 | X | **R** | **167R97** | **(E)DRN** | **100LM4** | 780 |
| **1.8** | 10700 | 999 | 120000 | 1.65 | X | **RF** | **167R97** | **(E)DRN** | **100LM4** | 780 |
| **2.0** | 9300 | 861 | 120000 | 1.95 | X | **RM** | **167R97** | **(E)DRN** | **100LM4** | 980 |
| **2.3** | 8230 | 760 | 120000 | 2.2 | X | | | | | |
| **2.7** | 6820 | 656 | 120000 | 2.6 | X | | | | | |
| **3.3** | 5670 | 533 | 72500 | 2.3 | X | | | | | |
| **3.8** | 4870 | 462 | 73000 | 2.7 | X | **R** | **147R87** | **(E)DRN** | **100LM4** | 470 |
| **4.1** | 4610 | 426 | 73200 | 2.8 | X | **RF** | **147R87** | **(E)DRN** | **100LM4** | 475 |
| **4.8** | 3980 | 368 | 73500 | 3.3 | X | **RM** | **147R87** | **(E)DRN** | **100LM4** | 640 |
| **5.4** | 3520 | 326 | 73800 | 3.7 | X | | | | | |
| **1.5** | 12700 | 1166 | 63100 | 1.00 | X | | | | | |
| **1.7** | 11200 | 1029 | 65900 | 1.15 | X | | | | | |
| **2.0** | 9710 | 889 | 68200 | 1.35 | X | | | | | |
| **2.2** | 8550 | 784 | 69700 | 1.50 | X | **R** | **147R77** | **(E)DRN** | **100LM4** | 445 |
| **2.5** | 7560 | 695 | 70800 | 1.70 | X | **RF** | **147R77** | **(E)DRN** | **100LM4** | 455 |
| **2.8** | 6800 | 619 | 71500 | 1.90 | X | **RM** | **147R77** | **(E)DRN** | **100LM4** | 620 |
| **3.2** | 6110 | 558 | 72100 | 2.1 | X | | | | | |
| **3.6** | 5350 | 489 | 72700 | 2.4 | X | | | | | |
| **2.5** | 7650 | 699 | 54100 | 1.05 | X | **R** | **137R77** | **(E)DRN** | **100LM4** | 305 |
| **2.9** | 6630 | 609 | 56000 | 1.20 | X | **RF** | **137R77** | **(E)DRN** | **100LM4** | 330 |
| | | | | | | **RM** | **137R77** | **(E)DRN** | **100LM4** | 440 |
| **2.4** | 7970 | 730 | 53400 | 1.00 | X | | | | | |
| **2.8** | 6830 | 629 | 55700 | 1.15 | X | | | | | |
| **3.1** | 6150 | 560 | 56800 | 1.30 | X | | | | | |
| **3.6** | 5330 | 490 | 58000 | 1.50 | X | | | | | |
| **4.1** | 4650 | 428 | 58800 | 1.70 | X | **R** | **137R77** | **(E)DRN** | **100LM4** | 315 |
| **4.6** | 4190 | 381 | 59300 | 1.90 | X | **RF** | **137R77** | **(E)DRN** | **100LM4** | 340 |
| **5.5** | 3550 | 323 | 59900 | 2.2 | X | **RM** | **137R77** | **(E)DRN** | **100LM4** | 450 |
| **6.0** | 3190 | 291 | 60200 | 2.5 | X | | | | | |
| **6.9** | 2790 | 255 | 60500 | 2.9 | X | | | | | |
| **7.9** | 2440 | 223 | 60700 | 3.3 | X | | | | | |
| **5.5** | 3530 | 323 | 33000 | 1.20 | X | **R** | **107R77** | **(E)DRN** | **100LM4** | 230 |
| **6.2** | 3110 | 285 | 34600 | 1.40 | X | **RF** | **107R77** | **(E)DRN** | **100LM4** | 235 |
| **7.0** | 2750 | 253 | 35700 | 1.55 | X | **RM** | **107R77** | **(E)DRN** | **100LM4** | 325 |
| **8.2** | 2330 | 214 | 36400 | 1.85 | X | | | | | |
| **5.4** | 3610 | 325 | 32700 | 1.20 | X | **R** | **107R77** | **(E)DRN** | **100LM4** | 225 |
| | | | | | | **RF** | **107R77** | **(E)DRN** | **100LM4** | 230 |
| | | | | | | **RM** | **107R77** | **(E)DRN** | **100LM4** | 315 |
| **8.4** | 2290 | 209 | 25100 | 1.30 | X | **R** | **97R57** | **(E)DRN** | **100LM4** | 155 |
| | | | | | | **RF** | **97R57** | **(E)DRN** | **100LM4** | 175 |
| | | | | | | **RM** | **97R57** | **(E)DRN** | **100LM4** | 225 |
| **5.8** | 3620 | 203.16 | 32700 | 1.20 | | **R** | **107** | **DRN** | **132S6** | 210 |
| **6.8** | 3070 | 172.34 | 34700 | 1.40 | | **RF** | **107** | **DRN** | **132S6** | 215 |
| **7.4** | 2820 | 158.68 | 35500 | 1.50 | | **RM** | **107** | **DRN** | **132S6** | 305 |
| **8.3** | 2520 | 141.83 | 36100 | 1.70 | | | | | | |
| **7.0** | 2990 | 251.15 | 35000 | 1.45 | X | **R** | **107** | **(E)DRN** | **100LM4** | 190 |
| **7.7** | 2740 | 229.95 | 35700 | 1.55 | X | **RF** | **107** | **(E)DRN** | **100LM4** | 195 |
| **8.7** | 2420 | 203.16 | 36300 | 1.80 | X | **RM** | **107** | **(E)DRN** | **100LM4** | 285 |
| **10** | 2050 | 172.34 | 36700 | 2.1 | X | | | | | |
| **11** | 1890 | 158.68 | 36900 | 2.3 | X | | | | | |
| **12** | 1690 | 141.83 | 37100 | 2.5 | X | **R** | **107** | **(E)DRN** | **100LM4** | 190 |
| **14** | 1520 | 127.68 | 37200 | 2.8 | X | **RF** | **107** | **(E)DRN** | **100LM4** | 195 |
| **15** | 1370 | 115.63 | 37300 | 3.1 | X | **RM** | **107** | **(E)DRN** | **100LM4** | 285 |
| **17** | 1220 | 102.53 | 37000 | 3.5 | X | | | | | |
| **19** | 1100 | 92.70 | 35900 | 3.9 | X | | | | | |

24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **8.2** | 2570 | 216.28 | 18000 | 1.15 | X | **R** | **97** | **(E)DRN** | **100LM4** | 135 |
| **9.5** | 2220 | 186.30 | 22300 | 1.35 | X | **RF** | **97** | **(E)DRN** | **100LM4** | 150 |
| **10** | 2020 | 170.02 | 24600 | 1.50 | X | **RM** | **97** | **(E)DRN** | **100LM4** | 200 |
| **12** | 1790 | 150.78 | 27100 | 1.65 | X | | | | | |
| **14** | 1510 | 126.75 | 27600 | 2.0 | X | | | | | |
| **15** | 1380 | 116.48 | 27800 | 2.2 | X | | | | | |
| **17** | 1230 | 103.44 | 28000 | 2.4 | X | | | | | |
| **19** | 1100 | 92.48 | 28100 | 2.7 | X | **R** | **97** | **(E)DRN** | **100LM4** | 135 |
| **21** | 990 | 83.15 | 27800 | 3.0 | X | **RF** | **97** | **(E)DRN** | **100LM4** | 150 |
| **24** | 860 | 72.17 | 26700 | 3.5 | X | **RM** | **97** | **(E)DRN** | **100LM4** | 200 |
| **27** | 775 | 65.21 | 25900 | 3.9 | X | | | | | |
| **29** | 710 | 59.92 | 25300 | 4.2 | X | | | | | |
| **33** | 630 | 53.21 | 24400 | 4.7 | X | | | | | |
| **37** | 565 | 47.58 | 23600 | 5.3 | X | | | | | |
| **14** | 1480 | 124.97 | 13400 | 1.05 | X | | | | | |
| **15** | 1410 | 118.43* | 14500 | 1.10 | X | **R** | **87** | **(E)DRN** | **100LM4** | 92 |
| **17** | 1230 | 103.65 | 17100 | 1.25 | X | **RF** | **87** | **(E)DRN** | **100LM4** | 99 |
| **19** | 1110 | 93.38 | 18800 | 1.40 | X | **RM** | **87** | **(E)DRN** | **100LM4** | 130 |
| **22** | 970 | 81.92 | 19900 | 1.60 | X | | | | | |
| **24** | 860 | 72.57 | 20000 | 1.80 | X | | | | | |
| **28** | 755 | 63.68* | 20000 | 2.0 | X | | | | | |
| **29** | 715 | 60.35* | 20000 | 2.1 | X | | | | | |
| **33** | 625 | 52.82 | 20000 | 2.5 | X | **R** | **87** | **(E)DRN** | **100LM4** | 92 |
| **37** | 565 | 47.58 | 19400 | 2.7 | X | **RF** | **87** | **(E)DRN** | **100LM4** | 99 |
| **42** | 495 | 41.74 | 18700 | 3.1 | X | **RM** | **87** | **(E)DRN** | **100LM4** | 130 |
| **48** | 435 | 36.84* | 18000 | 3.5 | X | | | | | |
| **54** | 385 | 32.66* | 17400 | 4.0 | X | | | | | |
| **51** | 410 | 34.40* | 17600 | 3.7 | X | | | | | |
| **56** | 370 | 31.40 | 17200 | 4.1 | X | **R** | **87** | **(E)DRN** | **100LM4** | 90 |
| **63** | 330 | 27.84* | 16500 | 4.7 | X | **RF** | **87** | **(E)DRN** | **100LM4** | 97 |
| **75** | 275 | 23.40 | 15700 | 5.5 | X | **RM** | **87** | **(E)DRN** | **100LM4** | 125 |
| **82** | 255 | 21.51 | 15300 | 5.8 | X | | | | | |
| **27** | 780 | 65.77 | 10200 | 1.05 | X | | | | | |
| **31** | 685 | 57.68 | 11000 | 1.20 | X | **R** | **77** | **(E)DRN** | **100LM4** | 65 |
| **34** | 620 | 52.07 | 11400 | 1.30 | X | **RF** | **77** | **(E)DRN** | **100LM4** | 71 |
| **38** | 545 | 45.81 | 11800 | 1.50 | X | **RM** | **77** | **(E)DRN** | **100LM4** | 96 |
| **41** | 515 | 43.26 | 12000 | 1.60 | X | | | | | |
| **48** | 435 | 36.83 | 12200 | 1.85 | X | **R** | **77** | **(E)DRN** | **100LM4** | 65 |
| **53** | 395 | 33.47 | 11900 | 2.0 | X | **RF** | **77** | **(E)DRN** | **100LM4** | 71 |
| **61** | 345 | 29.00 | 11400 | 2.4 | X | **RM** | **77** | **(E)DRN** | **100LM4** | 96 |
| **70** | 300 | 25.23 | 11000 | 2.6 | X | | | | | |
| **75** | 275 | 23.37 | 10800 | 2.9 | X | | | | | |
| **82** | 255 | 21.43 | 10500 | 3.2 | X | | | | | |
| **94** | 220 | 18.80 | 10100 | 3.5 | X | **R** | **77** | **(E)DRN** | **100LM4** | 64 |
| **99** | 210 | 17.82* | 9950 | 3.7 | X | **RF** | **77** | **(E)DRN** | **100LM4** | 70 |
| **113** | 186 | 15.60 | 9570 | 4.0 | X | **RM** | **77** | **(E)DRN** | **100LM4** | 94 |
| **125** | 168 | 14.05 | 9280 | 4.3 | X | | | | | |
| **44** | 475 | 39.88* | 8790 | 1.20 | X | | | | | |
| **47** | 445 | 37.50 | 9010 | 1.25 | X | **R** | **67** | **(E)DRN** | **100LM4** | 59 |
| **55** | 380 | 32.27 | 9360 | 1.40 | X | **RF** | **67** | **(E)DRN** | **100LM4** | 62 |
| **61** | 340 | 28.83 | 9100 | 1.50 | X | **RM** | **67** | **(E)DRN** | **100LM4** | 78 |
| **75** | 275 | 23.44 | 8630 | 2.0 | X | | | | | |
| **89** | 235 | 19.89 | 8260 | 2.5 | X | | | | | |
| **98** | 210 | 17.95 | 8030 | 2.8 | X | | | | | |
| **112** | 188 | 15.79 | 7750 | 3.0 | X | | | | | |
| **118** | 178 | 14.91 | 7630 | 3.1 | X | **R** | **67** | **(E)DRN** | **100LM4** | 58 |
| **139** | 151 | 12.70 | 7280 | 3.4 | X | **RF** | **67** | **(E)DRN** | **100LM4** | 61 |
| **153** | 138 | 11.54 | 7090 | 3.6 | X | **RM** | **67** | **(E)DRN** | **100LM4** | 77 |
| **176** | 119 | 10.00 | 6790 | 3.9 | X | | | | | |
| **203** | 104 | 8.70* | 6520 | 4.2 | X | | | | | |
| **226** | 93 | 7.79 | 6320 | 4.1 | X | | | | | |


24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **47** | 440 | 37.30* | 5020 | 1.00 | X | **R** | **57** | **(E)DRN** | **100LM4** | 52 |
| **50** | 415 | 35.07 | 4980 | 1.10 | X | **RF** | **57** | **(E)DRN** | **100LM4** | 56 |
| **58** | 355 | 30.18 | 4880 | 1.25 | X | **RM** | **57** | **(E)DRN** | **100LM4** | 68 |
| **65** | 320 | 26.97 | 4790 | 1.40 | X | | | | | |
| **80** | 260 | 21.93 | 4610 | 1.70 | X | | | | | |
| **95** | 220 | 18.60* | 4450 | 2.0 | X | | | | | |
| **105** | 200 | 16.79 | 4360 | 2.2 | X | | | | | |
| **119** | 176 | 14.77* | 4230 | 2.5 | X | | | | | |
| **126** | 166 | 13.95* | 4170 | 2.6 | X | **R** | **57** | **(E)DRN** | **100LM4** | 51 |
| **148** | 142 | 11.88 | 4010 | 2.9 | X | **RF** | **57** | **(E)DRN** | **100LM4** | 55 |
| **163** | 129 | 10.79 | 3920 | 3.0 | X | **RM** | **57** | **(E)DRN** | **100LM4** | 67 |
| **188** | 111 | 9.35 | 3770 | 3.3 | X | | | | | |
| **194** | 108 | 9.06 | 3750 | 3.5 | X | | | | | |
| **221** | 95 | 7.97 | 3630 | 3.7 | X | | | | | |
| **161** | 131 | 21.93 | 3930 | 3.4 | | | | | | |
| **190** | 111 | 18.60* | 3770 | 4.1 | | **R** | **57** | **DRN** | **90L2** | 40 |
| **210** | 100 | 16.79 | 3670 | 4.5 | | **RF** | **57** | **DRN** | **90L2** | 44 |
| **239** | 88 | 14.77* | 3540 | 4.9 | | **RM** | **57** | **DRN** | **90L2** | 56 |
| **253** | 83 | 13.95* | 3490 | 5.2 | | | | | | |
| **91** | 225 | 19.27 | 3430 | 1.30 | X | | | | | |
| **109** | 193 | 16.22 | 3330 | 1.40 | X | | | | | |
| **121** | 174 | 14.56 | 3260 | 1.55 | X | | | | | |
| **140** | 150 | 12.54 | 3160 | 1.65 | X | | | | | |
| **149** | 141 | 11.79 | 3110 | 1.75 | X | | | | | |
| **174** | 121 | 10.15 | 3010 | 1.90 | X | | | | | |
| **194** | 108 | 9.07 | 2930 | 2.0 | X | | | | | |
| **220** | 96 | 8.01 | 2840 | 2.1 | X | **R** | **47** | **(E)DRN** | **100LM4** | 46 |
| **227** | 92 | 7.76* | 2760 | 1.75 | X | **RF** | **47** | **(E)DRN** | **100LM4** | 46 |
| **253** | 83 | 6.96 | 2690 | 1.90 | X | | | | | |
| **294** | 72 | 6.00 | 2590 | 2.2 | X | | | | | |
| **312** | 67 | 5.64* | 2550 | 2.3 | X | | | | | |
| **363** | 58 | 4.85 | 2450 | 2.6 | X | | | | | |
| **406** | 52 | 4.34 | 2380 | 2.8 | X | | | | | |
| **460** | 46 | 3.83 | 2300 | 3.1 | X | | | | | |
| **183** | 115 | 19.27 | 2970 | 2.6 | | | | | | |
| **217** | 97 | 16.22 | 2850 | 2.9 | | | | | | |
| **242** | 87 | 14.56 | 2770 | 3.0 | | | | | | |
| **281** | 75 | 12.54 | 2660 | 3.3 | | **R** | **47** | **DRN** | **90L2** | 35 |
| **299** | 70 | 11.79 | 2620 | 3.5 | | **RF** | **47** | **DRN** | **90L2** | 35 |
| **347** | 60 | 10.15 | 2520 | 3.8 | | | | | | |
| **389** | 54 | 9.07 | 2440 | 4.1 | | | | | | |
| **440** | 48 | 8.01 | 2360 | 4.3 | | | | | | |
| **113** | 186 | 15.60 | 1840 | 1.10 | X | | | | | |
| **133** | 158 | 13.25 | 2250 | 1.20 | X | **R** | **37** | **(E)DRN** | **100LM4** | 42 |
| **149** | 141 | 11.83 | 2480 | 1.30 | X | **RF** | **37** | **(E)DRN** | **100LM4** | 44 |
| **174** | 121 | 10.11 | 2730 | 1.40 | X | | | | | |
| **186** | 113 | 9.47 | 2770 | 1.50 | X | | | | | |
| **221** | 95 | 7.97 | 2670 | 1.65 | X | | | | | |
| **264** | 80 | 6.67 | 2530 | 1.80 | X | | | | | |
| **311** | 68 | 5.67 | 2440 | 2.1 | X | **R** | **37** | **(E)DRN** | **100LM4** | 42 |
| **348** | 60 | 5.06 | 2370 | 2.2 | X | **RF** | **37** | **(E)DRN** | **100LM4** | 44 |
| **408** | 52 | 4.32 | 2280 | 2.5 | X | | | | | |
| **435** | 48 | 4.05 | 2240 | 2.5 | X | | | | | |
| **517** | 41 | 3.41 | 2140 | 2.8 | X | | | | | |
| **226** | 93 | 15.60 | 2660 | 2.1 | | | | | | |
| **266** | 79 | 13.25 | 2560 | 2.4 | | **R** | **37** | **DRN** | **90L2** | 31 |
| **298** | 71 | 11.83 | 2490 | 2.6 | | **RF** | **37** | **DRN** | **90L2** | 33 |


24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **349** | 60 | 10.11 | 2400 | 2.8 | | | | | | |
| **372** | 56 | 9.47 | 2360 | 3.0 | | | | | | |
| **442** | 48 | 7.97 | 2250 | 3.3 | | | | | | |
| **529** | 40 | 6.67 | 2130 | 3.6 | | | | | | |
| **622** | 34 | 5.67 | 2040 | 4.2 | | **R** | **37** | **DRN** | **90L2** | 31 |
| **697** | 30 | 5.06 | 1980 | 4.5 | | **RF** | **37** | **DRN** | **90L2** | 33 |
| **816** | 26 | 4.32 | 1890 | 4.9 | | | | | | |
| **871** | 24 | 4.05 | 1850 | 5.1 | | | | | | |
| **1035** | 20 | 3.41 | 1760 | 5.5 | | | | | | |
| **174** | 121 | 10.13 | 1550 | 1.00 | X | | | | | |
| **267** | 79 | 6.59 | 1470 | 1.35 | X | | | | | |
| **315** | 67 | 5.60* | 1550 | 1.50 | X | | | | | |
| **352** | 60 | 5.00* | 1520 | 1.60 | X | **R** | **27** | **(E)DRN** | **100LM4** | 37 |
| **413** | 51 | 4.27 | 1470 | 1.70 | X | **RF** | **27** | **(E)DRN** | **100LM4** | 37 |
| **440** | 48 | 4.00* | 1450 | 1.80 | X | | | | | |
| **523** | 40 | 3.37 | 1400 | 1.95 | X | | | | | |
| **265** | 79 | 13.28* | 1650 | 1.65 | | | | | | |
| **297** | 71 | 11.86 | 1620 | 1.85 | | | | | | |
| **348** | 60 | 10.13 | 1570 | 2.0 | | | | | | |
| **535** | 39 | 6.59 | 1390 | 2.7 | | | | | | |
| **629** | 33 | 5.60* | 1340 | 3.0 | | **R** | **27** | **DRN** | **90L2** | 25 |
| **705** | 30 | 5.00* | 1300 | 3.2 | | **RF** | **27** | **DRN** | **90L2** | 25 |
| **825** | 25 | 4.27 | 1250 | 3.4 | | | | | | |
| **881** | 24 | 4.00* | 1230 | 3.6 | | | | | | |
| **1045** | 20 | 3.37 | 1180 | 3.9 | | | | | | |
| **373** | 56 | 4.73 | 4860 | 2.2 | X | | | | | |
| **436** | 48 | 4.04* | 4630 | 3.0 | X | | | | | |
| **476** | 44 | 3.70 | 4520 | 3.5 | X | | | | | |
| **542** | 39 | 3.25* | 4340 | 4.7 | X | | | | | |
| **572** | 37 | 3.08* | 4270 | 5.3 | X | | | | | |
| **654** | 32 | 2.70 | 4100 | 6.7 | X | **RX** | **77** | **(E)DRN** | **100LM4** | 55 |
| **726** | 29 | 2.43 | 3970 | 7.4 | X | **RXF** | **77** | **(E)DRN** | **100LM4** | 57 |
| **827** | 25 | 2.13 | 3810 | 7.9 | X | | | | | |
| **937** | 22 | 1.88* | 3660 | 8.3 | X | | | | | |
| **1055** | 20 | 1.67 | 3530 | 8.7 | X | | | | | |
| **1240** | 17 | 1.42 | 3350 | 9.1 | X | | | | | |
| **467** | 45 | 3.77 | 3090 | 1.95 | X | | | | | |
| **551** | 38 | 3.20* | 2950 | 2.6 | X | | | | | |
| **610** | 34 | 2.89 | 2860 | 3.1 | X | | | | | |
| **693** | 30 | 2.54 | 2760 | 3.9 | X | | | | | |
| **734** | 29 | 2.40* | 2710 | 4.3 | X | **RX** | **67** | **(E)DRN** | **100LM4** | 45 |
| **862** | 24 | 2.04 | 2590 | 5.5 | X | **RXF** | **67** | **(E)DRN** | **100LM4** | 49 |
| **949** | 22 | 1.86 | 2510 | 5.7 | X | | | | | |
| **1095** | 19 | 1.61 | 2410 | 5.9 | X | | | | | |
| **1260** | 17 | 1.40* | 2300 | 6.2 | X | | | | | |
| **562** | 37 | 3.14 | 2320 | 1.75 | X | | | | | |
| **667** | 31 | 2.64* | 2210 | 2.2 | X | | | | | |
| **743** | 28 | 2.37 | 2150 | 2.4 | X | | | | | |
| **863** | 24 | 2.04 | 2060 | 2.8 | X | **RX** | **57** | **(E)DRN** | **100LM4** | 43 |
| **918** | 23 | 1.92* | 2020 | 3.0 | X | **RXF** | **57** | **(E)DRN** | **100LM4** | 45 |
| **1065** | 20 | 1.65 | 1940 | 3.5 | X | | | | | |
| **1195** | 18 | 1.48 | 1880 | 3.9 | X | | | | | |
| **1350** | 16 | 1.30 | 1810 | 4.0 | X | | | | | |

24772933/EN – 01/2018

### F..(E)DRN100LM4

| $P_m$ = 2.2 kW | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
| **1.2** | 14500 | 1441 | 109000 | 1.25 | X | **FA** | **157R97** | **(E)DRN** | **100LM4** | 790 |
| | | | | | | **FAF** | **157R97** | **(E)DRN** | **100LM4** | 850 |
| | | | | | | **F** | **157R97** | **(E)DRN** | **100LM4** | 810 |
| | | | | | | **FF** | **157R97** | **(E)DRN** | **100LM4** | 920 |
| **1.4** | 14100 | 1308 | 110000 | 1.25 | X | | | | | |
| **1.5** | 12500 | 1169 | 113100 | 1.45 | X | | | | | |
| **1.9** | 10000 | 953 | 117100 | 1.80 | X | | | | | |
| **2.1** | 8860 | 845 | 118700 | 2.0 | X | | | | | |
| **2.3** | 7940 | 764 | 119800 | 2.3 | X | **FA** | **157R97** | **(E)DRN** | **100LM4** | 790 |
| **2.6** | 7060 | 680 | 120000 | 2.5 | X | **FAF** | **157R97** | **(E)DRN** | **100LM4** | 850 |
| **3.1** | 5900 | 576 | 120000 | 3.0 | X | **F** | **157R97** | **(E)DRN** | **100LM4** | 810 |
| **4.0** | 4680 | 446 | 120000 | 3.8 | X | **FF** | **157R97** | **(E)DRN** | **100LM4** | 920 |
| **5.8** | 3170 | 302 | 120000 | 5.7 | X | | | | | |
| **6.5** | 2840 | 273 | 120000 | 6.3 | X | | | | | |
| **7.6** | 2370 | 232 | 120000 | 7.6 | X | | | | | |
| **9.0** | 2010 | 197 | 120000 | 8.9 | X | | | | | |
| **1.6** | 11800 | 1077 | 90000 | 1.00 | X | | | | | |
| **1.9** | 10100 | 930 | 90000 | 1.20 | X | | | | | |
| **2.1** | 8940 | 820 | 90000 | 1.35 | X | **FA** | **127R77** | **(E)DRN** | **100LM4** | 455 |
| **2.4** | 7900 | 727 | 90000 | 1.50 | X | **FAF** | **127R77** | **(E)DRN** | **100LM4** | 490 |
| **2.7** | 7110 | 648 | 90000 | 1.70 | X | **F** | **127R77** | **(E)DRN** | **100LM4** | 490 |
| **3.2** | 6030 | 549 | 90000 | 2.0 | X | **FF** | **127R77** | **(E)DRN** | **100LM4** | 530 |
| **3.6** | 5420 | 495 | 90000 | 2.2 | X | | | | | |
| **4.1** | 4690 | 428 | 90000 | 2.6 | X | | | | | |
| **2.8** | 7030 | 640 | 51500 | 1.10 | X | | | | | |
| **3.1** | 6090 | 560 | 53800 | 1.25 | X | **FA** | **107R77** | **(E)DRN** | **100LM4** | 300 |
| **3.6** | 5320 | 489 | 55600 | 1.45 | X | **FAF** | **107R77** | **(E)DRN** | **100LM4** | 325 |
| **4.0** | 4780 | 436 | 56800 | 1.60 | X | **F** | **107R77** | **(E)DRN** | **100LM4** | 320 |
| **4.8** | 4060 | 370 | 58300 | 1.90 | X | **FF** | **107R77** | **(E)DRN** | **100LM4** | 345 |
| **5.3** | 3650 | 333 | 59100 | 2.1 | X | | | | | |
| | | | | | | **FA** | **97R57** | **(E)DRN** | **100LM4** | 210 |
| **6.2** | 3140 | 285 | 33000 | 1.35 | X | **FAF** | **97R57** | **(E)DRN** | **100LM4** | 235 |
| **7.2** | 2700 | 245 | 34000 | 1.60 | X | **F** | **97R57** | **(E)DRN** | **100LM4** | 220 |
| | | | | | | **FF** | **97R57** | **(E)DRN** | **100LM4** | 250 |
| **4.6** | 4530 | 254.40* | 57300 | 1.70 | | **FA** | **107** | **DRN** | **132S6** | 285 |
| **5.5** | 3830 | 215.37 | 58800 | 2.0 | | **FAF** | **107** | **DRN** | **132S6** | 305 |
| **5.9** | 3550 | 199.31 | 59300 | 2.2 | | **F** | **107** | **DRN** | **132S6** | 300 |
| **6.6** | 3180 | 178.64 | 60000 | 2.4 | | **FF** | **107** | **DRN** | **132S6** | 325 |
| **6.9** | 3030 | 254.40* | 60300 | 2.5 | X | **FA** | **107** | **(E)DRN** | **100LM4** | 265 |
| **8.2** | 2560 | 215.37 | 61200 | 3.0 | X | **FAF** | **107** | **(E)DRN** | **100LM4** | 285 |
| **8.8** | 2370 | 199.31 | 61500 | 3.2 | X | **F** | **107** | **(E)DRN** | **100LM4** | 280 |
| **9.9** | 2120 | 178.64 | 62000 | 3.6 | X | **FF** | **107** | **(E)DRN** | **100LM4** | 305 |
| **5.3** | 3980 | 223.88 | 30800 | 1.10 | | **FA** | **97** | **DRN** | **132S6** | 210 |
| **6.2** | 3380 | 189.92 | 32400 | 1.25 | | **FAF** | **97** | **DRN** | **132S6** | 230 |
| **6.7** | 3110 | 174.87 | 33000 | 1.40 | | **F** | **97** | **DRN** | **132S6** | 215 |
| **7.5** | 2780 | 156.30 | 33800 | 1.55 | | **FF** | **97** | **DRN** | **132S6** | 250 |
| **6.4** | 3290 | 276.77 | 32600 | 1.30 | X | | | | | |
| **7.0** | 3020 | 253.41 | 33300 | 1.40 | X | | | | | |
| **7.9** | 2660 | 223.88 | 34000 | 1.60 | X | **FA** | **97** | **(E)DRN** | **100LM4** | 190 |
| **9.3** | 2260 | 189.92 | 34900 | 1.90 | X | **FAF** | **97** | **(E)DRN** | **100LM4** | 210 |
| **10** | 2080 | 174.87 | 35200 | 2.1 | X | **F** | **97** | **(E)DRN** | **100LM4** | 195 |
| **11** | 1860 | 156.30 | 35600 | 2.3 | X | **FF** | **97** | **(E)DRN** | **100LM4** | 230 |
| **13** | 1670 | 140.71 | 36000 | 2.6 | X | | | | | |
| **14** | 1510 | 127.42 | 36200 | 2.8 | X | | | | | |
| **8.9** | 2350 | 197.20 | 25300 | 1.30 | X | **FA** | **87** | **(E)DRN** | **100LM4** | 125 |
| **9.8** | 2140 | 179.97 | 26000 | 1.40 | X | **FAF** | **87** | **(E)DRN** | **100LM4** | 135 |
| **11** | 1900 | 159.61 | 26700 | 1.60 | X | **F** | **87** | **(E)DRN** | **100LM4** | 130 |
| **13** | 1590 | 134.16 | 27600 | 1.90 | X | **FF** | **87** | **(E)DRN** | **100LM4** | 145 |


24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **14** | 1470 | 123.29 | 27900 | 2.0 | X | | | | | |
| **16** | 1300 | 109.49 | 28300 | 2.3 | X | | | | | |
| **18** | 1160 | 97.89 | 28000 | 2.6 | X | | | | | |
| **20** | 1040 | 88.01 | 27300 | 2.9 | X | **FA** | **87** | **(E)DRN** | **100LM4** | 125 |
| **23** | 910 | 76.39 | 26400 | 3.3 | X | **FAF** | **87** | **(E)DRN** | **100LM4** | 135 |
| **26** | 810 | 68.40 | 25700 | 3.7 | X | **F** | **87** | **(E)DRN** | **100LM4** | 130 |
| **31** | 675 | 56.75 | 24500 | 4.4 | X | **FF** | **87** | **(E)DRN** | **100LM4** | 145 |
| **35** | 600 | 50.36 | 23700 | 4.9 | X | | | | | |
| **39** | 535 | 45.28 | 23100 | 5.2 | X | | | | | |
| **15** | 1360 | 114.45 | 16600 | 1.10 | X | **FA** | **77** | **(E)DRN** | **100LM4** | 84 |
| **16** | 1290 | 108.46* | 17000 | 1.15 | X | **FAF** | **77** | **(E)DRN** | **100LM4** | 91 |
| **19** | 1130 | 94.93 | 17800 | 1.35 | X | **F** | **77** | **(E)DRN** | **100LM4** | 88 |
| **21** | 1010 | 85.52 | 18200 | 1.45 | X | **FF** | **77** | **(E)DRN** | **100LM4** | 98 |
| **23** | 890 | 75.02 | 18700 | 1.70 | X | | | | | |
| **27** | 790 | 66.46 | 19000 | 1.90 | X | **FA** | **77** | **(E)DRN** | **100LM4** | 84 |
| **30** | 695 | 58.32 | 19300 | 2.2 | X | **FAF** | **77** | **(E)DRN** | **100LM4** | 91 |
| **32** | 655 | 55.27 | 19400 | 2.3 | X | **F** | **77** | **(E)DRN** | **100LM4** | 88 |
| **36** | 575 | 48.37 | 19500 | 2.6 | X | **FF** | **77** | **(E)DRN** | **100LM4** | 98 |
| **40** | 515 | 43.58 | 19700 | 2.9 | X | | | | | |
| **48** | 435 | 36.58 | 19800 | 2.5 | X | **FA** | **77** | **(E)DRN** | **100LM4** | 83 |
| **56** | 375 | 31.51 | 19900 | 3.7 | X | **FAF** | **77** | **(E)DRN** | **100LM4** | 89 |
| **61** | 340 | 28.75 | 19900 | 4.2 | X | **F** | **77** | **(E)DRN** | **100LM4** | 86 |
| **69** | 300 | 25.50* | 20000 | 4.9 | X | **FF** | **77** | **(E)DRN** | **100LM4** | 97 |
| **29** | 725 | 61.07 | 11100 | 1.15 | X | | | | | |
| **33** | 640 | 53.73 | 11700 | 1.30 | X | **FA** | **67** | **(E)DRN** | **100LM4** | 61 |
| **35** | 600 | 50.74 | 11900 | 1.35 | X | **FAF** | **67** | **(E)DRN** | **100LM4** | 67 |
| **41** | 515 | 43.20 | 12300 | 1.60 | X | **F** | **67** | **(E)DRN** | **100LM4** | 64 |
| **45** | 465 | 39.26 | 12500 | 1.65 | X | **FF** | **67** | **(E)DRN** | **100LM4** | 70 |
| **52** | 405 | 34.01 | 12800 | 1.80 | X | | | | | |
| **55** | 380 | 32.08 | 12900 | 2.1 | X | | | | | |
| **64** | 325 | 27.41 | 13000 | 2.5 | X | **FA** | **67** | **(E)DRN** | **100LM4** | 60 |
| **70** | 295 | 25.13 | 13000 | 2.7 | X | **FAF** | **67** | **(E)DRN** | **100LM4** | 66 |
| **80** | 260 | 22.05 | 13000 | 3.1 | X | **F** | **67** | **(E)DRN** | **100LM4** | 63 |
| **84** | 245 | 20.90* | 13000 | 3.3 | X | **FF** | **67** | **(E)DRN** | **100LM4** | 69 |
| **96** | 215 | 18.29 | 13000 | 3.8 | X | | | | | |
| **39** | 530 | 44.73 | 8620 | 1.10 | X | **FA** | **57** | **(E)DRN** | **100LM4** | 57 |
| **46** | 455 | 38.21 | 8480 | 1.30 | X | **FAF** | **57** | **(E)DRN** | **100LM4** | 63 |
| **49** | 425 | 35.79 | 8400 | 1.40 | X | **F** | **57** | **(E)DRN** | **100LM4** | 57 |
| **58** | 355 | 30.15 | 8200 | 1.65 | X | **FF** | **57** | **(E)DRN** | **100LM4** | 64 |
| **71** | 295 | 24.96 | 7930 | 1.95 | X | | | | | |
| **83** | 250 | 21.17 | 7680 | 2.4 | X | **FA** | **57** | **(E)DRN** | **100LM4** | 56 |
| **92** | 225 | 19.11 | 7520 | 2.6 | X | **FAF** | **57** | **(E)DRN** | **100LM4** | 62 |
| **105** | 200 | 16.81 | 7310 | 3.0 | X | **F** | **57** | **(E)DRN** | **100LM4** | 57 |
| **111** | 189 | 15.88 | 7220 | 3.2 | X | **FF** | **57** | **(E)DRN** | **100LM4** | 63 |
| **68** | 305 | 25.72 | 5500 | 1.30 | X | | | | | |
| **81** | 260 | 21.82 | 5410 | 1.55 | X | | | | | |
| **89** | 230 | 19.70 | 5340 | 1.70 | X | | | | | |
| **102** | 205 | 17.33 | 5240 | 1.95 | X | **FA** | **47** | **(E)DRN** | **100LM4** | 49 |
| **108** | 195 | 16.36 | 5200 | 2.0 | X | **FAF** | **47** | **(E)DRN** | **100LM4** | 51 |
| **126** | 166 | 13.93 | 5050 | 2.4 | X | **F** | **47** | **(E)DRN** | **100LM4** | 50 |
| **139** | 151 | 12.66 | 4960 | 2.6 | X | **FF** | **47** | **(E)DRN** | **100LM4** | 53 |
| **161** | 131 | 10.97 | 4820 | 3.1 | X | | | | | |
| **197** | 107 | 8.96 | 4530 | 3.1 | X | | | | | |

24772933/EN – 01/2018


## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **123** | 171 | 14.33 | 2820 | 1.15 | X | | | | | |
| **137** | 153 | 12.87 | 2810 | 1.30 | X | | | | | |
| **159** | 132 | 11.08 | 2790 | 1.45 | X | | | | | |
| **169** | 124 | 10.42 | 2780 | 1.50 | X | | | | | |
| **196** | 107 | 8.97 | 2730 | 1.65 | X | **FA** | **37** | **(E)DRN** | **100LM4** | 44 |
| **220** | 96 | 8.01 | 2690 | 1.80 | X | **FAF** | **37** | **(E)DRN** | **100LM4** | 46 |
| **261** | 80 | 6.74 | 2550 | 1.75 | X | **F** | **37** | **(E)DRN** | **100LM4** | 45 |
| **291** | 72 | 6.05 | 2510 | 1.85 | X | **FF** | **37** | **(E)DRN** | **100LM4** | 47 |
| **338** | 62 | 5.21 | 2450 | 2.0 | X | | | | | |
| **360** | 58 | 4.90 | 2420 | 2.0 | X | | | | | |
| **418** | 50 | 4.22 | 2350 | 2.2 | X | | | | | |
| **468** | 45 | 3.77 | 2300 | 2.3 | X | | | | | |
| **216** | 97 | 16.28 | 1730 | 1.35 | | | | | | |
| **255** | 82 | 13.84 | 1720 | 1.60 | | | | | | |
| **285** | 74 | 12.35 | 1710 | 1.75 | | | | | | |
| **334** | 63 | 10.55 | 1680 | 2.1 | | | | | | |
| **357** | 59 | 9.88 | 1670 | 2.2 | | **FA** | **27** | **DRN** | **90L2** | 27 |
| **434** | 48 | 8.13 | 1580 | 2.5 | | **FAF** | **27** | **DRN** | **90L2** | 28 |
| **510** | 41 | 6.91 | 1540 | 2.8 | | **F** | **27** | **DRN** | **90L2** | 28 |
| **572** | 37 | 6.17 | 1510 | 3.0 | | **FF** | **27** | **DRN** | **90L2** | 28 |
| **669** | 31 | 5.27 | 1470 | 3.2 | | | | | | |
| **715** | 29 | 4.93 | 1450 | 3.3 | | | | | | |
| **848** | 25 | 4.16 | 1400 | 3.5 | | | | | | |

24772933/EN – 01/2018

## K..(E)DRN100LM4

### $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **0.40** | 45300 | 4370 | 190000 | 1.10 | X | **K** | **187R97** | **(E)DRN** | **100LM4** | 1790 |
| **0.63** | 28200 | 2818 | 190000 | 1.75 | X | **KH** | **187R97** | **(E)DRN** | **100LM4** | 1720 |
| **0.49** | 38900 | 3609 | 190000 | 1.30 | X | | | | | |
| **0.58** | 32900 | 3062 | 190000 | 1.50 | X | | | | | |
| **0.70** | 26800 | 2519 | 190000 | 1.85 | X | | | | | |
| **0.78** | 23900 | 2268 | 190000 | 2.1 | X | **K** | **187R97** | **(E)DRN** | **100LM4** | 1790 |
| **0.86** | 21500 | 2054 | 190000 | 2.3 | X | **KH** | **187R97** | **(E)DRN** | **100LM4** | 1720 |
| **0.97** | 18900 | 1821 | 190000 | 2.6 | X | | | | | |
| **1.1** | 16800 | 1605 | 190000 | 3.0 | X | | | | | |
| **0.64** | 28900 | 2755 | 150000 | 1.10 | X | **K** | **167R97** | **(E)DRN** | **100LM4** | 1210 |
| **0.78** | 23000 | 2263 | 150000 | 1.40 | X | **KH** | **167R97** | **(E)DRN** | **100LM4** | 1170 |
| **0.81** | 23500 | 2182 | 150000 | 1.35 | X | | | | | |
| **1.0** | 18200 | 1704 | 150000 | 1.75 | X | | | | | |
| **1.2** | 15100 | 1408 | 150000 | 2.1 | X | **K** | **167R97** | **(E)DRN** | **100LM4** | 1210 |
| **1.4** | 13800 | 1296 | 150000 | 2.3 | X | **KH** | **167R97** | **(E)DRN** | **100LM4** | 1170 |
| **1.6** | 11400 | 1101 | 150000 | 2.8 | X | | | | | |
| **1.9** | 9920 | 944 | 150000 | 3.2 | X | | | | | |
| **1.1** | 17800 | 1659 | 112300 | 1.00 | X | | | | | |
| **1.3** | 14500 | 1365 | 113700 | 1.25 | X | | | | | |
| **1.4** | 13000 | 1229 | 114300 | 1.40 | X | **K** | **157R97** | **(E)DRN** | **100LM4** | 810 |
| **1.6** | 11500 | 1093 | 114800 | 1.55 | X | **KF** | **157R97** | **(E)DRN** | **100LM4** | 890 |
| **1.9** | 9970 | 942 | 115300 | 1.80 | X | **KA** | **157R97** | **(E)DRN** | **100LM4** | 780 |
| **2.1** | 8960 | 854 | 115500 | 2.0 | X | **KAF** | **157R97** | **(E)DRN** | **100LM4** | 830 |
| **2.3** | 7680 | 756 | 115800 | 2.3 | X | | | | | |
| **3.3** | 5680 | 536 | 82100 | 2.3 | X | | | | | |
| **3.7** | 4950 | 473 | 82300 | 2.6 | X | **K** | **127R87** | **(E)DRN** | **100LM4** | 520 |
| **4.2** | 4480 | 418 | 82400 | 2.9 | X | **KF** | **127R87** | **(E)DRN** | **100LM4** | 560 |
| **4.8** | 3940 | 367 | 82500 | 3.3 | X | **KA** | **127R87** | **(E)DRN** | **100LM4** | 490 |
| **5.3** | 3520 | 330 | 82600 | 3.7 | X | **KAF** | **127R87** | **(E)DRN** | **100LM4** | 530 |
| **1.7** | 11200 | 1025 | 80100 | 1.15 | X | | | | | |
| **2.0** | 9830 | 899 | 80700 | 1.30 | X | | | | | |
| **2.2** | 8520 | 790 | 81300 | 1.50 | X | **K** | **127R77** | **(E)DRN** | **100LM4** | 495 |
| **2.5** | 7670 | 704 | 81600 | 1.70 | X | **KF** | **127R77** | **(E)DRN** | **100LM4** | 540 |
| **2.9** | 6620 | 610 | 81900 | 1.95 | X | **KA** | **127R77** | **(E)DRN** | **100LM4** | 470 |
| **3.2** | 5970 | 549 | 82100 | 2.2 | X | **KAF** | **127R77** | **(E)DRN** | **100LM4** | 510 |
| **3.7** | 5150 | 477 | 82300 | 2.5 | X | | | | | |
| **4.2** | 4550 | 418 | 82400 | 2.9 | X | | | | | |
| **2.9** | 6670 | 615 | 65000 | 1.20 | X | | | | | |
| **3.4** | 5660 | 522 | 65000 | 1.40 | X | | | | | |
| **3.8** | 4980 | 461 | 65000 | 1.60 | X | **K** | **107R77** | **(E)DRN** | **100LM4** | 335 |
| **4.3** | 4400 | 408 | 65000 | 1.80 | X | **KF** | **107R77** | **(E)DRN** | **100LM4** | 350 |
| **4.8** | 3960 | 364 | 65000 | 2.0 | X | **KA** | **107R77** | **(E)DRN** | **100LM4** | 310 |
| **5.5** | 3460 | 318 | 65000 | 2.3 | X | **KAF** | **107R77** | **(E)DRN** | **100LM4** | 335 |
| **6.2** | 3110 | 286 | 65000 | 2.6 | X | | | | | |
| **7.0** | 2720 | 251 | 65000 | 2.9 | X | | | | | |
| **4.6** | 4190 | 382 | 40000 | 1.05 | X | | | | | |
| **5.2** | 3720 | 342 | 40000 | 1.15 | X | **K** | **97R57** | **(E)DRN** | **100LM4** | 205 |
| **5.8** | 3380 | 305 | 40000 | 1.25 | X | **KF** | **97R57** | **(E)DRN** | **100LM4** | 225 |
| **6.8** | 2850 | 258 | 40000 | 1.50 | X | **KA** | **97R57** | **(E)DRN** | **100LM4** | 190 |
| **7.6** | 2560 | 232 | 40000 | 1.65 | X | **KAF** | **97R57** | **(E)DRN** | **100LM4** | 215 |
| **8.8** | 2200 | 199 | 40000 | 1.95 | X | | | | | |
| **9.5** | 2200 | 123.93* | 40000 | 1.95 | | **K** | **97** | **DRN** | **132S6** | 205 |
| | | | | | | **KF** | **97** | **DRN** | **132S6** | 225 |
| | | | | | | **KA** | **97** | **DRN** | **132S6** | 185 |
| | | | | | | **KAF** | **97** | **DRN** | **132S6** | 210 |
| **11** | 1870 | 105.13 | 40000 | 2.3 | | **K** | **97** | **DRN** | **132S6** | 205 |
| | | | | | | **KF** | **97** | **DRN** | **132S6** | 225 |
| | | | | | | **KA** | **97** | **DRN** | **132S6** | 185 |
| | | | | | | **KAF** | **97** | **DRN** | **132S6** | 210 |

24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **10** | 2090 | 176.05* | 40000 | 2.0 | X | **K** | **97** | **(E)DRN** | **100LM4** | 185 |
| **12** | 1820 | 153.21* | 40000 | 2.4 | X | **KF** | **97** | **(E)DRN** | **100LM4** | 205 |
| **13** | 1670 | 140.28 | 40000 | 2.6 | X | **KA** | **97** | **(E)DRN** | **100LM4** | 165 |
| **14** | 1470 | 123.93* | 40000 | 2.9 | X | **KAF** | **97** | **(E)DRN** | **100LM4** | 190 |
| | | | | | | **K** | **97** | **(E)DRN** | **100LM4** | 185 |
| **17** | 1250 | 105.13 | 40000 | 3.4 | X | **KF** | **97** | **(E)DRN** | **100LM4** | 205 |
| **18** | 1150 | 96.80 | 40000 | 3.7 | X | **KA** | **97** | **(E)DRN** | **100LM4** | 165 |
| | | | | | | **KAF** | **97** | **(E)DRN** | **100LM4** | 190 |
| **12** | 1750 | 147.32* | 28300 | 1.55 | X | **K** | **87** | **(E)DRN** | **100LM4** | 125 |
| **14** | 1510 | 126.91* | 28500 | 1.80 | X | **KF** | **87** | **(E)DRN** | **100LM4** | 135 |
| **15** | 1380 | 115.82 | 28600 | 1.95 | X | **KA** | **87** | **(E)DRN** | **100LM4** | 110 |
| | | | | | | **KAF** | **87** | **(E)DRN** | **100LM4** | 125 |
| **17** | 1220 | 102.71* | 28700 | 2.2 | X | | | | | |
| **20** | 1020 | 86.34 | 28800 | 2.6 | X | **K** | **87** | **(E)DRN** | **100LM4** | 125 |
| **22** | 940 | 79.34 | 28800 | 2.9 | X | **KF** | **87** | **(E)DRN** | **100LM4** | 135 |
| **25** | 840 | 70.46 | 28900 | 3.2 | X | **KA** | **87** | **(E)DRN** | **100LM4** | 110 |
| **28** | 750 | 63.00* | 28900 | 3.6 | X | **KAF** | **87** | **(E)DRN** | **100LM4** | 125 |
| **16** | 1350 | 113.56 | 16600 | 1.15 | X | | | | | |
| **18** | 1150 | 97.05 | 17600 | 1.35 | X | **K** | **77** | **(E)DRN** | **100LM4** | 88 |
| **20** | 1060 | 88.97 | 18100 | 1.45 | X | **KF** | **77** | **(E)DRN** | **100LM4** | 96 |
| **23** | 930 | 78.07 | 18600 | 1.65 | X | **KA** | **77** | **(E)DRN** | **100LM4** | 80 |
| **24** | 880 | 73.99 | 18700 | 1.75 | X | **KAF** | **77** | **(E)DRN** | **100LM4** | 88 |
| **27** | 770 | 64.75 | 19100 | 2.0 | X | | | | | |
| **30** | 695 | 58.34 | 19300 | 2.2 | X | | | | | |
| **34** | 610 | 51.18 | 19500 | 2.5 | X | | | | | |
| **39** | 535 | 45.16 | 19600 | 2.9 | X | **K** | **77** | **(E)DRN** | **100LM4** | 88 |
| **44** | 475 | 40.04 | 19700 | 3.2 | X | **KF** | **77** | **(E)DRN** | **100LM4** | 96 |
| **50** | 415 | 35.20 | 19800 | 3.7 | X | **KA** | **77** | **(E)DRN** | **100LM4** | 80 |
| **57** | 365 | 30.89 | 19900 | 4.2 | X | **KAF** | **77** | **(E)DRN** | **100LM4** | 88 |
| **60** | 345 | 29.27 | 19900 | 4.4 | X | | | | | |
| **69** | 305 | 25.62 | 20000 | 5.1 | X | | | | | |
| **29** | 720 | 60.66 | 11100 | 1.15 | X | | | | | |
| **31** | 680 | 57.28 | 11400 | 1.20 | X | | | | | |
| **36** | 580 | 48.77 | 12000 | 1.40 | X | **K** | **67** | **(E)DRN** | **100LM4** | 63 |
| **40** | 525 | 44.32 | 12300 | 1.55 | X | **KF** | **67** | **(E)DRN** | **100LM4** | 69 |
| **46** | 455 | 38.39 | 12600 | 1.75 | X | **KA** | **67** | **(E)DRN** | **100LM4** | 60 |
| **49** | 420 | 35.62 | 12700 | 1.95 | X | **KAF** | **67** | **(E)DRN** | **100LM4** | 66 |
| **58** | 360 | 30.22 | 12900 | 2.3 | X | | | | | |
| **65** | 325 | 27.28 | 13000 | 2.5 | X | | | | | |
| **73** | 285 | 24.00 | 13000 | 2.8 | X | | | | | |
| **78** | 270 | 22.66 | 13000 | 2.9 | X | | | | | |
| **91** | 230 | 19.30 | 13000 | 3.3 | X | | | | | |
| **101** | 205 | 17.54 | 13000 | 3.5 | X | | | | | |
| **116** | 181 | 15.19 | 13000 | 3.9 | X | **K** | **67** | **(E)DRN** | **100LM4** | 63 |
| **133** | 158 | 13.22 | 13000 | 4.2 | X | **KF** | **67** | **(E)DRN** | **100LM4** | 69 |
| **141** | 149 | 12.48 | 13000 | 3.6 | X | **KA** | **67** | **(E)DRN** | **100LM4** | 60 |
| **166** | 127 | 10.63 | 13000 | 4.0 | X | **KAF** | **67** | **(E)DRN** | **100LM4** | 66 |
| **182** | 115 | 9.66 | 12900 | 4.2 | X | | | | | |
| **211** | 100 | 8.37 | 12500 | 4.4 | X | | | | | |
| **242** | 87 | 7.28 | 12000 | 4.8 | X | | | | | |
| **339** | 62 | 5.20 | 11000 | 5.6 | X | | | | | |
| **40** | 525 | 44.43 | 8190 | 1.15 | X | **K** | **57** | **(E)DRN** | **100LM4** | 57 |
| **46** | 455 | 38.49 | 8260 | 1.30 | X | **KF** | **57** | **(E)DRN** | **100LM4** | 62 |
| **49** | 425 | 35.70 | 8200 | 1.40 | X | **KA** | **57** | **(E)DRN** | **100LM4** | 55 |
| **58** | 360 | 30.28 | 8040 | 1.65 | X | **KAF** | **57** | **(E)DRN** | **100LM4** | 61 |

24772933/EN – 01/2018


## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **64** | 325 | 27.34 | 7920 | 1.85 | X | | | | | |
| **73** | 285 | 24.05 | 7760 | 2.1 | X | | | | | |
| **78** | 270 | 22.71 | 7680 | 2.2 | X | | | | | |
| **91** | 230 | 19.34 | 7450 | 2.5 | X | **K** | **57** | **(E)DRN** | **100LM4** | 57 |
| **100** | 205 | 17.57 | 7310 | 2.6 | X | **KF** | **57** | **(E)DRN** | **100LM4** | 62 |
| **116** | 182 | 15.22 | 7080 | 3.0 | X | **KA** | **57** | **(E)DRN** | **100LM4** | 55 |
| **133** | 158 | 13.25 | 6860 | 3.2 | X | **KAF** | **57** | **(E)DRN** | **100LM4** | 61 |
| **148** | 142 | 11.92 | 6570 | 2.9 | X | | | | | |
| **157** | 134 | 11.26 | 6480 | 3.1 | X | | | | | |
| **46** | 450 | 37.98 | 6850 | 1.10 | X | | | | | |
| **51** | 415 | 34.81 | 6830 | 1.20 | X | | | | | |
| **58** | 360 | 30.55 | 6780 | 1.35 | X | | | | | |
| **61** | 345 | 28.95 | 6750 | 1.45 | X | | | | | |
| **70** | 300 | 25.34 | 6660 | 1.65 | X | | | | | |
| **77** | 270 | 22.83 | 6570 | 1.85 | X | **K** | **49** | **(E)DRN** | **100LM4** | 63 |
| **88** | 235 | 20.03 | 6450 | 2.1 | X | **KF** | **49** | **(E)DRN** | **100LM4** | 64 |
| **100** | 210 | 17.67 | 6320 | 2.4 | X | **KA** | **49** | **(E)DRN** | **100LM4** | 60 |
| **112** | 187 | 15.67 | 6180 | 2.6 | X | **KAF** | **49** | **(E)DRN** | **100LM4** | 65 |
| **132** | 159 | 13.38 | 5990 | 3.0 | X | | | | | |
| **155** | 135 | 11.37 | 6130 | 3.6 | X | | | | | |
| **169** | 124 | 10.42 | 5990 | 3.9 | X | | | | | |
| **193** | 109 | 9.14 | 5780 | 4.6 | X | | | | | |
| **68** | 305 | 25.91 | 5260 | 1.30 | X | **K** | **47** | **(E)DRN** | **100LM4** | 51 |
| **81** | 260 | 21.81 | 5200 | 1.55 | X | **KF** | **47** | **(E)DRN** | **100LM4** | 55 |
| **90** | 230 | 19.58 | 5150 | 1.70 | X | **KA** | **47** | **(E)DRN** | **100LM4** | 50 |
| | | | | | | **KAF** | **47** | **(E)DRN** | **100LM4** | 53 |
| **104** | 200 | 16.86 | 5060 | 1.90 | X | | | | | |
| **111** | 189 | 15.86 | 5020 | 2.0 | X | | | | | |
| **129** | 163 | 13.65 | 4910 | 2.2 | X | **K** | **47** | **(E)DRN** | **100LM4** | 51 |
| **145** | 145 | 12.19 | 4810 | 2.4 | X | **KF** | **47** | **(E)DRN** | **100LM4** | 55 |
| **150** | 140 | 11.77 | 4720 | 2.0 | X | **KA** | **47** | **(E)DRN** | **100LM4** | 50 |
| **167** | 126 | 10.56 | 4630 | 2.2 | X | **KAF** | **47** | **(E)DRN** | **100LM4** | 53 |
| **194** | 108 | 9.10 | 4490 | 2.6 | X | | | | | |
| **72** | 290 | 24.40 | 4820 | 1.05 | X | | | | | |
| **76** | 270 | 23.04 | 4820 | 1.10 | X | | | | | |
| **90** | 230 | 19.62 | 4800 | 1.25 | X | | | | | |
| **99** | 210 | 17.83 | 4770 | 1.35 | X | | | | | |
| **114** | 184 | 15.44 | 4700 | 1.50 | X | | | | | |
| **131** | 160 | 13.44 | 4620 | 1.70 | X | | | | | |
| **166** | 127 | 10.61 | 4820 | 2.2 | X | **K** | **39** | **(E)DRN** | **100LM4** | 50 |
| **196** | 107 | 9.00 | 4640 | 2.8 | X | **KF** | **39** | **(E)DRN** | **100LM4** | 52 |
| **217** | 97 | 8.12 | 4520 | 3.1 | X | **KA** | **39** | **(E)DRN** | **100LM4** | 49 |
| **246** | 85 | 7.15 | 4380 | 3.5 | X | **KAF** | **39** | **(E)DRN** | **100LM4** | 51 |
| **261** | 80 | 6.75 | 4310 | 3.7 | X | | | | | |
| **307** | 69 | 5.75 | 4130 | 4.0 | X | | | | | |
| **337** | 62 | 5.22 | 4020 | 4.2 | X | | | | | |
| **389** | 54 | 4.52 | 3870 | 4.5 | X | | | | | |
| **447** | 47 | 3.94 | 3720 | 4.6 | X | | | | | |
| **135** | 156 | 13.08 | 2420 | 1.05 | X | | | | | |
| **168** | 125 | 10.49 | 2440 | 1.30 | X | | | | | |
| **198** | 106 | 8.91 | 2420 | 1.50 | X | **K** | **37** | **(E)DRN** | **100LM4** | 45 |
| **221** | 95 | 7.96 | 2400 | 1.65 | X | **KF** | **37** | **(E)DRN** | **100LM4** | 47 |
| **259** | 81 | 6.80 | 2360 | 1.85 | X | **KA** | **37** | **(E)DRN** | **100LM4** | 44 |
| **277** | 76 | 6.37 | 2340 | 1.90 | X | **KAF** | **37** | **(E)DRN** | **100LM4** | 46 |
| **329** | 64 | 5.36 | 2280 | 2.2 | X | | | | | |
| **443** | 47 | 3.98 | 2150 | 2.6 | X | | | | | |

24772933/EN – 01/2018

### S..(E)DRN100LM4

**$P_m$ = 2.2 kW**

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® |  | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **4.2** | 3970 | 420 | 33200 | 1.05 | X | **S** | **97R57** | **(E)DRN** | **100LM4** | 195 |
| **4.7** | 3590 | 376 | 34000 | 1.15 | X | **SF** | **97R57** | **(E)DRN** | **100LM4** | 230 |
| **5.4** | 3150 | 327 | 34700 | 1.35 | X | **SA** | **97R57** | **(E)DRN** | **100LM4** | 190 |
| **6.1** | 2780 | 287 | 35300 | 1.50 | X | **SAF** | **97R57** | **(E)DRN** | **100LM4** | 215 |
| | | | | | | **S** | **97** | **DRN** | **132S6** | 190 |
| **5.1** | 3030 | 231.67 | 34900 | 1.40 | | **SF** | **97** | **DRN** | **132S6** | 225 |
| **6.0** | 2600 | 196.52 | 35500 | 1.60 | | **SA** | **97** | **DRN** | **132S6** | 185 |
| | | | | | | **SAF** | **97** | **DRN** | **132S6** | 215 |
| **6.2** | 2540 | 286.40* | 35600 | 1.55 | X | | | | | |
| **6.7** | 2340 | 262.22 | 35800 | 1.70 | X | | | | | |
| **7.6** | 2090 | 231.67 | 36100 | 1.90 | X | | | | | |
| **9.0** | 1790 | 196.52 | 36300 | 2.1 | X | | | | | |
| **9.7** | 1660 | 180.95 | 36500 | 2.3 | X | **S** | **97** | **(E)DRN** | **100LM4** | 170 |
| **11** | 1490 | 161.74 | 36600 | 2.4 | X | **SF** | **97** | **(E)DRN** | **100LM4** | 205 |
| **12** | 1350 | 145.60* | 36700 | 2.6 | X | **SA** | **97** | **(E)DRN** | **100LM4** | 165 |
| **13** | 1230 | 131.85 | 36800 | 2.8 | X | **SAF** | **97** | **(E)DRN** | **100LM4** | 195 |
| **15** | 1100 | 116.92 | 36800 | 3.0 | X | | | | | |
| **17** | 1000 | 105.71 | 36900 | 3.2 | X | | | | | |
| **20** | 850 | 89.60* | 36900 | 3.5 | X | | | | | |
| **6.8** | 2220 | 258.18 | 28000 | 1.00 | X | | | | | |
| **7.9** | 1940 | 222.40* | 28500 | 1.15 | X | | | | | |
| **8.7** | 1780 | 202.96 | 28800 | 1.20 | X | | | | | |
| **9.8** | 1600 | 180.00* | 29000 | 1.35 | X | | | | | |
| **12** | 1360 | 151.30 | 29300 | 1.50 | X | | | | | |
| **13** | 1250 | 139.05 | 29400 | 1.60 | X | | | | | |
| **14** | 1120 | 123.48 | 29600 | 1.75 | X | **S** | **87** | **(E)DRN** | **100LM4** | 115 |
| **16** | 1010 | 110.40* | 29700 | 1.85 | X | **SF** | **87** | **(E)DRN** | **100LM4** | 135 |
| **18** | 910 | 99.26 | 29800 | 2.0 | X | **SA** | **87** | **(E)DRN** | **100LM4** | 110 |
| **20** | 800 | 86.15 | 29800 | 2.2 | X | **SAF** | **87** | **(E)DRN** | **100LM4** | 125 |
| **22** | 850 | 81.76 | 29800 | 1.85 | X | | | | | |
| **23** | 720 | 77.14 | 29900 | 2.4 | X | | | | | |
| **25** | 740 | 70.43 | 29900 | 2.2 | X | | | | | |
| **27** | 675 | 64.27 | 29900 | 2.4 | X | | | | | |
| **31** | 600 | 57.00* | 30000 | 2.6 | X | | | | | |
| **14** | 1120 | 130.00* | 12900 | 1.05 | X | | | | | |
| **14** | 1070 | 123.20* | 13300 | 1.05 | X | | | | | |
| **16** | 940 | 107.83 | 14100 | 1.15 | X | | | | | |
| **18** | 860 | 97.14 | 13900 | 1.25 | X | | | | | |
| **21** | 760 | 85.22 | 13600 | 1.40 | X | | | | | |
| **23** | 675 | 75.20* | 13300 | 1.50 | X | | | | | |
| **26** | 605 | 66.67 | 12900 | 1.60 | X | | | | | |
| **28** | 650 | 63.03 | 12000 | 1.70 | X | | | | | |
| **31** | 520 | 56.92 | 12500 | 1.75 | X | **S** | **77** | **(E)DRN** | **100LM4** | 77 |
| **33** | 555 | 53.87 | 11700 | 1.95 | X | **SF** | **77** | **(E)DRN** | **100LM4** | 87 |
| **36** | 510 | 49.38 | 11500 | 2.1 | X | **SA** | **77** | **(E)DRN** | **100LM4** | 77 |
| **41** | 450 | 43.33 | 11200 | 2.4 | X | **SAF** | **77** | **(E)DRN** | **100LM4** | 83 |
| **43** | 430 | 41.07 | 11100 | 2.5 | X | | | | | |
| **49** | 375 | 35.94 | 10800 | 2.8 | X | | | | | |
| **54** | 340 | 32.38 | 10500 | 3.0 | X | | | | | |
| **62** | 300 | 28.41 | 10200 | 3.3 | X | | | | | |
| **70** | 265 | 25.07 | 9910 | 3.6 | X | | | | | |
| **77** | 250 | 22.89 | 9180 | 2.8 | X | | | | | |
| **84** | 230 | 20.99 | 9010 | 3.1 | X | | | | | |

24772933/EN – 01/2018

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **38** | 460 | 46.40* | 7370 | 1.05 | X | | | | | |
| **42** | 415 | 41.89 | 7300 | 1.15 | X | | | | | |
| **48** | 370 | 36.85 | 7180 | 1.30 | X | | | | | |
| **51** | 350 | 34.80* | 7120 | 1.35 | X | | | | | |
| **59** | 300 | 29.63 | 6950 | 1.60 | X | | | | | |
| **65** | 270 | 26.93 | 6830 | 1.65 | X | | | | | |
| **76** | 235 | 23.33 | 6650 | 1.70 | X | **S** | **67** | **(E)DRN** | **100LM4** | 57 |
| **86** | 220 | 20.37 | 5980 | 1.55 | X | **SF** | **67** | **(E)DRN** | **100LM4** | 64 |
| **102** | 188 | 17.28* | 5840 | 1.80 | X | **SA** | **67** | **(E)DRN** | **100LM4** | 58 |
| **113** | 170 | 15.60* | 5730 | 2.0 | X | **SAF** | **67** | **(E)DRN** | **100LM4** | 63 |
| **128** | 150 | 13.73* | 5600 | 2.3 | X | | | | | |
| **136** | 142 | 12.96* | 5540 | 2.4 | X | | | | | |
| **160** | 121 | 11.03 | 5350 | 2.8 | X | | | | | |
| **176** | 110 | 10.03 | 5240 | 2.9 | X | | | | | |
| **203** | 96 | 8.69 | 5070 | 2.9 | X | | | | | |
| **124** | 153 | 14.24 | 4610 | 1.10 | X | | | | | |
| **146** | 130 | 12.10* | 4500 | 1.30 | X | | | | | |
| **163** | 117 | 10.80* | 4420 | 1.45 | X | | | | | |
| **191** | 100 | 9.23* | 4300 | 1.50 | X | **S** | **57** | **(E)DRN** | **100LM4** | 46 |
| **204** | 94 | 8.64* | 4250 | 1.50 | X | **SF** | **57** | **(E)DRN** | **100LM4** | 50 |
| **242** | 79 | 7.28 | 4100 | 1.55 | X | **SA** | **57** | **(E)DRN** | **100LM4** | 46 |
| **275** | 70 | 6.40* | 3960 | 1.40 | X | **SAF** | **57** | **(E)DRN** | **100LM4** | 49 |
| **327** | 60 | 5.39 | 3810 | 1.60 | X | | | | | |
| **370** | 53 | 4.76 | 3700 | 1.60 | X | | | | | |
| **440** | 44 | 4.00* | 3540 | 1.60 | X | | | | | |

### W..(E)DRN100LM4

## $P_m$ = 2.2 kW

| $n_a$ min$^{-1}$ | $M_a$ Nm | i | $F_{Ra}$ [1] N | SEW $f_B$ | HazLoc -NA® | | | | | m kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **123** | 153 | 14.35 | 3550 | 1.05 | X | | | | | |
| **131** | 144 | 13.44 | 3530 | 1.10 | X | | | | | |
| **156** | 122 | 11.32 | 3480 | 1.30 | X | | | | | |
| **205** | 98 | 8.61 | 3690 | 1.10 | X | | | | | |
| **241** | 84 | 7.32 | 3560 | 1.30 | X | **W** | **47** | **(E)DRN** | **100LM4** | 45 |
| **270** | 75 | 6.53 | 3460 | 1.45 | X | **WF** | **47** | **(E)DRN** | **100LM4** | 45 |
| **316** | 64 | 5.58 | 3330 | 1.70 | X | **WA** | **47** | **(E)DRN** | **100LM4** | 43 |
| **337** | 60 | 5.23 | 3280 | 1.85 | X | **WAF** | **47** | **(E)DRN** | **100LM4** | 44 |
| **400** | 51 | 4.40 | 3140 | 2.2 | X | | | | | |
| **453** | 45 | 3.89 | 3040 | 2.5 | X | | | | | |
| **539** | 38 | 3.27 | 2900 | 2.9 | X | | | | | |

24772933/EN – 01/2018

### 1.2.3 Technical data (E)DRN100LM4

#### DRN100LM4, 380 V, 60 Hz, 4-pole, S1

**Motor data**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 380 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 5.1 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

**Further information on the motor and brakemotor**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ kgm² | | $h^{-1}$ | Nm | kg | $10^{-4}$ kgm² |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | – 3700 | 28 | 38 | 96.7 |

#### DRN100LM4, 440 V, 60 Hz, 4-pole, S1

**Motor data**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 440 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 4.4 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

**Further information on the motor and brakemotor**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ kgm² | | $h^{-1}$ | Nm | kg | $10^{-4}$ kgm² |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | – 3700 | 28 | 38 | 96.7 |

#### DRN100LM4, 460 V, 60 Hz, 4-pole, S1

**Motor data**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 4.2 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

**Further information on the motor and brakemotor**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ kgm² | | $h^{-1}$ | Nm | kg | $10^{-4}$ kgm² |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | – 3700 | 28 | 38 | 96.7 |

24772933/EN – 01/2018

### DRN100LM4, 575 V, 60 Hz, 4-pole, S1

#### Motor data

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 575 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 3.4 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

#### Further information on the motor and brakemotor

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$ kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$ kgm$^2$ |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | –<br>3700 | 28 | 38 | 96.7 |

### HazLoc-NA® EDRN100LM4 , 460 V, 60 Hz, 4-pole, S1

#### Motor data

| Motor type EDRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| EDRN 100LM 4 | 2.2 | 3 | 11.9 | 1762 | 4.2 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

#### Further information on motor and brakemotor

| Motor type EDRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{Mot}$ | BE.. | $Z_0$ BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$ kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$ kgm$^2$ |
| EDRN 100LM 4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | 590 | 28 | 38 | 96.7 |

### HazLoc-NA® EDRN100LM4 , 575 V, 60 Hz, 4-pole, S1

#### Motor data

| Motor type EDRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 575 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| EDRN 100LM 4 | 2.2 | 3 | 11.9 | 1762 | 3.4 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |

#### Further information on motor and brakemotor

| Motor type EDRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{Mot}$ | BE.. | $Z_0$ BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$ kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$ kgm$^2$ |
| EDRN 100LM 4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | 590 | 28 | 38 | 96.7 |

24772933/EN – 01/2018

## 1.3 Technical data DR63.., DRS71.., 60 Hz, 6-pole, S1

### 1.3.1 DR63.., DRS71.., 380 V, 60 Hz, 6-pole, S1, IEC

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 380 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$<br>$M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 0.40 | 0.64 | - | - | 52.8 | 2.95 | 2.3<br>2.3 | 2.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 0.59 | 0.67 | - | - | 50.2 | 2.9 | 2.7<br>2.6 | 2.8 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 0.82 | 0.65 | - | - | 53.8 | 2.9 | 2.5<br>2.5 | 2.6 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 0.57 | 0.71 | - | - | 67.9 | 3.2 | 1.7<br>1.7 | 2.0 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 0.79 | 0.71 | 64.2 | 68.2 | 67.9 | 2.9 | 1.7<br>1.7 | 2.0 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 1.09 | 0.72 | 67.8 | 71.3 | 70.9 | 3.5 | 1.9<br>1.9 | 2.1 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BR..<br>BE.. | $Z_0$<br>BG<br>BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}kgm^2$ | | $h^{-1}$ | Nm | kg | $10^{-4}kgm^2$ |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 2.5 | 7.6 | 6.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 3.2 | 7.6 | 6.6 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 6.7 | 6.8 | BR03 | 16000<br>- | 3.2 | 8.2 | 8.0 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 9 | 11.9 | BE1 | 5280<br>12000 | 10 | 12 | 13.2 |

24772933/EN – 01/2018

### 1.3.2 DR63.., DRS71.., 440 V, 60 Hz, 6-pole, S1, IEC

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 440 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 0.35 | 0.64 | – | – | 52.8 | 2.95 | 2.3<br>2.3 | 2.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 0.51 | 0.67 | – | – | 50.2 | 2.9 | 2.7<br>2.6 | 2.8 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 0.71 | 0.65 | – | – | 53.8 | 2.9 | 2.5<br>2.5 | 2.6 |
| DRS71S6 | 0.18 | 0.25 | 1.56 | 1100 | 0.50 | 0.71 | – | – | 67.9 | 3.2 | 1.7<br>1.7 | 2.0 |
| DRS71S6 | 0.25 | 0.33 | 2.15 | 1100 | 0.68 | 0.71 | 64.2 | 68.2 | 67.9 | 2.9 | 1.7<br>1.7 | 2.0 |
| DRS71M6 | 0.37 | 0.5 | 3.2 | 1100 | 0.94 | 0.72 | 67.8 | 71.3 | 70.9 | 3.5 | 1.9<br>1.9 | 2.1 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BR..<br>BE.. | $Z_0$<br>BG<br>BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}kgm^2$ | | $h^{-1}$ | Nm | kg | $10^{-4}kgm^2$ |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 2.5 | 7.6 | 6.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 3.2 | 7.6 | 6.6 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 6.7 | 6.8 | BR03 | 16000<br>- | 3.2 | 8.2 | 8.0 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 9 | 11.9 | BE1 | 5280<br>12000 | 10 | 12 | 13.2 |

24772933/EN – 01/2018

### 1.3.3 DR63.., DRS71.., 460 V, 60 Hz, 6-pole, S1, NEMA

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 0.33 | 0.64 | - | - | 52.8 | 2.95 | 2.3<br>2.3 | 2.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 0.49 | 0.67 | - | - | 50.2 | 2.9 | 2.7<br>2.6 | 2.8 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 0.68 | 0.65 | - | - | 53.8 | 2.9 | 2.5<br>2.5 | 2.6 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 0.48 | 0.71 | - | - | 66.0 | 3.2 | 1.7<br>1.7 | 2.0 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 0.65 | 0.71 | 64.2 | 68.2 | 66.0 | 2.9 | 1.7<br>1.7 | 2.0 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 0.9 | 0.72 | 67.8 | 71.3 | 70.0 | 3.5 | 1.9<br>1.9 | 2.1 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BR..<br>BE.. | $Z_0$<br>BG<br>BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$kgm$^2$ |
| DR63S6 | 0.09 | 0.12 | 0.77 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 2.5 | 7.6 | 6.6 |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 3.2 | 7.6 | 6.6 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 6.7 | 6.8 | BR03 | 16000<br>- | 3.2 | 8.2 | 8.0 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 9 | 11.9 | BE1 | 5280<br>12000 | 10 | 12 | 13.2 |

24772933/EN – 01/2018

### 1.3.4 DR63.., DRS71.., 575 V, 60 Hz, 6-pole, S1, NEMA

#### Information on motors

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 575 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 0.39 | 0.67 | - | - | 50.2 | 2.9 | 2.7<br>2.6 | 2.8 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 0.54 | 0.65 | - | - | 53.8 | 2.9 | 2.5<br>2.5 | 2.6 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 0.38 | 0.71 | - | - | 66.0 | 3.2 | 1.7<br>1.7 | 2.0 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 0.52 | 0.71 | 64.2 | 68.2 | 66.0 | 2.9 | 1.7<br>1.7 | 2.0 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 0.72 | 0.72 | 67.8 | 71.3 | 70.0 | 3.5 | 1.9<br>1.9 | 2.1 |

#### Further information on motors and brakemotors

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BR..<br>BE.. | $Z_0$<br>BG<br>BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$kgm$^2$ |
| DR63M6 | 0.12 | 0.16 | 1.03 | 1110 | 6.1 | 5.4 | BR03 | 16000<br>- | 3.2 | 7.6 | 6.6 |
| DR63L6 | 0.18 | 0.25 | 1.56 | 1100 | 6.7 | 6.8 | BR03 | 16000<br>- | 3.2 | 8.2 | 8.0 |
| DRS 71S 6 | 0.18 | 0.25 | 1.56 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71S 6 | 0.25 | 0.33 | 2.15 | 1100 | 7.9 | 8.29 | BE05 | 5600<br>12800 | 5 | 10 | 9.59 |
| DRS 71M 6 | 0.37 | 0.5 | 3.2 | 1100 | 9 | 11.9 | BE1 | 5280<br>12000 | 10 | 12 | 13.2 |

24772933/EN – 01/2018

## 1.4 Technical data of the DRN.., 460 V, 60 Hz, 4-pole, S1

### 1.4.1 DRN.., 460 V, 60 Hz, 4-pole, S1

**Information on motors**

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRN80M4 | 0.75 | 1.0 | 4.1 | 1751 | 1.56 | 0.70 | 82.0 | 84.9 | 85.5 | 8.1 | 3.7<br>3.0 | 4.2 |
| DRN90S4 | 1.1 | 1.5 | 6 | 1762 | 2.3 | 0.69 | 83.5 | 86.1 | 86.5 | 8.2 | 3.3<br>2.3 | 4.0 |
| DRN90L4 | 1.5 | 2 | 8.1 | 1767 | 3 | 0.70 | 83.8 | 86.1 | 86.5 | 9.1 | 3.3<br>1.9 | 4.0 |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 4.2 | 0.73 | 88.1 | 89.5 | 89.5 | 9.1 | 3.4<br>2.4 | 4.2 |
| DRN100L4 | 3 | 4 | 16.2 | 1763 | 5.8 | 0.73 | 87.6 | 89.3 | 89.5 | 9.2 | 3.9<br>2.3 | 4.4 |
| DRN100L4 | 3.7 | 5 | 20 | 1758 | 7.2 | 0.72 | 87.8 | 89.4 | 89.5 | 9.1 | 4.1<br>2.0 | 4.4 |
| DRN112M4 | 4 | 5.4 | 21.5 | 1769 | 7.1 | 0.79 | 88.5 | 89.6 | 89.5 | 9.8 | 2.8<br>1.4 | 4.0 |
| DRN132S4 | 5.5 | 7.5 | 29.5 | 1768 | 9.2 | 0.82 | 90.9 | 91.8 | 91.7 | 9.8 | 3.5<br>2.8 | 4.3 |
| DRN132M4 | 7.5 | 10 | 40.5 | 1774 | 13.3 | 0.77 | 91.1 | 91.9 | 91.7 | 8.5 | 3.7<br>2.6 | 3.7 |
| DRN132L4 | 9.2 | 12.3 | 49.5 | 1775 | 16.5 | 0.76 | 91.0 | 91.9 | 91.7 | 8.4 | 4.3<br>1.7 | 4.1 |
| DRN160M4 | 11 | 15 | 59 | 1776 | 18.5 | 0.80 | 91.2 | 92.3 | 92.4 | 7.0 | 2.6<br>2.1 | 3.1 |
| DRN160L4 | 15 | 20 | 81 | 1777 | 25 | 0.80 | 92.3 | 93.3 | 93.0 | 9.0 | 3.4<br>2.1 | 3.8 |
| DRN180M4 | 18.5 | 25 | 99 | 1781 | 29.5 | 0.84 | 92.7 | 93.6 | 93.6 | 9.5 | 4.1<br>3.4 | 4.0 |
| DRN180L4 | 22 | 30 | 118 | 1781 | 34 | 0.86 | 93.2 | 93.8 | 93.6 | 9.8 | 4.2<br>2.7 | 3.9 |
| DRN200L4 | 30 | 40 | 161 | 1783 | 48.5 | 0.82 | 93.0 | 94.0 | 94.1 | 8.5 | 3.5<br>2.5 | 3.3 |
| DRN225S4 | 37 | 50 | 198 | 1785 | 56 | 0.88 | 94.2 | 94.7 | 94.5 | 9.2 | 3.4<br>2.6 | 3.0 |
| DRN225M4 | 45 | 60 | 240 | 1785 | 70 | 0.85 | 94.5 | 95.1 | 95.0 | 8.9 | 3.6<br>2.2 | 2.7 |
| DRN250ME4 | 55 | 75 | 295 | 1785 | 88 | 0.82 | 94.3 | 95.2 | 95.4 | 8.6 | 4.6<br>2.4 | 2.7 |
| DRN280S4 | 75 | 100 | 400 | 1785 | 125 | 0.79 | 94.6 | 95.3 | 95.4 | 9.1 | 4.8<br>2.7 | 3.1 |
| DRN280M4 | 90 | 125 | 480 | 1784 | 141 | 0.83 | 94.8 | 95.4 | 95.4 | 8.0 | 4.8<br>2.5 | 2.9 |
| DRN315S4 | 110 | 150 | 590 | 1790 | 165 | 0.87 | 95.0 | 95.7 | 95.8 | 7.6 | 3.3<br>2.5 | 3.5 |
| DRN315ME4 | 132 | 177 | 700 | 1791 | 200 | 0.86 | 95.4 | 96.0 | 96.2 | 8.3 | 3.8<br>3.1 | 4.3 |
| DRN315L4 | 150 | 200 | 800 | 1788 | 225 | 0.87 | 95.5 | 96.1 | 96.2 | 7.8 | 3.4<br>2.7 | 3.8 |
| DRN315L4 | 160 | 210 | 850 | 1788 | 235 | 0.88 | 95.6 | 96.2 | 96.2 | 7.4 | 3.2<br>2.6 | 3.6 |
| DRN315H4 | 185 | 250 | 990 | 1792 | 290 | 0.83 | 94.8 | 95.9 | 96.2 | 8.6 | 4.6<br>3.4 | 4.6 |

24772933/EN – 01/2018

### Further information on motors and brakemotors

| Motor type DRN.. | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ kgm² | | $h^{-1}$ | Nm | kg | $10^{-4}$ kgm² |
| DRN80M4 | 0.75 | 1.0 | 4.1 | 1751 | 14 | 24.7 | BE1 | 2600<br>6600 | 10 | 18 | 26.2 |
| DRN90S4 | 1.1 | 1.5 | 6 | 1762 | 20 | 54 | BE2 | 1800<br>4800 | 14 | 24 | 58.7 |
| DRN90L4 | 1.5 | 2 | 8.1 | 1767 | 23 | 67.2 | BE2 | 1800<br>4700 | 20 | 27 | 71.9 |
| DRN100LM4 | 2.2 | 3 | 11.9 | 1762 | 33 | 90.7 | BE5 | –<br>3700 | 28 | 38 | 96.7 |
| DRN100L4 | 3 | 4 | 16.2 | 1763 | 34 | 112 | BE5 | –<br>2900 | 40 | 40 | 118 |
| DRN100L4 | 3.7 | 5 | 20 | 1758 | 34 | 112 | BE5 | –<br>2900 | 40 | 40 | 118 |
| DRN112M4 | 4 | 5.4 | 21.5 | 1769 | 45 | 178 | BE5 | –<br>2300 | 55 | 52 | 183 |
| DRN132S4 | 5.5 | 7.5 | 29.5 | 1768 | 56 | 241 | BE11 | –<br>1700 | 80 | 71 | 251 |
| DRN132M4 | 7.5 | 10 | 40.5 | 1774 | 73 | 381 | BE11 | –<br>900 | 110 | 91 | 403 |
| DRN132L4 | 9.2 | 12.3 | 49.5 | 1775 | 81 | 439 | BE11 | –<br>780 | 110 | 100 | 461 |
| DRN160M4 | 11 | 15 | 59 | 1776 | 115 | 817 | BE20 | –<br>720 | 150 | 145 | 877 |
| DRN160L4 | 15 | 20 | 81 | 1777 | 130 | 1040 | BE20 | –<br>640 | 200 | 165 | 1100 |
| DRN180M4 | 18.5 | 25 | 99 | 1781 | 155 | 1630 | BE20 | –<br>400 | 200 | 190 | 1690 |
| DRN180L4 | 22 | 30 | 118 | 1781 | 170 | 1950 | BE30 | –<br>380 | 300 | 210 | 2090 |
| DRN200L4 | 30 | 40 | 161 | 1783 | 280 | 2660 | BE32 | –<br>400 | 400 | 335 | 2890 |
| DRN225S4 | 37 | 50 | 198 | 1785 | 310 | 4350 | BE32 | –<br>180 | 400 | 365 | 4580 |
| DRN225M4 | 45 | 60 | 240 | 1785 | 310 | 4350 | BE32 | –<br>160 | 500 | 365 | 4580 |
| DRN250ME4 | 55 | 75 | 295 | 1785 | 510 | 8940 | BE60 | –<br>120 | 600 | 590 | 9280 |
| DRN280S4 | 75 | 100 | 400 | 1785 | 520 | 8940 | BE62 | –<br>120 | 1000 | 600 | 9530 |
| DRN280M4 | 90 | 125 | 480 | 1784 | 630 | 12000 | BE62 | –<br>63 | 1000 | 720 | 12600 |
| DRN315S4 | 110 | 150 | 590 | 1790 | 870 | 23400 | BE122 | –<br>42 | 1200 | 1000 | 24400 |
| DRN315ME4 | 132 | 177 | 700 | 1791 | 990 | 28300 | BE122 | –<br>33 | 1600 | 1130 | 29400 |
| DRN315L4 | 150 | 200 | 800 | 1788 | 1020 | 28600 | BE122 | –<br>27 | 2000 | 1150 | 29600 |
| DRN315L4 | 160 | 210 | 850 | 1788 | 1020 | 28600 | BE122 | –<br>27 | 2000 | 1150 | 29600 |
| DRN315H4 | 185 | 250 | 990 | 1792 | 1140 | 35200 | BE122 | –<br>18 | 2000 | 1270 | 36200 |

24772933/EN – 01/2018

## 1.5 Technical data of DRS71.., 60 Hz, 4-pole, S1

### 1.5.1 DRS71.., 380 V

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 380 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.53 | 0.70 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ $kgm^2$ | | $h^{-1}$ | Nm | kg | $10^{-4}$ $kgm^2$ |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 4800<br>7600 | 5 | 10 | 6.43 |

### 1.5.2 DRS71.., 440 V

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 440 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.46 | 0.7 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ $kgm^2$ | | $h^{-1}$ | Nm | kg | $10^{-4}$ $kgm^2$ |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 4800<br>7600 | 5 | 10 | 6.43 |

### 1.5.3 DRS71.., 460 V

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.44 | 0.7 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ $kgm^2$ | | $h^{-1}$ | Nm | kg | $10^{-4}$ $kgm^2$ |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 4800<br>7600 | 5 | 10 | 6.43 |

24772933/EN – 01/2018

### 1.5.4 DRS71.., 575 V

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 575 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | A | | % | % | % | | | |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.35 | 0.70 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BG BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | $min^{-1}$ | kg | $10^{-4}$ kgm² | | $h^{-1}$ | Nm | kg | $10^{-4}$ kgm² |
| DRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 4800<br>7600 | 5 | 10.0 | 6.43 |

24772933/EN – 01/2018

## 1.6 Technical data of HazLoc-NA® EDRS71.., 60 Hz, 4-pole, S1

### 1.6.1 HazLoc-NA® EDRS71.., 460 V

**Information on motors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 460 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| EDRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.44 | 0.70 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |
| EDRS 71S 4 | 0.25 | 0.33 | 1.4 | 1700 | 0.57 | 0.74 | 69.9 | 74.4 | 75.3 | 4.6 | 1.9<br>1.9 | 2.5 |
| EDRS 71S 4 | 0.37 | 0.5 | 2.1 | 1700 | 0.92 | 0.69 | 66.6 | 71.3 | 72.3 | 4.2 | 1.9<br>1.9 | 2.5 |
| EDRS 71M 4 | 0.55 | 0.75 | 3.1 | 1690 | 1.25 | 0.71 | 73.5 | 76.0 | 75.4 | 4.3 | 2.2<br>2.1 | 2.4 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$ kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$ kgm$^2$ |
| EDRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 1500 | 2.50 | 10 | 6.43 |
| EDRS 71S 4 | 0.25 | 0.33 | 1.4 | 1700 | 7.9 | 5.13 | BE05 | 1500 | 3.50 | 10 | 6.43 |
| EDRS 71S 4 | 0.37 | 0.5 | 2.1 | 1700 | 7.9 | 5.13 | BE05 | 1500 | 5 | 10 | 6.43 |
| EDRS 71M 4 | 0.55 | 0.75 | 3.1 | 1690 | 9 | 7.21 | BE1 | 1500 | 7 | 12 | 8.51 |

### 1.6.2 HazLoc-NA® EDRS71.., 575 V

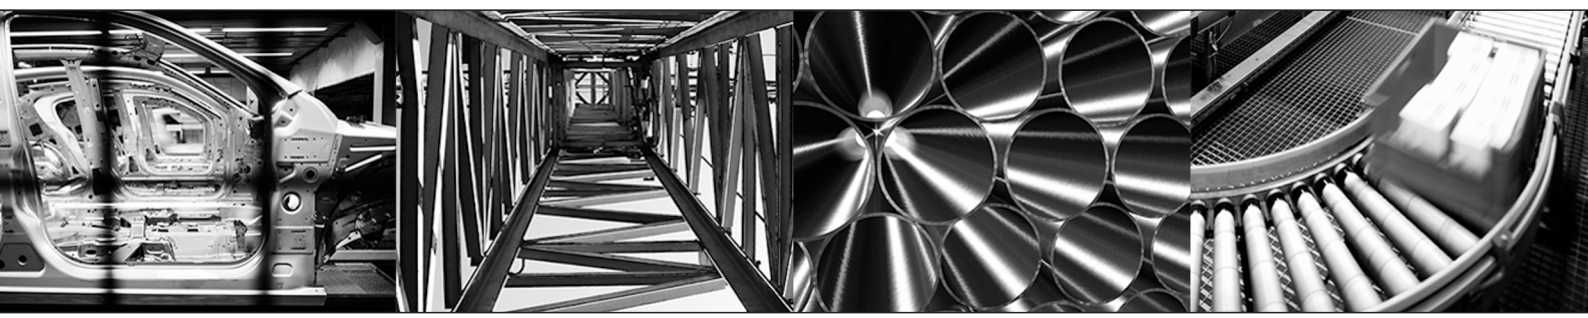
**Information on motors**

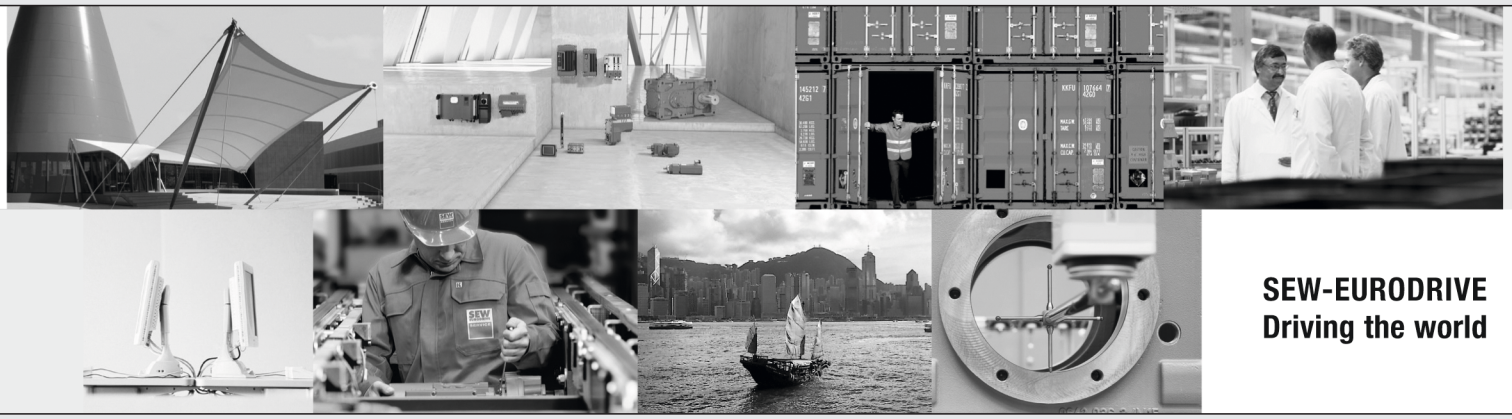
| Motor | $P_N$ | | $M_N$ | $n_N$ | $I_N$ 575 V | cosφ | $\eta_{50\%}$ | $\eta_{75\%}$ | $\eta_{100\%}$ | $I_A/I_N$ | $M_A/M_N$ $M_H/M_N$ | $M_K/M_N$ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | A | | % | % | % | | | |
| EDRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 0.35 | 0.70 | 69.0 | 73.0 | 74.0 | 4.8 | 2.5<br>2.2 | 2.5 |
| EDRS 71S 4 | 0.25 | 0.33 | 1.4 | 1700 | 0.46 | 0.74 | 69.9 | 74.4 | 75.3 | 4.6 | 1.9<br>1.9 | 2.5 |
| EDRS 71S 4 | 0.37 | 0.5 | 2.1 | 1700 | 0.74 | 0.69 | 66.6 | 71.3 | 72.3 | 4.2 | 1.9<br>1.9 | 2.5 |
| EDRS 71M 4 | 0.55 | 0.75 | 3.1 | 1690 | 1 | 0.71 | 73.5 | 76.0 | 75.4 | 4.3 | 2.2<br>2.1 | 2.4 |

**Further information on motors and brakemotors**

| Motor | $P_N$ | | $M_N$ | $n_N$ | $m_{Mot}$ | $J_{mot}$ | BE.. | $Z_0$ BGE | $M_B$ | $m_{BMot}$ | $J_{BMot}$ |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | hp | Nm | min$^{-1}$ | kg | 10$^{-4}$ kgm$^2$ | | h$^{-1}$ | Nm | kg | 10$^{-4}$ kgm$^2$ |
| EDRS 71S 4 | 0.18 | 0.25 | 1.01 | 1710 | 7.9 | 5.13 | BE05 | 1500 | 2.50 | 10 | 6.43 |
| EDRS 71S 4 | 0.25 | 0.33 | 1.4 | 1700 | 7.9 | 5.13 | BE05 | 1500 | 3.50 | 10 | 6.43 |
| EDRS 71S 4 | 0.37 | 0.5 | 2.1 | 1700 | 7.9 | 5.13 | BE05 | 1500 | 5 | 10 | 6.43 |
| EDRS 71M 4 | 0.55 | 0.75 | 3.1 | 1690 | 9 | 7.21 | BE1 | 1500 | 7 | 12 | 8.51 |

24772933/EN – 01/2018





**SEW-EURODRIVE**
**Driving the world**

SEW-EURODRIVE GmbH & Co KG
Ernst-Blickle-Str. 42
76646 BRUCHSAL
GERMANY
Tel. +49 7251 75-0
Fax +49 7251 75-1970
sew@sew-eurodrive.com
➞ **www.sew-eurodrive.com**