


```
mpg$drv <- factor(mpg$drv, levels=c("f","r","4"),  
                  labels=c("front wheel",  
                           "rear wheel", "4wd"))
```

```
ggplot(mpg, aes(displ, hwy)) +  
  geom_point() +  
  geom_smooth(method="lm", se=FALSE) +  
  facet_wrap(~drv)
```

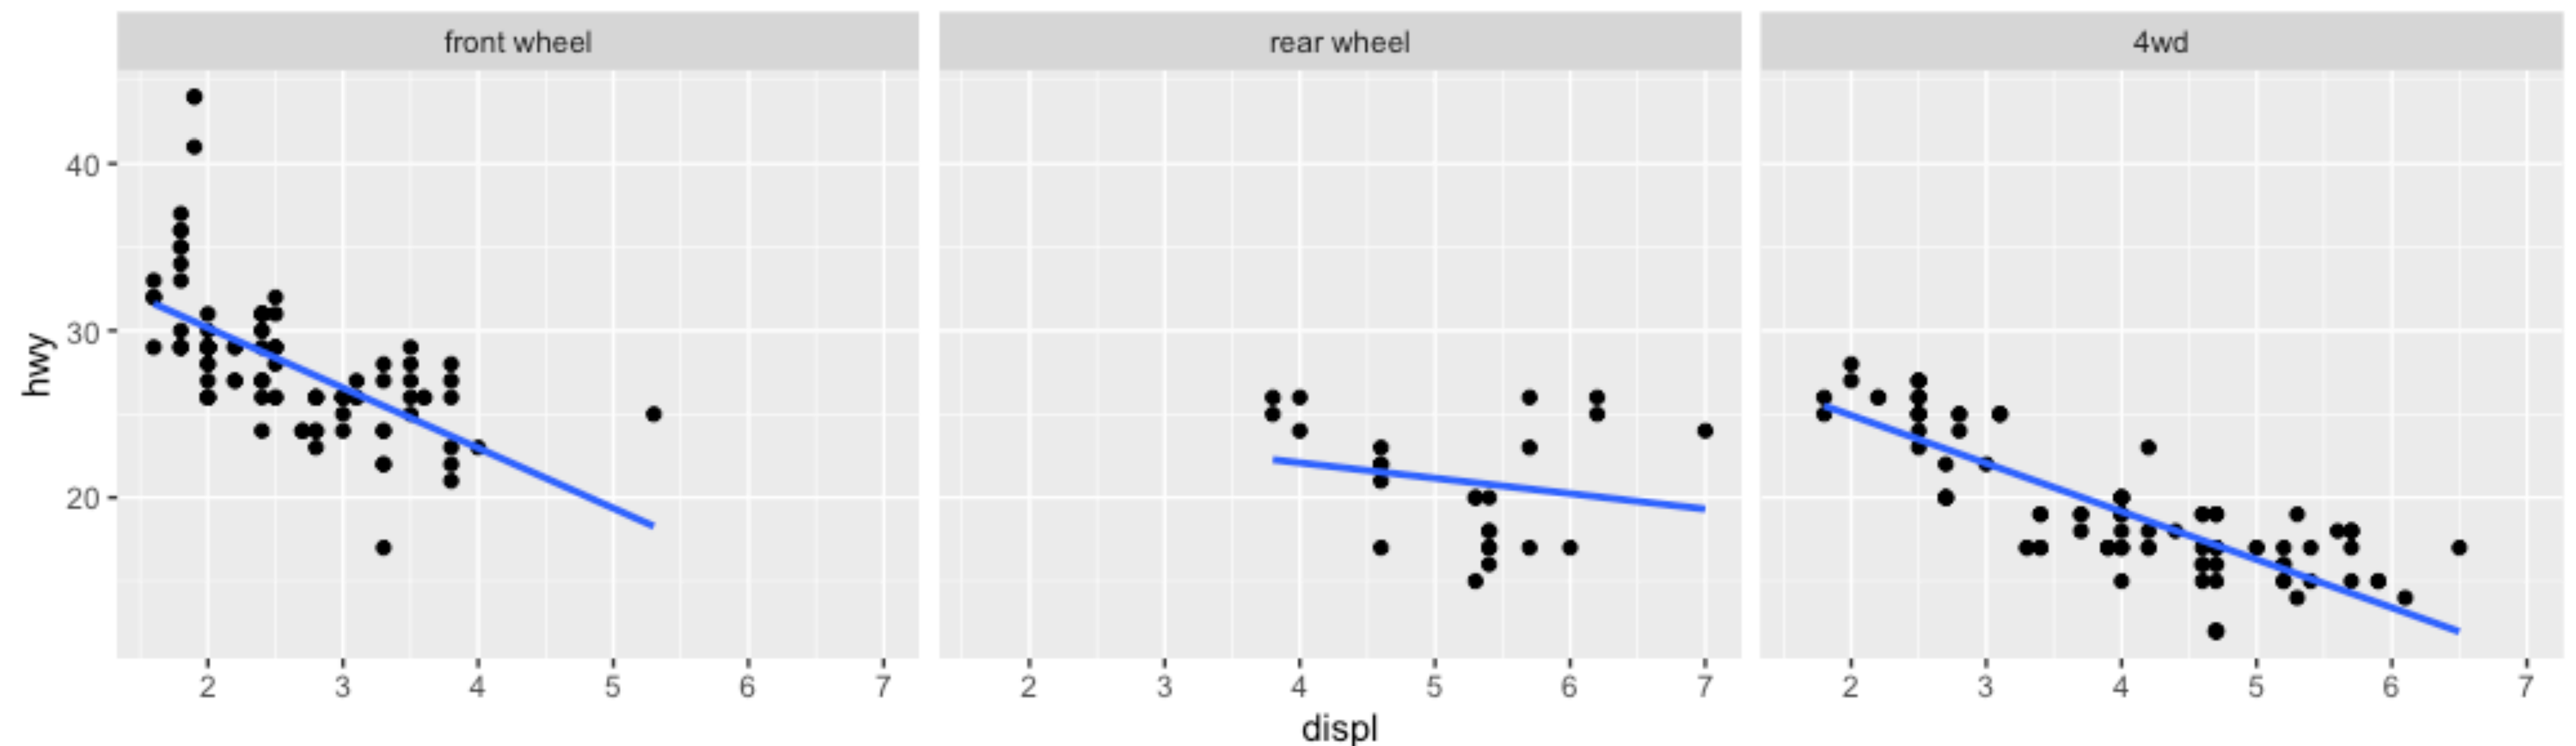

Exercise 1G

02:00

Open `exercise/exercise1g.r`

Run the setup code

Modify the plot to use a `facet_wrap` by name.

Bonus: Reverse the order of the facets.