
```
ggplot(ud2, aes(x=year, y=n, fill=sex)) +
 geom bar(stat="identity")
```




use stat_identity() not stat_count()



ggplot(ud2, aes(x=year, y=n, fill=sex)) +
geom bar(stat="identity")

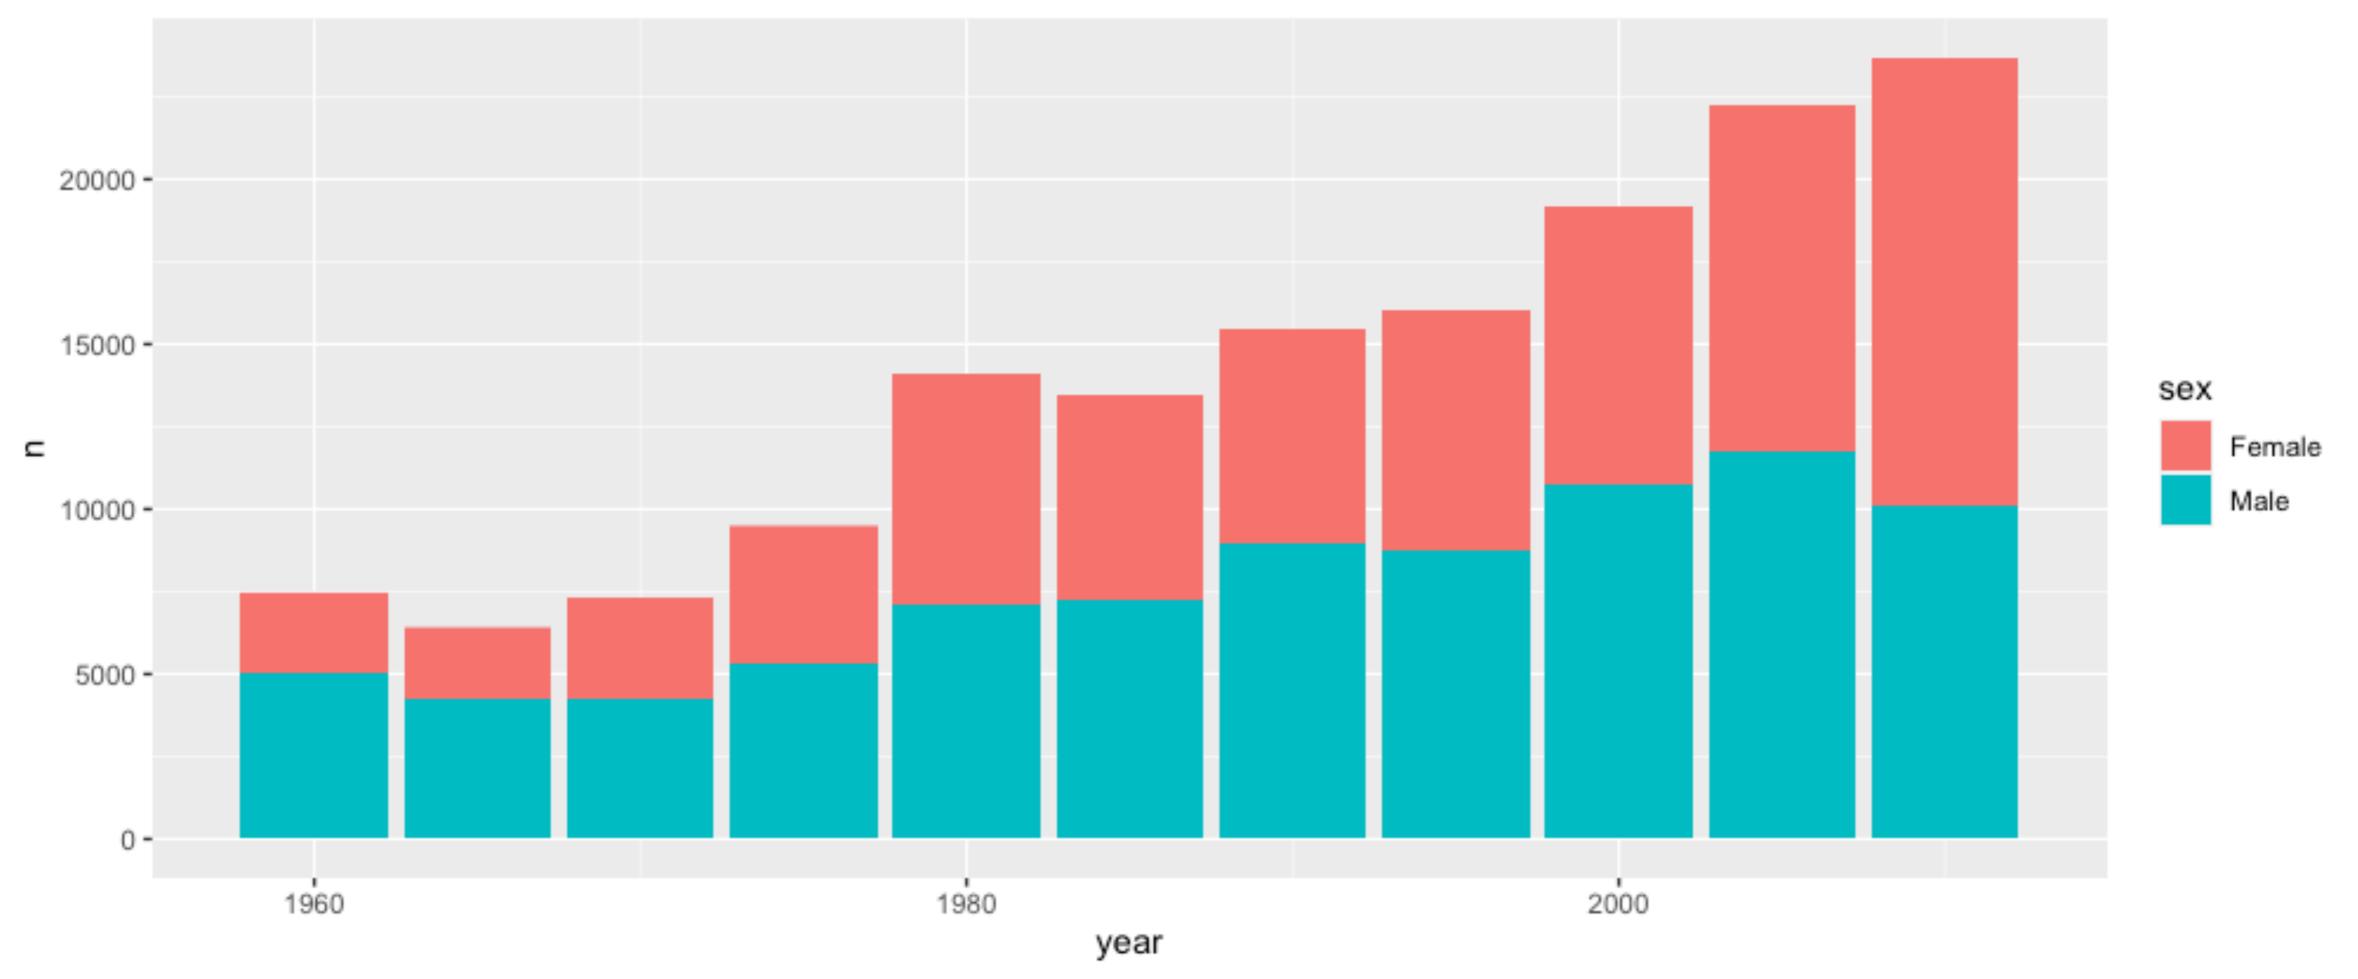

USe stat_identity() not stat_count()

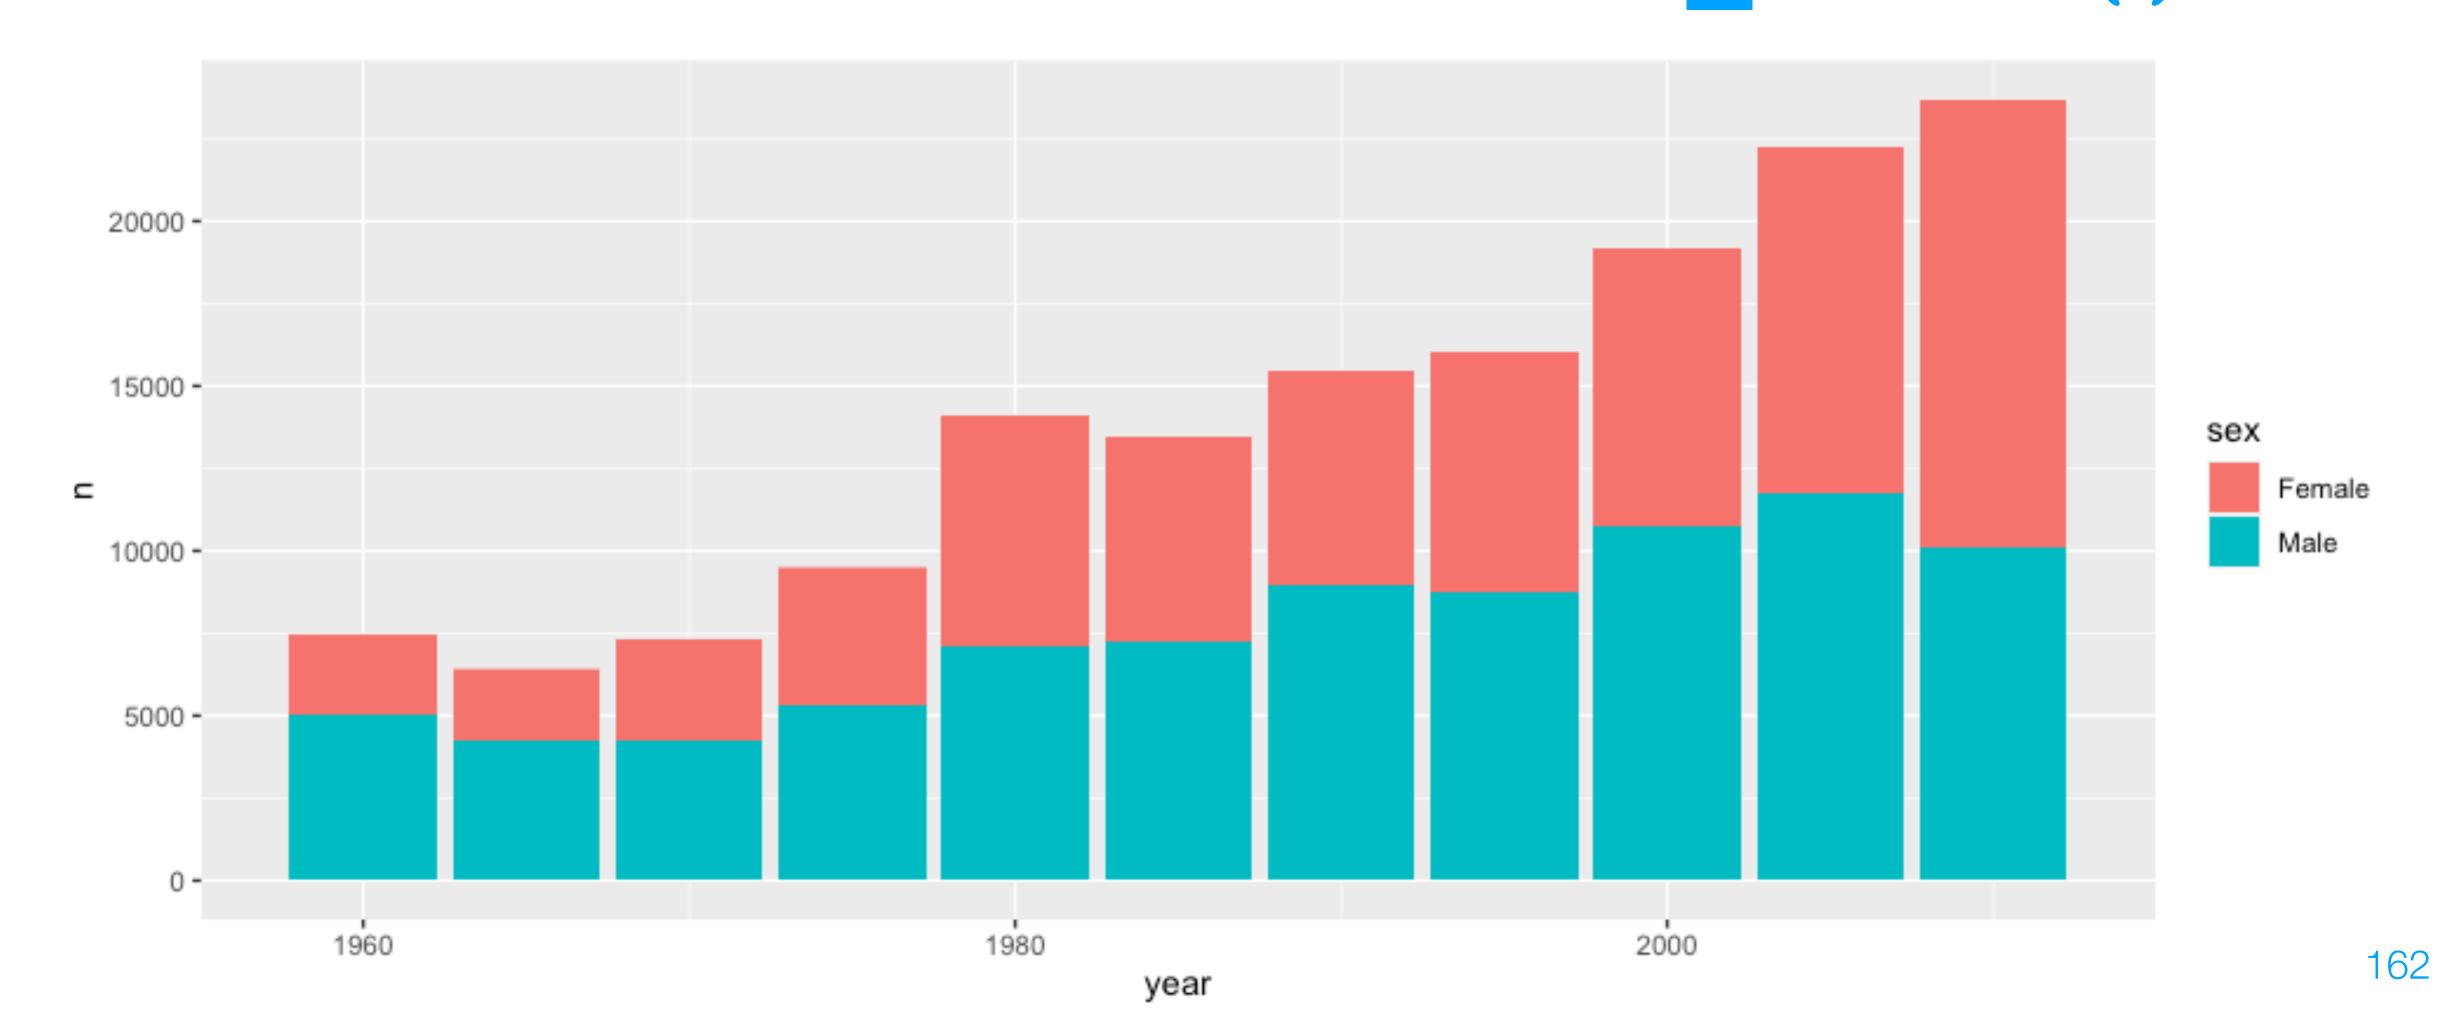

```
ggplot(ud2, aes(x=year, y=n, fill=sex)) +
  geom_bar(stat="identity") +
  facet grid(~name)
```

