


```
ggplot(mpg, aes(hwy)) +  
  geom_histogram(bins=20, aes(y=stat(density)))
```

**Function *Inside* aes():**  
use a variable computed  
by the stat



**Argument *Outside* aes():**  
which stat should be used

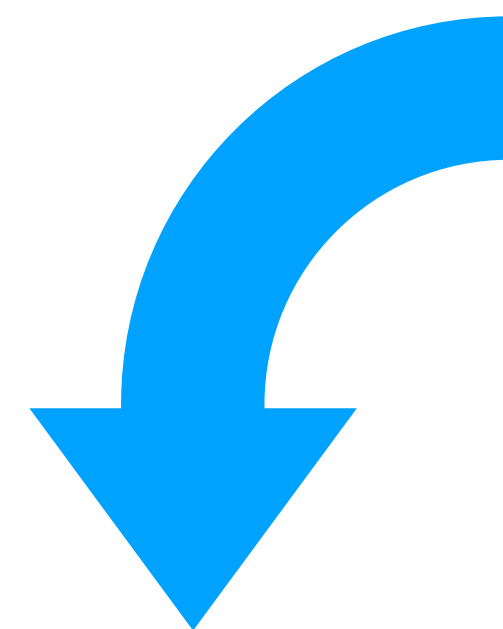

```
ggplot(mpg, aes(hwy)) +  
  geom_histogram(stat="bin", bins=20)
```

```
ggplot(mpg, aes(hwy)) +  
  geom_histogram(bins=20, aes(y=stat(density)))
```

