

1. Overview

Allows various costs such as HP, MP, TP, Gold, EXP, items, equipment, game variables, and states to be assigned to skills.

Each cost is set in the skill's Note field. HP and MP costs can be specified as fixed values or as percentages of maximum/current values.

2. Installation

1. Place NUUN_SkillCostEX.js in the project's js/plugins folder.
2. Enable NUUN_SkillCostEX in the Plugin Manager.
3. Ver.1.4.0 and later can be used without NUUN_Base.

3. Skill Note Tags

You can configure skill costs by entering the following tags in the skill's Note field.

HP Cost

<SkillHPCost:[cost]>	
[cost]	Specifies the amount of HP to consume.
Example: <SkillHPCost:150>	Consumes 150 HP.
<SkillHPCostMR:[cost]>	
[cost]	Specifies the percentage of Max HP to consume.
Example:<SkillHPCostMR:30>	Consumes 30% of Max HP.
<SkillHPCostR:[cost]>	
[cost]	Specifies the percentage of current HP to consume.
Example:<SkillHPCostR:30>	Consumes 30% of current HP.

Options

Item	Item
<HPCostDead>	Allows the user to become incapacitated by paying the HP cost.

MP Cost

<SkillMPCost:[cost]>	
[cost]	Specifies the amount of MP to consume. The database supports up to 9999, but this tag supports MP costs of 10000 or more.
Example: <SkillMPCost:150>	Consumes 150 MP.
<SkillMPCostMR:[cost]>	
[cost]	Specifies the percentage of Max MP to consume.
Example: <SkillMPCostMR:30>	Consumes 30% of Max MP.
< SkillMPCostR:[cost]>	
[cost]	Specifies the percentage of current MP to consume.
Example: <SkillMPCostR:30>	Consumes 30% of current MP.

Options

Item	Item
<MPCostNoMcr>	Does not apply the "MP Cost Rate" trait to this skill's MP cost.

TP Cost

<SkillTPCostR:[cost]>	
[cost]	Specifies the percentage of current TP to consume.
Example: <SkillGoldCost:1000>	Consumes 1000G.

Gold Cost

<SkillGoldCost:[cost]>	
[cost]	Specifies the amount of Gold to consume.
Example: <SkillGoldCost:1000>	Consumes 1000G.
<SkillGoldCostR:[cost]>	
[cost]	Specifies the percentage of current Gold to consume.
Example: <SkillGoldCostR:30>	Consumes 30% of current Gold.

EXP Cost

<SkillExpCost:[cost]>	
[cost]	Specifies the amount of EXP to consume.
Example: <SkillExpCost:300>	Consumes 300 EXP.
<SkillExpCostR:[cost]>	
[cost]	Specifies the percentage of EXP required for the next level to consume.
Example: <SkillExpCost:300>	Consumes 50% of the EXP required for the next level.

Options

Item	Item
<SkillLevelExpCost >	Consumes the EXP cost from the EXP earned at the current level.

Item, Weapon, and Armor Costs

<code><SkillItemCost:[itemType],[itemId],[num],[mode]></code> Consumes items, weapons, or armor as skill costs. If multiple tags are specified, the skill can be used only when all required costs are available.	
<code>[itemType]</code>	I: Item, W: Weapon, A: Armor
<code>[itemId]</code>	ID of the item, weapon, or armor to consume
<code>[num]</code>	Quantity to consume
<code>[mode]</code>	Specifies whether equipped items are included. 0: Exclude, 1: Include. Valid for weapons and armor. If inventory is insufficient, the equipped target is consumed.

Equipment Cost

<code><SkillEquipCost:[itemType],[itemId],[num],[eval]></code> Treats an equipped weapon or armor as a cost. Equipment can also be removed only when a condition is met.	
<code>[itemType]</code>	W: Weapon, A: Armor
<code>[itemId]</code>	ID of the target weapon or armor
<code>[num]</code>	0: Do not consume, 1: Remove the equipment
<code>[eval]</code>	When <code>[num]</code> is 1, specifies the condition formula for consuming the equipment. If the condition is not met, it is not removed. If omitted, it is always consumed.
Example: <code><SkillEquipCost:W,53,1,\$gameParty.numItems(\$dataItems[1]) == 0></code>	If Item ID 1 is not in the inventory, equipped Weapon ID 53 is removed.

Game Variable Cost

< SkillVarCost:[id],[cost],[Identifier]> Consumes a fixed value from the specified game variable.	
[id]	Game Variable ID
[cost]	Value to consume
[Identifier]	S Identifier ID used by Triacontane's SkillCostRateCustomize plugin. This can be omitted. For the cost type in SkillCostRateCustomize , enter the [Identifier] string from the Text tab.
Example: <SkillVarCost:6,3>	Consumes 3 from Game Variable 6.
<SkillVarCostR:[id],[max],[rate],[Identifier]> Consumes a percentage from a game variable. If [max] is 0, consumes [rate]% of the current value. Otherwise, consumes [rate]% of [max].	
[id]	Game Variable ID
[cost]	Value to consume
[Identifier]	Identifier ID used by Triacontane's SkillCostRateCustomize plugin. This can be omitted. For the cost type in SkillCostRateCustomize , enter the [Identifier] string from the Text tab.
Example: <SkillVarCostR:5,0,30>	Consumes 30% of the current value of Game Variable 5.
Example: <SkillVarCostR:5,100,30>	Consumes 30% of the maximum value 100 from Game Variable 5.

State Cost

<SkillStateCost:[stateId]> The skill can be used only while the specified state is applied, and that state is removed when the skill is used.	
[stateId]	Specifies the State ID used as the cost.

Evaluation Formula

<SkillEvalCost:[eval]>	
[eval]	Specifies an evaluation formula that determines whether the cost can be paid.
<SkillEvalCons:[eval]>	
[eval]	Specifies an evaluation formula used to consume the cost when the skill is used.

4. Parameters for Retrieving Values Before Cost Consumption

Parameter	Description
this.consBHp	Retrieves the user's HP before cost consumption.
this.consBMp	Retrieves the user's MP before cost consumption.
this.consBTp	Retrieves the user's TP before cost consumption.
this.consBGGold	Retrieves Gold before cost consumption.
this.consBExp	Retrieves the EXP earned at the current level before cost consumption.

例：スキルのダメージ計算式に「a.consBMp * 1.5」と記入すると、MP コストを支払う前の MP の 1.5 倍のダメージを与えます。

5. Note Tags for Data with Traits

<NoConsumptionCost[id]:±[rate]>	
Adjusts the probability of not consuming MP, TP, HP, or Gold costs.	
[id]	1 : MP、2 : TP、3 : HP、4 : Gold
[rate]	Adjustment value for the consumption rate (+/-). The default is 0.

Terms of Use

Credit: Optional

Commercial use: Allowed

Adult content: Allowed

Modification: Allowed

Redistribution: Allowed

Support is not provided for modified versions or copies downloaded from sources other than the official GitHub repository, official forum, or authorized retailers.

Log

9/21/2026 Ver.1.4.1

Added the ability to set states as costs.

Minor fixes.

9/20/2026 Ver.1.4.0

Changed the specifications so the plugin can run without NUUN_Base.

Fixed an issue where the cost rate from SkillCostRateCustomize was not retrieved correctly for variable costs.

1/26/2025 Ver.1.3.3

Fixed an issue where skills costing more than current HP could not be used when incapacitation by HP cost was enabled.

Fixed an issue where the enemy graphic remained displayed when incapacitated by HP cost consumption.

1/13/2024 Ver.1.3.2

Added SkillCostRateCustomize support for costs other than MP and TP.

7/23/2023 Ver.1.3.1

Fixed an issue where HP and Gold were not consumed.

7/13/2023 Ver.1.3.0

Added a feature that can prevent MP, TP, HP, and Gold costs from being consumed based on probability.

7/9/2023 Ver.1.2.4

Fixed an issue where skills could not be selected when HP was 0.

2/19/2023 Ver.1.2.3

Added a feature that removes equipped weapons or armor when the required item cost is not in the inventory.

2/15/2023 Ver.1.2.2

Added a feature that allows equipped items to be removed as a cost when a condition is met.

12/17/2022 Ver.1.2.1

Minor fixes.

12/4/2022 Ver.1.2.0

Added costs that consume a percentage from game variables.

11/25/2022 Ver.1.1.1

Added MP skill costs with support for values of 10000 or more.

Changed non-Japanese display text to English.

4/2/2022 Ver.1.1.0

Added the ability to configure skills that consume equipped weapons or armor when activated.

12/5/2021 Ver.1.0.0

Initial release.

1. Overview

Extends the display of skill costs shown in skill lists and similar windows.

You can configure the display order of multiple costs, separator characters, font sizes, display positions, and the colors, prefixes, and suffixes for HP, MP, TP, Gold, and EXP. Costs other than HP, MP, TP, Gold, Exp, and states can also be displayed by specifying a cost tag name and cost evaluation formula.

This plugin is an extension for **NUUN_SkillCostEX**



2. Installation

1. Place NUUN_SkillCostShowEX.js in the project's js/plugins folder.
2. Enable **NUUN_SkillCostShowEX** in the Plugin Manager.
3. Place it below **NUUN_SkillCostEX**.

3. Basic Settings

Item	Description
Skill Cost Display Order	Sets the skill costs to display and their order. Costs higher in the list are displayed later.
Cost Width	Specifies the display width for one cost using a string. The default is "000".
Cost Separator	Specifies the character displayed between multiple costs. The default is "/".
Prefix Font Size	Sets the prefix font size.
Suffix Font Size	Sets the suffix font size.
Cost Separator Font Size	Sets the cost separator font size.
Cost Font Size	Sets the cost font size.
Prefix Y Coordinate	Adjusts the Y coordinate of the prefix.
Suffix Y Coordinate	Adjusts the Y coordinate of the suffix.
Cost Separator Y Coordinate	Adjusts the Y coordinate of the cost separator.
Cost Y Coordinate	Adjusts the Y coordinate of the cost.

4. HP, MP, TP, Gold, and EXP Settings

Sets the text color, prefix, and suffix for each cost. Normally specify a system color, or enter a color code from the Text tab.

Item	Description
HP Settings	Sets HP cost color, prefix, and suffix. Defaults: color 21, prefix "HP".
MP Settings	Sets MP cost color, prefix, and suffix. Defaults: color 23, prefix "MP".
TP Settings	Sets TP cost color, prefix, and suffix. Defaults: color 29, prefix "TP".
Gold Settings	Sets Gold cost color, prefix, and suffix. Defaults: color 17, suffix "G".
EXP Settings	Sets EXP cost color, prefix, and suffix. Defaults: color 27, prefix "EXP".

5. Skill Cost Display Order

Specify a Cost Display Target for each cost to display. For non-standard costs, use the individual settings in the same entry.


Cost Display Target

Item	Description
HP	Displays the HP cost.
MP	Displays the MP cost.
TP	Displays the TP cost.
Gold	Displays the Gold cost.
Exp	Displays the EXP cost.
State	Displays the state cost as an icon.
limitCost	Used to display the Party Limit Gauge cost.
EquipSkillLearnSkill	Used to display points from the Skill Learning Equipment plugin.
Other	Enter the tag name of the cost to display.

Individual Settings for Costs Other Than HP, MP, TP, Gold, Exp, and States

Item	Description
Cost Color	Sets the cost text color.
Prefix	Sets the string displayed before the cost value.
Suffix	Sets the string displayed after the cost value.
Cost Evaluation Formula	Sets the evaluation formula used to calculate the displayed cost. Specify an expression or function that retrieves the cost.

For costs other than HP, MP, TP, Gold, Exp, and states, enter the cost tag name in Cost Display Target and configure its display in the individual cost settings.

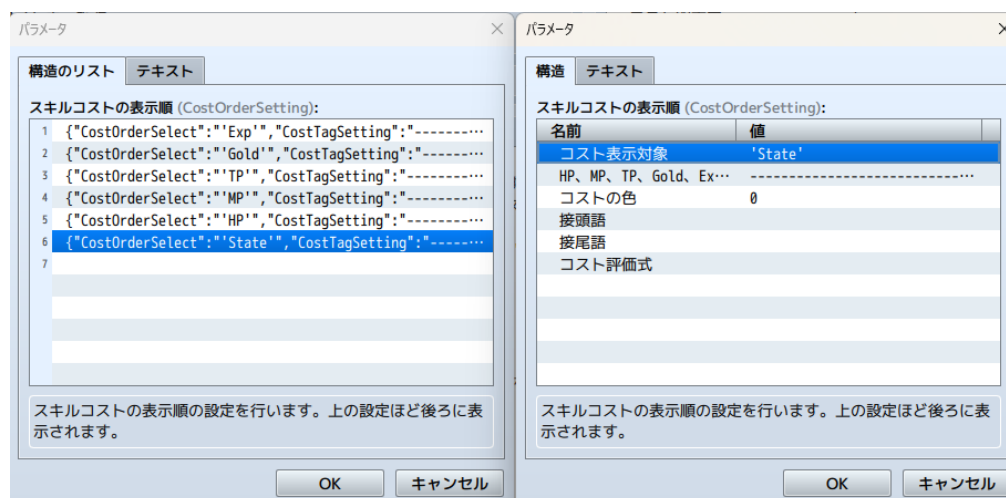

6. Cost Evaluation Formula

The following values can be used in the cost evaluation formula.

Item	Description
actor	Actor game data.
skill	Skill data to be activated.
cost	Retrieved cost data. Equipment consumption and evaluation formulas return true/false values.

To display the Party Limit Gauge cost, enter **limitCost** in Cost Display Target and **this._actor.skillLimitCost(skill)** in Cost Evaluation Formula.

7. Skill Note Tags

Item	Description
<SkillCostEval:[eval]>	Defines the displayed cost format with an evaluation formula. Specify the formula in [eval]. actor, skill, and cost can be used.
<SkillCostWidth:[string]>	Specifies this skill's cost display width using a string. The specified string width also affects the width available for the skill name.
<SkillCostWidth:00000>	Uses the width of "00000" as this skill's cost display width.

Prefixes and suffixes are not applied to skills for which a cost evaluation formula is defined.

8. Cost Data Reference

In cost evaluation formulas and individual display cost settings, the contents of cost differ by cost type.

Item	Description
HP / MP / TP / Gold / Exp	Retrieves the cost value directly. Example: If the MP cost is 50, cost contains 50.
Other Costs	Retrieves the cost data as an array.
cost[id]	References values after ":" in the tag from left to right as 0, 1, 2, and so on.

Example: With <SkillItemCost:value0,value1,value2>, specifying **cost[2]** retrieves the third value.

Array indexes start at 0, so enter 0 to retrieve the first value.

9. Integration with Other Plugins

Plugin	Description
Skill Learning Equipment Plugin NUUN_EquipSkillLearning	Required when setting EquipSkillLearnSkill as the Cost Display Target.
Limit Gauge Plugin NUUN_PartyLimitGauge	Required when setting limitCost as the Cost Display Target.

Terms of Use

Credit: Optional

Commercial use: Allowed

Adult content: Allowed

Modification: Allowed

Redistribution: Allowed

Support is not provided for modified versions or copies downloaded from sources other than the official GitHub repository, official forum, or authorized retailers.

Log

9/21/2026 Ver.1.2.1

Added support for displaying state skill costs.

9/20/2026 Ver.1.2.0

Changed the specifications so the plugin can run without NUUN_Base.

Fixed an issue where 0 could not be set for some plugin parameters.

Fixed an issue where the previous skill's cost width was applied.

1/22/2023 Ver.1.1.3

Added the ability to specify the cost width for each skill.

12/17/2022 Ver.1.1.2

Added the ability to display points from the Skill Learning Equipment plugin.

12/6/2022 Ver.1.1.1

Changed the Type of color-related plugin parameters to color. (Core Script Ver.1.6.0 or later)

12/4/2022 Ver.1.1.0

Changed the specifications of the cost evaluation formula for individual cost settings other than HP, MP, TP, Gold, and Exp.

Changed the specifications of Cost Display Target in Skill Cost Display Order.

Applied the cost evaluation formula to all consumption costs.

11/25/2022 Ver.1.0.2

Changed actor game data so it can be retrieved with actor.

Changed non-Japanese display text to English.

1/3/2022 Ver.1.0.1

Fixed an issue where multiple tags not listed in Cost Display Target were not displayed correctly.

12/5/2021 Ver.1.0.0

Initial release.