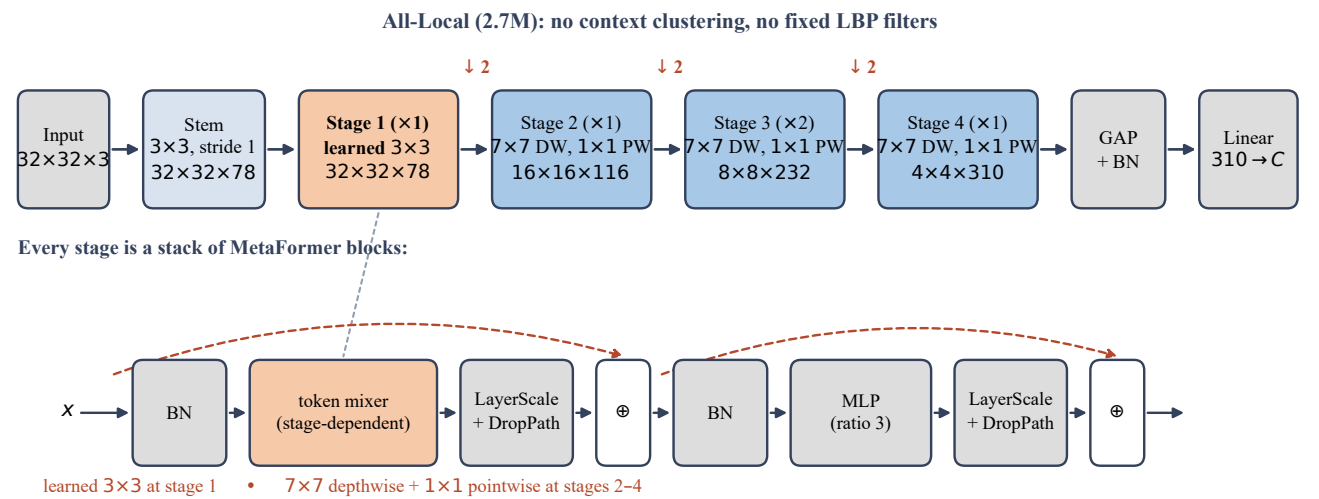

All-Local (2.7M): no context clustering, no fixed LBP filters
↓ 2
↓ 2
↓ 2
Input
32×32×3
Stem
3×3, stride 1
32×32×78
Stage 1 (×1)
learned 3×3
32×32×78
Stage 2 (×1)
7×7 DW, 1×1 PW
16×16×116
Stage 3 (×2)
7×7 DW, 1×1 PW
8×8×232
Stage 4 (×1)
7×7 DW, 1×1 PW
4×4×310
GAP
+ BN
Linear
310 → C
Every stage is a stack of MetaFormer blocks:
x
BN
token mixer
(stage-dependent)
LayerScale
+ DropPath
⊕
BN
MLP
(ratio 3)
LayerScale
+ DropPath
⊕
learned 3×3 at stage 1
•
7×7 depthwise + 1×1 pointwise at stages 2–4