

Theory of low-weight quantum codes

Fuchuan Wei,^{1,2} Zhengyi Han,¹ Austin Yubo He,^{3,4} Zimu Li,¹ and Zi-Wen Liu¹

¹*Yau Mathematical Sciences Center, Tsinghua University, Beijing 100084, China*

²*Department of Mathematical Sciences, Tsinghua University, 100084 Beijing, China*

³*The University of Texas at Austin, Austin, TX 78712, USA*

⁴*University of California, Berkeley, Berkeley, CA 94720, USA*

(Dated: January 28, 2026)

Low check weight is practically crucial code property for fault-tolerant quantum computing, which underlies the strong interest in quantum low-density parity-check (qLDPC) codes. Here, we explore the theory of weight-constrained stabilizer codes from various foundational perspectives including the complexity of computing code weight and the explicit boundary of feasible low-weight codes in both theoretical and practical settings. We first prove that calculating the optimal code weight is an NP-hard problem, demonstrating the necessity of establishing bounds for weight that are analytical or efficiently computable. Then we systematically investigate the feasible code parameters with weight constraints. We provide various explicit analytical lower bounds and in particular completely characterize stabilizer codes with weight at most 3, showing that they have distance 2 and code rate at most 1/4. We also develop a powerful linear programming (LP) scheme for setting code parameter bounds with weight constraints, which yields exact optimal weight values for all code parameters with $n \leq 9$. We further refined this constraint from multiple perspectives by considering the generator weight distribution and overlap. In particular, we consider practical architectures and demonstrate how to apply our methods to e.g. the IBM 127-qubit chip. Our study brings the weight as a crucial parameter into coding theory and provide guidance for code design and utility in practical scenarios.

I. INTRODUCTION

The potentially transformative promise of quantum computing and various other technologies [1–4] is tempered by a fundamental practical challenge: quantum systems and their manipulation are inherently susceptible to noise and errors, necessitating efficient fault tolerance schemes in order to realize scalable advantages in practice.

Such fault tolerance is expected to be built on quantum error-correcting (QEC) codes [5–8], which protect logical quantum information by encoding it into a suitable larger Hilbert space, enabling physical errors to be detected and corrected. Stabilizer codes provide a canonical framework for QEC in which error correction is enabled by measuring certain parity-check (stabilizer) operators and applying recovery operations accordingly [6]. While the code rate and distance are usually viewed as the most fundamental code parameters, the check weights (i.e., the size of the nontrivial support of stabilizers) are a less studied property particularly crucial in the fault tolerance context: higher-weight checks generally require larger circuits and more ancilla resources, worsening experimental complexity and error propagation, which is detrimental to fault tolerance.

The importance of low check weight has driven numerous research directions of substantial interest, including quantum low-density parity-check (qLDPC) codes [9, 10], generalized coding schemes such as subsystem codes [11, 12] and dynamical codes [13, 14], and weight reduction methods [15–18]. In particular, qLDPC codes (i.e., stabilizer code families with asymptotically $O(1)$ weight and degree) with good connectivity are theoretically under-

stood to offer a compelling route toward fault tolerance with low overhead [9, 10, 19–21] and have garnered surging attention in QEC and fault tolerance. Remarkably, the implementation of general qLDPC codes aligns well with current experimental advances with e.g., the reconfigurable atom array platform [22], offering compelling prospects for highly efficient practical fault tolerance based on them.

The study of qLDPC codes has largely focused on the theoretical setting where the asymptotic parameter scalings in the infinite-code-length limit is of interest (see e.g. Ref. [10] for an early review and Refs. [23–25] for recent breakthroughs achieving qLDPC code families with asymptotically optimal rate and distance). However, from a practical perspective, more relevant are explicit finite-size code parameters and constructions, the theory and optimization of which present markedly different problems with limited systematic understanding so far. Crucially, extending the rich results on code parameter bounds [1, 26–32], the joint limits and achievability of weight and conventional code parameters remain little understood outside the asymptotic regime.

In this work, we set out to address this pressing goal, seeking to delineate the theory of quantum codes with low weight constraints. To characterize the explicit boundaries of feasible code parameters under weight constraints, a motivating question is:

What is the minimum stabilizer-check weight needed to achieve an $[n, k, d]$ stabilizer code?

To formalize this question, for a stabilizer group G we define $W(G)$ as the optimal maximum generator weight (minimized over all generating sets). For fixed n, k, d , we

define $W_{\text{opt}}(n, k, d)$ as the optimal achievable stabilizer-check weight among all $\llbracket n, k, d \rrbracket$ stabilizer codes. We aim to characterize $W_{\text{opt}}(n, k, d)$. We establish that computing $W(G)$ is NP-hard, thus motivating provable limits and efficiently computable certificates, and then specialize them to hardware. First, we derive universal lower bounds on $W_{\text{opt}}(n, k, d)$, which rule out broad parameter regimes under generator-weight constraints. In particular, we completely characterize codes with check weight at most 3: any such stabilizer code has distance $d = 2$ and rate at most $1/4$. Consequently, achieving better performance necessarily requires check weight at least 4. More generally, our bounds reveal a tradeoff between blocklength and check weight: for any fixed target (k, d) , larger blocklength permits lower-weight checks, down to a constant floor (3 or 4). Second, we develop a linear-programming (LP) method based on quantum weight enumerators: starting from the standard LP feasibility constraints for the existence of $\llbracket n, k, d \rrbracket$ codes, we incorporate new linear constraints induced by bounded-weight generators: a growth law for the cumulative counts of low-weight stabilizers, further strengthened by overlap and parity constraints. This yields an efficient algorithm to compute a lower bound on W_{opt} ; the bound is tight for all $n \leq 9$, with matching constructions listed. Finally, we show that the LP framework can incorporate architectural constraints to produce hardware-dependent limits; under a natural check-placement rule on IBM's 127-qubit **Eagle** connectivity graph, it certifies that radius- r neighborhoods with $r \geq 5$ are necessary to realize a $\llbracket 127, 100, 6 \rrbracket$ stabilizer code.

II. OPTIMAL WEIGHT FOR STABILIZER CODES

Consider stabilizer quantum codes, which are uniquely defined by the $+1$ -eigenspace of stabilizer groups given by $(-I)$ -free abelian subgroups of the multiqubit Pauli group. As a standard notation, a stabilizer code has parameters $\llbracket n, k, d \rrbracket$ where n, k are the numbers of physical and logical qubits respectively, and d is the code distance. Of central interest in this work are weight parameters, which we now formally define.

Definition 1. The weight of a stabilizer code defined by stabilizer group G is defined by

$$W(G) := \min_{S \subset G, \langle S \rangle = G} \max_{s \in S} \text{wt}(s), \quad (1)$$

(where $\text{wt}(s)$ denotes the number of non-identity tensor factors in s), namely, the optimal maximum-generator-weight of G among all possible choices of generating sets. Then, we define the optimal weight for an (n, k, d) parameter combination as

$$W_{\text{opt}}(n, k, d) := \min_{G \text{ has parameters } \llbracket n, k, d \rrbracket} W(G), \quad (2)$$

where the minimum is taken over all stabilizer groups G which define an $\llbracket n, k, d \rrbracket$ code. If an $\llbracket n, k, d \rrbracket$ code does not exist, set $W_{\text{opt}}(n, k, d) = \infty$.

Here we include the weight parameter in the code notation, defining an $\llbracket n, k, d \rrbracket$ stabilizer code to have parameters $\llbracket n, k, d; w \rrbracket$ if $w = W(G)$ where G is its stabilizer group.

Trivially, $W_{\text{opt}}(n, k, d) = 1$ when $d = 1$ or $k = 0$. Henceforth, we focus on the nontrivial regime $k \geq 1$ and $d \geq 2$.

A fundamental question is the computational complexity of the weight parameter. Computing $W(G)$ resembles an integer program, suggesting NP-hardness. Indeed, we prove (formal proof presented in Appendix C):

Theorem 1. *The computation of $W(G)$ is NP-hard.*

As a corollary of the NP-hardness of computing $W(G)$, determining $W_{\text{opt}}(n, k, d)$ is also computationally hard, since by definition it requires minimizing the intractable objective $W(G)$ over all $\llbracket n, k, d \rrbracket$ stabilizer codes. Consequently, to prob the value of W_{opt} , it is essential to develop both upper bounds (via explicit code constructions) and lower bounds (as we do in this work) for it.

Using the theoretical and LP bounds derived in the following sections, we obtain Algorithm 1 (Appendix J), which runs in time $\text{poly}(N)$ and outputs lower bounds $W_{\text{LB}}(n, k, d) \leq W_{\text{opt}}(n, k, d)$ for all parameter triples with $n \leq N$. Table I and Table II summarize our results for $W_{\text{opt}}(n, k, d)$ for $n \leq 12$, where for $n \leq 9$ we obtain the exact values.

To achieve some target (k, d) , one must choose a blocklength n and a set of stabilizer checks. As n increases, it is often possible to realize the same (k, d) with smaller check weight, reflecting a tradeoff between code efficiency and weight. Typically, higher-weight checks incur larger measurement overhead (e.g., more ancillas and/or deeper circuits). This raises a natural question: as n grows, what is the minimum check weight required? We prove the following theorem.

Theorem 2. *For any $k \geq 1$, we have:*

- (i) $W_{\text{opt}}(n', k, d) \leq W_{\text{opt}}(n, k, d)$ for $n' \geq n$.
- (ii) $\min_{n \geq 1} W_{\text{opt}}(n, k, 2) = 3$.
- (iii) For $d \geq 3$, $\min_{n \geq 1} W_{\text{opt}}(n, k, d) = 4$.

Proof. (i) For any $\llbracket n, k, d; w \rrbracket$ code we can add $n' - n$ qubits with 1-qubit Z -checks on them to get a $\llbracket n', k, d; w \rrbracket$ code.

(ii) By Theorem 4, for any code with $k \geq 1, d \geq 2$, the maximum weight ≥ 3 . There exists a $\llbracket 4, 1, 2; 3 \rrbracket$ code defined by stabilizer group $\langle XXXI, IYYY, ZIZZ \rangle$. For any k , the tensor product of k copies of this code would be a construction.

(iii) For $d \geq 3$, the rotated surface code [33] on $d \times d$ lattice has parameters $\llbracket d^2, 1, d; 4 \rrbracket$. The tensor product of k copies of this code has parameters $\llbracket kd^2, k, d; 4 \rrbracket$. By

n = 4	$d = 2$	n = 5	$d = 2$	$d = 3$	n = 6	$d = 2$	$d = 3$	n = 7	$d = 2$	$d = 3$	n = 8	$d = 2$	$d = 3$	n = 9	$d = 2$	$d = 3$
$k = 1$	3	$k = 1$	3	4												
$k = 2$	4	$k = 2$	4	∞	$k = 2$	4	∞	$k = 2$	4	∞	$k = 2$	3	4	$k = 2$	3	4
					$k = 3$	4	∞	$k = 3$	4	∞	$k = 3$	4	6	$k = 3$	4	5
					$k = 4$	6	∞	$k = 4$	6	∞	$k = 4$	4	∞	$k = 4$	4	∞
								$k = 5$	6	∞	$k = 5$	5	∞	$k = 5$	5	∞
								$k = 6$	8	∞	$k = 6$	7	∞	$k = 6$	7	∞

TABLE I. The value of $W_{\text{opt}}(n, k, d)$ for all codes with $n \leq 9$. Lower bounds are obtained via Algorithm 1. Constructions achieving these bounds (i.e., weight-optimal codes) are provided in Appendix H. The cases $10 \leq n \leq 12$ are listed separately in Table II.

Theorem 5, weight-3 codes could not have distance ≥ 3 . \square

To illustrate how the optimal weight decreases and finally reaches the limit of 3 or 4 guaranteed by the above theorem, consider the following two choices of (k, d) . For $(k, d) = (5, 2)$, we have

$$W_{\text{opt}}(n, 5, 2) = \begin{cases} \infty, & n \leq 7, \\ 6, & n = 8, \\ 5, & n = 9, \\ 4, & 10 \leq n \leq 19, \\ 3, & n \geq 20, \end{cases} \quad (3)$$

whereas for $(k, d) = (3, 3)$,

$$W_{\text{opt}}(n, 3, 3) = \begin{cases} \infty, & n \leq 7, \\ 6, & n = 8, \\ 5, & n = 9, \\ 4, & n \geq 15. \end{cases} \quad (4)$$

While we primarily focus on the maximum generator weight in this paper, the average generator weight is also practically important. Accordingly, we define the following parameters with respect to the average weight:

$$W^{\text{avg}}(G) := \min_{S \subset G, \langle S \rangle = G} \frac{1}{|S|} \sum_{s \in S} \text{wt}(s), \quad (5)$$

$$W_{\text{opt}}^{\text{avg}}(n, k, d) := \min_{G \text{ has parameters } \llbracket n, k, d \rrbracket} W^{\text{avg}}(G). \quad (6)$$

Remarkably, W and W^{avg} can be optimized simultaneously, through a “weight-optimal” generating set:

Definition 2. Let G be a stabilizer group with $|G| = 2^r$. Let $S = \{g_1, \dots, g_r\} \subset G$ be a generating set ordered so that $\text{wt}(g_1) \leq \dots \leq \text{wt}(g_r)$. We say that S is *weight-optimal*¹ if, for every generating set $\{h_1, \dots, h_r\} \subset G$ of G ordered so that $\text{wt}(h_1) \leq \dots \leq \text{wt}(h_r)$, one has

$$\text{wt}(g_i) \leq \text{wt}(h_i), \quad i = 1, \dots, r. \quad (7)$$

¹ For every stabilizer group, there exists a weight-optimal generating set; see Appendix B. Any two weight-optimal generating sets $\{g_1^{(1)}, \dots, g_r^{(1)}\}$ and $\{g_1^{(2)}, \dots, g_r^{(2)}\}$ of G satisfy $\text{wt}(g_i^{(1)}) = \text{wt}(g_i^{(2)})$, for all $i \in [r]$. By Theorem 1, finding a weight-optimal generating set is also NP-hard, since it directly yields $W(G)$.

Proposition 3. Let S be a weight-optimal generating set of a stabilizer group G , then the maximum and average weight of S simultaneously attain the optimal value. That is, $\max_{s \in S} \text{wt}(s) = W(G)$ and $\frac{1}{|S|} \sum_{s \in S} \text{wt}(s) = W^{\text{avg}}(G)$.

However, for a target parameter $\llbracket n, k, d \rrbracket$, optimizing the maximum weight W_{opt} does not necessarily optimize the average weight $W_{\text{opt}}^{\text{avg}}$ (and vice versa), so these two objectives can be in tension. We illustrate this mismatch for $\llbracket 4, 1, 2 \rrbracket$ codes. Consider two stabilizer groups

$$G_1 = \langle XXXI, IYYY, ZIZZ \rangle, \quad (8)$$

$$G_2 = \langle ZZII, IIZZ, XXXX \rangle, \quad (9)$$

they form two $\llbracket 4, 1, 2 \rrbracket$ codes. $W_{\text{opt}}(4, 1, 2) = 3$ is achieved on G_1 , $W_{\text{opt}}^{\text{avg}}(4, 1, 2) = 8/3$ is achieved on G_2 . Yet we have

$$W(G_1) = 3 < 4 = W(G_2), \quad (10)$$

$$W^{\text{avg}}(G_1) = 3 > 8/3 = W^{\text{avg}}(G_2), \quad (11)$$

and the optimal value for W_{opt} and $W_{\text{opt}}^{\text{avg}}$ cannot be obtained on a same stabilizer group.

III. FUNDAMENTAL BOUNDS

In this section, we present a series of fundamental lower bounds that establish general limitations on weight-constrained codes. These bounds are also helpful in reducing the computational cost of the LP bounds below, as they allow us to exclude theoretically forbidden parameter sets $\llbracket n, k, d; w \rrbracket$ without solving the LP.

Theorem 4. Suppose $k \geq 1$ and $d \geq 2$, then

$$W_{\text{opt}}(n, k, d) \geq \left\lceil \frac{2n}{n - k} \right\rceil. \quad (12)$$

Intuitively, when $d \geq 2$, every effective qubit used to encode logical information must be covered by at least two stabilizer generators with distinct Paulis on it, requiring $w(n - k) \geq 2n$. See Appendix D for the full proof. As an immediate example, for $m \geq 2$, a $\llbracket 2m, 2m - 2, 2 \rrbracket$ code must have maximum generator weight $\geq 2m$. Consequently, the code with stabilizer group $\langle X^{\otimes 2m}, Z^{\otimes 2m} \rangle$ is optimal.

As a corollary of Theorem 4, any code with maximum weight $< \lceil \frac{2n}{n-1} \rceil = 3$ must be trivial ($d \leq 1$). Now we proceed to consider codes with maximum weight 3, which can always be reduced to the case where all stabilizers have weight 3. Consequently, any Pauli of weight ≤ 2 commuting with the stabilizer group is logical. Intuitively, one can order the generators so that consecutive generators overlap on two qubits, producing a path-like structure with two ends (analogous to a cyclic code). This then allows the construction of a weight-2 logical Pauli supported on the endpoint qubits. The path-like structure forces the supports to expand, so any weight-3 code decomposes into a tensor product of blocks, each encoding one logical qubit. Since the smallest $\llbracket m, 1, 2; 3 \rrbracket$ code has $m = 4$, it follows that $k/n \leq 1/4$. More formally, we arrive at the following theorem, whose complete proof is given in Appendix E.

Theorem 5. *Suppose $k \geq 1$, $d \geq 2$. If there exists an $\llbracket n, k, d; 3 \rrbracket$ code, then $d = 2$ and $k/n \leq 1/4$.*

Some key messages from the above results are:

Corollary 6. *For any stabilizer code with $k \geq 1$,*

- (i) *If $d = 2$, then $W_{\text{opt}}(n, k, d) \geq 3$;*
- (ii) *If $d = 2$ and $k/n > 1/4$, then $W_{\text{opt}}(n, k, d) \geq 4$;*
- (iii) *If $d \geq 3$, then $W_{\text{opt}}(n, k, d) \geq 4$.*

On weight-optimal instances. We list below several parameter regimes for which explicit codes attain $W_{\text{opt}}(n, k, d)$.

- **$\llbracket 5, 1, 3 \rrbracket$ code:** The $\llbracket 5, 1, 3 \rrbracket$ perfect code admits a generating set of maximum weight 4, hence it achieves $W_{\text{opt}}(5, 1, 3) = 4$ and is weight-optimal.
- **(2D) toric code ($d \geq 3$):** The (2D) toric code has $d \geq 3$ and stabilizer checks of weight 4, so it is also weight-optimal.
- **$d = 2$ and $k/n \leq 1/4$:** For $k/n \leq 1/4$, the k -fold tensor product of a $\llbracket 4, 1, 2; 3 \rrbracket$ block, padded with $n - 4k$ trivial qubits, gives an $\llbracket n, k, 2; 3 \rrbracket$ code, which saturates $W_{\text{opt}}(n, k, 2)$.

On distance restriction from weight. For $w \leq 2$, it necessarily holds that $d = 1$, hence no nontrivial code is possible. For $w = 3$, Theorem 5 indicates $d \leq 2$. At the other extreme, for constant $w \geq 5$, one can use weight-reduction methods to obtain good codes with $k, d = \Theta(n)$ [16, 34]. The $w = 4$ case is the most subtle. Although codes with growing distance are already permitted, we expect that weight-4 checks preclude linear distance. More specifically, we conjecture that any $\llbracket n, k, d; 4 \rrbracket$ code obeys the square-root distance barrier, i.e., $d = O(\sqrt{n})$. Some remarks regarding this conjecture are in order. First, this bound holds for and is saturable by hypergraph product (HGP) codes [35–38] which constitute a particularly nice and representative

quantum code family. In particular, note that the toric code directly provides a simple weight-4 HGP code example with $\Theta(\sqrt{n})$ distance, which is expected to be optimal. Second, To overcome the $O(\sqrt{n})$ distance barrier, general product structures involving high dimensional expanders (HDXs) are utilized [23–25, 39–42]. Intuitively, such codes should obey weight ≥ 6 : the node degrees of these expanders account for the weights, and as non-trivial expander graphs have degree ≥ 3 , the product structure of current constructions of HDXs enforces degree ≥ 6 for 2D expanders, which is the lowest dimension that supports quantum codes. The aforementioned weight reduction scheme can reduce the weight to 5, but in line with our distance conjecture, we believe this is optimal, i.e., weight reduction to 4 is not possible. Indeed, all known methods that can overcome the $d = O(\sqrt{n})$ barrier are not known to work for weight 4, which provides strong evidence for our conjecture. We leave the full understanding of the weight-4 case as an important future research opportunity.

IV. BOUNDS FROM LINEAR PROGRAMMING

Weight enumerators provide a convenient way to examine the weight structure of codes [32]. Here we demonstrate how to apply LP methods based on enumerators to the weight-constrained situation so as to systematically produce refined code parameter bounds especially in the finite-size regime.

Given a quantum code defined by projector Π onto a rank- K space ($K = 2^k$ for stabilizer codes), we define the weight enumerators A_0, \dots, A_n by (up to normalization) summing the squared overlaps $|\text{Tr}(P\Pi)|^2$ over all weight- j Pauli operators $P \in \{I, X, Y, Z\}^{\otimes n}$. Intuitively, A_j measures how strongly the code space “correlates” with weight- j Paulis, and for stabilizer codes it reduces to a counting function [32]:

$$A_j = |\{g \in G : \text{wt}(g) = j\}|. \quad (13)$$

Two related distributions, dual enumerators B_j and shadow enumerators Sh_j , encode further positivity constraints and dual information.

These quantities are related: the quantum MacWilliams identity relates \vec{B} and \vec{A} through a *Krawtchouk matrix* (a fixed $(n+1) \times (n+1)$ matrix M) [43], and similarly \vec{Sh} can be obtained from \vec{A} via a *signed Krawtchouk matrix* \widetilde{M} [44, 45]. Importantly, the distance d is characterized by the condition $A_j = B_j$ for all $j < d$ [32]. Consequently, the existence of such a quantum code indicates the feasibility of an efficiently solvable linear program in the variables A_0, \dots, A_n with constraints: i) $A_0 = B_0 = 1$, ii) $B_j \geq A_j \geq 0$, iii) $A_j = B_j$ for $j < d$, and iv) $Sh_j \geq 0$. Infeasibility of this LP certifies that no such code exists. See Appendix F for more detailed information.

n = 10	$d = 2$	$d = 3$	$d = 4$	n = 11	$d = 2$	$d = 3$	$d = 4$	$d = 5$	n = 12	$d = 2$	$d = 3$	$d = 4$	$d = 5$
$k = 1$	3	4	4 - 6	$k = 1$	3	4	4 - 6	6	$k = 1$	3	4	4 - 6	6
$k = 2$	3	4	5 - 6	$k = 2$	3	4	4 - 6	∞	$k = 2$	3	4	4 - 6	∞
$k = 3$	4	4 - 5	∞	$k = 3$	4	4 - 5	∞	∞	$k = 3$	3	4 - 5	6 - 8	∞
$k = 4$	4	6 - 7	∞	$k = 4$	4	5 - 7	∞	∞	$k = 4$	4	4 - 7	7 - 8	∞
$k = 5$	4	∞	∞	$k = 5$	4	6 - 8	∞	∞	$k = 5$	4	6 - 8	∞	∞
$k = 6$	6	∞	∞	$k = 6$	5	∞	∞	∞	$k = 6$	4	8 - 10	∞	∞
$k = 7$	7	∞	∞	$k = 7$	6	∞	∞	∞	$k = 7$	6	∞	∞	∞
$k = 8$	10	∞	∞	$k = 8$	8	∞	∞	∞	$k = 8$	12	∞	∞	∞

TABLE II. The values of $W_{\text{opt}}(n, k, d)$ for $n = 10, 11, 12$. We remark that the code constructions are not yet fully optimized, so the resulting upper bounds may be non-tight. The lower bound $W_{\text{opt}}(12, 7, 2) \geq 6$ follows from Proposition 20, while all other lower bounds on W_{opt} are obtained via Algorithm 1.

We now incorporate the weight parameter. If an $[n, k, d; w]$ stabilizer code exists, then one can derive additional linear constraints by linking w to the weights of stabilizer-group elements, as captured by A_j . A key observation is that low-weight generators force many stabilizer elements to have small weight. Since there are $n - k$ independent generators of weight at most w , (13) implies $\sum_{j=1}^w A_j \geq n - k$; Moreover, the product of any two generators has weight at most $2w$, hence $\sum_{i=1}^{2w} A_i \geq (n - k) + \binom{n-k}{2}$. More generally, for each $C = 1, \dots, \lfloor n/w \rfloor$ we obtain

$$\sum_{i=1}^{Cw} A_i \geq \sum_{c=1}^C \binom{n-k}{c}. \quad (14)$$

These cumulative lower bounds provide a coarse “growth law” for the weights of stabilizer-group elements.

In Appendix G we sharpen these constraints in several directions. First, we track how many generators attain the maximal weight w , which yields additional lower/upper bounds on A_w and $\sum_{j < w} A_j$, as well as tighter cumulative lower bounds. Second, for certain parameter candidates $[n, k, d; w]$, the code cannot decompose as a tensor product of smaller codes (which is computationally efficient to identify); hence, $A_1 = 0$, and its generators need to have more overlap to be “connected”. Finally, we incorporate parity constraints valid for stabilizer codes: in any stabilizer group, either all elements have even weight, or even/odd weights are balanced. These refinements make the resulting LP bounds substantially tighter in practice. We organize these constraints into the pseudocode in Algorithm 1 in Appendix J. Using this procedure, we can generate in $\text{poly}(N)$ time lower bounds $W_{\text{LB}}(n, k, d)$ for $W_{\text{opt}}(n, k, d)$ for all $n \leq N$.

Theorem 7 (No-go criteria from LP family (informal)). *If an $[n, k, d; w]$ stabilizer code exists, then its weight enumerators (A_0, \dots, A_n) must satisfy the standard LP constraints for $[n, k, d]$ codes, together with the additional weight-induced constraints summarized in (G17) (for some admissible choice of auxiliary discrete parameters).*

Consequently, if the weight-induced constraints can not be satisfied for all admissible choices of parameters, then no $[n, k, d; w]$ stabilizer code can exist. See Appendix G for the formal version of Theorem 7.

This method leads to lower bounds for W_{opt} in Table I ($n \leq 9$) and Table II ($10 \leq n \leq 12$). In Table I, all lower bounds match the corresponding upper bounds and are thus tight. We solved the LPs in Mathematica [46] using exact (rational) arithmetic, thereby avoiding floating-point round-off errors. The complete bounds for $n \lesssim 100$ will be uploaded to GitHub.

V. PRACTICAL CODE ARCHITECTURES

While we have so far focused on general bounds, actual experimental setups or architectures most likely give rise to more specific connectivity constraints, such as geometric locality, on the check configuration. This clearly motivates the study of situations subject to such more refined conditions.

As a representative practical example, consider the IBM 127-qubit “Eagle” chip [47, 48], whose qubit connectivity graph is shown in Fig. 1. We “evenly” place Pauli check operators according to the hardware layout as follows: on each of the 27 qubits colored orange in Fig. 1, we assign a check supported within the radius- r neighborhood of that qubit in the connectivity graph.

To illustrate our architecture-dependent analysis, consider the natural case $(n, k) = (127, 100)$, for which stabilizer codes with distance $d = 6$ are known to exist [49]. Now the question is the following: under the above check-placement rule, what radius r is necessary to realize a $[127, 100, 6]$ stabilizer code on the Eagle chip?

We can use LP to lower bound r . Without exploiting the geometric information of check locations, imposing the coarse constraint $\sum_{i=1}^{Cw} A_i \geq \sum_{c=1}^C \binom{n-k}{c}$ yields a lower bound of 13 on the maximum stabilizer weight. Since the central checks reach weight 13 at radius $r = 3$, this baseline bound gives $r \geq 3$.

Now taking the hardware layout into account, we can strengthen the LP constraints and obtain the improved

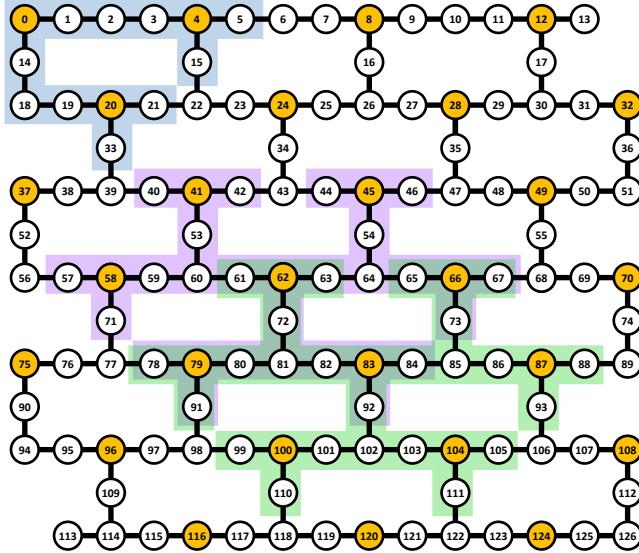


FIG. 1. Qubit layout of the IBM **Eagle** chip. With checks centered at the 27 qubits colored in orange, our LP lower bound implies that radius $r \geq 5$ is required to achieve a $[127, 100, 6]$ code. The three shaded areas show the radius-5 neighborhoods of qubits 0, 62, and 83.

bound

$$r \geq 5. \quad (15)$$

The key insight is that the prescribed geometry allows us to derive much sharper upper bounds on the weights of products of checks by accounting for overlaps of their supports. For instance, radius-5 neighborhoods of the qubits 62 (purple) and 83 (green) overlap substantially, so the product of the corresponding checks satisfies $\text{wt}(g_{62}g_{83}) \leq \text{ub}(g_{62}g_{83}) := 2 \times 31 - \#\text{overlap} = 45$, which is significantly better than the structure-agnostic bound 62. Generally, by enumerating the support-union upper bounds $\text{ub}(g)$ for all elements $g \in G$ generated by these 27 checks (taking overlaps into account), we obtain, for every $M = 0, 1, \dots, n$, the cumulative constraints

$$\sum_{i \leq M} A_i \geq \#\{g \in G : \text{ub}(g) \leq M\}. \quad (16)$$

After adding these constraints, the resulting LP remains infeasible for $r \leq 4$, and becomes feasible at $r = 5$.

VI. LOW-WEIGHT CODE CONSTRUCTIONS AND UPPER BOUNDS

To compare with the above theoretical lower bounds, we collect representative finite-size, low-check-weight code instances and display them in Fig. 2. These examples serve as explicit witnesses of achievability under low-weight constraints and provide benchmarks for assessing the sharpness of our lower bounds.

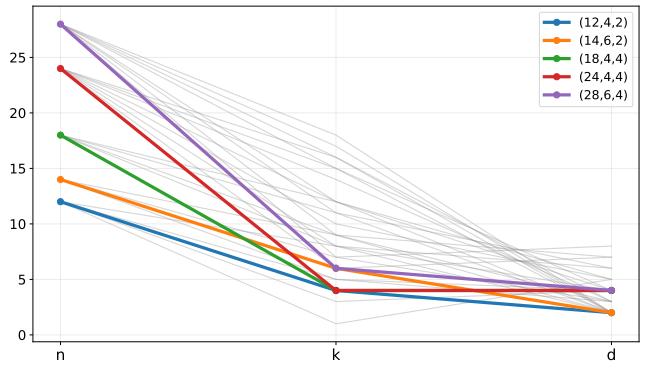


FIG. 2. Constructions are weight 6 BB codes taken from [50]. Bounds for (k, d) of weight 6 codes are drawn in gray and are obtained by Algorithm 1.

To generate additional finite-size codes consistent with our bounds, we restrict attention to CSS codes. Our dataset combines established constructions of bivariate bicycle (BB) codes [50] with additional instances obtained via a reinforcement-learning (RL) search following [51].

In the RL environment, the state is the pair of parity-check matrices (H_X, H_Z) . Starting from a base code, we first enlarge (H_X, H_Z) by appending a prescribed number of additional physical qubits, thereby giving the agent extra degrees of freedom to redistribute check support.

VII. DISCUSSION AND OUTLOOK

Motivated by pressing theoretical questions and experimental needs in QEC and fault tolerance, we formulated and explored the theory of stabilizer codes under explicit weight constraints. As our main contributions, we developed a variety of fundamental results concerning the weight parameter of stabilizer codes, addressing its computational hardness and integrating it into the theory of code parameter interplay to establish a systematic understanding of both the efficiency and limitations of low-weight codes.

Several immediate problems remain important directions for further study. First, some instances in the parameter bound table remain unmatched; we hope to close these gaps with further theoretical and numerical efforts, including tightening lower bounds via e.g. SDP relaxations [52] and finding more explicit code instances. Second, as discussed in the paper, the weight-4 case is particularly interesting and practically relevant. We expect deeper investigations of our initial insights and conjectures will yield profound and fruitful advances. Third, the average generator weight is also expected to be a practically important parameter that merits extended study. We have observed a tension between optimizing the maximum and average generator weights, the mechanism and implications of which would be interesting to

further understood.

It would also be worthwhile to extend the following aspects of this study. For instance, from a practical perspective, it is feasible and valuable to generalize the weight considerations to other connectivity graphs and additional practical constraints such as qubit degree (the number of checks acting on a qubit), locality, and syndrome extraction methods, depending on experimental needs, thereby further strengthening the connection to realistic implementations. Moreover, refining the considerations for more specific classes of codes such as CSS and HGP codes may yield more targeted and improved results. Finally, a comprehensive examination of asymptotic code design strategies including HGP codes, generalized product constructions could provide valuable insights into their practical utility and further bridge the gap between theoretical advances in quantum coding and experimentally relevant scenarios.

An important long-term future endeavor is to incorporate even more code properties—including logical operations, decoding features, check soundness and energy barriers—into the picture. Furthermore, extending the questions and methods here to more general dynamical and spacetime code settings is expected to be valuable. These efforts would offer more comprehensive insights and guidance for both the theoretical and experimental

developments in quantum coding and fault tolerance.

ACKNOWLEDGMENTS

We thank Kun Fang, Yuguo Shao, and Bochen Tan for valuable discussion. Z.H., Z.L., Z.-W.L. are supported in part by NSFC under Grant No. 12475023, Dushi Program, and a startup funding from YMSC.

Note added. While finalizing this work, we noticed an excellent concurrent paper by Wang et al. [53] that studies closely related questions. The two works were carried out independently and are consistent where they overlap. Key differences include the following. Wang et al. [53] considered the CSS and subsystem code settings more carefully, obtaining bounds for some special weight-4 CSS codes as well as weight-2 subsystem codes. They also worked out specific instances of quantum Tanner codes, which provide additional insight into the finite-size behaviors of asymptotic codes. We worked in the general stabilizer-code setting and further presented computational-complexity results, code rate condition for weight 3, more refined LP constraints (which leads to various better bounds and, in particular, tight bounds for small n), and architecture-specific considerations.

-
- [1] Michael A. Nielsen and Isaac L. Chuang, *Quantum Computation and Quantum Information: 10th Anniversary Edition* (Cambridge University Press, 2010).
- [2] Peter W. Shor, “Polynomial-time algorithms for prime factorization and discrete logarithms on a quantum computer,” *SIAM Journal on Computing* **26**, 1484–1509 (1997).
- [3] Seth Lloyd, “Universal Quantum Simulators,” *Science* **273**, 1073 (1996).
- [4] Vittorio Giovannetti, Seth Lloyd, and Lorenzo Maccone, “Advances in quantum metrology,” *Nature Photonics* **5**, 222–229 (2011).
- [5] Peter W. Shor, “Scheme for reducing decoherence in quantum computer memory,” *Phys. Rev. A* **52**, R2493–R2496 (1995).
- [6] Daniel Gottesman, *Stabilizer Codes and Quantum Error Correction*, Ph.D. thesis, California Institute of Technology, Pasadena, CA (1997).
- [7] Peter W. Shor, “Fault-tolerant quantum computation,” in *Proceedings of 37th Conference on Foundations of Computer Science* (1996) pp. 56–65.
- [8] Earl T. Campbell, Barbara M. Terhal, and Christophe Vuillot, “Roads towards fault-tolerant universal quantum computation,” *Nature* **549**, 172–179 (2017).
- [9] Daniel Gottesman, “Fault-tolerant quantum computation with constant overhead,” *Quantum Info. Comput.* **14**, 1338–1372 (2014).
- [10] Nikolas P. Breuckmann and Jens Niklas Eberhardt, “Quantum low-density parity-check codes,” *PRX Quantum* **2**, 040101 (2021).
- [11] David Poulin, “Stabilizer formalism for operator quantum error correction,” *Phys. Rev. Lett.* **95**, 230504 (2005).
- [12] Panos Aliferis and Andrew W. Cross, “Subsystem fault tolerance with the bacon-shor code,” *Phys. Rev. Lett.* **98**, 220502 (2007).
- [13] Matthew B. Hastings and Jeongwan Haah, “Dynamically Generated Logical Qubits,” *Quantum* **5**, 564 (2021).
- [14] Xiaozhen Fu and Daniel Gottesman, “Error correction in dynamical codes,” (2024), arXiv:2403.04163 [quant-ph].
- [15] Matthew B. Hastings, “Weight reduction for quantum codes,” (2016), arXiv:1611.03790 [quant-ph].
- [16] Matthew B Hastings, “On quantum weight reduction,” (2021), arXiv:2102.10030 [quant-ph].
- [17] Eric Sabo, Lane G. Gunderman, Benjamin Ide, Michael Vasmer, and Guillaume Dauphinais, “Weight-reduced stabilizer codes with lower overhead,” *PRX Quantum* **5**, 040302 (2024).
- [18] Austin Yubo He and Zi-Wen Liu, “Discovering highly efficient low-weight quantum error-correcting codes with reinforcement learning,” (2025), arXiv:2502.14372 [quant-ph].
- [19] Lawrence Z. Cohen, Isaac H. Kim, Stephen D. Bartlett, and Benjamin J. Brown, “Low-overhead fault-tolerant quantum computing using long-range connectivity,” *Science Advances* **8**, eabn1717 (2022).
- [20] Antonio deMarti iOlius, Imanol Etxezarreta Martinez, Joschka Roffe, and Josu Etxezarreta Martinez, “An almost-linear time decoding algorithm for quantum ldpc codes under circuit-level noise,” (2024), arXiv:2409.01440 [quant-ph].
- [21] Shiro Tamiya, Masato Koashi, and Hayata Ya-

- masaki, “Polylog-time- and constant-space-overhead fault-tolerant quantum computation with quantum low-density parity-check codes,” [arXiv:2411.03683 \[quant-ph\]](https://arxiv.org/abs/2411.03683).
- [22] Dolev Bluvstein, Simon J. Evered, Alexandra A. Geim, Sophie H. Li, Hengyun Zhou, Tom Manovitz, Sepehr Ebadi, Madelyn Cain, Marcin Kalinowski, Dominik Hangleiter, J. Pablo Bonilla Ataides, Nishad Maskara, Iris Cong, Xun Gao, Pedro Sales Rodriguez, Thomas Karolyshyn, Giulia Semeghini, Michael J. Gullans, Markus Greiner, Vladan Vuletić, and Mikhail D. Lukin, “Logical quantum processor based on reconfigurable atom arrays,” *Nature* **626**, 58–65 (2023).
- [23] Pavel Panteleev and Gleb Kalachev, “Asymptotically good quantum and locally testable classical LDPC codes,” (2022), [arXiv:2111.03654 \[cs.IT\]](https://arxiv.org/abs/2111.03654).
- [24] Anthony Leverrier and Gilles Zemor, “Quantum Tanner codes,” in *2022 IEEE 63rd Annual Symposium on Foundations of Computer Science (FOCS)* (IEEE, 2022) p. 872–883.
- [25] Irit Dinur, Min-Hsiu Hsieh, Ting-Chun Lin, and Thomas Vidick, “Good quantum LDPC codes with linear time decoders,” [arXiv:2206.07750 \[quant-ph\]](https://arxiv.org/abs/2206.07750).
- [26] Emanuel Knill and Raymond Laflamme, “A theory of quantum error-correcting codes,” *Physical Review A* **55**, 900–911 (1997).
- [27] Daniel Gottesman, “A class of quantum error-correcting codes saturating the quantum Hamming bound,” *Physical Review A* **54**, 1862–1868 (1996).
- [28] Daniel Gottesman, “*Stabilizer codes and quantum error correction*,” [quant-ph/9705052](https://arxiv.org/abs/quant-ph/9705052).
- [29] Alexey Ashikhmin and Simon Litsyn, “Upper bounds on the size of quantum codes,” *IEEE Transactions on Information Theory* **45**, 1206–1215 (1999).
- [30] Sergey Bravyi and Barbara Terhal, “A no-go theorem for a two-dimensional self-correcting quantum memory based on stabilizer codes,” *New Journal of Physics* **11**, 043029 (2009).
- [31] Sergey Bravyi, David Poulin, and Barbara Terhal, “Tradeoffs for reliable quantum information storage in 2D systems,” *Phys. Rev. Lett.* **104**, 050503 (2010).
- [32] Daniel Gottesman, “Surviving as a quantum computer in a classical world,” *Textbook manuscript preprint* (2016).
- [33] “Rotated surface code,” in *The Error Correction Zoo*, edited by Victor V. Albert and Philippe Faist (2024).
- [34] Min-Hsiu Hsieh, Xingjian Li, and Ting-Chun Lin, “Simplified quantum weight reduction with optimal bounds,” (2025), [arXiv:2510.09601 \[quant-ph\]](https://arxiv.org/abs/2510.09601).
- [35] Jean-Pierre Tillich and Gilles Zémor, “Quantum ldpc codes with positive rate and minimum distance proportional to the square root of the blocklength,” *IEEE Transactions on Information Theory* **60**, 1193–1202 (2014).
- [36] Anthony Leverrier, Jean-Pierre Tillich, and Gilles Zémor, “Quantum expander codes,” in *2015 IEEE 56th Annual Symposium on Foundations of Computer Science* (IEEE, 2015) p. 810–824.
- [37] Weilei Zeng and Leonid P. Pryadko, “Higher-dimensional quantum hypergraph-product codes with finite rates,” *Physical Review Letters* **122** (2019), 10.1103/physrevlett.122.230501.
- [38] Weilei Zeng and Leonid P. Pryadko, “Minimal distances for certain quantum product codes and tensor products of chain complexes,” *Physical Review A* **102** (2020), 10.1103/physreva.102.062402.
- [39] Matthew B. Hastings, Jeongwan Haah, and Ryan O’Donnell, “Fiber bundle codes: breaking the $n^{1/2}$ polylog(n) barrier for quantum LDPC codes,” in *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2021 (Association for Computing Machinery, New York, NY, USA, 2021) p. 1276–1288.
- [40] Pavel Panteleev and Gleb Kalachev, “Quantum LDPC codes with almost linear minimum distance,” *IEEE Transactions on Information Theory* **68**, 213–229, conference Name: IEEE Transactions on Information Theory.
- [41] Nikolas P. Breuckmann and Jens N. Eberhardt, “Balanced product quantum codes,” *IEEE Transactions on Information Theory* **67**, 6653–6674, conference Name: IEEE Transactions on Information Theory.
- [42] Irit Dinur, Ting-Chun Lin, and Thomas Vidick, “Expansion of high-dimensional cubical complexes: with application to quantum locally testable codes,” in *2024 IEEE 65th Annual Symposium on Foundations of Computer Science (FOCS)* (2024) pp. 379–385.
- [43] Peter Shor and Raymond Laflamme, “Quantum analog of the macwilliams identities for classical coding theory,” *Phys. Rev. Lett.* **78**, 1600–1602 (1997).
- [44] E.M. Rains, “Shadow bounds for self-dual codes,” *IEEE Transactions on Information Theory* **44**, 134–139 (1998).
- [45] E.M. Rains, “Quantum shadow enumerators,” *IEEE Transactions on Information Theory* **45**, 2361–2366 (1999).
- [46] Wolfram Research, Inc., “*Mathematica, Version 14.3*,” Champaign, IL, 2025.
- [47] Youngseok Kim, Andrew Eddins, Sajant Anand, Ken Xuan Wei, Ewout van den Berg, Sami Rosenblatt, Hasan Nayfeh, Yantao Wu, Michael Zaletel, Kristan Temme, and Abhinav Kandala, “Evidence for the utility of quantum computing before fault tolerance,” *Nature* **618**, 500–505 (2023).
- [48] Almudena Carrera Vazquez, Caroline Tornow, Diego Ristè, Stefan Woerner, Maika Takita, and Daniel J. Egger, “Combining quantum processors with real-time classical communication,” *Nature* **636**, 75–79 (2024).
- [49] Markus Grassl, “Bounds on the minimum distance of linear codes and quantum codes,” Online available at <http://www.codetables.de> (2007), accessed on 2025-02-15.
- [50] Zijian Liang, Ke Liu, Hao Song, and Yu-An Chen, “Generalized toric codes on twisted tori for quantum error correction,” *PRX Quantum* **6**, 020357 (2025).
- [51] Austin Yubo He and Zi-Wen Liu, “Discovering highly efficient low-weight quantum error-correcting codes with reinforcement learning,” (2025).
- [52] Gerard Anglès Munné, Andrew Nemec, and Felix Huber, “SDP bounds on quantum codes,” (2025), [arXiv:2408.10323 \[quant-ph\]](https://arxiv.org/abs/2408.10323).
- [53] Lily Wang, Andy Zeyi Liu, Ray Li, Aleksander Kubica, and Shouzhen Gu, “Check-weight-constrained quantum codes: Bounds and examples,” (2026), [arXiv:2601.15446 \[quant-ph\]](https://arxiv.org/abs/2601.15446).
- [54] E. Berlekamp, R. McEliece, and H. van Tilborg, “On the inherent intractability of certain coding problems (corresp.),” *IEEE Transactions on Information Theory* **24**, 384–386 (1978).
- [55] A. Vardy, “The intractability of computing the minimum distance of a code,” *IEEE Transactions on Information*

- Theory **43**, 1757–1766 (1997).
- [56] Andrew Cross and Drew Vandeth, “Small binary stabilizer subsystem codes,” arXiv:2501.17447 (2025).
 - [57] Joschka Roffe, Stefan Zohren, Dominic Horsman, and Nicholas Chancellor, “Quantum codes from classical graphical models,” IEEE Transactions on Information Theory **66**, 130–146 (2020).

Appendix A: Notations and auxiliary lemmas

Let \mathcal{P}_n be the n -qubit Pauli group and let $\hat{\mathcal{P}}_n = \mathcal{P}_n / \langle iI \rangle$, whose elements are the 4^n Pauli strings with phase +1. For any $P \in \mathcal{P}_n$, let \hat{P} be the corresponding element in $\hat{\mathcal{P}}_n$. For a subset $A \subset \mathcal{P}_n$, denote $\hat{A} = \{\hat{a} : a \in A\}$. Let $N(A) = \{P \in \mathcal{P}_n : PQ = QP, \forall Q \in A\}$ be the normalizer of A . A stabilizer code with stabilizer group G has distance $\min\{\text{wt}(E) : E \in \hat{N}(G) \setminus \hat{G}\}$. By definition, any $\llbracket n, n \rrbracket$ stabilizer code (i.e., a stabilizer state) satisfies $\hat{N}(G) = \hat{G}$, thus it has distance $\min\emptyset = \infty$.

For a Pauli string P acting on n qubits and a subset of qubits $S \subset [n] := \{1, \dots, n\}$, we write $P|_S$ as the Pauli string of P restricting on S , and ignore the phase, e.g., $(-X \otimes Y \otimes Z)|_{\{1,3\}} = X \otimes Z$, $(-X \otimes Y \otimes Z)|_2 = Y$. For two Pauli strings P, Q , denote $\{P, Q\} := PQ + QP$. We sometimes omit the \otimes , e.g. write $X \otimes Y \otimes Z$ as XYZ .

Lemma 8. *Let $G_i \subset \mathcal{P}_{n_i}$ be stabilizer groups that define $\llbracket n_i, k_i, d_i; w_i \rrbracket$ stabilizer codes for $i = 1, 2$. Then the tensor product $G := G_1 \otimes G_2 = \{g_1 \otimes g_2 : g_i \in G_i\} \subset \mathcal{P}_{n_1+n_2}$ defines a stabilizer code with parameters*

$$\llbracket n_1+n_2, k_1+k_2, \min\{d_1, d_2\}; \max\{w_1, w_2\} \rrbracket. \quad (\text{A1})$$

Proof. The statement is straightforward for CSS codes by inspecting their parity-check matrices. For general stabilizer codes, suppose G defines a $\llbracket n, k, d; w \rrbracket$ code. Since $|G| = |G_1||G_2| = 2^{(n_1-k_1)+(n_2-k_2)}$, we have

$$k = (n_1 + n_2) - \log_2 |G| = k_1 + k_2. \quad (\text{A2})$$

By definition, we have

$$d = \min\{\text{wt}(E) : E \in \hat{N}(G) - \hat{G}\}, \quad (\text{A3})$$

$$d_i = \min\{\text{wt}(E) : E \in \hat{N}(G_i) - \hat{G}_i\}, \quad i = 1, 2. \quad (\text{A4})$$

We have $N(G) = N(G_1) \otimes N(G_2)$. Indeed, if $P_1 \otimes P_2 \in N(G)$, then it commutes with $g_1 \otimes I$ and $I \otimes g_2$, for all $g_i \in G_i$, hence $P_i \in N(G_i)$; the converse is immediate. Hence $\hat{N}(G) = \hat{N}(G_1) \otimes \hat{N}(G_2)$.

For every $E \in \hat{N}(G) - \hat{G}$, write $E = E_1 \otimes E_2$, then $E_i \in \hat{N}(G_i)$. At least one of $E_i \notin \hat{G}_i$, otherwise by $\hat{G} = \hat{G}_1 \otimes \hat{G}_2$ we know $E_1 \otimes E_2 \in \hat{G}$. Thus, this $E_i \in \hat{N}(G_i) - \hat{G}_i$, implying $\text{wt}(E) \geq \text{wt}(E_i) \geq d_i$. Therefore, we have

$$d \geq \min\{d_1, d_2\}. \quad (\text{A5})$$

For $i = 1, 2$, there exists an $E_i \in \hat{N}(G_i) - \hat{G}_i$ with $\text{wt}(E_i) = d_i$ (If $\hat{N}(G_i) - \hat{G}_i = \emptyset$, i.e., $d_i = \infty$, we simply pick no element). Let $E'_1 = E_1 \otimes I$ and $E'_2 = I \otimes E_2$, satisfying $\text{wt}(E'_i) = \text{wt}(E_i)$. Both $E'_i \in \hat{N}(G) - \hat{G}$. Therefore, we have

$$d \leq \min\{d_1, d_2\}. \quad (\text{A6})$$

Recall that by definition,

$$w = \min_{S \subset G, \langle S \rangle = G} \max_{s \in S} \text{wt}(s), \quad (\text{A7})$$

$$w_i = \min_{S \subset G_i, \langle S \rangle = G_i} \max_{s \in S} \text{wt}(s), \quad i = 1, 2. \quad (\text{A8})$$

Let S_i be a generating set of G_i achieving w_i . Then $S := \{s_1 \otimes I : s_1 \in S_1\} \cup \{I \otimes s_2 : s_2 \in S_2\}$ generates G and satisfies $\max_{s \in S} \text{wt}(s) = \max\{w_1, w_2\}$, so

$$w \leq \max\{w_1, w_2\}. \quad (\text{A9})$$

Take any generating set $S \subset G$ and write each $s \in S$ as $s = s_1 \otimes s_2$ with $s_i \in G_i$. The projection maps

$$\varphi_i : G \rightarrow G_i, \quad s_1 \otimes s_2 \mapsto s_i, \quad (\text{A10})$$

are surjective homomorphisms, hence

$$\langle \varphi_i(S) \rangle = \varphi_i(\langle S \rangle) = \varphi_i(G) = G_i. \quad (\text{A11})$$

By the definition of w_i we have $\max_{t \in \varphi_i(S)} \text{wt}(t) \geq w_i$. Consequently,

$$\begin{aligned} \max_{s \in S} \text{wt}(s) &\geq \max \left\{ \max_{t \in \varphi_1(S)} \text{wt}(t), \max_{t \in \varphi_2(S)} \text{wt}(t) \right\} \\ &\geq \max\{w_1, w_2\}. \end{aligned} \quad (\text{A12})$$

Minimizing over S gives

$$w \geq \max\{w_1, w_2\}. \quad (\text{A13})$$

Collecting the above parts gives the claimed parameters. \square

Lemma 9. Suppose G is a stabilizer group that defines an $\llbracket n, k, d; w \rrbracket$ stabilizer code. If $\#\{g \in G : \text{wt}(g) = 1\} = t$, then there exists a stabilizer group G' that defines an $\llbracket n - t, k, d; w \rrbracket$ stabilizer code, and $\#\{g \in G' : \text{wt}(g) = 1\} = 0$.

Proof. Let $\{g_1, \dots, g_{n-k}\}$ be a set of weight-optimal generators for this code, with $\text{wt}(g_1) \leq \dots \leq \text{wt}(g_{n-k})$. Since all weight-1 elements in a stabilizer group are independent, we know g_1, \dots, g_t are exactly the t elements in G with weight 1. Let $J := \text{supp}(g_1) \cup \dots \cup \text{supp}(g_t)$, we have $|J| = t$. Denote

$$P_j = \text{sgn}(g_j)g_j|_{\text{supp}(g_j)}, \quad j = 1, \dots, t, \quad (\text{A14})$$

where $\text{sgn}(g_j)$ is the global phase of g_j . For $i = t + 1, \dots, n - k$, we must have $J \cap \text{supp}(g_i) = \emptyset$, because otherwise we can replace g_i by $g_i \prod_{j=1}^t g_j^{1_{\text{supp}(g_j) \in \text{supp}(g_i)}}$ in $\{g_1, \dots, g_{n-k}\}$, which has weight $< \text{wt}(g_i)$, contrary to the weight-optimal property of $\{g_1, \dots, g_{n-k}\}$.

Discarding the tensor factor I on J for $\{g_{t+1}, \dots, g_{n-k}\}$, we define

$$g'_i := \text{sgn}(g_i)g_i|_{[n]-J}, \quad i = t + 1, \dots, n - k. \quad (\text{A15})$$

$\{g'_{t+1}, \dots, g'_{n-k}\}$ are independent. Consider the $\llbracket n - t, k \rrbracket$ stabilizer code given by $G' := \langle g'_{t+1}, \dots, g'_{n-k} \rangle$. We have

$$G = G' \otimes \left(\bigotimes_{j=1}^t \langle P_j \rangle \right). \quad (\text{A16})$$

There are no weight-1 elements in G' , because otherwise we can find $> t$ weight-1 elements in G . Note that $\bigotimes_{j=1}^t \langle P_j \rangle$ has parameters $\llbracket t, 0, \infty; 1 \rrbracket$. By Lemma 8, we know

$$d = \text{distance of } G = \min\{\text{distance of } G', \infty\}, \quad (\text{A17})$$

implying distance of $G' = d$. Again by Lemma 8, we know

$$w = W(G) = \max\{W(G'), 1\}, \quad (\text{A18})$$

implying $W(G') = w$. Therefore, the stabilizer code defined by G' has parameters $\llbracket n - t, k, d; w \rrbracket$, saving t qubits while achieving the same k, d, w , compared to the code G . \square

Appendix B: Weight-optimal generating set

Proposition 10. For every stabilizer group, there exists a weight-optimal generating set.

Proof. Let G be a stabilizer group with $|G| = 2^r$. We take $g_1 \in G$ such that

$$\text{wt}(g_1) = \min_{g \in G} \text{wt}(g). \quad (\text{B1})$$

For $j = 2, \dots, r$, we take $g_j \in G - \langle g_1, \dots, g_{j-1} \rangle$ such that

$$\text{wt}(g_j) = \min_{g \in G - \langle g_1, \dots, g_{j-1} \rangle} \text{wt}(g). \quad (\text{B2})$$

By construction, $S := \{g_1, \dots, g_r\}$ satisfies $|\langle S \rangle| = 2^r$, hence $\langle S \rangle = G$. For $j = 2, \dots, r$, if an element $h \in G$ satisfies $\text{wt}(h) < \text{wt}(g_j)$, by the choice of g_j , we must have $h \in \langle g_1, \dots, g_{j-1} \rangle$.

Now we show that S is weight-optimal. Suppose G has another set of generators $S' = \langle h_1, \dots, h_r \rangle$, with $\text{wt}(h_1) \leq \dots \leq \text{wt}(h_r)$. By $|S'| = r$ we know elements in S' are independent. By the choice of g_1 , we have $\text{wt}(g_1) \leq \text{wt}(h_1)$. For $i = 2, \dots, r$, we must have $\text{wt}(g_i) \leq \text{wt}(h_i)$, because $\text{wt}(h_i) < \text{wt}(g_i)$ would imply $\{h_1, \dots, h_i\} \subset \langle g_1, \dots, g_{i-1} \rangle$, contradicting the independence of $\{h_1, \dots, h_i\}$. \square

Appendix C: Computational complexity of calculating optimal weight

We represent the n -qubit Pauli group in the standard binary symplectic form: each Pauli operator is encoded by a vector in \mathbb{F}_2^{2n} . An instance of MW-SG is specified by $n - k$ commuting Pauli generators, hence has input length $O(n(n - k))$. Throughout this section, ‘‘polynomial time’’ refers to polynomial in the input length.

Definition 3 (Minimum-weight stabilizer generators (MW-SG)).

- *Instance:* An n -qubit stabilizer group G with $|G| = 2^{n-k}$, given by generators $\{P_1, \dots, P_{n-k}\} \subset \mathcal{P}_n$, and an integer $t \geq 0$.
- *Question:* Does there exist a generating set $S \subset G$ such that $\max_{s \in S} \text{wt}(s) \leq t$?

Lemma 11 (Bounded-size certificates). *Let $G \cong \mathbb{F}_2^r$ with $r = n - k$. If $T \subset G$ generates G , then T contains a subset $S \subset T$ with $|S| = r$ that still generates G . Moreover, $\max_{s \in S} \text{wt}(s) \leq \max_{t \in T} \text{wt}(t)$.*

Proof. Viewing G as an r -dimensional vector space over \mathbb{F}_2 , any generating set is a spanning set and hence contains a basis of size r . Taking a subset cannot increase the maximum weight. \square

Theorem 12. MW-SG is NP-complete.

Proof. Step 1: MW-SG \in NP. By Lemma 11, it suffices to consider certificates consisting of exactly $n - k$ elements. A certificate for a YES-instance (G, t) is a generating set $\{s_1, \dots, s_{n-k}\} \subset G$ such that $\max_i \text{wt}(s_i) \leq t$. Assume $G = \langle P_1, \dots, P_{n-k} \rangle$ is given by generators. A verifier checks in polynomial time that:

1. $s_i \in \langle P_1, \dots, P_{n-k} \rangle$ for all i ;
2. $P_j \in \langle s_1, \dots, s_{n-k} \rangle$ for all j ;
3. $\max_i \text{wt}(s_i) \leq t$.

Items 1,2 imply $\langle s_1, \dots, s_{n-k} \rangle = \langle P_1, \dots, P_{n-k} \rangle = G$. Both membership tests can be performed efficiently using the binary symplectic representation (e.g. [32]) by solving linear systems over \mathbb{F}_2 .

Step 2: MW-SG is NP-hard. Ref. [54] proved that MLD is NP-complete via a reduction from 3-DIMENSIONAL MATCHING. We now give a polynomial-time reduction chain

$$\text{MLD} \leq_p \text{SBP}_{\mathbb{F}_2} \leq_p \text{MW-SG}. \quad (\text{C1})$$

Definition 4 (Maximum-likelihood decoding (MLD) [54, 55]).

- *Instance:* A binary $m \times n$ matrix H of rank m , a vector $\mathbf{s} \in \mathbb{F}_2^m$, and an integer $t \geq 0$.
- *Question:* Is there a vector $\mathbf{e} \in \mathbb{F}_2^n$ such that $H\mathbf{e} = \mathbf{s}$ and $\text{wt}(\mathbf{e}) \leq t$?

Definition 5 (Shortest basis problem on \mathbb{F}_2 (SBP $_{\mathbb{F}_2}$)). For any ambient dimension $N \geq 1$:

- *Instance:* A linear subspace $V \subset \mathbb{F}_2^N$ of dimension r , given by a basis $\{\mathbf{v}_1, \dots, \mathbf{v}_r\} \subset \mathbb{F}_2^N$, and an integer $t \geq 0$.
- *Question:* Does V admit a basis $\{\mathbf{b}_1, \dots, \mathbf{b}_r\}$ such that $\max_i \text{wt}(\mathbf{b}_i) \leq t$?

Step 2.1: $\text{MLD} \leq_p \text{SBP}_{\mathbb{F}_2}$. Let (H, \mathbf{s}, t) be an instance of MLD with $H \in \mathbb{F}_2^{m' \times n}$ of rank m' and $\mathbf{s} \in \mathbb{F}_2^{m'}$. Let $m = n - m'$. Compute a basis $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ for $\ker(H)$ and find $\mathbf{x} \in \mathbb{F}_2^n$ such that $H\mathbf{x} = \mathbf{s}$. Define

$$B = \left\{ \begin{bmatrix} \mathbf{a}_1 \\ 0 \end{bmatrix}, \dots, \begin{bmatrix} \mathbf{a}_m \\ 0 \end{bmatrix}, \begin{bmatrix} \mathbf{x} \\ 1^n \end{bmatrix} \right\} \subset \mathbb{F}_2^{2n}, \quad V := \text{span}_{\mathbb{F}_2}(B), \quad (\text{C2})$$

and output the SBP $_{\mathbb{F}_2}$ instance $(V, n + t)$.

If (H, \mathbf{s}, t) is a YES-instance, there exists $\mathbf{e} \in \mathbb{F}_2^n$ such that $H\mathbf{e} = \mathbf{s}$ and $\text{wt}(\mathbf{e}) \leq t$. Then $H(\mathbf{e} + \mathbf{x}) = 0$, hence $\mathbf{e} + \mathbf{x} = \sum_{i=1}^m c_i \mathbf{a}_i$ for some $c_i \in \mathbb{F}_2$. Therefore,

$$\left\{ \begin{bmatrix} \mathbf{a}_1 \\ 0 \end{bmatrix}, \dots, \begin{bmatrix} \mathbf{a}_m \\ 0 \end{bmatrix}, \begin{bmatrix} \mathbf{e} \\ 1^n \end{bmatrix} \right\} \text{ is a basis of } V, \quad \text{wt} \left(\begin{bmatrix} \mathbf{e} \\ 1^n \end{bmatrix} \right) \leq n + t, \quad (\text{C3})$$

so $(V, n + t)$ is a YES-instance.

If (H, \mathbf{s}, t) is a NO-instance, then for every $\mathbf{e} \in \mathbb{F}_2^n$ with $H\mathbf{e} = \mathbf{s}$ we have $\text{wt}(\mathbf{e}) > t$. Let $\{\mathbf{w}_1, \dots, \mathbf{w}_{m+1}\}$ be any basis of V . Since all vectors in $\text{span}\{\begin{bmatrix} \mathbf{a}_i \\ 0 \end{bmatrix}\}$ have the last n coordinates equal to 0, at least one basis vector must have the last n coordinates equal to 1^n ; write it as

$$\mathbf{w}_1 = \sum_{i=1}^m c_i \begin{bmatrix} \mathbf{a}_i \\ 0 \end{bmatrix} + \begin{bmatrix} \mathbf{x} \\ 1^n \end{bmatrix} = \begin{bmatrix} \mathbf{x} + \sum_{i=1}^m c_i \mathbf{a}_i \\ 1^n \end{bmatrix}. \quad (\text{C4})$$

Then $H(\mathbf{x} + \sum_{i=1}^m c_i \mathbf{a}_i) = H\mathbf{x} = \mathbf{s}$, so the top block has weight $> t$, which implies $\text{wt}(\mathbf{w}_1) > n + t$. Hence $(V, n + t)$ is a NO-instance.

Step 2.2: $\text{SBP}_{\mathbb{F}_2} \leq_p \text{MW-SG}$. Let (V, t) be an instance of $\text{SBP}_{\mathbb{F}_2}$ with $V \subset \mathbb{F}_2^n$ of dimension r given by a basis $\{\mathbf{v}_1, \dots, \mathbf{v}_r\}$. For $\mathbf{u} = (u_1, \dots, u_n) \in \mathbb{F}_2^n$, define the Z -type Pauli operator

$$Z(\mathbf{u}) := Z^{u_1} \otimes \dots \otimes Z^{u_n}. \quad (\text{C5})$$

Let $G := \{Z(\mathbf{u}) : \mathbf{u} \in V\}$. Then G is an abelian stabilizer group generated by $\{Z(\mathbf{v}_1), \dots, Z(\mathbf{v}_r)\}$, and $\text{wt}(Z(\mathbf{u})) = \text{wt}(\mathbf{u})$. Moreover, a set $S \subset G$ generates G if and only if the corresponding vectors span V ; by Lemma 11, we may restrict to generating sets of size r without increasing the maximum weight. Therefore, (V, t) is a YES-instance of $\text{SBP}_{\mathbb{F}_2}$ if and only if (G, t) is a YES-instance of MW-SG.

This completes the proof that MW-SG is NP-hard, and hence NP-complete. \square

Appendix D: Proof of Theorem 4

By definition, there exists a stabilizer group G with parameters $\llbracket n, k, d; w \rrbracket$, such that $w = W_{\text{opt}}(n, k, d)$. Denote

$$t = \#\{g \in G : \text{wt}(g) = 1\}, \quad (\text{D1})$$

by Lemma 9, there exists a stabilizer group G' with parameters $\llbracket n - t, k, d; w \rrbracket$, and there are no weight-1 elements in G' . Take $\{h_1, \dots, h_{n-t-k}\}$ as a weight-optimal generating set for G' , satisfying $\text{wt}(h_1) \leq \dots \leq \text{wt}(h_{n-t-k}) = w$.

Now we show that each qubit is covered by at least two elements in $\{h_1, \dots, h_{n-t-k}\}$. If there exists a qubit $q \in [n - t]$, such that none of h_1, \dots, h_{n-t-k} covers q , then single qubit Paulis on q are logical error for the code G' , implying $d = 1$, contrary to our assumption $d \geq 2$. If there exists a qubit $q \in [n - t]$, such that only one element in $\{h_1, \dots, h_{n-t-k}\}$ covers q , say h_i , then $h_i|_q \otimes I_{[n-t]-\{q\}}$ is a logical error for G' , implying $d = 1$, a contradiction.

Notice that

$$\sum_{i=1}^{n-t-k} \text{wt}(h_i) = \sum_{q=1}^{n-t} \#\{i \in [n - t - k] : q \in \text{supp}(h_i)\} \quad (\text{D2})$$

Also we have

$$\sum_{i=1}^{n-t-k} \text{wt}(h_i) \leq (n - t - k)w \quad (\text{D3})$$

and

$$\sum_{q=1}^{n-t} \#\{i \in [n - t - k] : q \in \text{supp}(h_i)\} \geq 2(n - t), \quad (\text{D4})$$

Therefore, we have $(n - t - k)w \geq 2(n - t)$, implying

$$W_{\text{opt}}(n, k, d) = w \geq \frac{2(n - t)}{n - t - k} \geq \frac{2n}{n - k}. \quad (\text{D5})$$

Appendix E: Stabilizer codes with weight ≤ 3

In this section, we want to derive the behavior of codes with weight 3. Our main result is the following theorem.

Theorem 13. Suppose $k \geq 1$ and $d \geq 2$. If there exists an $\llbracket n, k, d; 3 \rrbracket$ stabilizer code, then $d = 2$ and $k/n \leq 1/4$.

To prove the theorem, we need the following two lemmas.

Lemma 14. Suppose $k \geq 1$ and suppose an $\llbracket n, k, d; w \rrbracket$ stabilizer code admits an independent generating set $S := \{g_1, \dots, g_{n-k}\}$ with $\max_{i \in [n-k]} \text{wt}(g_i) \leq w$. If for some $1 \leq T < n - k$ there exists a subset $\{g_{i_1}, \dots, g_{i_T}\} \subset S$ such that

$$\left| \bigcup_{t=1}^T \text{supp}(g_{i_t}) \right| = T, \quad (\text{E1})$$

then the code factorizes as a tensor product of two subcodes with parameters $\llbracket T, 0, \infty; w \rrbracket$ and $\llbracket n - T, k, d; w \rrbracket$.

Proof. Let

$$A := \bigcup_{t=1}^T \text{supp}(g_{i_t}), \quad B := [n] \setminus A, \quad (\text{E2})$$

and $|A| = T$. Write $S_A := \{g_{i_1}|_A, \dots, g_{i_T}|_A\}$. These are independent and mutually commuting T -qubit Paulis. Let $H := \langle S_A \rangle$. Since $|S_A| = T$ on T qubits, H is a maximal abelian subgroup, hence any T -qubit Pauli commuting with all elements of S_A lies in H up to phase.

Write $S = \{g_{i_1}, \dots, g_{i_T}, g_{j_1}, \dots, g_{j_{n-k-T}}\}$. For each $b = 1, \dots, n - k - T$, the restriction $g_{j_b}|_A$ commutes with all of S_A , so $g_{j_b}|_A \in H$. Thus we may replace g_{j_b} by

$$g'_{j_b} := g_{j_b} \cdot \prod_{t \in \Lambda_b} g_{i_t}, \quad (\text{E3})$$

for a suitable subset $\Lambda_b \subset [T]$, such that $g'_{j_b}|_A = I_A$. This does not change the generated stabilizer group, and $\text{wt}(g'_{j_b}) \leq \text{wt}(g_{j_b})$.

Hence with

$$S' := \{g_{i_1}, \dots, g_{i_T}, g'_{j_1}, \dots, g'_{j_{n-k-T}}\}, \quad (\text{E4})$$

the first T generators act only on A and the rest act only on B . Therefore the code space factorizes as $\mathcal{C} \cong \mathcal{C}_A \otimes \mathcal{C}_B$.

The factor on A has parameters $\llbracket T, 0, \infty; w \rrbracket$. The factor on B has parameters $\llbracket n - T, k, d_B; w \rrbracket$ for some d_B .

It remains to show $d_B = d$. Since $k \geq 1$, we have $d < \infty$. Let $S_B := \{g'_{j_1}|_B, \dots, g'_{j_{n-k-T}}|_B\}$.

- (i) $d_B \geq d$. Let E be an $(n - T)$ -qubit Pauli on B with $\text{wt}(E) \leq d - 1$ commuting with all of S_B . Then $\tilde{E} := I_A \otimes E$ commutes with all of S' . By distance d of the original code, $\tilde{E} \in \langle S' \rangle$, hence $E \in \langle S_B \rangle$ up to phase. So $d_B \geq d$.
- (ii) $d_B \leq d$. Let F be a weight- d logical Pauli of the original code: $[F, g] = 0$ for all $g \in S'$ but $F \notin \langle S' \rangle$. If $\text{supp}(F)$ intersects A , then by maximality of H we can multiply F by a stabilizer supported on A to remove its A -part without changing its logical action, producing an equivalent logical supported on B of weight $< d$, contradicting minimality of d . Thus necessarily $\text{supp}(F) \subset B$, and $F|_B$ is a logical Pauli for the B -factor of weight d , so $d_B \leq d$.

Therefore $d_B = d$. □

Lemma 15. Suppose $k \geq 1$, $d \geq 2$. If there exists an $\llbracket n, k, d; 3 \rrbracket$ code, and its stabilizer group has a non-identity element with weight < 3 , then it can be written as the tensor product of two codes with parameters $\llbracket n - m, 0, \infty; 3 \rrbracket$ and $\llbracket m, k, d; 3 \rrbracket$, where $m < n$.

Proof. Denote $G = \langle g_1, \dots, g_{n-k} \rangle$ be the stabilizer group of this $\llbracket n, k, d; 3 \rrbracket$ code, where $\max_i \{\text{wt}(g_i)\} = 3$. Suppose a non-identity element $g \in G$ has weight < 3 . g can be written as the product of some generators. We can replace one of these generators (WLOG, g_1) by g and get a new set of generators $\{g, g_2, \dots, g_{n-k}\}$ with maximum weight 3.

If $\text{wt}(g) = 1$, by Lemma 14 this code factories into two codes with parameters $\llbracket 1, 0, \infty; 1 \rrbracket$ (thus also $\llbracket 1, 0, \infty; 3 \rrbracket$) and $\llbracket n - 1, k, d; 3 \rrbracket$.

If $\text{wt}(g) = 2$, we denote the qubits g acts on be $\{p, q\}$.

Case 1: $\text{supp}(g)$ is not the subset of any of $\text{supp}(g_2), \dots, \text{supp}(g_{n-k})$, then all other generators must be $g|_p$ or I on p , because otherwise they will anti-commute with g . Thus $g|_p \otimes I_{[n]-\{p\}}$ commutes with all the generators. By $d \geq 2$ we know that $g|_p \otimes I_{[n]-\{p\}} \in G$ up to a ± 1 phase. Thus by Lemma 14 we can get an $\llbracket n-1, k, d; 3 \rrbracket$ code.

Case 2: $\text{supp}(g)$ is contained in some of $\text{supp}(g_2), \dots, \text{supp}(g_{n-k})$. Suppose that $\{p, q\} \subset \text{supp}(h)$. Then we have 2 subcases, depending on $\text{wt}(h) = 2$ or 3.

1. $\text{wt}(h) = 2$. Then $\{g, h\}$ are two independent stabilizer elements supported on $\{p, q\}$ and we can apply Lemma 14 with $T = 2$ to split off a $\llbracket 2, 0, \infty; 3 \rrbracket$ factor.
2. $\text{wt}(h) = 3$. Assume $\text{supp}(h) = \{p, q, r\}$. Since $[g, h] = 0$ and g overlaps with h only on $\{p, q\}$, the commutation condition forces that either $h|_p = g|_p$ and $h|_q = g|_q$, or $h|_p$ anticommutes with $g|_p$ and $h|_q$ anticommutes with $g|_q$.
 - (a) If $h|_p = g|_p$ and $h|_q = g|_q$, then gh acts nontrivially only on r , $\text{wt}(gh) = 1$. Hence G contains a weight-1 stabilizer element and we split off a $\llbracket 1, 0, \infty; 3 \rrbracket$ factor by Lemma 14.
 - (b) Otherwise $h|_p$ anticommutes with $g|_p$ and $h|_q$ anticommutes with $g|_q$. Consider qubit r .
 - i. If $\forall g_j \in \{g, g_2, \dots, g_{n-k}\}$, $g_j|_r$ commute with h_r , then $h|_r \otimes I_{[n]\setminus\{r\}}$ commutes with all stabilizers, so by $d \geq 2$ it must lie in G , yielding a weight-1 stabilizer element and we are done.
 - ii. Otherwise, choose a generator h_1 such that $\{h_1|_r, h|_r\} = 0$. Since $[h_1, h] = 0$, if $\text{supp}(g_3) \subset \{p, q, r\}$, by Lemma 14 we get an $\llbracket n-3, k, d; 3 \rrbracket$ code. Otherwise, to keep the total number of local anticommutations even, h_1 must overlap with h on exactly one of p, q , and thus introduce a third qubit outside $\{p, q, r\}$. If at some step the newly chosen generator does not introduce a new qubit, then among the collected generators, we obtain a subset of T independent generators supported on exactly T qubits, and Lemma 14 applies to split off a $\llbracket T, 0, \infty; 3 \rrbracket$ factor. If the process continues introducing new qubits until generators are exhausted, then some qubit is covered by at most one generator, so there exists a weight-1 Pauli commuting with all stabilizers. Again $d \geq 2$ forces it to lie in G , yielding a weight-1 stabilizer element and allowing us to split off a $\llbracket 1, 0, \infty; 3 \rrbracket$ factor.

In all cases, the code factorizes as $\llbracket n-m, 0, \infty; 3 \rrbracket \otimes \llbracket m, k, d; 3 \rrbracket$ for some $m < n$. \square

With the above two lemmas, we begin to prove Theorem 13.

Proof sketch. Apply Lemma 15 iteratively to factor off all $k = 0$ tensor factors until we obtain an $\llbracket n', k, d, 3 \rrbracket$ code with $n' \leq n$ such that every non-identity element of its stabilizer group has weight at least 3. In particular, this code has a set of generators S' all with weight 3.

In this regime, any commuting Pauli of weight ≤ 2 cannot be a stabilizer and hence must be a nontrivial logical operator.

Consider the 3-uniform hypergraph whose vertices are the n' qubits and whose hyperedges are the supports $\text{supp}(g_i)$. The code factorizes as a tensor product over connected components of this hypergraph. The connectedness of the hypergraph implies that the corresponding codes could not be factorized.

A combinatorial expansion lemma prevents supports from being too tight inside such a component, which forces the component to encode exactly one logical qubit and produces two leaf-like qubits p, q . The last remaining generator must touch both p and q , enabling construction of a commuting weight-2 Pauli, which is therefore logical and implies distance 2. Finally, each logical qubit needs at least 4 physical qubits, giving the rate bound. \square

Next, we formalize the above intuition. Since some of the required lemmas are rather technical and would interrupt the flow of the argument, we defer their proofs until after the proof of the theorem.

Proof of Theorem 13.

Step 1 (Hypergraph decomposition). For the 3-uniform hypergraph, we choose one connected component whose induced subcode has at least one logical qubit, and denote its parameters by $\llbracket \tilde{n}, \tilde{k}, \tilde{d}; 3 \rrbracket$, where $\tilde{k} \geq 1$ and $\tilde{d} \geq d$. Let $\tilde{S} = \{g_1, \dots, g_{\tilde{n}-\tilde{k}}\}$ be a generating set for this component, still with all $\text{wt}(g_i) = 3$.

Step 2 (Weight-2 logical Pauli) By Lemmas 16 and 17 below, necessarily $\tilde{k} = 1$ and hence $\tilde{m} = \tilde{n} - 1$. Moreover, there exists an ordering $(g_{m_1}, \dots, g_{m_{\tilde{n}-1}})$ of \tilde{S} and qubits p, q such that

$$\left| \bigcup_{t=1}^{\tilde{n}-2} \text{supp}(g_{m_t}) \right| = \tilde{n} - 1, \quad (\text{E5})$$

and

$$p \in \text{supp}(g_{m_1}) \setminus \bigcup_{t=2}^{\tilde{n}-2} \text{supp}(g_{m_t}), \quad q \in \text{supp}(g_{m_{\tilde{n}-2}}) \setminus \bigcup_{t=1}^{\tilde{n}-3} \text{supp}(g_{m_t}). \quad (\text{E6})$$

Lemma 17 also implies

$$\{p, q\} \subset \text{supp}(g_{m_{\tilde{n}-1}}), \quad (\text{E7})$$

and the third qubit of $\text{supp}(g_{m_{\tilde{n}-1}})$ is the unique qubit not covered by the prefix union in (E5).

Define a Pauli operator E supported on $\{p, q\}$ by

$$E|_p := g_{m_1}|_p, \quad E|_q := g_{m_{\tilde{n}-2}}|_q, \quad (\text{E8})$$

and E acts as identity elsewhere. We want to show that such E is a logical Pauli. According to the construction, E commutes with g_{m_t} for $1 \leq t \leq \tilde{n}-2$. It remains to check $[E, g_{m_{\tilde{n}-1}}] = 0$. By (E7), $g_{m_{\tilde{n}}}$ acts on p and q . Moreover, $g_{m_{\tilde{n}-1}}$ cannot overlap with g_{m_1} on any qubit other than p : its third qubit lies outside the prefix union (E5), and $q \notin \text{supp}(g_{m_1})$ by (E6). Hence $g_{m_{\tilde{n}-1}}$ and g_{m_1} overlap on exactly one qubit p and commute, forcing $g_{m_{\tilde{n}-1}}|_p = g_{m_1}|_p$. Similarly, $g_{m_{\tilde{n}-1}}$ and $g_{m_{\tilde{n}-2}}$ overlap on exactly one qubit q and commute, forcing $g_{m_{\tilde{n}-1}}|_q = g_{m_{\tilde{n}-2}}|_q$. Therefore E matches $g_{m_{\tilde{n}-1}}$ on both p and q , so $[E, g_{m_{\tilde{n}-1}}] = 0$. Thus E commutes with the entire stabilizer group of the component.

Since $\text{wt}(E) = 2$, E cannot be a stabilizer, hence E is a nontrivial logical Pauli. Therefore $\tilde{d} \leq 2$. Since $\tilde{d} \geq d \geq 2$, we conclude $\tilde{d} = 2$ and hence $d = 2$.

Step 3 (Rate bound). The original code is a tensor product of components with $k = 0$ and components with $k = 1$ and $d = 2$. The smallest N admitting an $\llbracket N, 1, 2; 3 \rrbracket$ stabilizer code is $N = 4$. The original $\llbracket n, k, 2; 3 \rrbracket$ code can be written as a tensor product of several trivial sub-codes with 0 logical qubits, and several sub-codes with 1 logical qubits and distance 2. The smallest N such that there exists an $\llbracket N, 1, 2 \rrbracket$ code is $N = 4$, with stabilizer group $\langle XXXI, IYYY, ZIZZ \rangle$. Therefore each logical qubit requires at least 4 physical qubits, so $n \geq 4k$ and $k/n \leq 1/4$. \square

Below we separately present several auxiliary lemmas for Theorem 13.

Lemma 16 (Support expansion). *In the setting of Theorem 13, fix a connected component $\llbracket \tilde{n}, \tilde{k}, \tilde{d}, 3 \rrbracket$ with $\tilde{k} \geq 1$. Let $\tilde{S} = \{h_1, \dots, h_{\tilde{m}}\}$ be a weight-3 generating set for this component, where $\tilde{m} = \tilde{n} - \tilde{k}$. Then for any $1 \leq r \leq \tilde{m} - 1$ and any distinct r generators h_{i_1}, \dots, h_{i_r} ,*

$$\left| \bigcup_{t=1}^r \text{supp}(h_{i_t}) \right| \geq r + 2. \quad (\text{E9})$$

Proof sketch. If r generators only covered $r + 1$ qubits, connectedness would force another generator to cross the boundary, introducing a new qubit. To keep $\tilde{d} \geq 2$ in the pure setting, that new qubit must be in the support of another generator, which in turn introduces another new qubit, and so on. Since $\tilde{n} > \tilde{m}$, this process eventually forces a qubit covered by at most one generator, yielding a weight-1 centralizer element and contradicting $\tilde{d} \geq 2$ together with weight-3 condition. \square

Proof. Let $J := \bigcup_{t=1}^r \text{supp}(h_{i_t})$. First $|J| \geq r + 1$: if $|J| = r$, then Lemma 14 would split off a trivial factor, contradicting the fact that connect component in the hypergraph is indecomposable. Assume for contradiction that $|J| = r + 1$.

By the indecomposability, there exists a generator $h \in \tilde{S}$ such that $\text{supp}(h) \cap J \neq \emptyset$ and $\text{supp}(h) \cap ([\tilde{n}] \setminus J) \neq \emptyset$. Since $\text{wt}(h) = 3$, the restriction $h|_J$ has weight 1 or 2.

If $\text{wt}(h|_J) = 1$, let v be the unique qubit in $\text{supp}(h) \cap J$. Commutation forces that on v the r chosen generators act only by I or by $h|_v$. If no other generator acts on v by a Pauli that anticommutes with $h|_v$, then the single-qubit Pauli $h|_v \otimes I$ commutes with the full stabilizer group, producing a weight-1 centralizer element, contradicting $\tilde{d} \geq 2$. Thus there exists a generator crossing from v to $[\tilde{n}] \setminus J$ whose restriction to J has weight 2, so we may assume $\text{wt}(h|_J) = 2$.

Now $\text{wt}(h|_J) = 2$ means h introduces exactly one new qubit $a_1 \in [\tilde{n}] \setminus J$. To avoid a_1 being covered by only one generator (which would again yield a weight-1 centralizer element and force $\tilde{d} = 1$), there must exist another generator $h' \in \tilde{S}$ acting on a_1 . Commutation constraints imply h' intersects $J \cup \{a_1\}$ at least one qubit and might introduce a further new qubit a_2 . Iterating, we obtain a sequence of distinct generators, each introducing a new qubit, until either:

- the process closes without introducing a new qubit, in which case Lemma 14 applies to the collected generators and yields a tensor factorization, contradicting the indecomposability; or
- generators are exhausted while some qubit is covered by at most one generator, yielding a weight-1 centralizer element and forcing $\tilde{d} = 1$, contradicting $\tilde{d} \geq 2$.

Both outcomes contradict $|J| = r + 1$, so we must have $|J| \geq r + 2$. \square

Lemma 17 (Ordering and $\tilde{k} = 1$). *In the setting of Lemma 16, necessarily $\tilde{k} = 1$. Moreover, there exists an ordering $(h_{m_1}, \dots, h_{m_{\tilde{n}-1}})$ of \tilde{S} and qubits p, q satisfying (E5)–(E6). $h_{m_{\tilde{n}-1}}$ satisfies (E7).*

Proof. Forcing $\tilde{k} = 1$. Apply Lemma 16 with $r = \tilde{m} - 1$: any $\tilde{m} - 1$ generators cover at least $(\tilde{m} - 1) + 2 = \tilde{m} + 1$ qubits. Since $\tilde{n} = \tilde{m} + \tilde{k}$, if $\tilde{k} \geq 2$ then at least two qubits remain uncovered while only one generator is left, forcing a qubit covered by at most one generator and hence producing a weight-1 centralizer element. This contradicts $\tilde{d} \geq 2$. Therefore $\tilde{k} = 1$ and $\tilde{m} = \tilde{n} - 1$.

Greedy ordering. Construct an ordering greedily: pick any h_{m_1} ; having chosen h_{m_1}, \dots, h_{m_t} , choose $h_{m_{t+1}}$ that intersects the current union and introduces a new qubit (Lemma 16 ensures the union grows). After $t = \tilde{n} - 2$ steps, the union has size exactly equal to $\tilde{n} - 1$, giving (E5). By construction, h_{m_1} contains a qubit p not appearing later in the prefix, and the last chosen generator $h_{m_{\tilde{n}-2}}$ introduces a new qubit q not appearing earlier, giving (E6).

Let $h_{m_{\tilde{n}-1}}$ be the unique generator not among the prefix. If $h_{m_{\tilde{n}-1}}$ failed to contain p , then p would be covered exactly once in the entire component, creating a weight-1 centralizer element and contradicting $\tilde{d} \geq 2$. Similarly, $h_{m_{\tilde{n}-1}}$ must contain q . Hence (E7) holds. \square

Appendix F: Weight enumerators and linear programming bounds

Definition 6 ([32]). Let Π be a projector from the n -qubit Hilbert space to a rank- K subspace. Define

$$A_j := \frac{1}{K^2} \sum_{P \in \hat{\mathcal{P}}_n, \text{wt}(P)=j} |\text{Tr}(P\Pi)|^2, \quad (\text{F1})$$

$$B_j := \frac{1}{K} \sum_{P \in \hat{\mathcal{P}}_n, \text{wt}(P)=j} \text{Tr}(P\Pi P\Pi), \quad (\text{F2})$$

$$Sh_j := \frac{1}{K} \sum_{P \in \hat{\mathcal{P}}_n, \text{wt}(P)=j} \text{Tr}(P\Pi PY^{\otimes n} \Pi^* Y^{\otimes n}), \quad (\text{F3})$$

where Π^* is the complex conjugate of Π . We call A_j 's the *weight enumerators* for Π . Denote $\vec{A} = (A_0, A_1, \dots, A_n)^T$, $\vec{B} = (B_0, B_1, \dots, B_n)^T$, and $\vec{Sh} = (Sh_0, Sh_1, \dots, Sh_n)^T$.

For any projector Π , we have [32]: i) $A_0 = B_0 = 1$, ii) $B_j \geq A_j \geq 0$, iii) Π has distance d iff $A_j = B_j$ for $j < d$, and iv) $Sh_j \geq 0$.

Define $(n+1) \times (n+1)$ matrices M and \widetilde{M} by

$$M_{ij} = P_i(j; n), \quad \widetilde{M}_{ij} = (-1)^j P_i(j; n), \quad (\text{F4})$$

where $i, j = 0, 1, \dots, n$, and $P(\cdot, \cdot)$ is the Krawtchouk polynomial defined by

$$P_j(z; n) = \sum_{m=0}^{\min\{z, j\}} (-1)^m 3^{j-m} \binom{n-z}{j-m} \binom{z}{m}. \quad (\text{F5})$$

The quantum MacWilliams identity [43] states that

$$\vec{B} = \frac{K}{2^n} M \vec{A}, \quad (\text{F6})$$

and \vec{Sh} can also be determined from \vec{A} by [44, 45]

$$\vec{Sh} = \frac{K}{2^n} \widetilde{M} \vec{A}. \quad (\text{F7})$$

Therefore, if there exists an n -qubit quantum code with logical dimension K and distance d , then the following linear programming problem has a feasible solution:

$$\text{Find } A_0, A_1, \dots, A_n \quad (\text{F8a})$$

$$\text{s.t. } A_0 = 1, A_1 \geq 0, \dots, A_n \geq 0, \quad (\text{F8b})$$

$$\frac{K}{2^n} M[:d] \vec{A} = \vec{A}[:d], \quad (\text{F8c})$$

$$\frac{K}{2^n} M[d:] \vec{A} \geq \vec{A}[d:], \quad (\text{F8d})$$

$$\widetilde{M} \vec{A} \geq 0. \quad (\text{F8e})$$

Here $[:d]$ means taking the first d rows (row 0 to row $d-1$) of a matrix, and $[d:]$ means taking the rest rows.

For an $\llbracket n, k \rrbracket$ stabilizer code with stabilizer group G , its weight enumerators satisfy [32]

$$A_j = |\{g \in G : \text{wt}(g) = j\}| \quad \text{for } j = 0, \dots, n. \quad (\text{F9})$$

An interesting observation is the following, which can be proved using the quantum MacWilliams identity [43].

Proposition 18. Suppose an n -qubit stabilizer code has $d \geq 2$, then the average weight of the whole stabilizer group is $\frac{1}{4}(3n - A_1)$, where A_1 is the number of weight-1 elements in its stabilizer group.

Appendix G: Linear constraints from weight

1. Main constraints

Suppose there exists an $\llbracket n, k, d; w \rrbracket$ stabilizer code with stabilizer group G . Let A_0, A_1, \dots, A_n be the weight enumerators for this code.

We pick a weight-optimal generating set $\{g_1, \dots, g_{n-k}\}$ for G , where $\text{wt}(g_1) \leq \dots \leq \text{wt}(g_{n-k})$. By definition, we have $\text{wt}(g_{n-k}) = w$.

Let y be the numbers of elements in $\{g_1, \dots, g_{n-k}\}$ with weight $= w$, satisfying $1 \leq y \leq n-k$. We have $\text{wt}(g_1) \leq \dots \leq \text{wt}(g_{n-k-y}) < w = \text{wt}(g_{n-k-y+1}) = \dots = \text{wt}(g_{n-k})$. Therefore, we have the constraint

$$A_w \geq y. \quad (\text{G1})$$

We now show that

$$\sum_{i=0}^{w-1} A_i \leq 2^{n-k-y}. \quad (\text{G2})$$

Suppose on the contrary that $\sum_{i=0}^{w-1} A_i > 2^{n-k-y}$, then we can find a generating set $\{g'_1, \dots, g'_{n-k}\}$ of G such that $\text{wt}(g'_1) \leq \dots \leq \text{wt}(g'_{n-k-y+1}) < w$. However, notice that $\text{wt}(g_{n-k-y+1}) = w$, this contradict to the ‘‘optimality’’ of $\{g_1, \dots, g_{n-k}\}$. As a special case, if $y = n-k$, (G2) means $A_1 = \dots = A_{w-1} = 0$.

For $p = 0, \dots, n-k-y$ and $q = 0, \dots, y$, an element in G that can be written as the product of p elements in $\{g_1, \dots, g_{n-k-y}\}$ (weight $\leq w-1$) and q elements in $\{g_{n-k-y+1}, \dots, g_{n-k}\}$ (weight $= w$) has weight $\leq p(w-1) + qw$. Therefore, for every $(p, q) \in \{0, \dots, n-k-y\} \times \{0, \dots, y\}$, there exist $\binom{n-k-y}{p} \binom{y}{q}$ elements in G that have weight $\leq p(w-1) + qw$. For any $M = w-1, \dots, n$, we have

$$\sum_{m=0}^M A_m \geq \sum_{p=0}^{n-k-y} \sum_{q=0}^y \mathbf{1}_{p(w-1)+qw \leq M} \binom{n-k-y}{p} \binom{y}{q}. \quad (\text{G3})$$

Here $\mathbf{1}$ denotes the indicator function.

Therefore, if an $\llbracket n, k, d; w \rrbracket$ stabilizer code exists, then there exists a $1 \leq y \leq n-k$ such that (G1)–(G3) are satisfied.

Notice that, if for an $\llbracket n, k, d; w \rrbracket$ stabilizer code, w satisfies $w = \lceil \frac{2n}{n-k} \rceil$, then by $d \geq 2$ (see the proof of Theorem 4) we must have $wy + (w-1)(n-k-y) \geq 2n$, implying $y \geq 2n - (w-1)(n-k)$.

2. Stabilizer code constraint

For an $\llbracket n, k \rrbracket$ stabilizer code, write $G = \langle S \rangle$ with $|S| = n - k$. If all elements in S have even weights, then all elements in G have even weights; if there exists an element in S with odd weight, then half of the elements in G have even weights. Therefore, for an $\llbracket n, k \rrbracket$ stabilizer code, one has

$$\text{either } \sum_{i=0}^{\lfloor n/2 \rfloor} A_{2i} = 2^{n-k-1} \quad \text{or} \quad \sum_{i=0}^{\lfloor n/2 \rfloor} A_{2i} = 2^{n-k}. \quad (\text{G4})$$

Furthermore, if for an $\llbracket n, k, d; w \rrbracket$ stabilizer code, w is odd, then

$$\sum_{i=0}^{\lfloor n/2 \rfloor} A_{2i} = 2^{n-k-1}. \quad (\text{G5})$$

If for an $\llbracket n, k, d; w \rrbracket$ stabilizer code, w is even, and $y = n - k$ (where y is the number of elements in a weight-optimal generating set that has weight w), then

$$\sum_{i=0}^{\lfloor n/2 \rfloor} A_{2i} = 2^{n-k}. \quad (\text{G6})$$

3. $A_1 = 0$ constraint

Suppose there exists an $\llbracket n, k, d; w \rrbracket$ stabilizer code with stabilizer group G and enumerator $A_1 > 0$. By Lemma 9, there exists an $\llbracket n - A_1, k, d; w \rrbracket$ stabilizer code, thus there also exists an $\llbracket n - 1, k, d; w \rrbracket$ stabilizer code.

Therefore, suppose $w < W_{\text{opt}}(n - 1, k, d)$ and there exists an $\llbracket n, k, d; w \rrbracket$ stabilizer code, then we must have the constraint

$$A_1 = 0. \quad (\text{G7})$$

In practice, $w < W_{\text{opt}}(n - 1, k, d)$ can be inferred from $w < W_{\text{LB}}(n - 1, k, d)$, where $W_{\text{LB}} \leq W_{\text{opt}}$ is an efficiently computable lower bound.

4. Constraint imposed by generators' overlap

If two commuting Pauli strings P and Q have overlap in their supports, then we have $\text{wt}(PQ) \leq \text{wt}(P) + \text{wt}(Q) - 2$.

Suppose G is an $\llbracket n, k, d; w \rrbracket$ stabilizer code that is not a simple product of smaller codes. we pick a generating set $\{g_1, \dots, g_{n-k}\}$ for G , with $\text{wt}(g_1) \leq \dots \leq \text{wt}(g_{n-k}) = w$. Form the *overlap graph* on these generators: the $n - k$ vertices correspond to the g_i 's, and we place an edge between g_i and g_j iff their supports overlap. This graph must be connected; otherwise the generators split into two disjoint sets, and the code would factor. A connected graph on $n - k$ vertices has at least $n - k - 1$ edges. Therefore, for all the $\binom{n-k}{2}$ pairs of generators, at least $n - k - 1$ pairs are overlapped, so their product satisfies $1 \leq \text{weight} \leq 2w - 2$. Note that the $n - k$ generators satisfies $1 \leq \text{weight} \leq w \leq 2w - 2$. Consequently, we have the constraint

$$\sum_{i=1}^{\min\{2w-2, n\}} A_i \geq (n - k) + (n - k - 1). \quad (\text{G8})$$

Notice that the number $n - k - 1$ cannot be improved without further information about the code, since for a $\llbracket 4, 2, 2; 4 \rrbracket$ code, there are $n - k = 2$ generators and $n - k - 1 = 1$ edge.

We give a necessary condition for an $\llbracket n, k, d; w \rrbracket$ stabilizer code to factorize into smaller codes. Suppose an $\llbracket n, k, d; w \rrbracket$ code can be written as a tensor product of $T \geq 2$ codes with parameters $\llbracket n_i, k_i, d_i; w_i \rrbracket$, $i = 1, \dots, T$, where $1 \leq n_i \leq n - 1$, and

$$n = n_1 + \dots + n_T, \quad k = k_1 + \dots + k_T. \quad (\text{G9})$$

By Lemma 8, we know $d_i \geq d$, $w_i \leq w$. Then, there exists an i such that the code $\llbracket n_i, k_i, d_i; w_i \rrbracket$ has rate $k_i/n_i \geq k/n$. Therefore, there must exist a stabilizer code with parameters $\llbracket n', k', d'; w' \rrbracket$ with $1 \leq n' \leq n-1$, $k'/n' \geq k/n$, $d' \geq d$, $w' \leq w$.

If all codes with size $1 \leq n' \leq n-1$ with distance $d' \geq d$ and weight $w' \leq w$ have code rate $k'/n' < k/n$, then we know that any $\llbracket n, k, d; w \rrbracket$ code, if exists, cannot be factorized into tensor products of smaller codes. Suppose $W_{LB} \leq W_{opt}$ is an efficiently computable lower bound for W_{opt} . Then

$$\{(n', k') : 1 \leq n' \leq n-1, \exists d' \geq d, \\ w' \leq w, \text{ and an } \llbracket n', k', d'; w' \rrbracket \text{ code}\} \quad (G10)$$

$$= \{(n', k') : 1 \leq n' \leq n-1, \exists d' \geq d \\ \text{such that } W_{opt}(n', k', d') \leq w\} \quad (G11)$$

$$\subset \{(n', k') : 1 \leq n' \leq n-1, \exists d' \geq d \\ \text{such that } W_{LB}(n', k', d') \leq w\} =: R_{d,w}(n). \quad (G12)$$

Equality (G10)=(G11) holds by the definition of W_{opt} (recall $W_{opt}(n', k', d') = \infty$ if no $\llbracket n', k', d' \rrbracket$ code exists). Consequently, if

$$r_{d,w}(n) := \max_{(n', k') \in R_{d,w}(n)} k'/n' < k/n, \quad (G13)$$

then any $\llbracket n, k, d; w \rrbracket$ code (if it exists) cannot be factorized into tensor products of smaller codes. Notice that $r_{d,w}(n)$ is efficiently computable.

5. Summary

We summarize the linear constraints in the above subsections.

Assume there is an $\llbracket n, k, d; w \rrbracket$ stabilizer code. Then there exists an admissible choice of

$$y \in \{\max\{1, 2n - (w-1)(n-k)\}, \dots, n-k\}, \quad (G14)$$

$$\text{parity} \in \{0, 1\}, \quad (G15)$$

$$b_{\text{single}}, b_{\text{overlap}} \in \{0, 1\}, \quad (G16)$$

such that the following linear program $LP(n, k, d; w; y, \text{parity}, b_{\text{single}}, b_{\text{overlap}})$ is feasible in the variables A_0, \dots, A_n :

$$\text{Find } A_0, A_1, \dots, A_n \in \mathbb{R} \quad (G17a)$$

$$\text{s.t. } \text{Constraints (F8b)-(F8e) hold,} \quad (G17b)$$

$$A_w \geq y, \quad (G17c)$$

$$A_0 + \dots + A_{w-1} \leq 2^{n-k-y}, \quad (G17d)$$

$$\sum_{m=0}^M A_m \geq \sum_{p=0}^{n-k-y} \sum_{q=0}^y \mathbf{1}_{p(w-1)+qw \leq M} \times \quad (G17e)$$

$$\binom{n-k-y}{p} \binom{y}{q}, \text{ for } M = w-1, \dots, n-1,$$

$$\sum_{i=0}^{\lfloor n/2 \rfloor} A_{2i} = 2^{n-k-\text{parity}}, \quad (G17f)$$

$$b_{\text{single}} \cdot A_1 = 0, \quad (G17g)$$

$$b_{\text{overlap}} \cdot \left[\sum_{i=1}^{\min\{2w-2, n\}} A_i - (2n - 2k - 1) \right] \geq 0. \quad (G17h)$$

Constraints (F8b)-(F8e) are those that must hold if there exists an $\llbracket n, k, d \rrbracket$ code. The admissible choices of parity, b_{single} , and b_{overlap} are limited for certain parameter candidate $\llbracket n, k, d; w \rrbracket$, given by:

$$\text{parity} = \begin{cases} 1, & \text{if } w \text{ is odd,} \\ 0, & \text{if } w \text{ is even and } y = n-k, \\ \text{either 0 or 1,} & \text{otherwise,} \end{cases} \quad (G18)$$

and

$$b_{\text{single}} = \mathbf{1}_{w < W_{LB}(n-1, k, d)}, \quad (\text{G19})$$

$$b_{\text{overlap}} = \mathbf{1}_{r_{d,w}(n) < k/n}. \quad (\text{G20})$$

If this LP is infeasible for all admissible choices of y , parity, b_{single} , and b_{overlap} , then no $\llbracket n, k, d; w \rrbracket$ stabilizer code exists.

Theorem 19. Fix integers (n, k, d) and a candidate generator weight w . Let $\text{LP}(n, k, d; w; y, \text{parity}, b_{\text{single}}, b_{\text{overlap}})$ denote the feasibility problem (G17) in the variables A_0, \dots, A_n , where the discrete parameters are required to satisfy

$$y \in \{\max\{1, 2n - (w-1)(n-k)\}, \dots, n-k\}, \quad \text{parity} \in \{0, 1\}, \quad b_{\text{single}}, b_{\text{overlap}} \in \{0, 1\}, \quad (\text{G21})$$

together with the admissibility rules for parity and the definitions of $b_{\text{single}} = \mathbf{1}_{w < W_{LB}(n-1, k, d)}$ and $b_{\text{overlap}} = \mathbf{1}_{r_{d,w}(n) < k/n}$. If for every admissible choice of $(y, \text{parity}, b_{\text{single}}, b_{\text{overlap}})$ the problem $\text{LP}(n, k, d; w; y, \text{parity}, b_{\text{single}}, b_{\text{overlap}})$ is infeasible, then there is no $\llbracket n, k, d; w \rrbracket$ stabilizer code.

Appendix H: Low-weight code constructions

- $\llbracket 4, 1, 2; 3 \rrbracket: \langle XXXI, IYYY, ZIZZ \rangle$
- $\llbracket 4, 2, 2; 4 \rrbracket: \langle XXXX, ZZZZ \rangle$
- $\llbracket 5, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 5, 2, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 5, 1, 3; 4 \rrbracket: \langle XZZXI, IXZZX, XIXZZ, ZXIXZ \rangle$
- $\llbracket 6, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 6, 2, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 6, 3, 2; 4 \rrbracket: \langle XXXXII, IIYYYY, ZZIIZZ \rangle$
- $\llbracket 6, 4, 2; 6 \rrbracket: \langle XXXXXX, ZZZZZZ \rangle$
- $\llbracket 6, 1, 3; 4 \rrbracket: \llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 7, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
- $\llbracket 7, 2, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
- $\llbracket 7, 3, 2; 4 \rrbracket: \llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 7, 4, 2; 6 \rrbracket: \llbracket 6, 4, 2; 6 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 7, 1, 3; 4 \rrbracket: \llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 8, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 4, 0 \rrbracket$
- $\llbracket 8, 2, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket^{\otimes 2}$
- $\llbracket 8, 3, 2; 4 \rrbracket: \llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 8, 4, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket^{\otimes 2}$
- $\llbracket 8, 5, 2; 6 \rrbracket: \langle XXXXXXII, IIYYYYYY, ZZIIZZZZ \rangle$
- $\llbracket 8, 6, 2; 8 \rrbracket: \langle XXXXXXIX, ZZZZZZZZ \rangle$
- $\llbracket 8, 1, 3; 4 \rrbracket: \llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
- $\llbracket 8, 2, 3; 4 \rrbracket: \langle ZIIIZYZY, IIIZXIXZ, ZZIYIII, IZXIXIZ, IXZIZIZI, XIZZIZII \rangle$ [56]
- $\llbracket 8, 3, 3; 6 \rrbracket: \langle XIZIYXXY, ZIZXIYXX, IXZZYXYI, IZIYXXXY, IIXYXXYZ \rangle$ [49]
- $\llbracket 9, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 5, 0 \rrbracket$
- $\llbracket 9, 2, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket^{\otimes 2} \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 9, 3, 2; 4 \rrbracket: \llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
- $\llbracket 9, 4, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket^{\otimes 2} \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 9, 5, 2; 5 \rrbracket: \langle IIIIXXXXX, IIIZZXYII, ZZIXZIIIZ, YYXIZIIZI \rangle$ [56]
- $\llbracket 9, 6, 2; 7 \rrbracket: \langle IIIIXXXXX, XXXIIZZZZ, ZZZZZIIZY \rangle$ [56]
- $\llbracket 9, 1, 3; 4 \rrbracket: \llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 4, 0 \rrbracket$
- $\llbracket 9, 2, 3; 4 \rrbracket: \llbracket 8, 2, 3; 4 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
- $\llbracket 9, 3, 3; 5 \rrbracket: \langle IIIIXXXXX, IXIZYIZXI, IYYIIXIZY, XZXIXXIII, YIZIYIXY, ZIYYIYIY \rangle$ [56]
- $\llbracket 10, 1, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 6, 0 \rrbracket$
- $\llbracket 10, 2, 2; 3 \rrbracket: \llbracket 4, 1, 2; 3 \rrbracket^{\otimes 2} \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 10, 3, 2; 4 \rrbracket: \llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 4, 0 \rrbracket$
- $\llbracket 10, 4, 2; 4 \rrbracket: \llbracket 4, 2, 2; 4 \rrbracket^{\otimes 2} \otimes \llbracket 2, 0 \rrbracket$
- $\llbracket 10, 5, 2; 4 \rrbracket: \llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 4, 2, 2; 4 \rrbracket$
- $\llbracket 10, 6, 2; 6 \rrbracket: \langle XXXXXXIII, ZZZZZZIII, IIIIXXXXX, IIIIZZZZZ \rangle$

$\llbracket 10, 7, 2; 7 \rrbracket$: $\langle XXXXXXXXIII, IIIYYYYYYY, ZZZIIIZZZZ \rangle$
 $\llbracket 10, 8, 2; 10 \rrbracket$: $\langle XXXXXXXXXX, ZZZZZZZZZZ \rangle$
 $\llbracket 10, 1, 3; 4 \rrbracket$: $\llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 5, 0 \rrbracket$
 $\llbracket 10, 2, 3; 4 \rrbracket$: $\llbracket 8, 2, 3; 4 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 10, 3, 3; 5 \rrbracket$ (not known to be optimal): $\llbracket 9, 3, 3; 5 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 10, 4, 3; 7 \rrbracket$ (not known to be optimal): [57, Fig. 11]
 $\llbracket 10, 1, 4; 6 \rrbracket$ (not known to be optimal): The below $\llbracket 10, 2, 4; 6 \rrbracket$ code plus a weight 4 logical Pauli.
 $\llbracket 10, 2, 4; 6 \rrbracket$ (not known to be optimal): $\langle XIXIXIYZZY, ZIIIXYIYXZ, IXIYZYIZX, IZIIIZZZYY, IIIXIIXZXZ, IIZIZIYYXX, IIIXYZZYXI, IIIZXYXZYI \rangle$ [49]
 $\llbracket 11, 1, 2; 3 \rrbracket$: $\llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 7, 0 \rrbracket$
 $\llbracket 11, 2, 2; 3 \rrbracket$: $\llbracket 4, 1, 2; 3 \rrbracket^{\otimes 2} \otimes \llbracket 3, 0 \rrbracket$
 $\llbracket 11, 3, 2; 4 \rrbracket$: $\llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 5, 0 \rrbracket$
 $\llbracket 11, 4, 2; 4 \rrbracket$: $\llbracket 4, 2, 2; 4 \rrbracket^{\otimes 2} \otimes \llbracket 3, 0 \rrbracket$
 $\llbracket 11, 5, 2; 4 \rrbracket$: $\llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 4, 2, 2; 4 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 11, 6, 2; 5 \rrbracket$: $\langle IIIIIIXXXXI, IIIIXZZZZI, IIIXXZIIIXX, XXXZIIIIIZ, ZZZZIIIIIIY \rangle$
 $\llbracket 11, 7, 2; 6 \rrbracket$: $\langle XXXXIIIIIXX, IIIIXXXXIX, ZZIIIZIIIZZ, IIZZZIZZZII \rangle$
 $\llbracket 11, 8, 2; 8 \rrbracket$: $\langle IIIIXXXXZ, XXXZIIIX, ZZZIIIZZZX \rangle$
 $\llbracket 11, 1, 3; 4 \rrbracket$: $\llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 6, 0 \rrbracket$
 $\llbracket 11, 2, 3; 4 \rrbracket$: $\llbracket 8, 2, 3; 4 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
 $\llbracket 11, 3, 3; 5 \rrbracket$ (not known to be optimal): $\llbracket 9, 3, 3; 5 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 11, 4, 3; 7 \rrbracket$ (not known to be optimal): $\llbracket 10, 4, 3; 7 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 11, 5, 3; 8 \rrbracket$ (not known to be optimal): $\langle XIYIXYXXYZI, ZIXIZXZZXYI, IXIYIYZZZ, IZZIIXXYY, IIIXXZZYY, IIIZZZYXXX \rangle$ [49]
 $\llbracket 11, 1, 4; 6 \rrbracket$ (not known to be optimal): $\llbracket 10, 1, 4; 6 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 11, 2, 4; 6 \rrbracket$ (not known to be optimal): $\llbracket 10, 2, 4; 6 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 11, 1, 5; 6 \rrbracket$: $\langle XIXIXZZIXX, ZIIIZXYYIX, IXIIXYZIY, IZIIIZZZYYI, IIIXIIXZXZI, IIZIIZYIYZZ, IIIXIXYIXXY, IIIZIZIZZXZ, IIIIXXXIZZX, IIIIZZIYZYZ \rangle$ [49]
 $\llbracket 12, 1, 2; 3 \rrbracket$: $\llbracket 4, 1, 2; 3 \rrbracket \otimes \llbracket 8, 0 \rrbracket$
 $\llbracket 12, 2, 2; 3 \rrbracket$: $\llbracket 4, 1, 2; 3 \rrbracket^{\otimes 2} \otimes \llbracket 4, 0 \rrbracket$
 $\llbracket 12, 3, 2; 3 \rrbracket$: $\llbracket 4, 1, 2; 3 \rrbracket^{\otimes 3}$
 $\llbracket 12, 4, 2; 4 \rrbracket$: $\llbracket 4, 2, 2; 4 \rrbracket^{\otimes 2} \otimes \llbracket 4, 0 \rrbracket$
 $\llbracket 12, 5, 2; 4 \rrbracket$: $\llbracket 6, 3, 2; 4 \rrbracket \otimes \llbracket 4, 2, 2; 4 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 12, 6, 2; 4 \rrbracket$: $\llbracket 6, 3, 2; 4 \rrbracket^{\otimes 2}$
 $\llbracket 12, 7, 2; 6 \rrbracket$: $\llbracket 11, 7, 2; 6 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 12, 8, 2; 6 \rrbracket$: $\langle XXXXIIIIIXX, IIIIXXXXIX, ZZIIIZZIIZZ, IIZZIIZZIIZZ \rangle$
 $\llbracket 12, 9, 2; 8 \rrbracket$: $\langle XXXXXXIX, IIIIYYYYYYYY, ZZZZIIIZZZZ \rangle$
 $\llbracket 12, 1, 3; 4 \rrbracket$: $\llbracket 5, 1, 3; 4 \rrbracket \otimes \llbracket 7, 0 \rrbracket$
 $\llbracket 12, 2, 3; 4 \rrbracket$: $\llbracket 8, 2, 3; 4 \rrbracket \otimes \llbracket 4, 0 \rrbracket$
 $\llbracket 12, 3, 3; 5 \rrbracket$ (not known to be optimal): $\llbracket 9, 3, 3; 5 \rrbracket \otimes \llbracket 3, 0 \rrbracket$
 $\llbracket 12, 4, 3; 7 \rrbracket$ (not known to be optimal): $\llbracket 10, 4, 3; 7 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 12, 5, 3; 8 \rrbracket$ (not known to be optimal): $\llbracket 11, 5, 3; 8 \rrbracket \otimes \llbracket 1, 0 \rrbracket$
 $\llbracket 12, 6, 3; 10 \rrbracket$ (not known to be optimal): $\langle XIYIXIZYXX, ZIXIZIYXZX, IXIYIYXX, IZIXYXX, IIIXXXX, IIZZZZZZZZ \rangle$ [49]
 $\llbracket 12, 1, 4; 6 \rrbracket$ (not known to be optimal): $\llbracket 10, 1, 4; 6 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 12, 2, 4; 6 \rrbracket$ (not known to be optimal): $\llbracket 10, 2, 4; 6 \rrbracket \otimes \llbracket 2, 0 \rrbracket$
 $\llbracket 12, 3, 4; 8 \rrbracket$ (not known to be optimal): The below $\llbracket 12, 4, 4; 8 \rrbracket$ code plus a weight 4 logical Pauli.
 $\llbracket 12, 4, 4; 8 \rrbracket$ (not known to be optimal): $\langle XIXYZIXZ, ZIIZXYIY, IXIYZIXZ, IZIZYXIZY, IIIXXXIIXX, IIZZZZZZZZ, IIIIIXXXX, IIIIZZZZZZ \rangle$ [49]
 $\llbracket 12, 1, 5; 6 \rrbracket$: $\llbracket 11, 1, 5; 6 \rrbracket \otimes \llbracket 1, 0 \rrbracket$

Appendix I: Lower bound for specific parameters

By Algorithm 1, we can get $W_{\text{opt}}(12, 7, 2) \geq 5$.

Proposition 20. $W_{\text{opt}}(12, 7, 2) \geq 6$.

Proof. Assume for contradiction that there exist 5 independent commuting generators $g_1, \dots, g_5 \in \mathcal{P}_{12}^+$ with $\text{wt}(g_i) \leq 5$

and that the resulting code has distance $d \geq 2$.

For each qubit $j \in [12]$, let

$$t_j := \#\{i \in [5] : g_i \text{ acts nontrivially on qubit } j\}. \quad (\text{I1})$$

Since $W_{\text{opt}}(11, 7, 2) = 6 > 5$, we know $t_j \geq 2$ for all j . We have

$$24 \leq \sum_{j=1}^{12} t_j = \sum_{i=1}^5 \text{wt}(g_i) \leq 25. \quad (\text{I2})$$

If $\sum_j t_j = 24$, then $t_j = 2$ for all j . For different $a, b \in [5]$, when $\text{supp}(g_a)$ and $\text{supp}(g_b)$ overlap, they must differ on every qubit they overlap (otherwise $d = 1$). Since any pair g_a, g_b commute, we know

$$|\text{supp}(g_a) \cap \text{supp}(g_b)| \equiv 0 \pmod{2} \quad \text{for all } a \neq b. \quad (\text{I3})$$

Fix a , since each qubit in $\text{supp}(g_a)$ is shared with exactly one other generator, we have

$$\text{wt}(g_a) = \sum_{b \neq a} |\text{supp}(g_a) \cap \text{supp}(g_b)|. \quad (\text{I4})$$

By (I3), the right-hand side is a sum of even integers, hence $\text{wt}(g_a)$ is even. But $\text{wt}(g_a) \leq 5$, so $\text{wt}(g_a) \in \{2, 4\}$ for all a , which is impossible.

If $\sum_j t_j = 25$, then exactly one qubit has $t_j = 3$ and all other qubits have $t_j = 2$. Also, $\text{wt}(g_i) = 5$ for all $i \in [5]$. Let j^* be the unique qubit with $t_{j^*} = 3$. Exactly three generators act nontrivially on j^* , so there exists at least one generator, say g_5 , that acts trivially on j^* .

Every qubit j in $\text{supp}(g_5)$ is not j^* , hence has $t_j = 2$, so it is shared by g_5 and exactly one other generator. By $[g_5, g_b] = 0$, we know

$$|\text{supp}(g_5) \cap \text{supp}(g_b)| \equiv 0 \pmod{2} \quad \forall b \in \{1, 2, 3, 4\}. \quad (\text{I5})$$

Again we have

$$\text{wt}(g_5) = \sum_{b=1}^4 |\text{supp}(g_5) \cap \text{supp}(g_b)|, \quad (\text{I6})$$

so by (I5), $\text{wt}(g_5)$ is even, contradicting $\text{wt}(g_5) = 5$. \square

Appendix J: Pseudo code for calculating weight lower bound

We summarize the procedure of calculating a lower bound W_{LB} for W_{opt} , for all stabilizer codes with $n \leq N$, into Algorithm 1.

Algorithm 1 Calculating W_{LB}

Input: An integer N .

Output: $W_{LB}(n, k, d)$ for $4 \leq n \leq N$, $2 \leq d \leq n$, $2 \leq k \leq n$.

```

1: for  $n = 4, \dots, N$  do
2:   for  $d = 2, \dots, \lfloor \frac{n+1}{2} \rfloor$  do                                 $\triangleright$  By quantum Singleton bound  $n - k \geq 2(d - 1)$ .
3:     for  $k = 1, \dots, n$  do
4:       if  $d = 2$  and  $k/n \leq 1/4$  then
5:         Set  $W_{LB}(n, k, d) = 3$                                           $\triangleright$  Based on Theorem 4.
6:         continue
7:       end if
8:       if LP problem (F8) is infeasible then
9:         for  $\kappa = k, \dots, n$  do
10:          Set  $W_{LB}(n, \kappa, d) = \infty$ 
11:        end for
12:        break
13:      end if
14:      Set BreakFlag = False
15:      for  $w = \max\{4, \lceil \frac{2n}{n-k} \rceil, \dots, n$  do                                 $\triangleright$  Based on Theorem 13 and Theorem 4.
16:        Set  $b_{\text{single}} = \mathbf{1}_{w < W_{LB}(n-1, k, d)}$ 
17:        Set  $b_{\text{overlap}} = \mathbf{1}_{r_{d,w}(n) < k/n}$ 
18:        for  $y = \max\{1, 2n - (w-1)(n-k)\}, \dots, n-k$  do
19:          for parity = 0, 1 do
20:            if (parity = 0 and  $w$  is odd) or (parity = 1 and  $w$  is even and  $y = n - k$ ) then
21:              continue
22:            end if
23:            if  $LP(n, k, d; w; y, \text{parity}, b_{\text{single}}, b_{\text{overlap}})$  (G17) is feasible then
24:              Set  $W_{LB}(n, k, d) = w$ 
25:              Set BreakFlag = True
26:              break
27:            end if
28:          end for
29:          if BreakFlag = True then
30:            break
31:          end if
32:        end for
33:        if BreakFlag = True then
34:          break
35:        end if
36:      end for
37:      if BreakFlag = False then
38:        Set  $W_{LB}(n, k, d) = \infty$ 
39:      end if
40:    end for
41:  end for
42: end for

```
