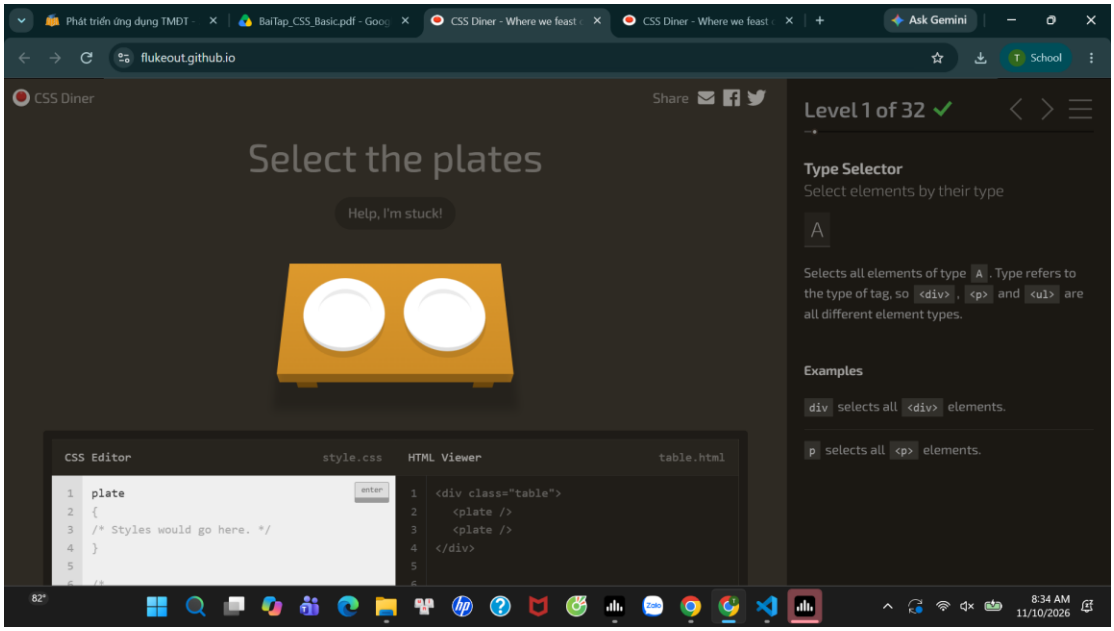
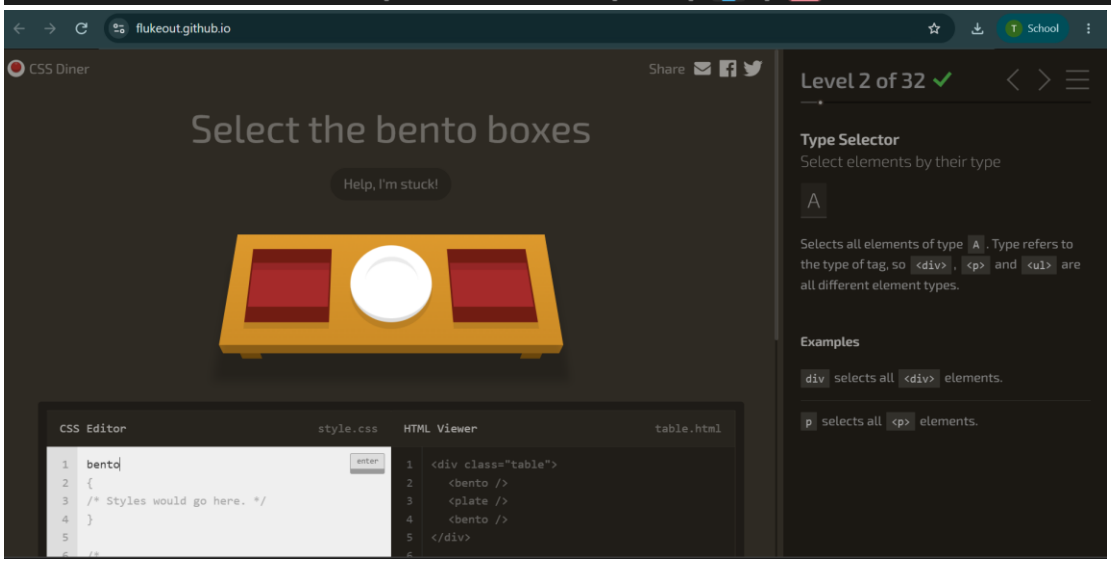
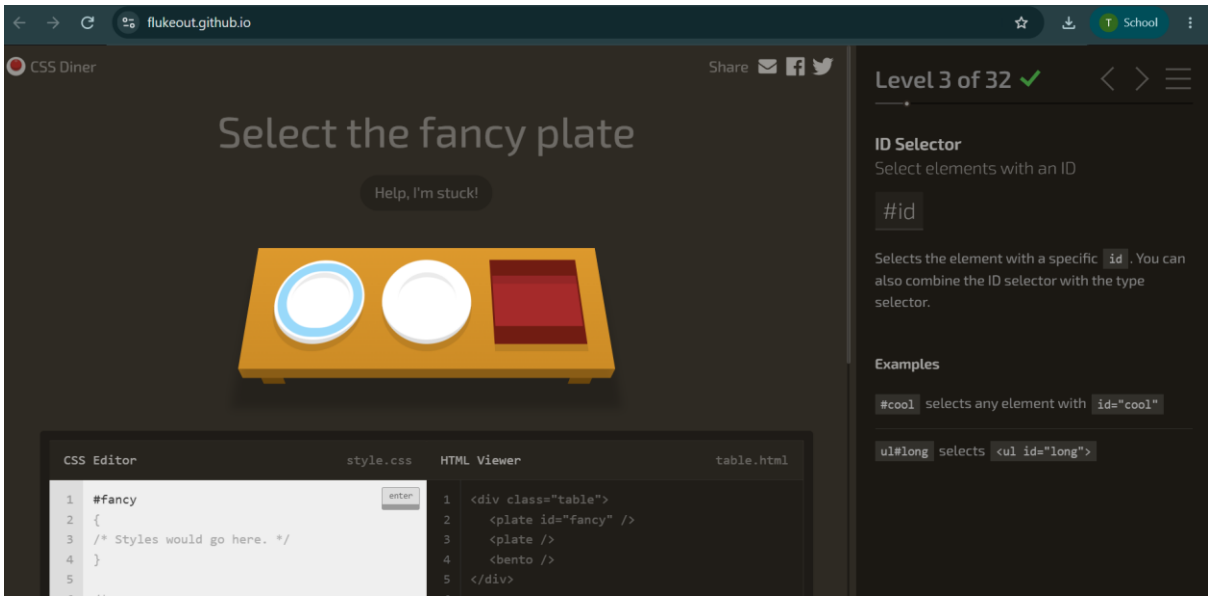
**Link GitHub:** https://github.com/nvt080906/PTUDTMDT-Tuan3

# 1. Bài tập 1

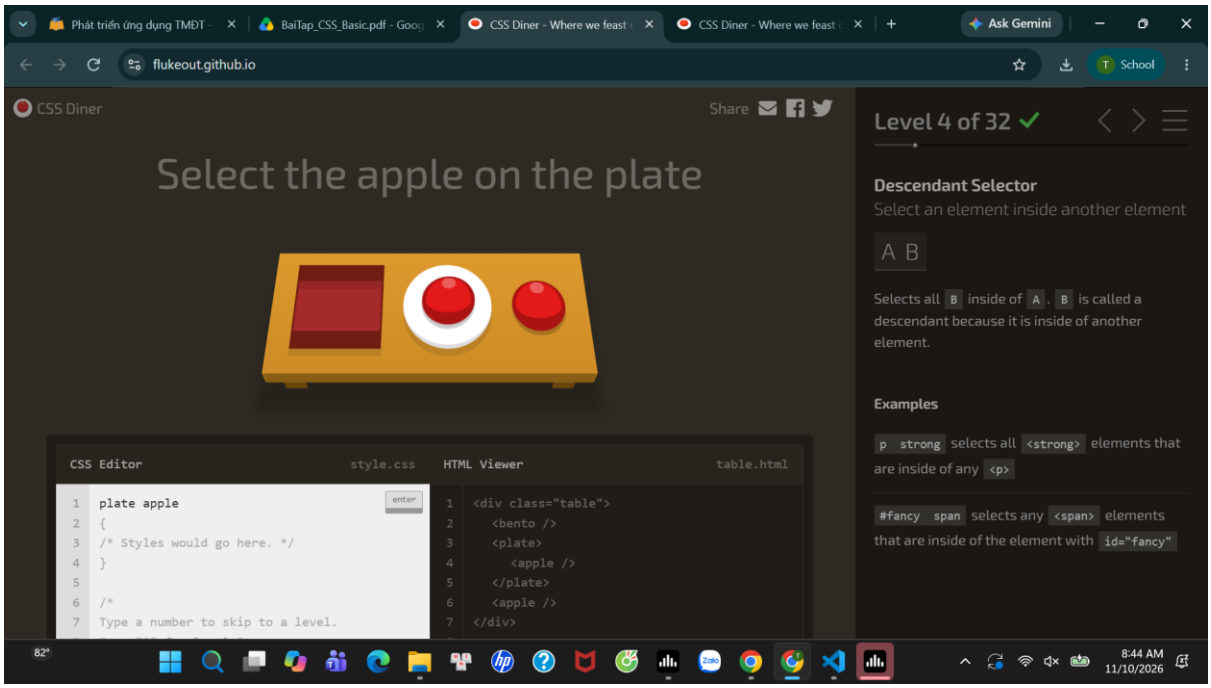
## 1.1. CSS Diner



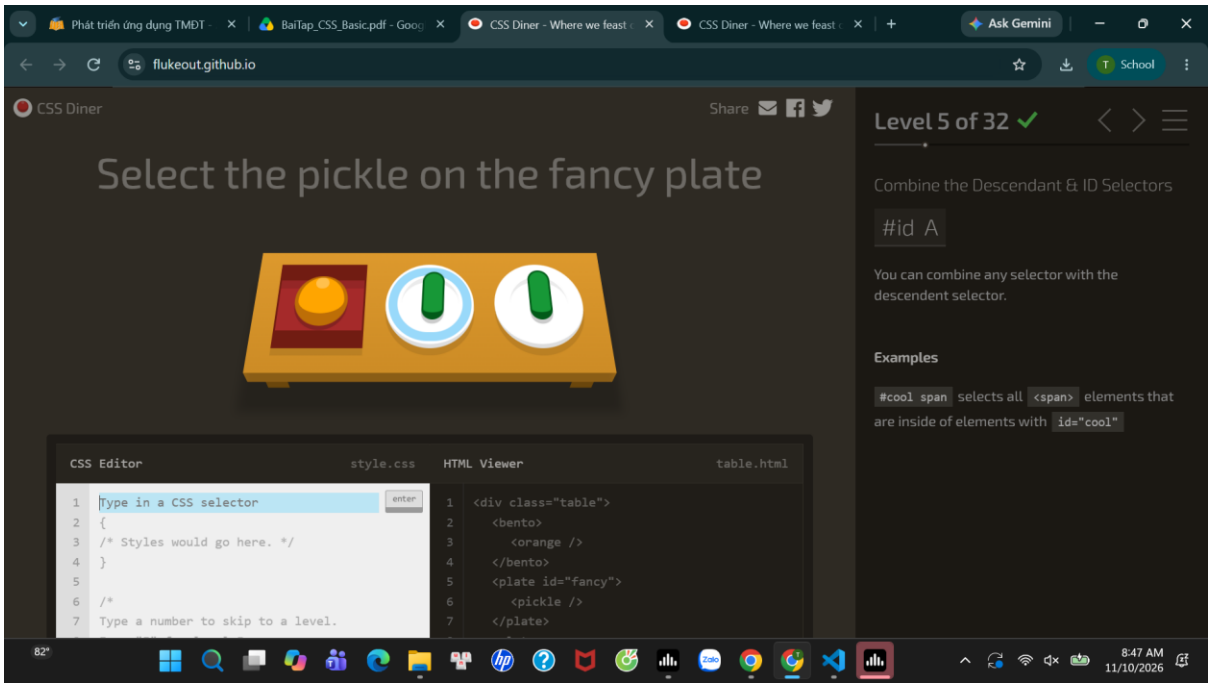

flukeout.github.io
School
CSS Diner
Share
Level 3 of 32
Select the fancy plate
Help, I'm stuck!
ID Selector
Select elements with an ID
#id
Selects the element with a specific id. You can also combine the ID selector with the type selector.
Examples
#cool selects any element with id="cool"
ul#long selects <ul id="long">
CSS Editor
style.css
HTML Viewer
table.html
enter
#fancy
{
/* Styles would go here. */
}

<plate id="fancy" />
<plate />
<bento />

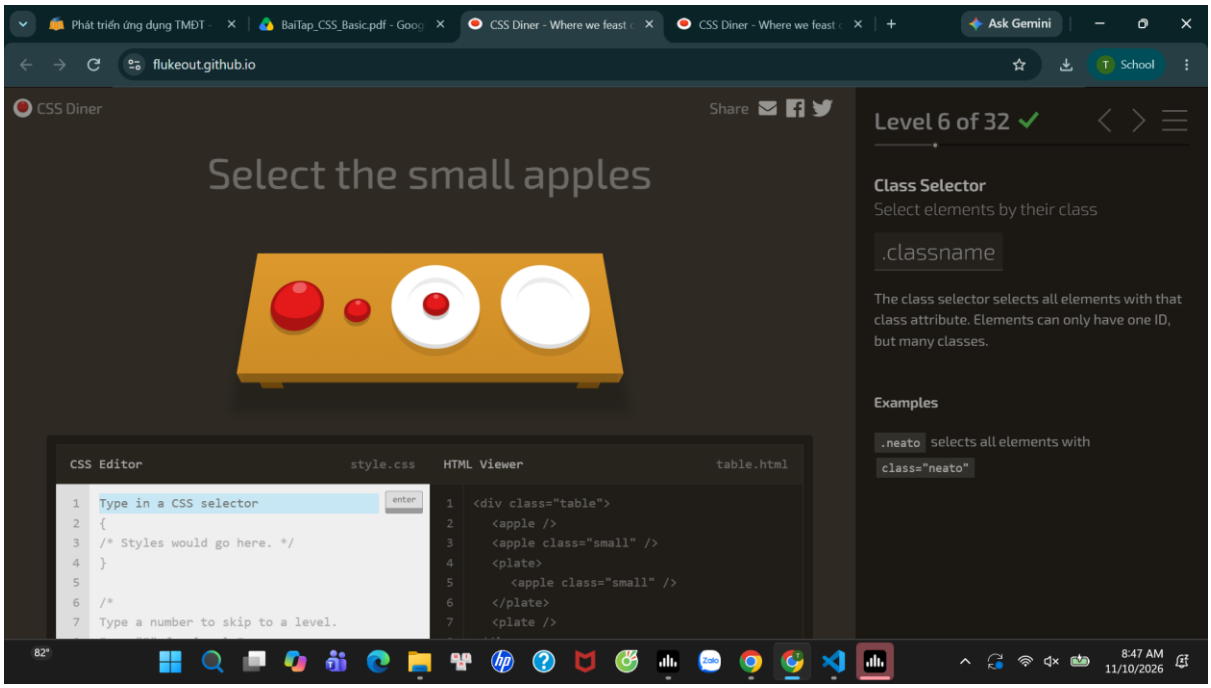

Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 4 of 32
Select the apple on the plate
Descendant Selector
Select an element inside another element
A B
Selects all B inside of A. B is called a descendant because it is inside of another element.
Examples
p strong selects all  elements that are inside of any <p>
#fancy span selects any  elements that are inside of the element with id="fancy"
CSS Editor
style.css
HTML Viewer
table.html
plate apple
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.

<bento />
<plate>
<apple />
</plate>
<apple />

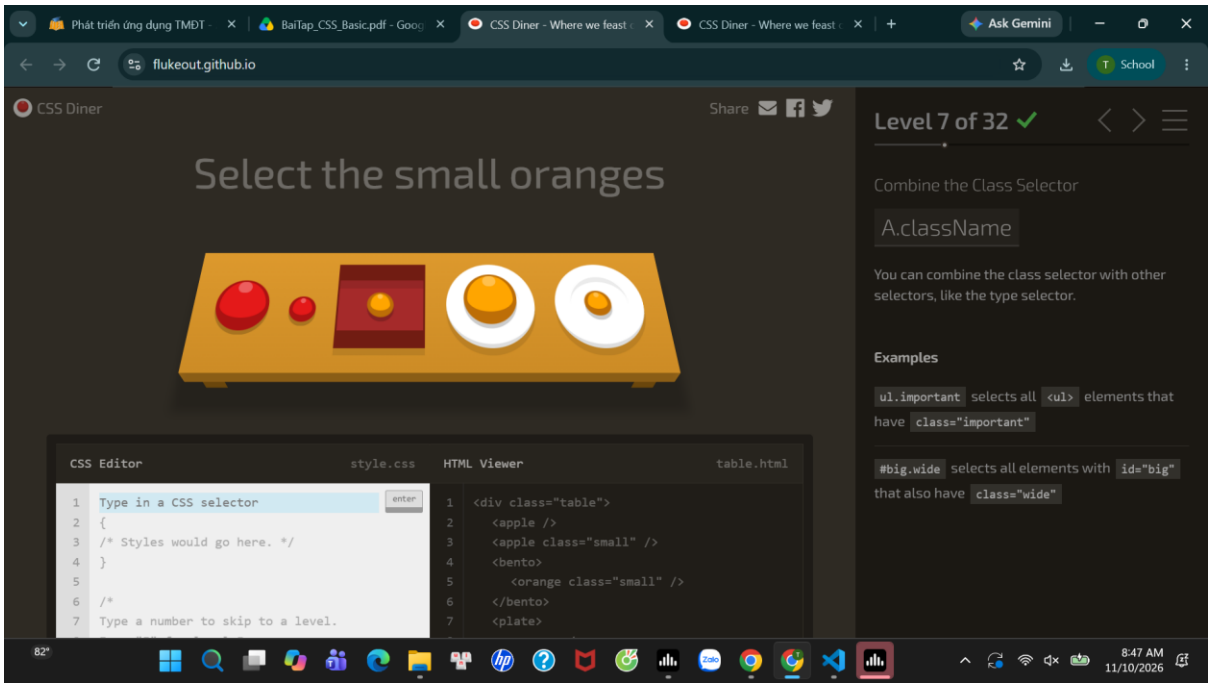
8:44 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 5 of 32
Select the pickle on the fancy plate
Combine the Descendant & ID Selectors
#id A
You can combine any selector with the descendent selector.
Examples
#cool span selects all  elements that are inside of elements with id="cool"
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.

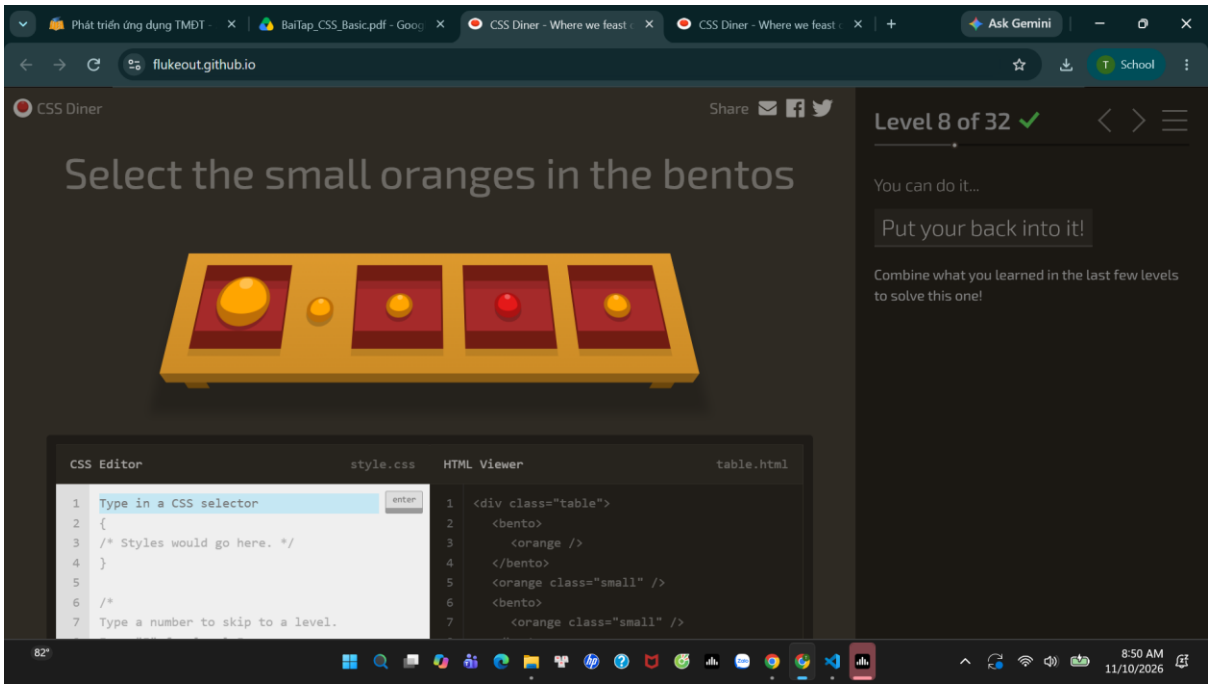
<bento>
<orange />
</bento>
<plate id="fancy">
<pickle />
</plate>
8:47 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 6 of 32
Select the small apples
Class Selector
Select elements by their class
.classname
The class selector selects all elements with that class attribute. Elements can only have one ID, but many classes.
Examples
.neato selects all elements with class="neato"
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*
Type a number to skip to a level.

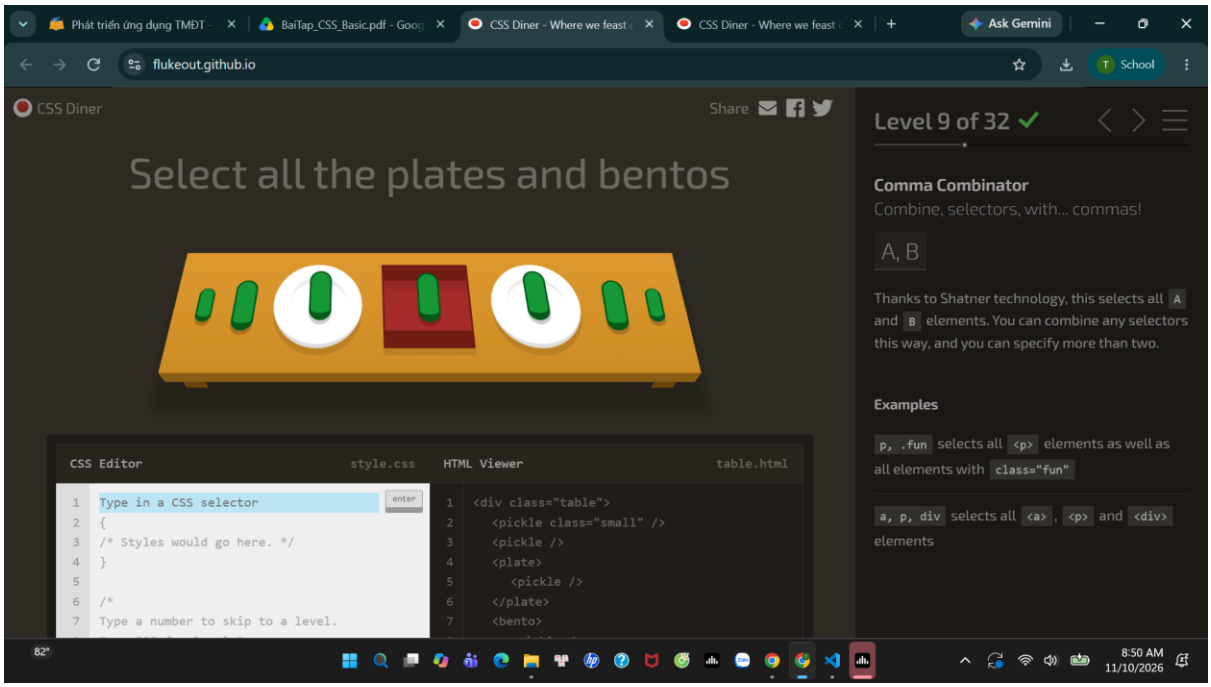
<apple />
<apple class="small" />
<plate>
<apple class="small" />
</plate>
<plate />
82°
8:47 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 7 of 32
Select the small oranges
Combine the Class Selector
A.className
You can combine the class selector with other selectors, like the type selector.
Examples
ul.important selects all <ul> elements that have class="important"
#big.wide selects all elements with id="big" that also have class="wide"
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*
Type a number to skip to a level.

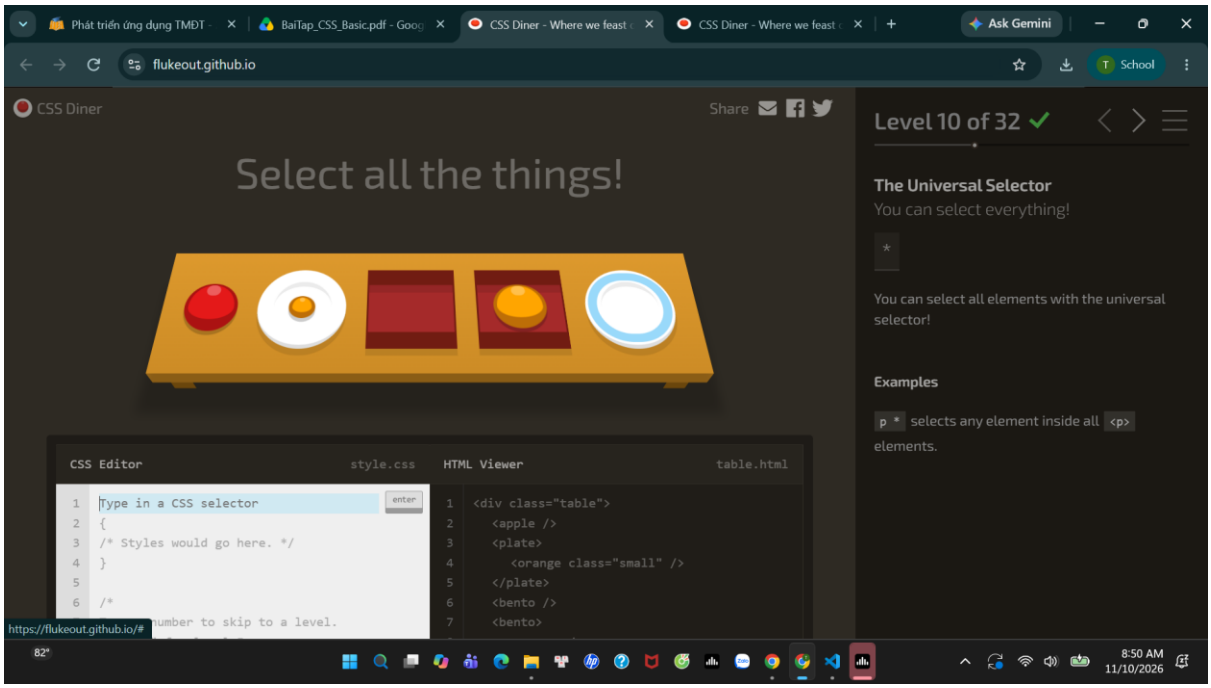
<apple />
<apple class="small" />
<bento>
<orange class="small" />
</bento>
<plate>
82°
8:47 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 8 of 32
Select the small oranges in the bentos
You can do it...
Put your back into it!
Combine what you learned in the last few levels to solve this one!
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.

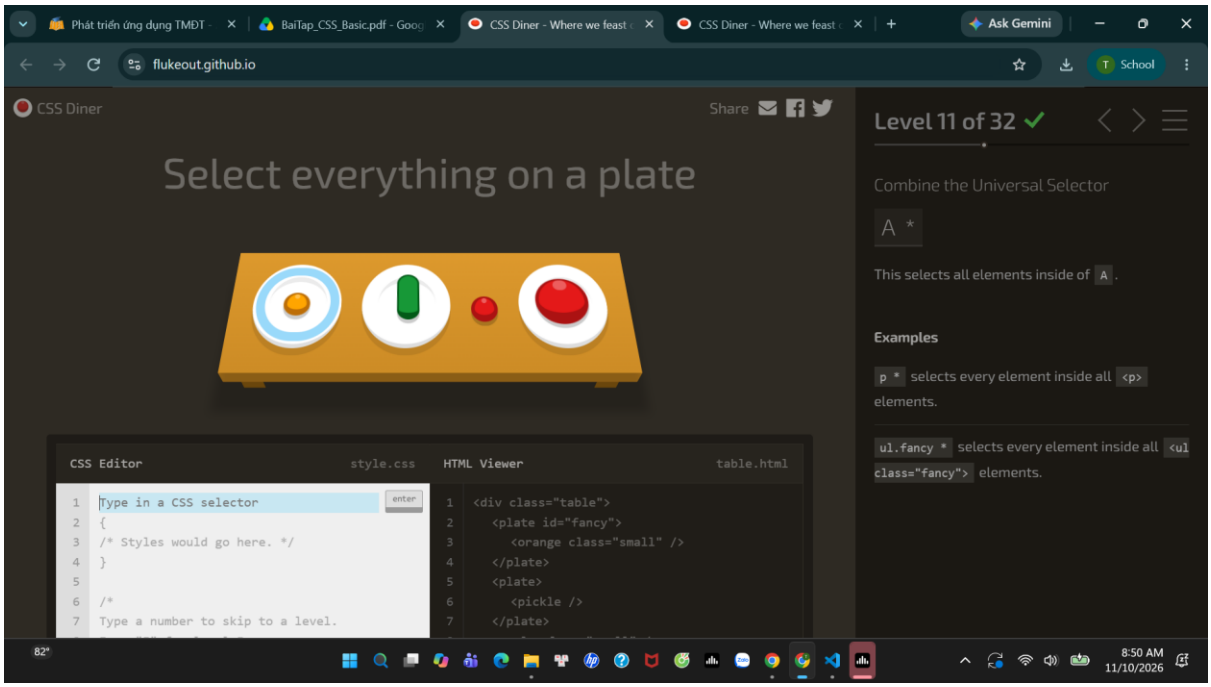
<bento>
<orange />
</bento>
<orange class="small" />
<bento>
<orange class="small" />
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 9 of 32
Select all the plates and bentos
Comma Combinator
Combine, selectors, with... commas!
A, B
Thanks to Shatner technology, this selects all A and B elements. You can combine any selectors this way, and you can specify more than two.
Examples
p, .fun selects all <p> elements as well as all elements with class="fun"
a, p, div selects all <a>, <p> and  elements
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.

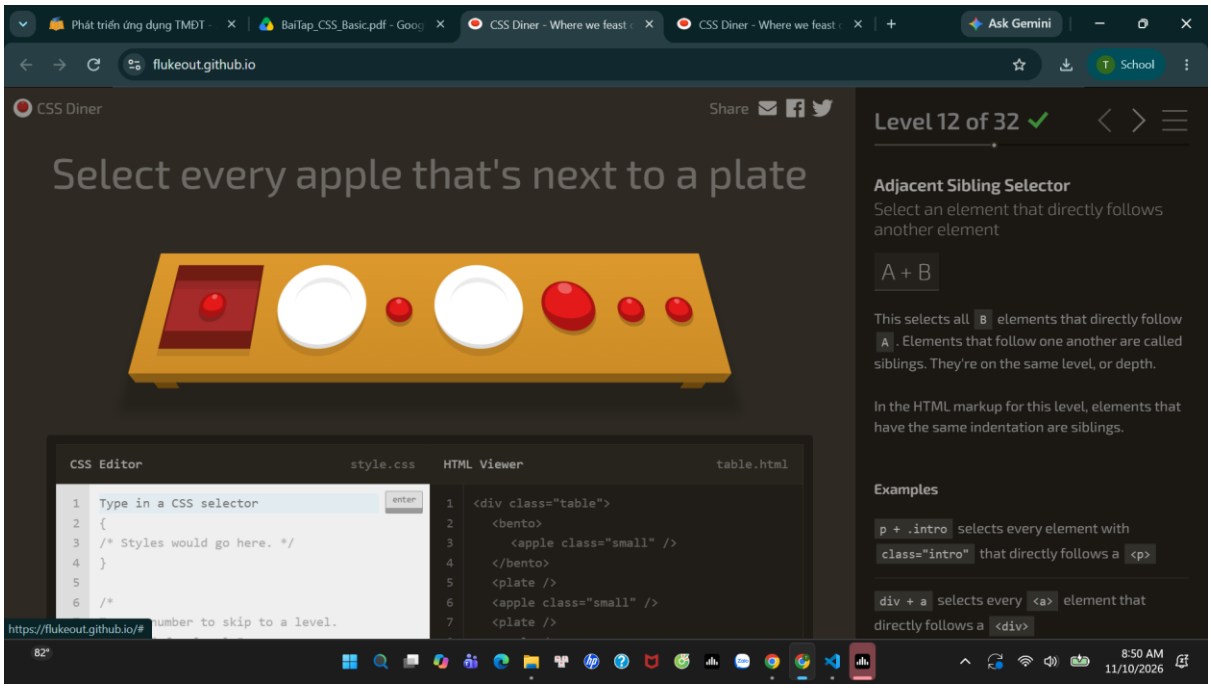
<pickle class="small" />
<pickle />
<plate>
<pickle />
</plate>
<bento>
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 10 of 32
Select all the things!
The Universal Selector
You can select everything!
*
You can select all elements with the universal selector!
Examples
p * selects any element inside all <p> elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}
/*
number to skip to a level.

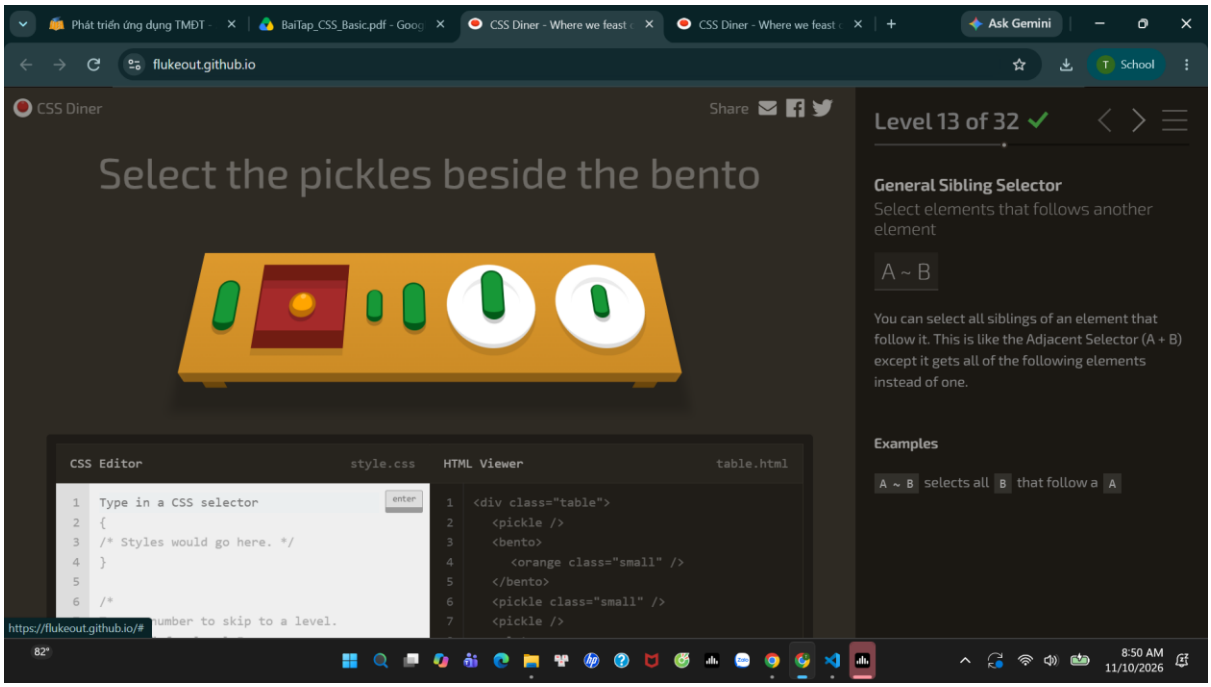
<apple />
<plate>
<orange class="small" />
</plate>
<bento />
<bento>
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 11 of 32
Select everything on a plate
Combine the Universal Selector
A *
This selects all elements inside of A.
Examples
p * selects every element inside all <p> elements.
ul.fancy * selects every element inside all <ul class="fancy"> elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}
/*
Type a number to skip to a level.

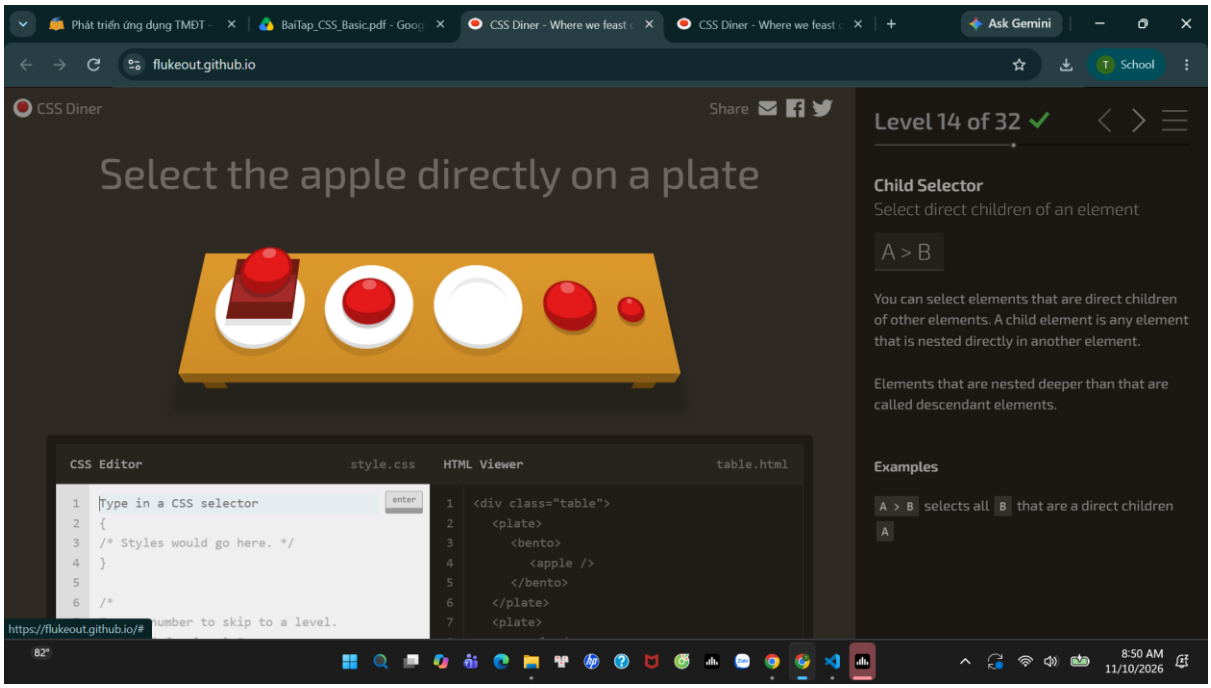
<plate id="fancy">
<orange class="small" />
</plate>
<plate>
<pickle />
</plate>
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select every apple that's next to a plate
Level 12 of 32
Adjacent Sibling Selector
Select an element that directly follows another element
A + B
This selects all B elements that directly follow A. Elements that follow one another are called siblings. They're on the same level, or depth.
In the HTML markup for this level, elements that have the same indentation are siblings.
Examples
p + .intro selects every element with class="intro" that directly follows a <p>
div + a selects every <a> element that directly follows a 
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

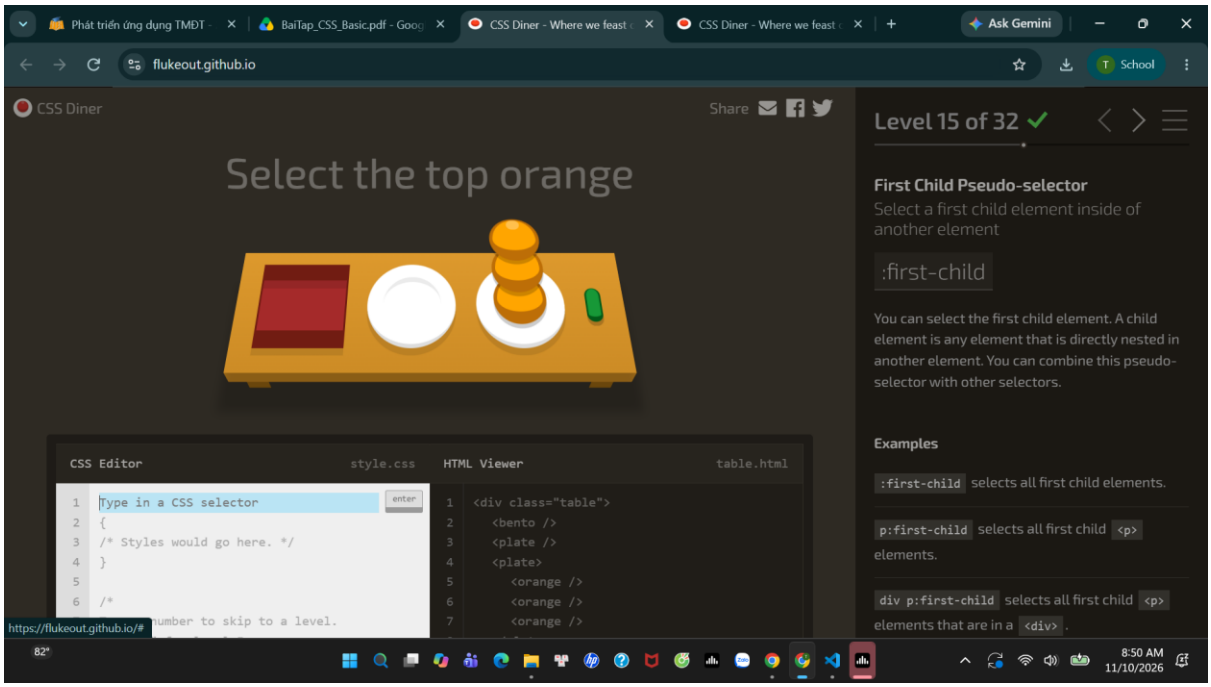
<bento>
<apple class="small" />
</bento>
<plate />
<apple class="small" />
<plate />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the pickles beside the bento
Level 13 of 32
General Sibling Selector
Select elements that follows another element
A ~ B
You can select all siblings of an element that follow it. This is like the Adjacent Selector (A + B) except it gets all of the following elements instead of one.
Examples
A ~ B selects all B that follow a A
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

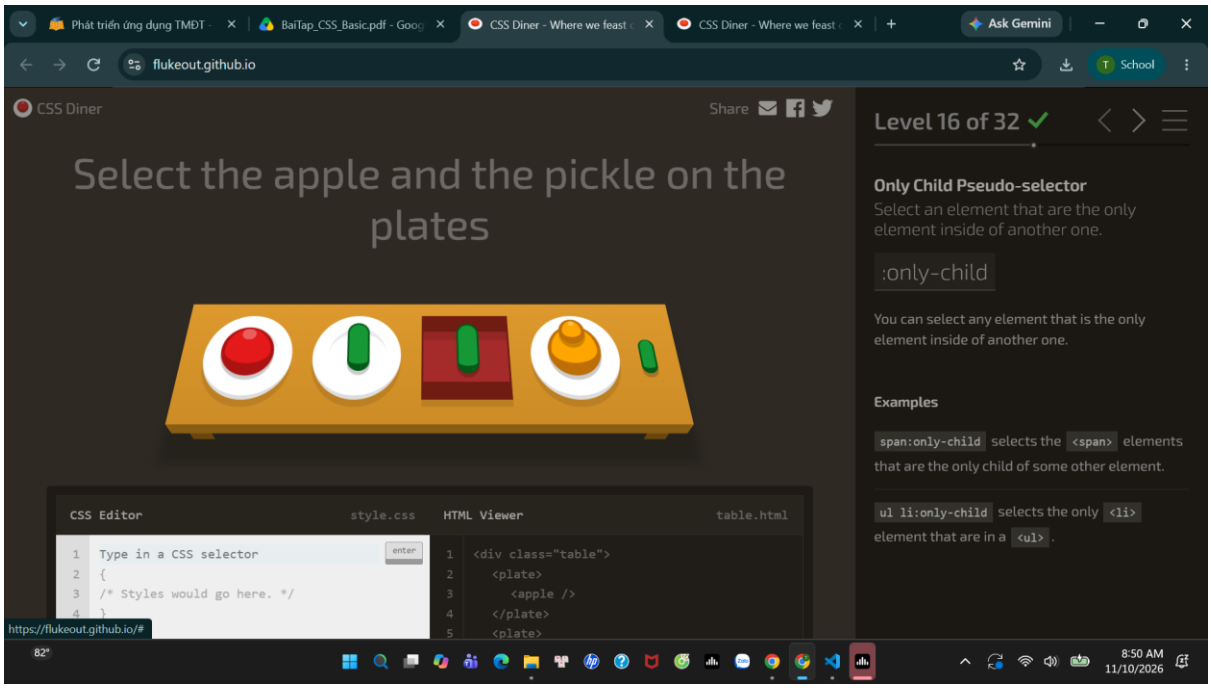
<pickle />
<bento>
<orange class="small" />
</bento>
<pickle class="small" />
<pickle />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the apple directly on a plate
Level 14 of 32
Child Selector
Select direct children of an element
A > B
You can select elements that are direct children of other elements. A child element is any element that is nested directly in another element.
Elements that are nested deeper than that are called descendant elements.
Examples
A > B selects all B that are a direct children A
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

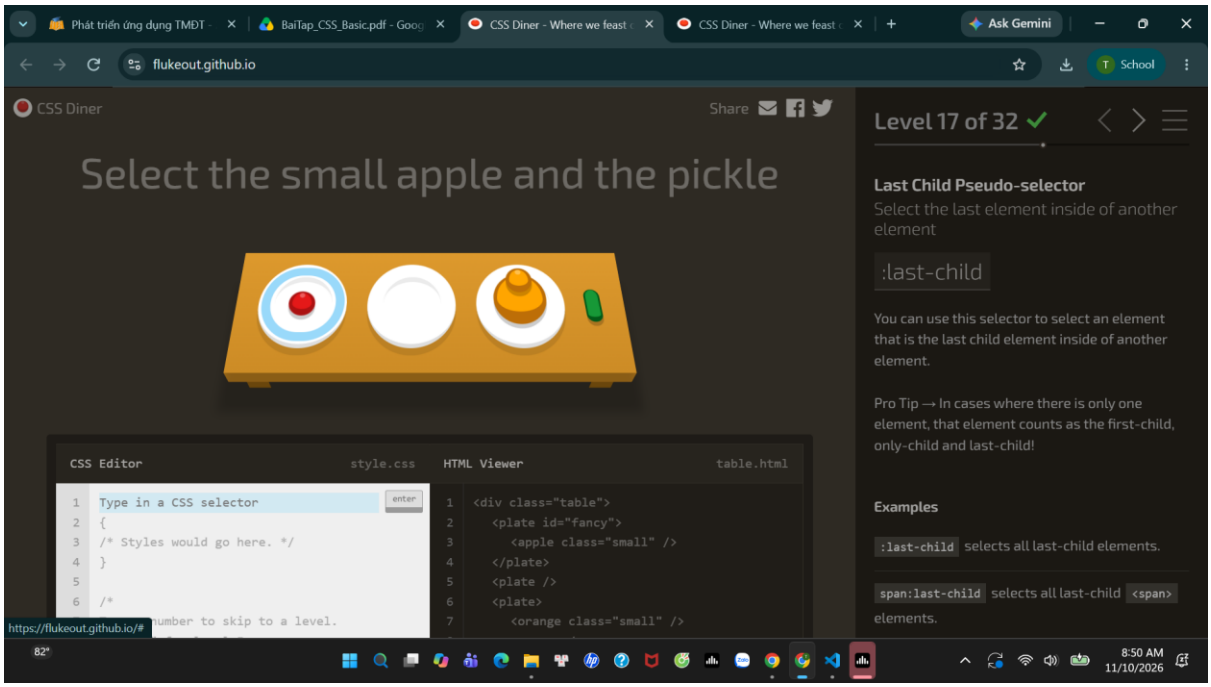
<plate>
<bento>
<apple />
</bento>
</plate>
<plate>
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the top orange
Level 15 of 32
First Child Pseudo-selector
Select a first child element inside of another element
:first-child
You can select the first child element. A child element is any element that is directly nested in another element. You can combine this pseudo-selector with other selectors.
Examples
:first-child selects all first child elements.
p:first-child selects all first child <p> elements.
div p:first-child selects all first child <p> elements that are in a .
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

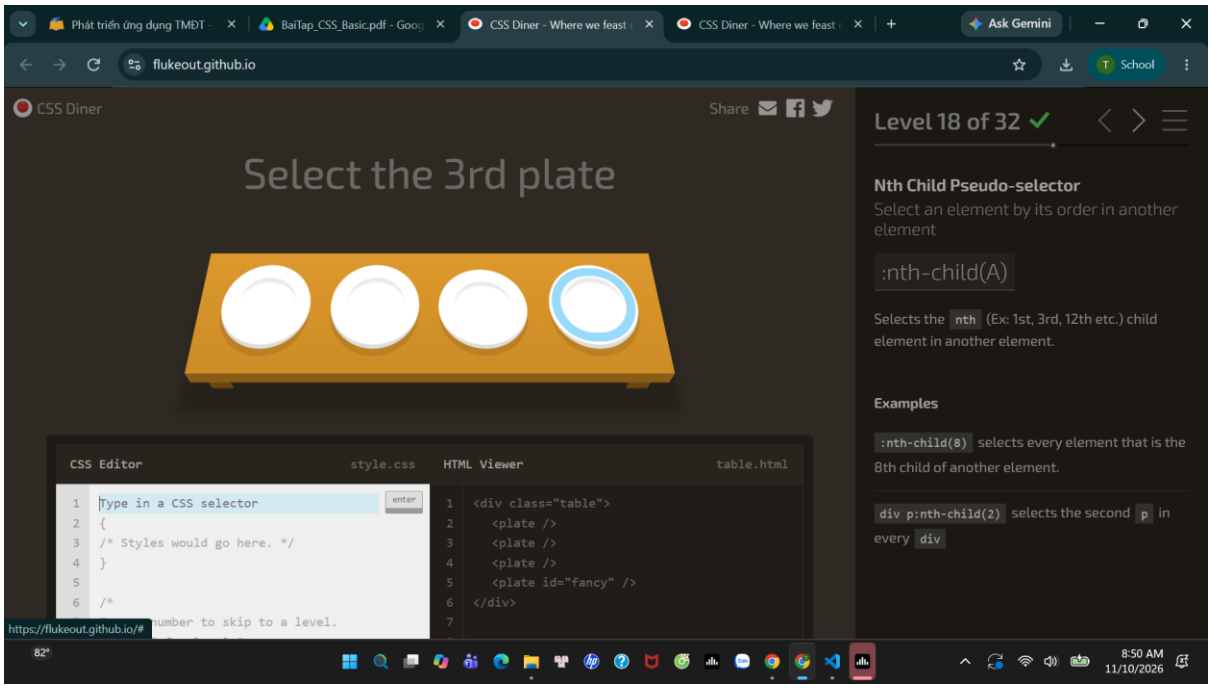
<bento />
<plate />
<plate>
<orange />
<orange />
<orange />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the apple and the pickle on the plates
Level 16 of 32
Only Child Pseudo-selector
Select an element that are the only element inside of another one.
:only-child
You can select any element that is the only element inside of another one.
Examples
span:only-child selects the  elements that are the only child of some other element.
ul li:only-child selects the only <li> element that are in a <ul>.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

<plate>
<apple />
</plate>
<plate>
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026

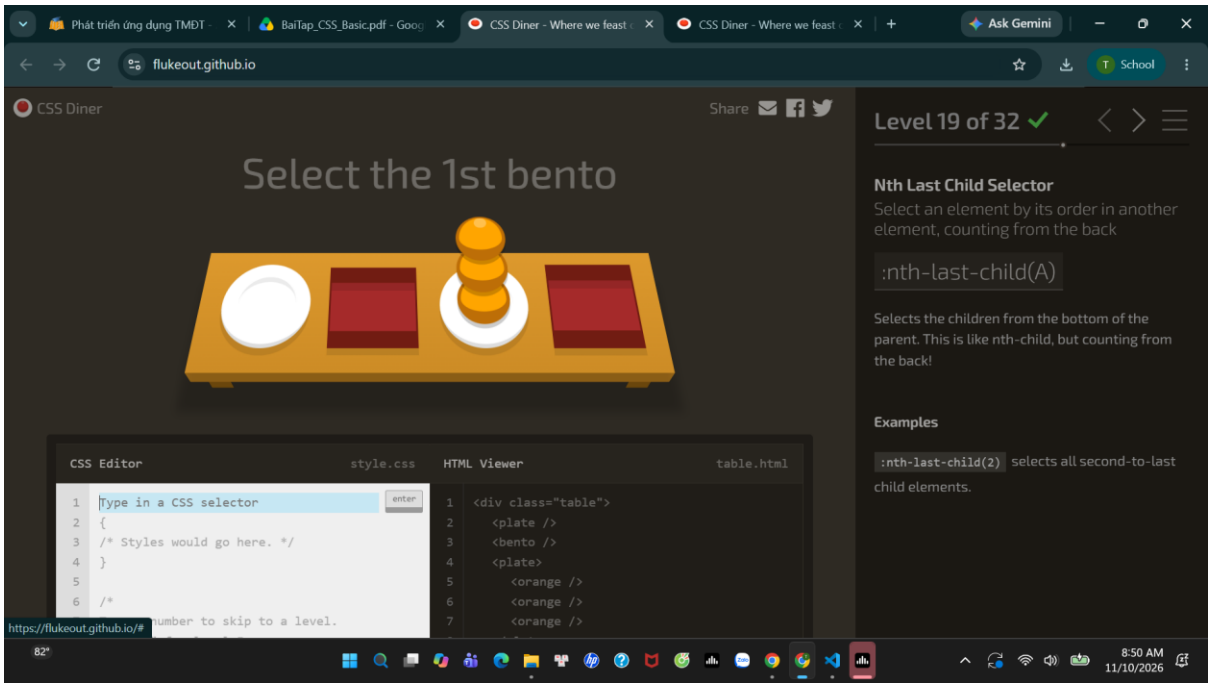

Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the small apple and the pickle
Level 17 of 32
Last Child Pseudo-selector
Select the last element inside of another element
:last-child
You can use this selector to select an element that is the last child element inside of another element.
Pro Tip → In cases where there is only one element, that element counts as the first-child, only-child and last-child!
Examples
:last-child selects all last-child elements.
span:last-child selects all last-child  elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

<plate id="fancy">
<apple class="small" />
</plate>
<plate />
<plate>
<orange class="small" />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026

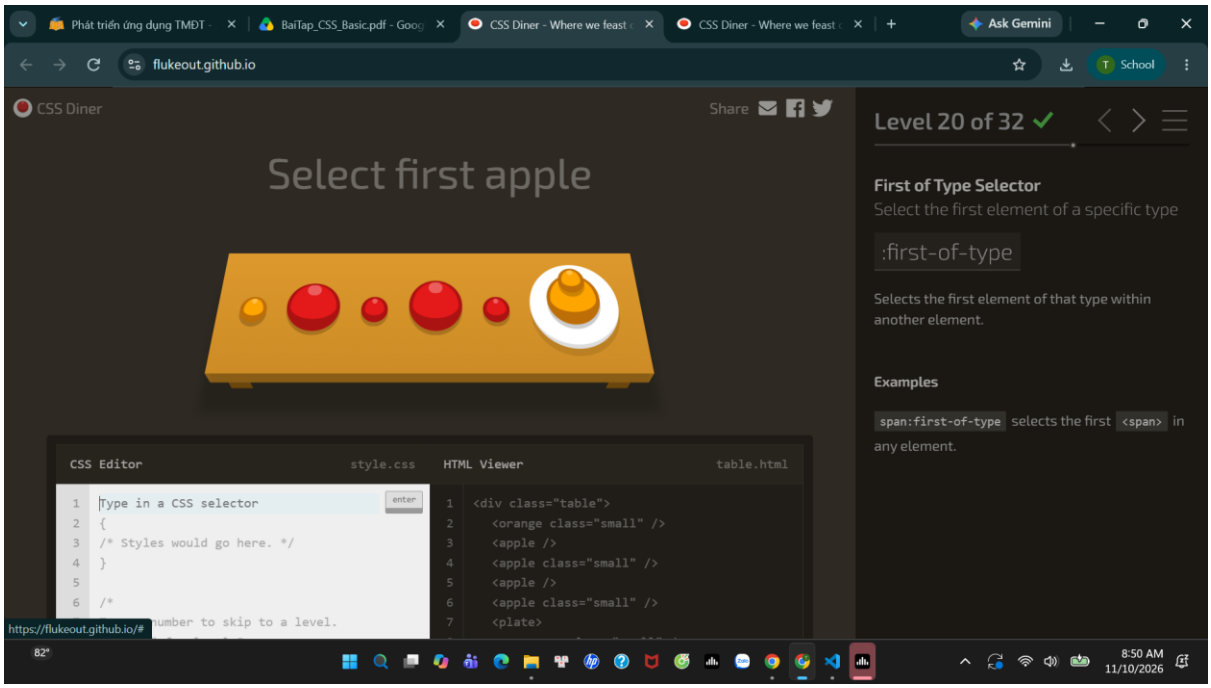

Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the 3rd plate
Level 18 of 32
Nth Child Pseudo-selector
Select an element by its order in another element
:nth-child(A)
Selects the nth (Ex: 1st, 3rd, 12th etc.) child element in another element.
Examples
:nth-child(8) selects every element that is the 8th child of another element.
div p:nth-child(2) selects the second p in every div
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

<plate />
<plate />
<plate />
<plate id="fancy" />

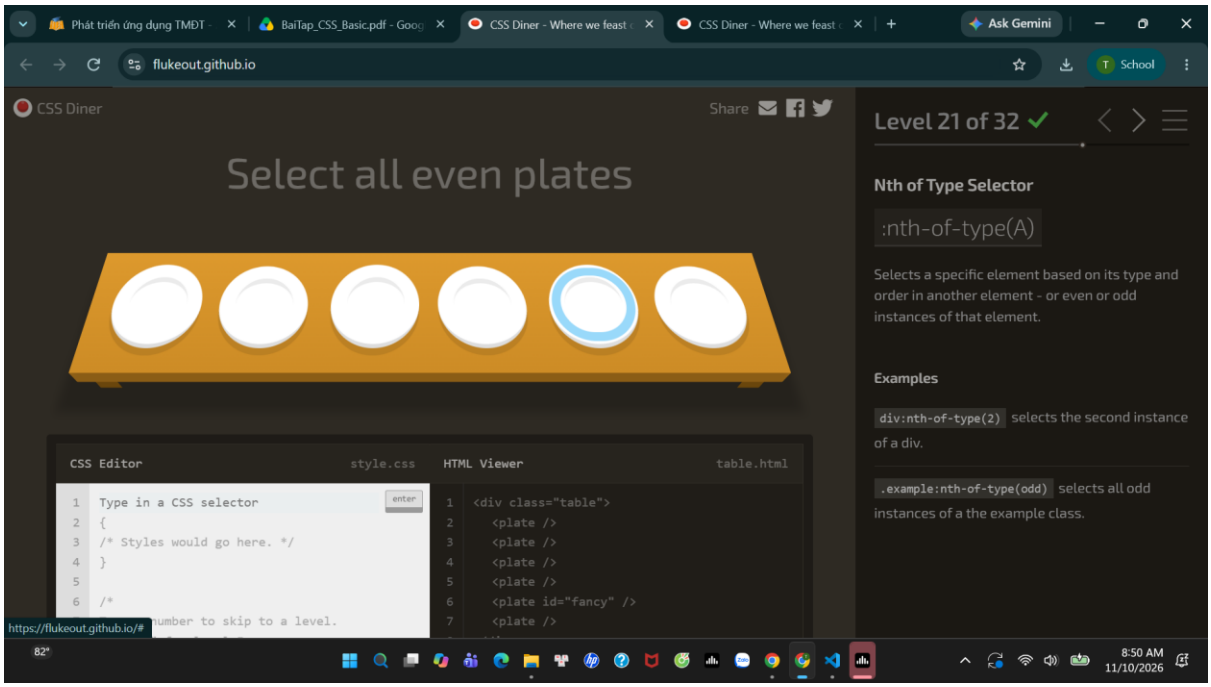
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the 1st bento
Level 19 of 32
Nth Last Child Selector
Select an element by its order in another element, counting from the back
:nth-last-child(A)
Selects the children from the bottom of the parent. This is like nth-child, but counting from the back!
Examples
:nth-last-child(2) selects all second-to-last child elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

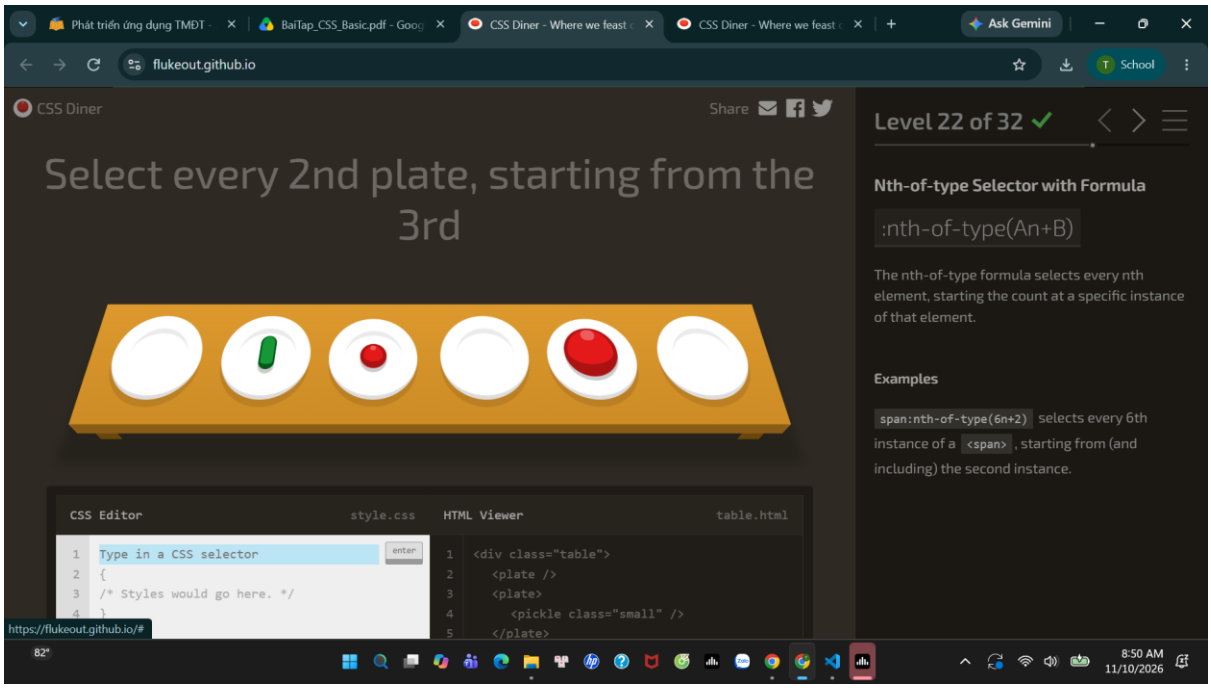
<plate />
<bento />
<plate>
<orange />
<orange />
<orange />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select first apple
Level 20 of 32
First of Type Selector
Select the first element of a specific type
:first-of-type
Selects the first element of that type within another element.
Examples
span:first-of-type selects the first  in any element.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

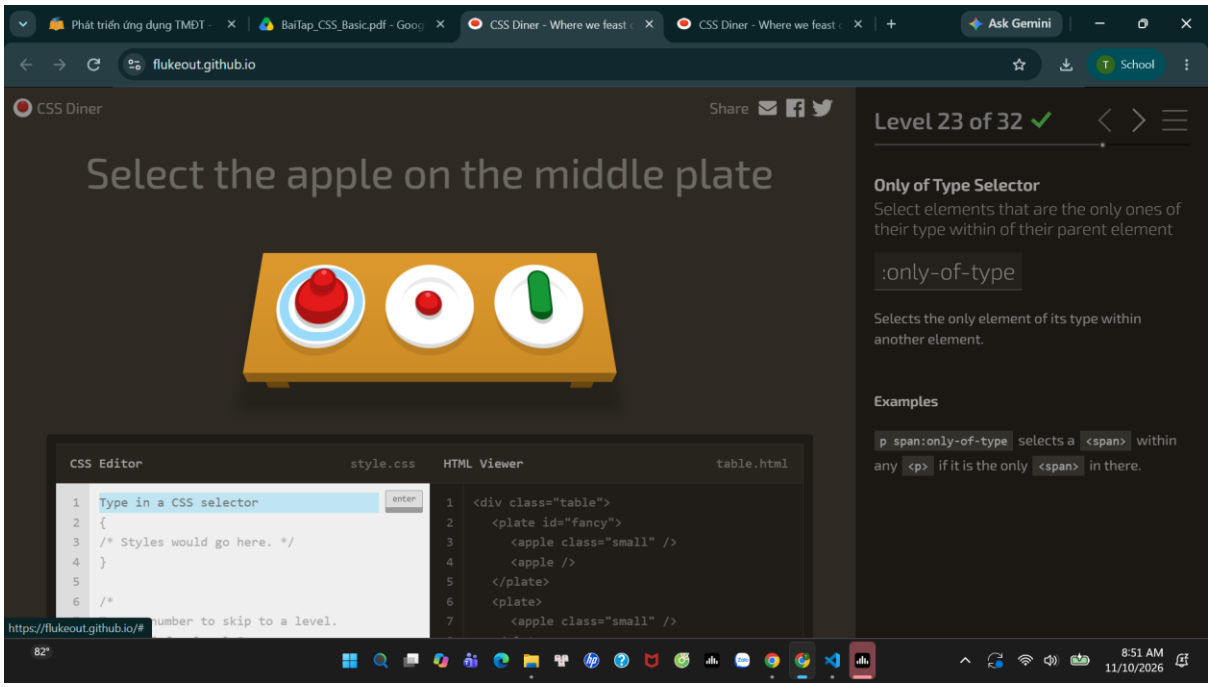
<orange class="small" />
<apple />
<apple class="small" />
<apple />
<apple class="small" />
<plate>
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select all even plates
Level 21 of 32
Nth of Type Selector
:nth-of-type(A)
Selects a specific element based on its type and order in another element - or even or odd instances of that element.
Examples
div:nth-of-type(2) selects the second instance of a div.
.example:nth-of-type(odd) selects all odd instances of a the example class.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

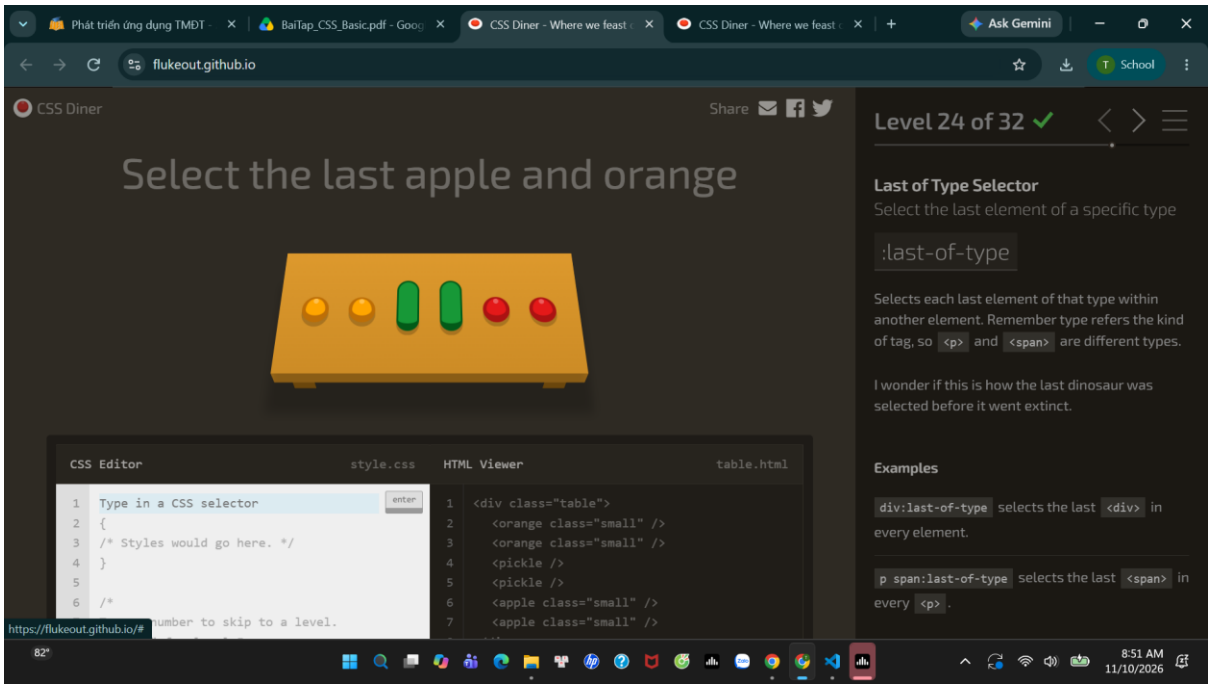
<plate />
<plate />
<plate />
<plate />
<plate id="fancy" />
<plate />
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select every 2nd plate, starting from the 3rd
Level 22 of 32
Nth-of-type Selector with Formula
:nth-of-type(An+B)
The nth-of-type formula selects every nth element, starting the count at a specific instance of that element.
Examples
span:nth-of-type(6n+2) selects every 6th instance of a , starting from (and including) the second instance.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}

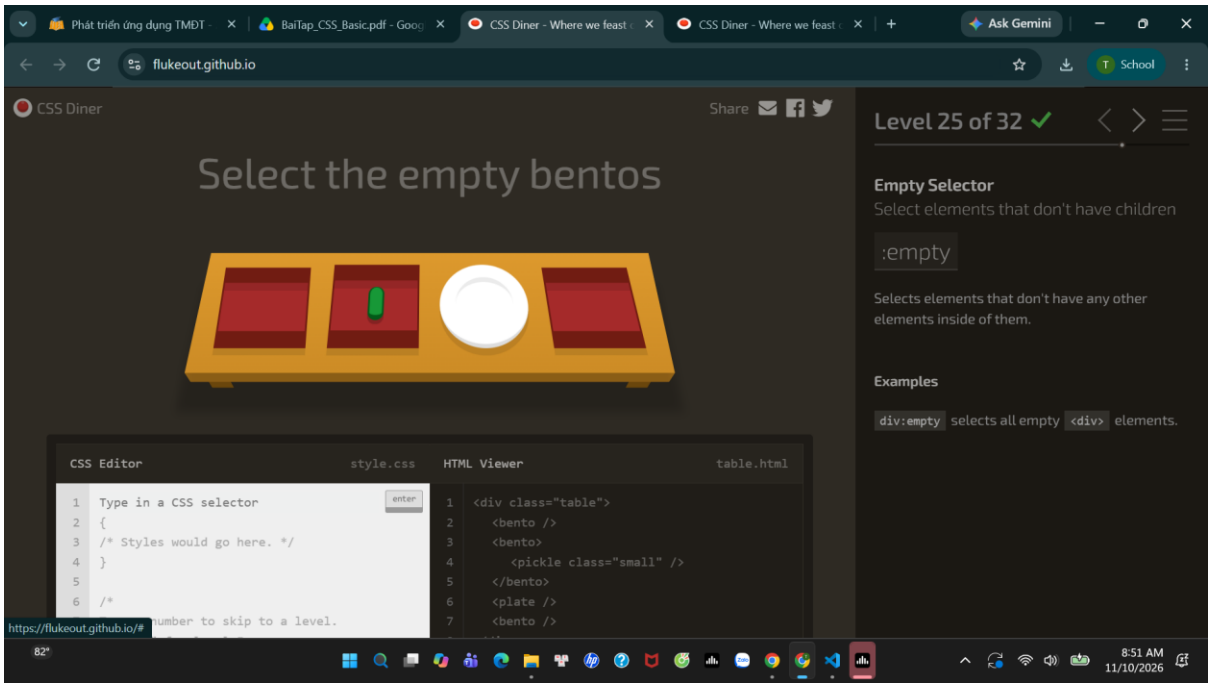
<plate />
<plate>
<pickle class="small" />
</plate>
https://flukeout.github.io/#
82°
8:50 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the apple on the middle plate
Level 23 of 32
Only of Type Selector
Select elements that are the only ones of their type within of their parent element
:only-of-type
Selects the only element of its type within another element.
Examples
p span:only-of-type selects a  within any <p> if it is the only  in there.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
{
/* Styles would go here. */
}
/*

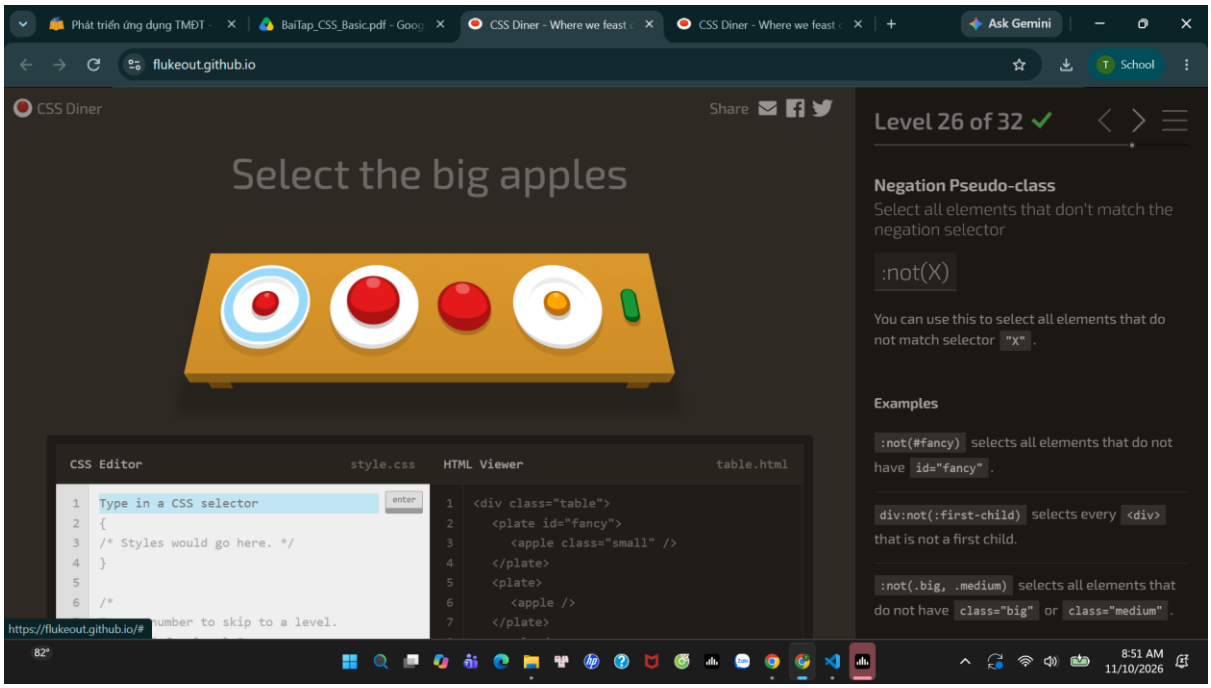
<plate id="fancy">
<apple class="small" />
<apple />
</plate>
<plate>
<apple class="small" />
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the last apple and orange
Level 24 of 32
Last of Type Selector
Select the last element of a specific type
:last-of-type
Selects each last element of that type within another element. Remember type refers the kind of tag, so <p> and  are different types.
I wonder if this is how the last dinosaur was selected before it went extinct.
Examples
div:last-of-type selects the last  in every element.
p span:last-of-type selects the last  in every <p>.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

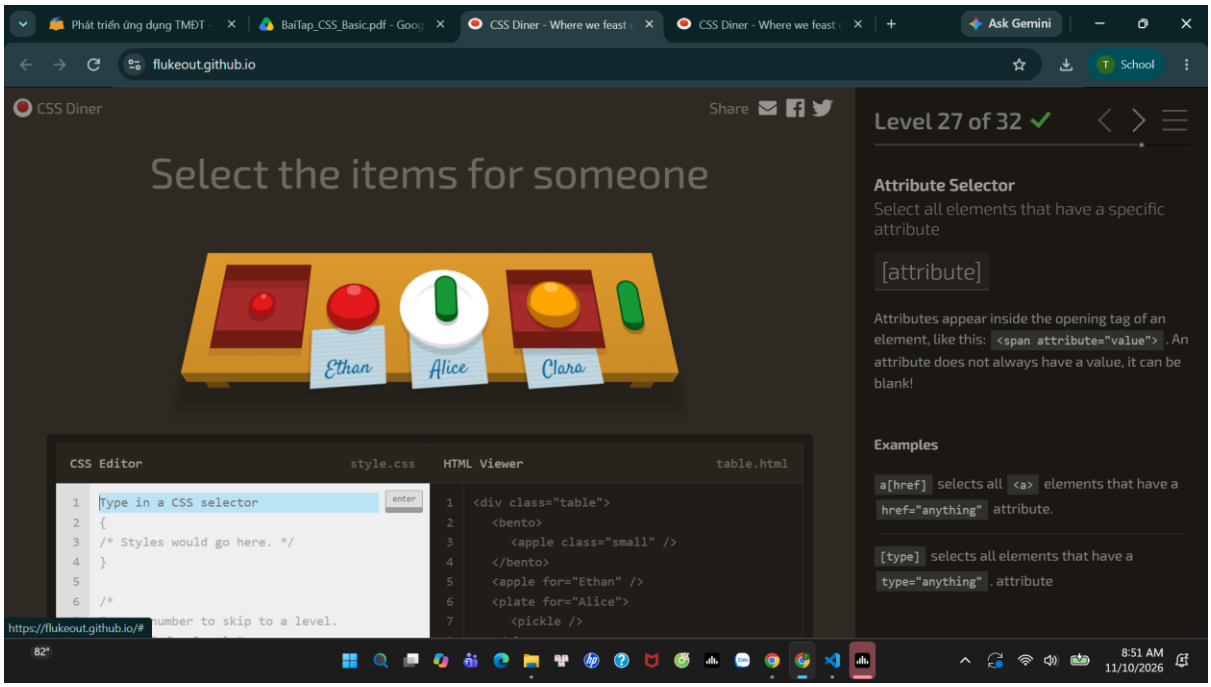
<orange class="small" />
<orange class="small" />
<pickle />
<pickle />
<apple class="small" />
<apple class="small" />
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the empty bentos
Level 25 of 32
Empty Selector
Select elements that don't have children
:empty
Selects elements that don't have any other elements inside of them.
Examples
div:empty selects all empty  elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

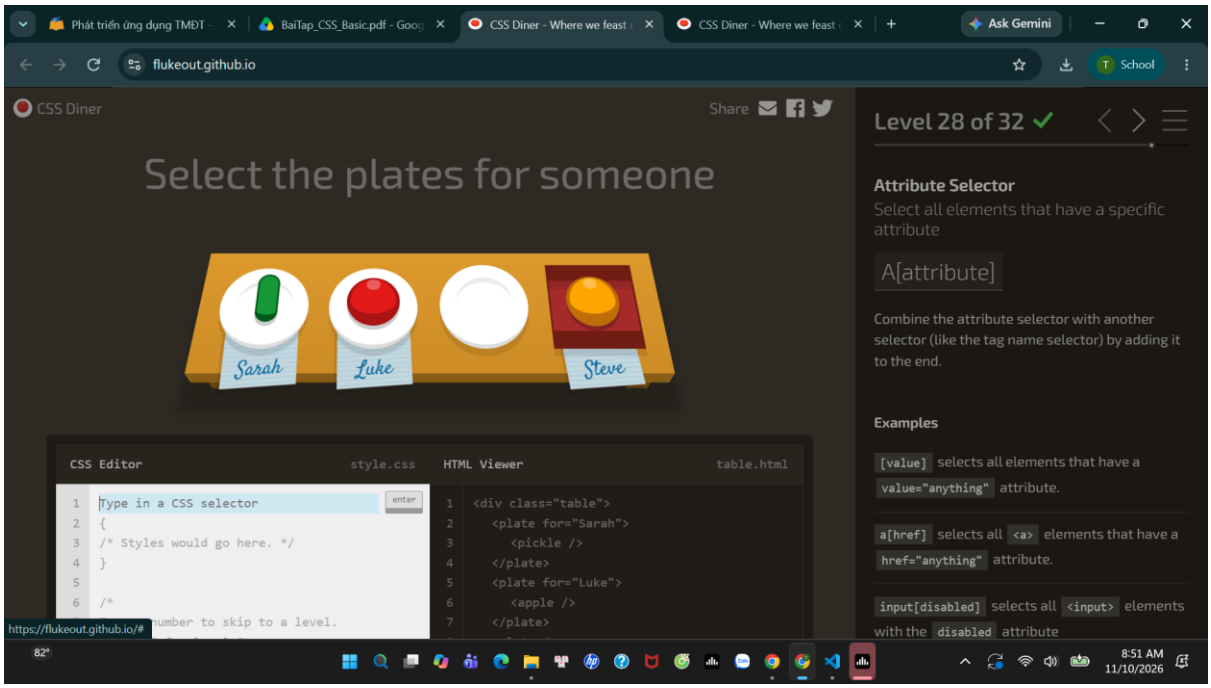
<bento />
<bento>
<pickle class="small" />
</bento>
<plate />
<bento />
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the big apples
Level 26 of 32
Negation Pseudo-class
Select all elements that don't match the negation selector
:not(X)
You can use this to select all elements that do not match selector "X".
Examples
:not(#fancy) selects all elements that do not have id="fancy".
div:not(:first-child) selects every  that is not a first child.
:not(.big, .medium) selects all elements that do not have class="big" or class="medium".
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

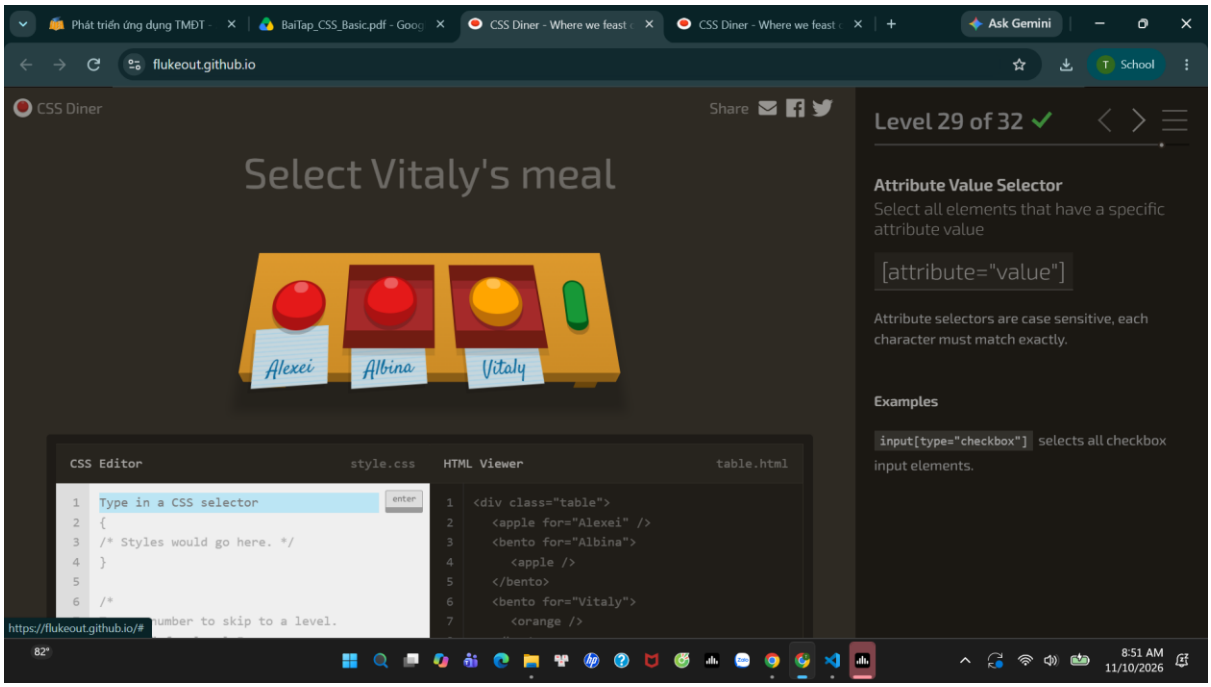
<plate id="fancy">
<apple class="small" />
</plate>
<plate>
<apple />
</plate>
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the items for someone
Ethan
Alice
Clara
Level 27 of 32
Attribute Selector
Select all elements that have a specific attribute
[attribute]
Attributes appear inside the opening tag of an element, like this: . An attribute does not always have a value, it can be blank!
Examples
a[href] selects all <a> elements that have a href="anything" attribute.
[type] selects all elements that have a type="anything". attribute
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */
/*

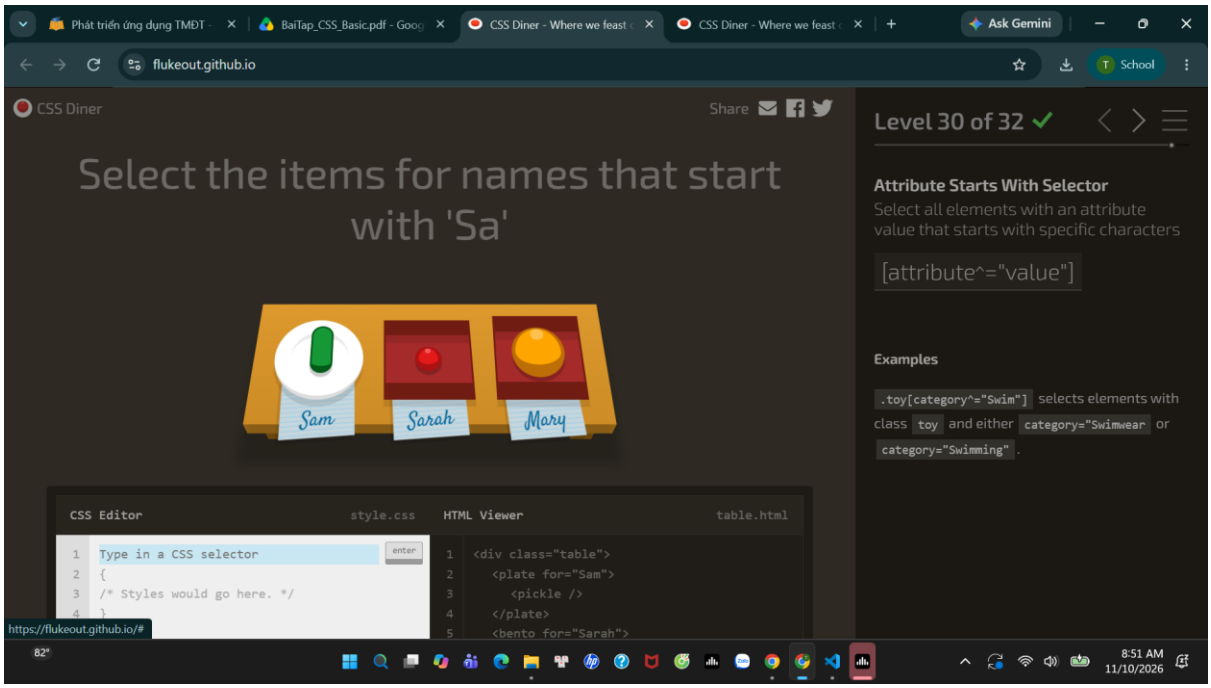
<bento>
<apple class="small" />
</bento>
<apple for="Ethan" />
<plate for="Alice">
<pickle />
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select the plates for someone
Sarah
Luke
Steve
Level 28 of 32
Attribute Selector
Select all elements that have a specific attribute
A[attribute]
Combine the attribute selector with another selector (like the tag name selector) by adding it to the end.
Examples
[value] selects all elements that have a value="anything" attribute.
a[href] selects all <a> elements that have a href="anything" attribute.
input[disabled] selects all <input> elements with the disabled attribute
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

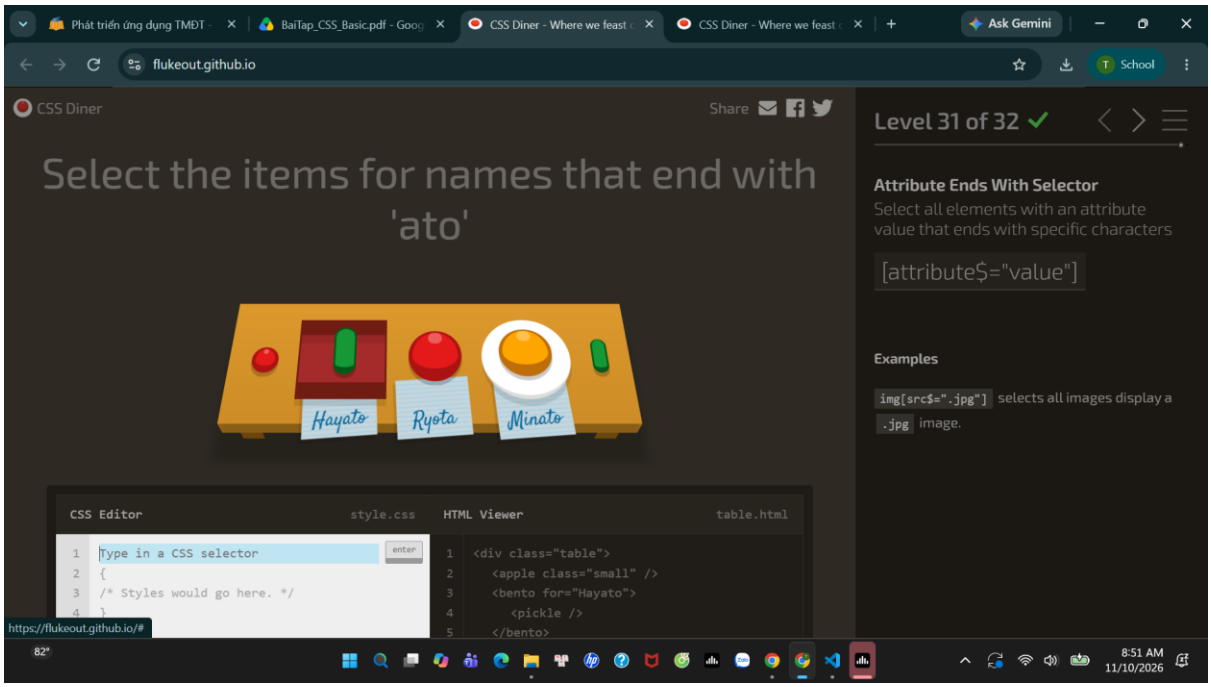
<plate for="Sarah">
<pickle />
</plate>
<plate for="Luke">
<apple />
</plate>
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Select Vitaly's meal
Alexei
Albina
Vitaly
Level 29 of 32
Attribute Value Selector
Select all elements that have a specific attribute value
[attribute="value"]
Attribute selectors are case sensitive, each character must match exactly.
Examples
input[type="checkbox"] selects all checkbox input elements.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

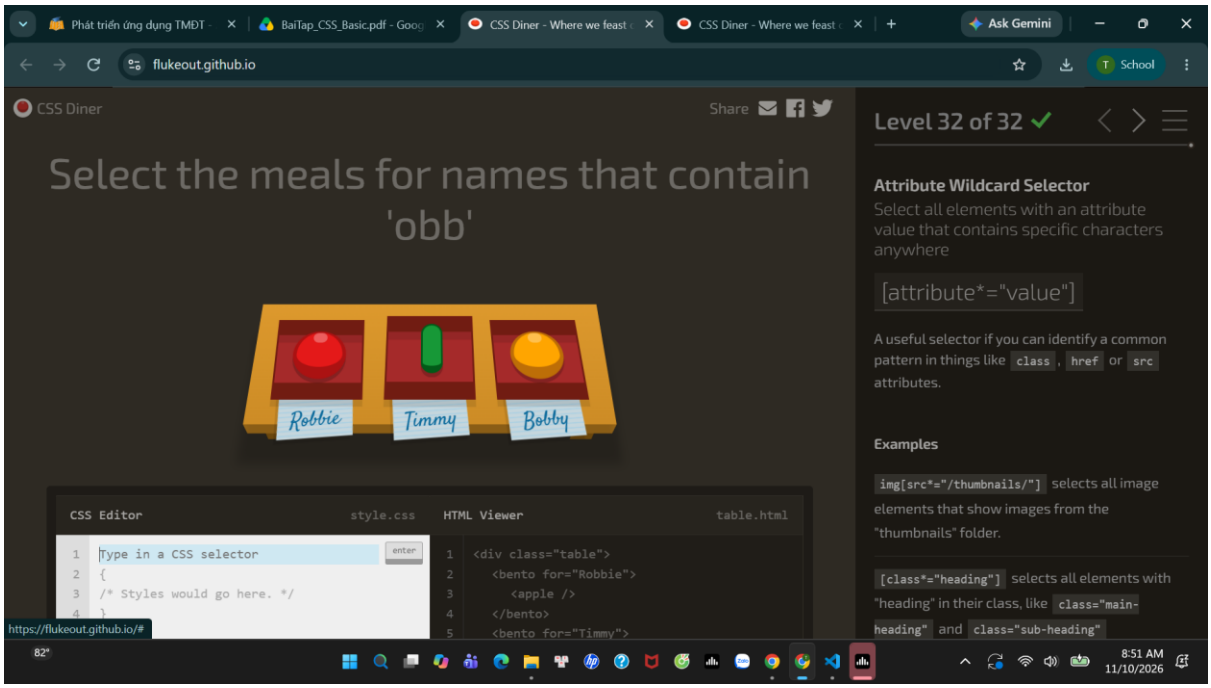
<apple for="Alexei" />
<bento for="Albina">
<apple />
</bento>
<bento for="Vitaly">
<orange />
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 30 of 32
Select the items for names that start with 'Sa'
Sam
Sarah
Mary
Attribute Starts With Selector
Select all elements with an attribute value that starts with specific characters
[attribute^="value"]
Examples
.toy[category^="Swim"] selects elements with class toy and either category="Swimwear" or category="Swimming".
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

<plate for="Sam">
<pickle />
</plate>
<bento for="Sarah">
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Diner - Where we feast
CSS Diner - Where we feast
Ask Gemini
flukeout.github.io
School
CSS Diner
Share
Level 31 of 32
Select the items for names that end with 'ato'
Hayato
Ryota
Minato
Attribute Ends With Selector
Select all elements with an attribute value that ends with specific characters
[attribute$="value"]
Examples
img[src$=".jpg"] selects all images display a .jpg image.
CSS Editor
style.css
HTML Viewer
table.html
Type in a CSS selector
enter
/* Styles would go here. */

<apple class="small" />
<bento for="Hayato">
<pickle />
</bento>
https://flukeout.github.io/#
82°
8:51 AM
11/10/2026

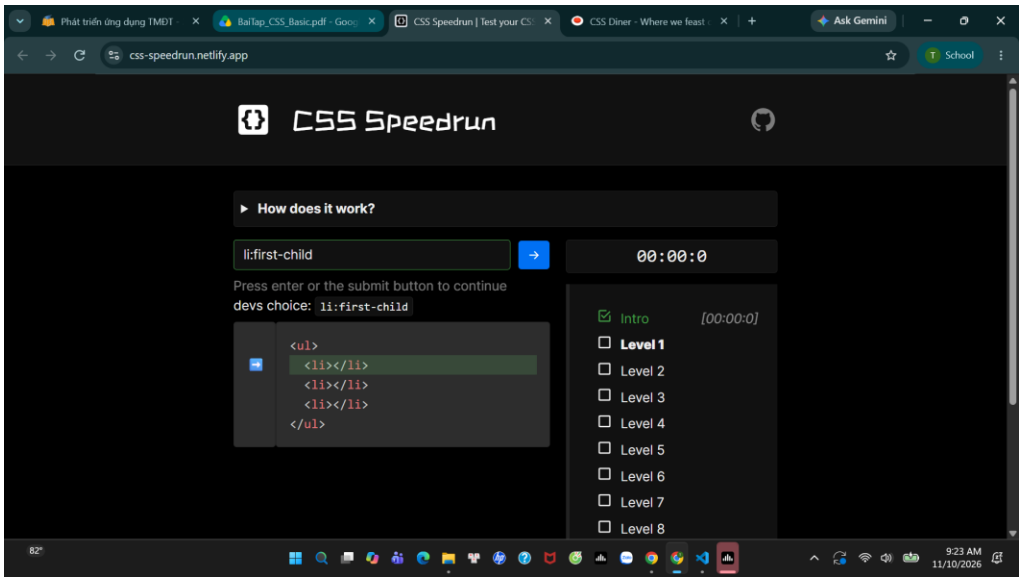


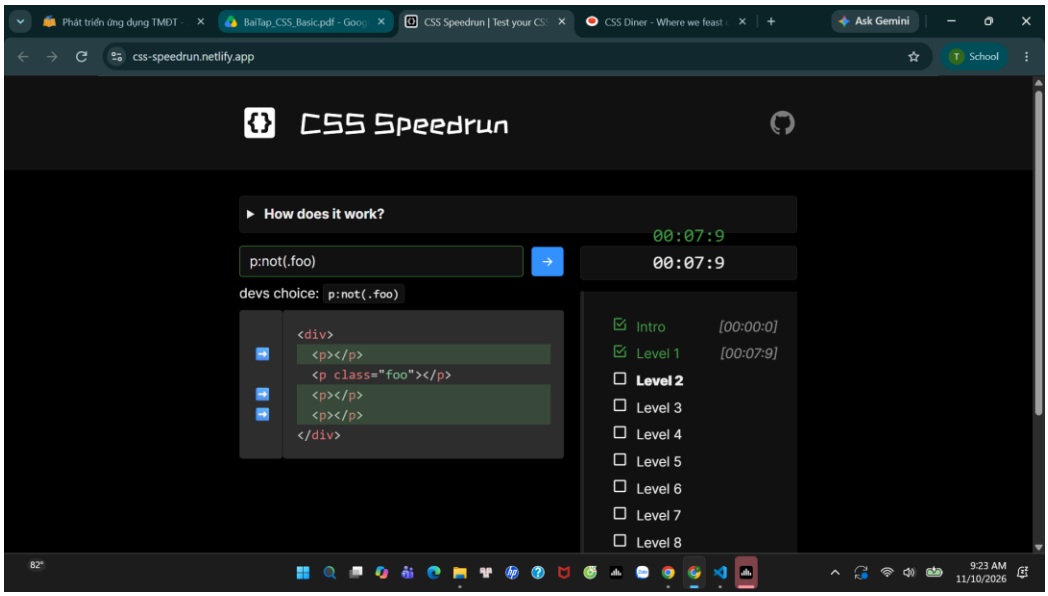

**Đáp án cho các level:**

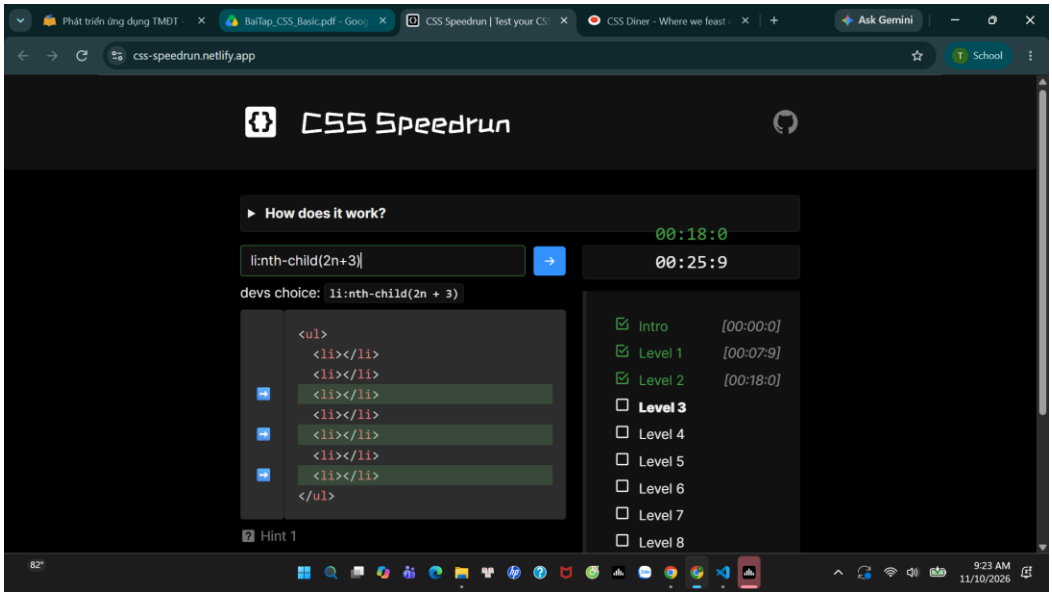
| Level | Đáp án | Level | Đáp án |
|---|---|---|---|
| 1 | plate | 17 | .small:last-child |
| 2 | bento | 18 | plate:nth-child(3) |
| 3 | #fancy | 19 | bento:nth-last-child(3) |
| 4 | plate apple | 20 | apple:first-of-type |
| 5 | #fancy pickle | 21 | plate:nth-of-type(even) |
| 6 | .small | 22 | plate:nth-of-type(2n+3) |
| 7 | orange.small | 23 | apple:only-of-type |
| 8 | bento orange.small | 24 | apple:last-of-type, orange:last-of-type |
| 9 | plate, bento | 25 | bento:empty |
| 10 | * | 26 | apple:not(.small) |
| 11 | plate * | 27 | [for] |
| 12 | plate + apple | 28 | plate[for] |

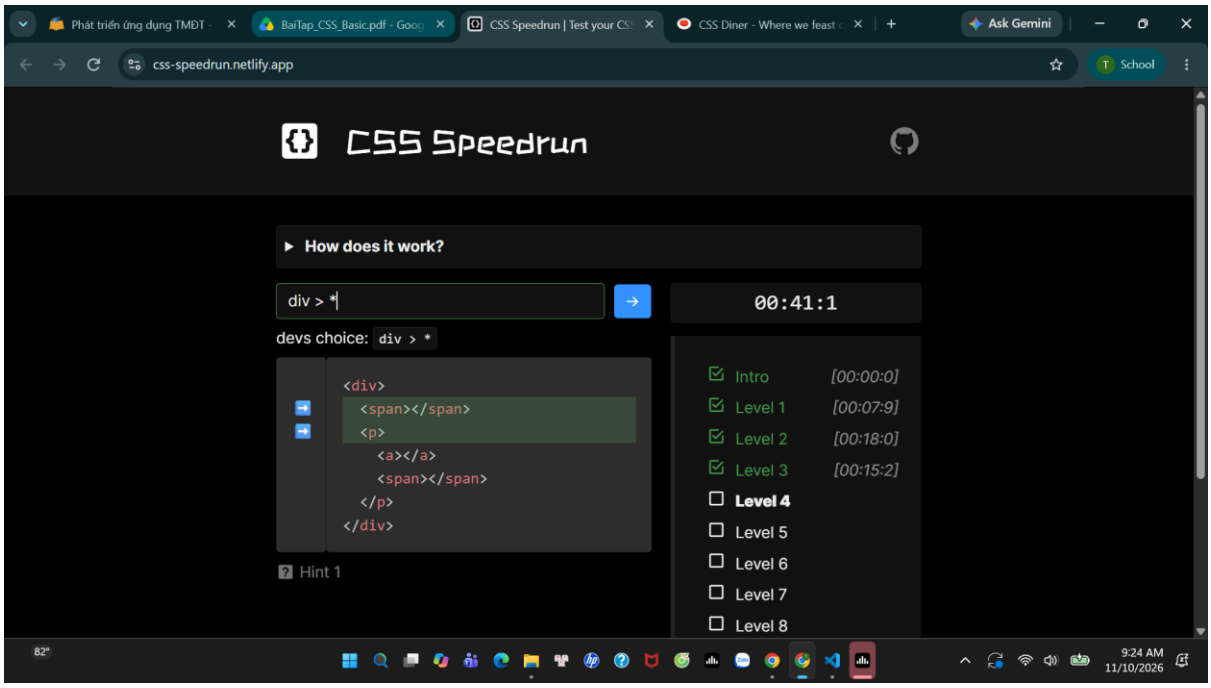
| Level | Đáp án | Level | Đáp án |
|---|---|---|---|
| 13 | bento ~ pickle | 29 | [for="Vitaly"] |
| 14 | plate > apple | 30 | [for^="Sa"] |
| 15 | orange:first-child | 31 | [for$="ato"] |
| 16 | plate :only-child | 32 | [for*="obb"] |

## 1.2 CSS Speedrun



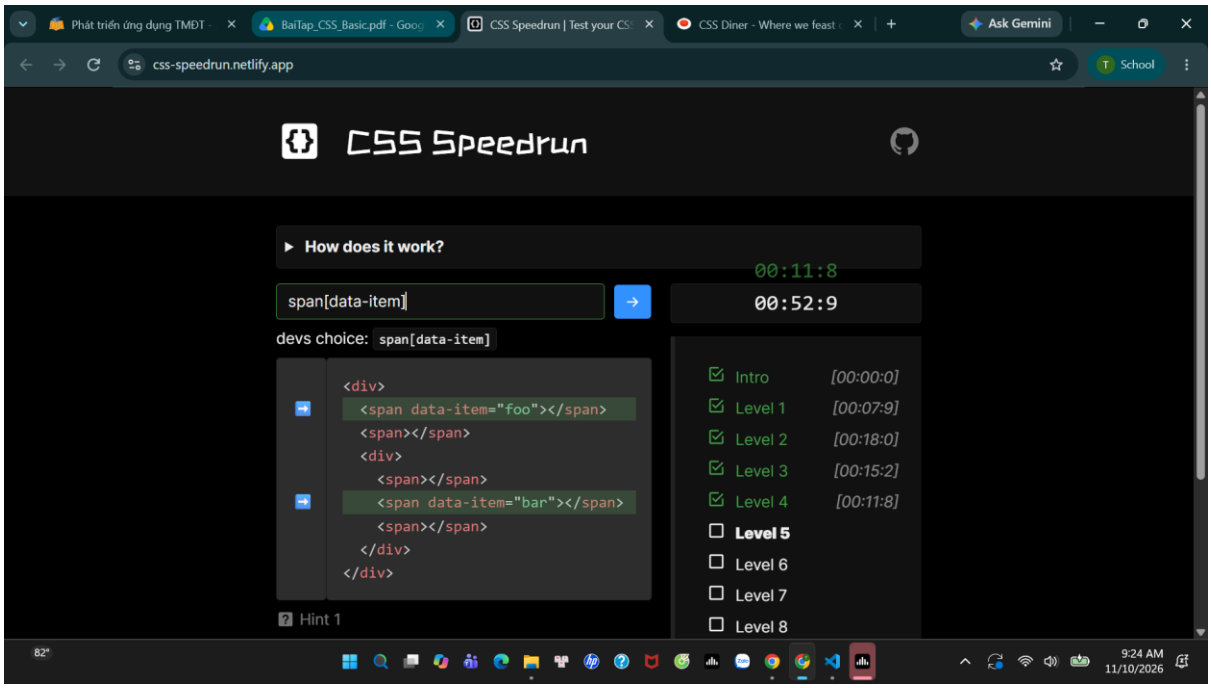




Phát triển ứng dụng TMĐT -
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
CSS Speedrun
How does it work?
00:18:0
li:nth-child(2n+3)
00:25:9
devs choice: li:nth-child(2n + 3)
<ul>
<li></li>
<li></li>
<li></li>
<li></li>
<li></li>
<li></li>
<li></li>
</ul>
Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3
Level 4
Level 5
Level 6
Level 7
Level 8
Hint 1
82°
9:23 AM
11/10/2026

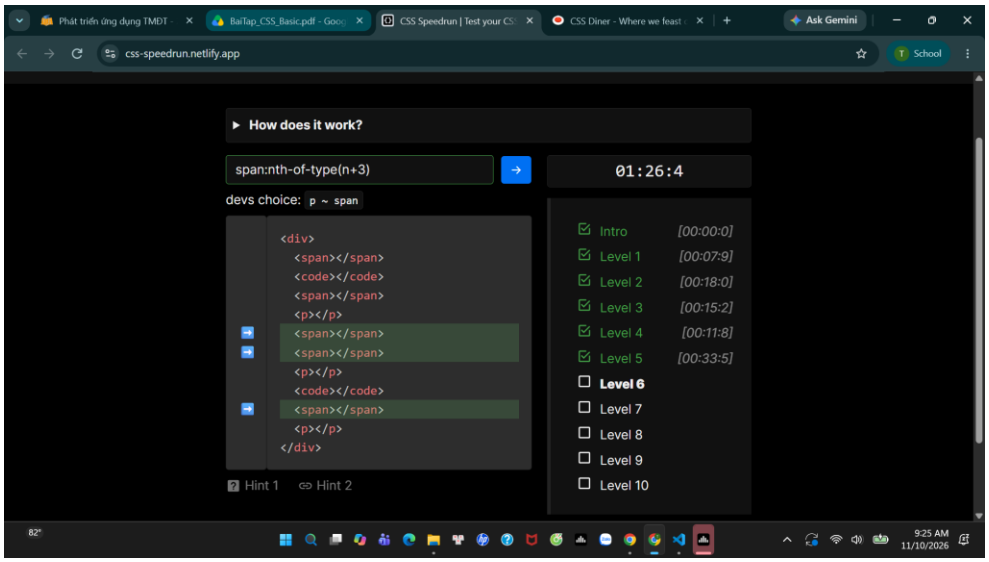

Phát triển ứng dụng TMĐT -
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
CSS Speedrun
How does it work?
div > *
00:41:1
devs choice: div > *

<a></a>

Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4
Level 5
Level 6
Level 7
Level 8
Hint 1
82°
9:24 AM
11/10/2026


Phát triển ứng dụng TMĐT -
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
CSS Speedrun
How does it work?
00:11:8
span[data-item]
00:52:9
devs choice: span[data-item]

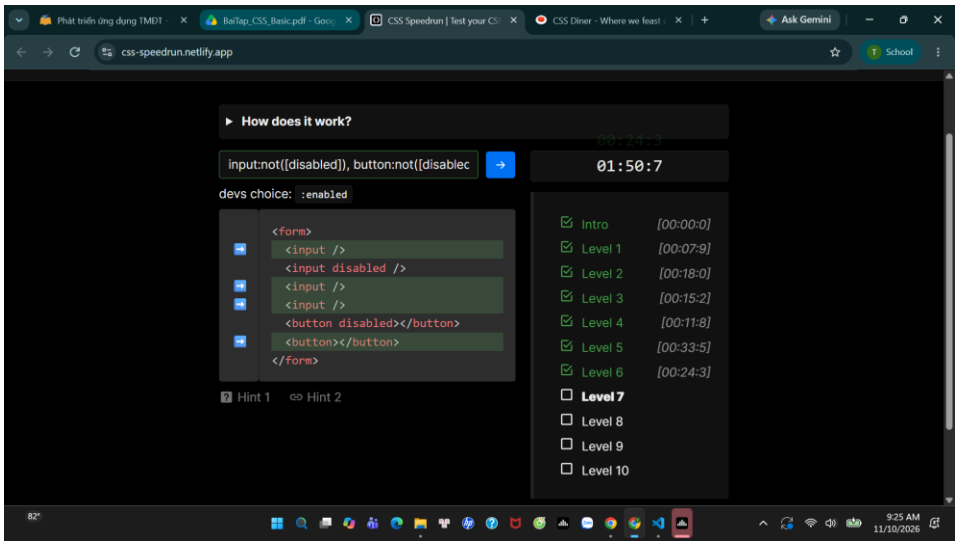
Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4 [00:11:8]
Level 5
Level 6
Level 7
Level 8
Hint 1
82°
9:24 AM
11/10/2026

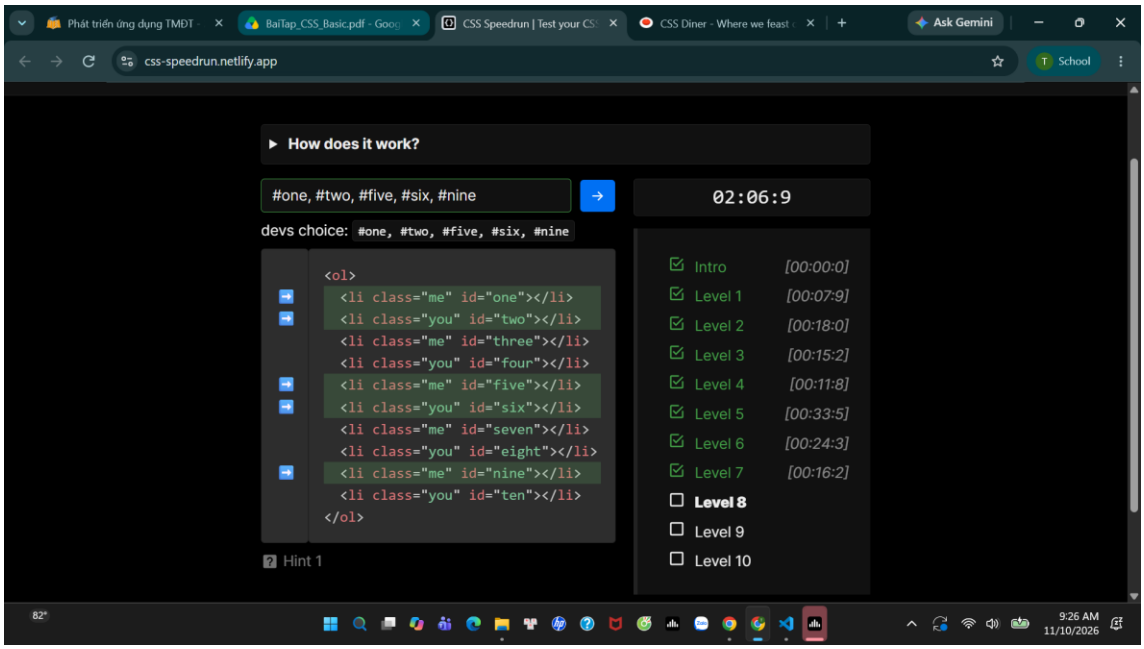

Phát triển ứng dụng TMĐT -
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
How does it work?
span:nth-of-type(n+3)
01:26:4
devs choice: p ~ span

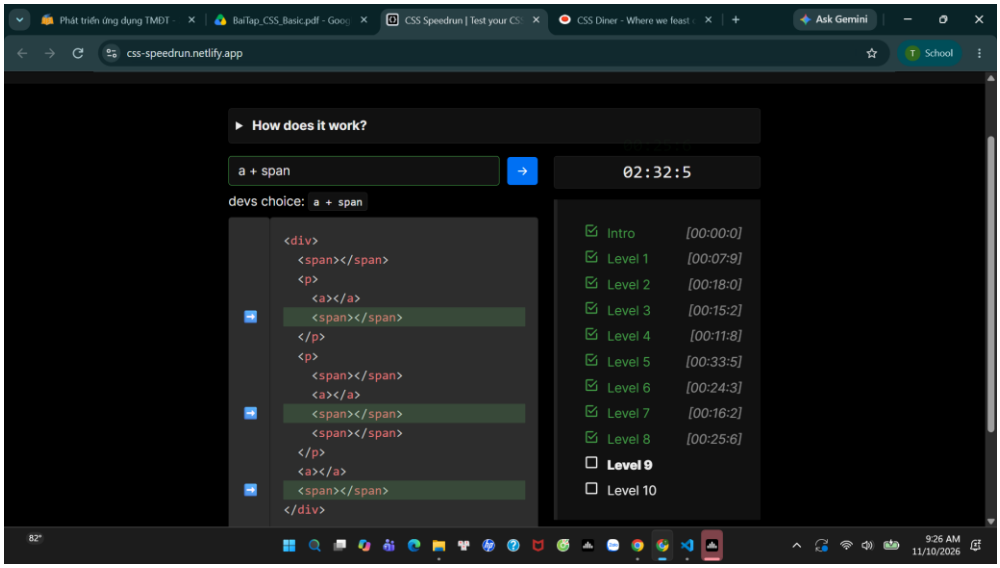
<code></code>

<code></code>

Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4 [00:11:8]
Level 5 [00:33:5]
Level 6
Level 7
Level 8
Level 9
Level 10
Hint 1
Hint 2
82°
9:25 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
How does it work?
input:not([disabled]), button:not([disablec
01:50:7
devs choice: :enabled
<form>
<input />
<input disabled />
<input />
<input />
<button disabled></button>
<button></button>
</form>
Hint 1
Hint 2
Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4 [00:11:8]
Level 5 [00:33:5]
Level 6 [00:24:3]
Level 7
Level 8
Level 9
Level 10
82°
9:25 AM
11/10/2026


Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
How does it work?
#one, #two, #five, #six, #nine
02:06:9
devs choice: #one, #two, #five, #six, #nine
<ol>
<li class="me" id="one"></li>
<li class="you" id="two"></li>
<li class="me" id="three"></li>
<li class="you" id="four"></li>
<li class="me" id="five"></li>
<li class="you" id="six"></li>
<li class="me" id="seven"></li>
<li class="you" id="eight"></li>
<li class="me" id="nine"></li>
<li class="you" id="ten"></li>
</ol>
Hint 1
Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4 [00:11:8]
Level 5 [00:33:5]
Level 6 [00:24:3]
Level 7 [00:16:2]
Level 8
Level 9
Level 10
82°
9:26 AM
11/10/2026

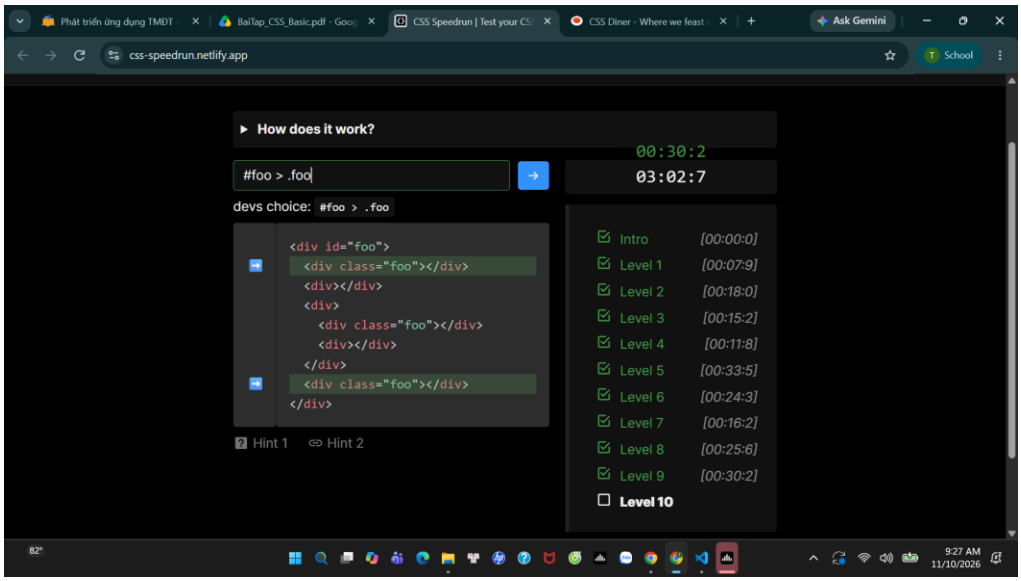

Phát triển ứng dụng TMĐT
BaiTap_CSS_Basic.pdf - Goog
CSS Speedrun | Test your CS
CSS Diner - Where we feast
Ask Gemini
css-speedrun.netlify.app
School
How does it work?
a + span
02:32:5
devs choice: a + span

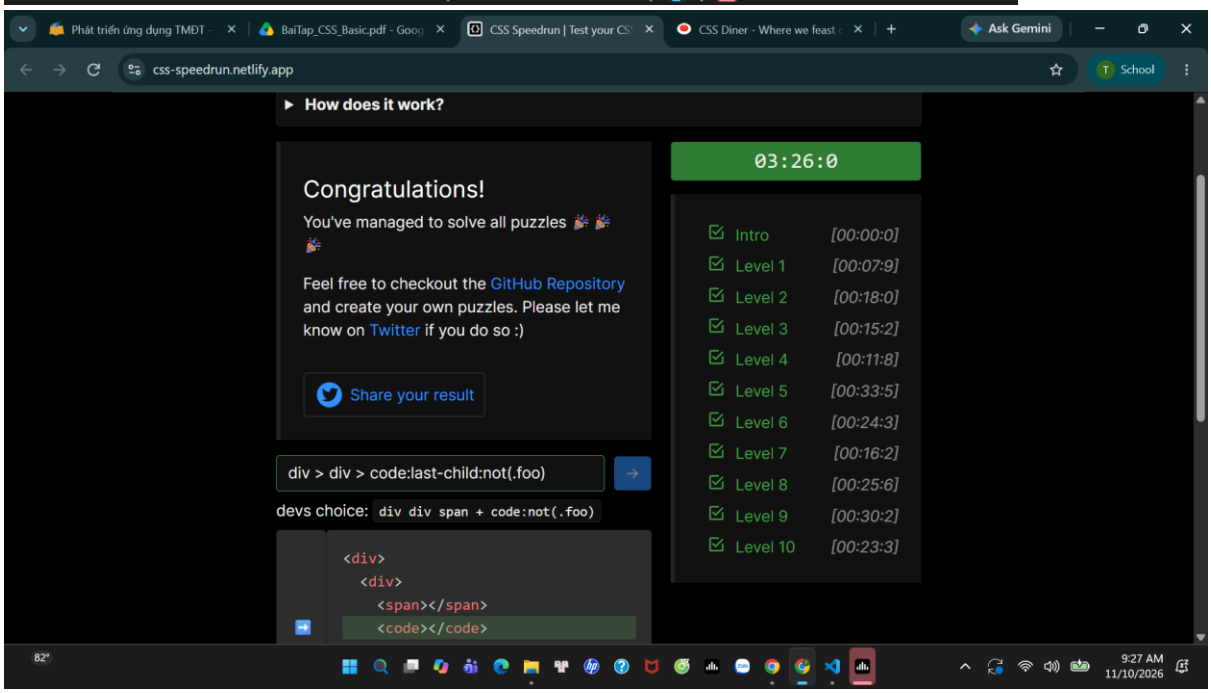
<a></a>

<a></a>

<a></a>

Intro [00:00:0]
Level 1 [00:07:9]
Level 2 [00:18:0]
Level 3 [00:15:2]
Level 4 [00:11:8]
Level 5 [00:33:5]
Level 6 [00:24:3]
Level 7 [00:16:2]
Level 8 [00:25:6]
Level 9
Level 10
82°
9:26 AM
11/10/2026

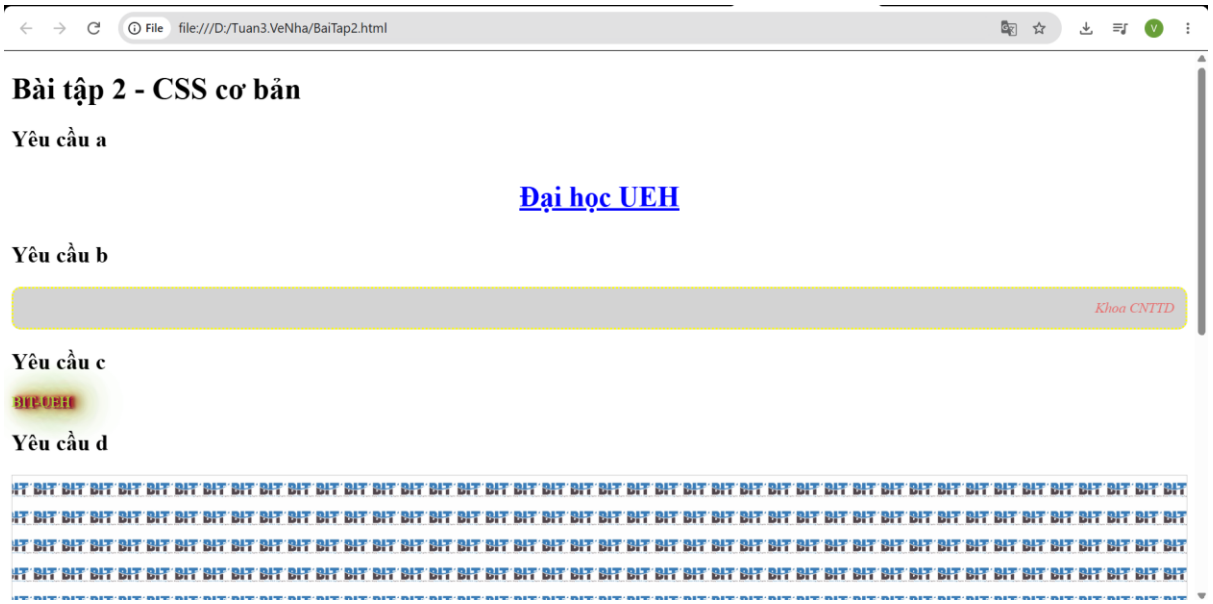


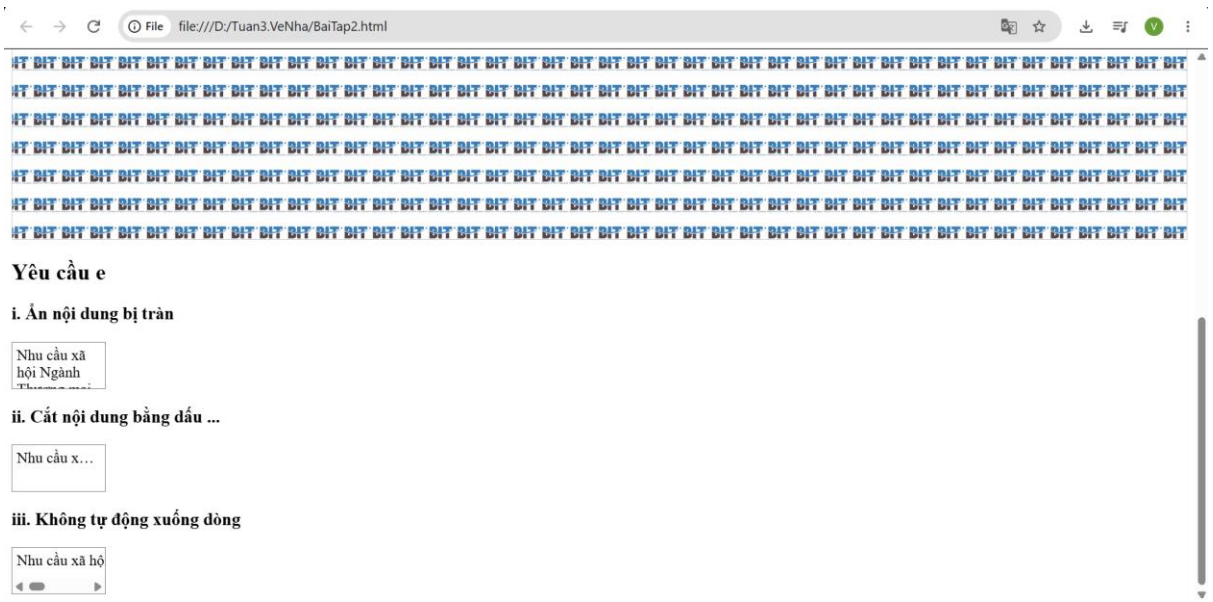




| Level | Đáp án | Level | Đáp án |
|---|---|---|---|
| Intro | li:first-child | 6 | input:not([disabled]), button:not([disabled]) |
| 1 | p:not(.foo) | 7 | #one, #two, #five, #six, #nine |
| 2 | li:nth-child(2n+3) | 8 | a + span |
| 3 | div > * | 9 | #foo > .foo |

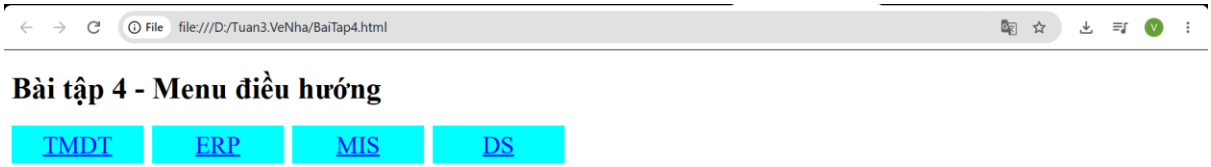
| Level | Đáp án | Level | Đáp án |
|---|---|---|---|
| 4 | span[data-item] | 10 | div > div > code:last-child:not(.foo) |
| 5 | span:nth-of-type(n+3) | | |

## 2. Bài tập 2

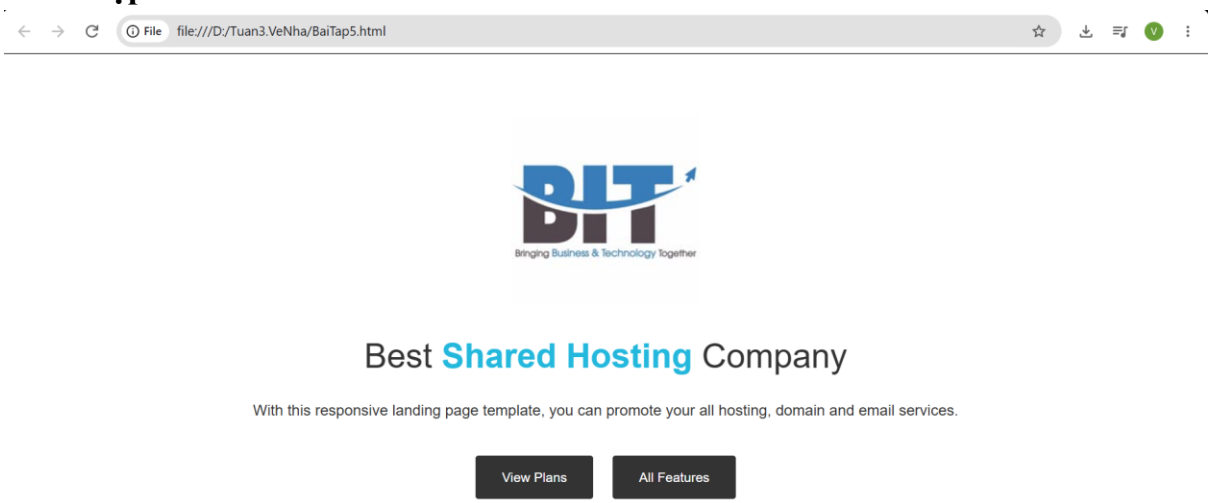


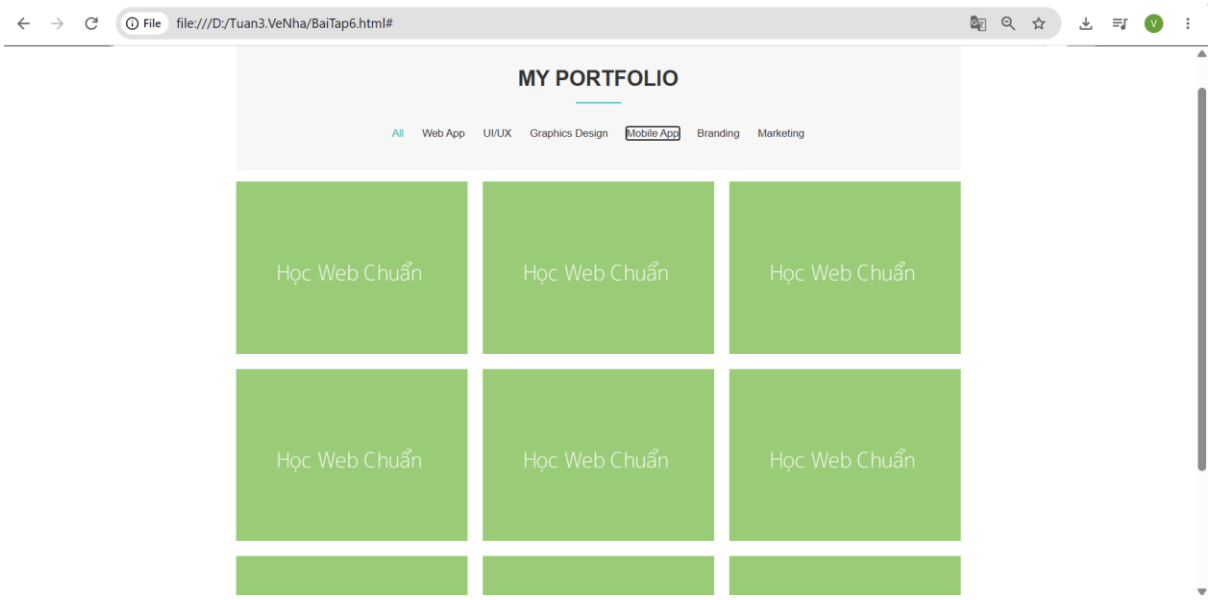
## 4. Bài tập 4



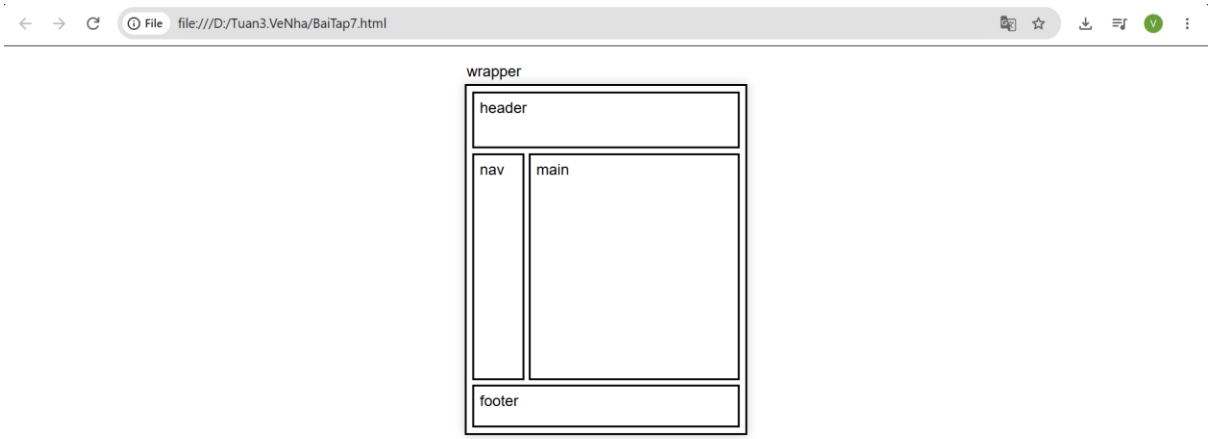

## 5. Bài tập 5



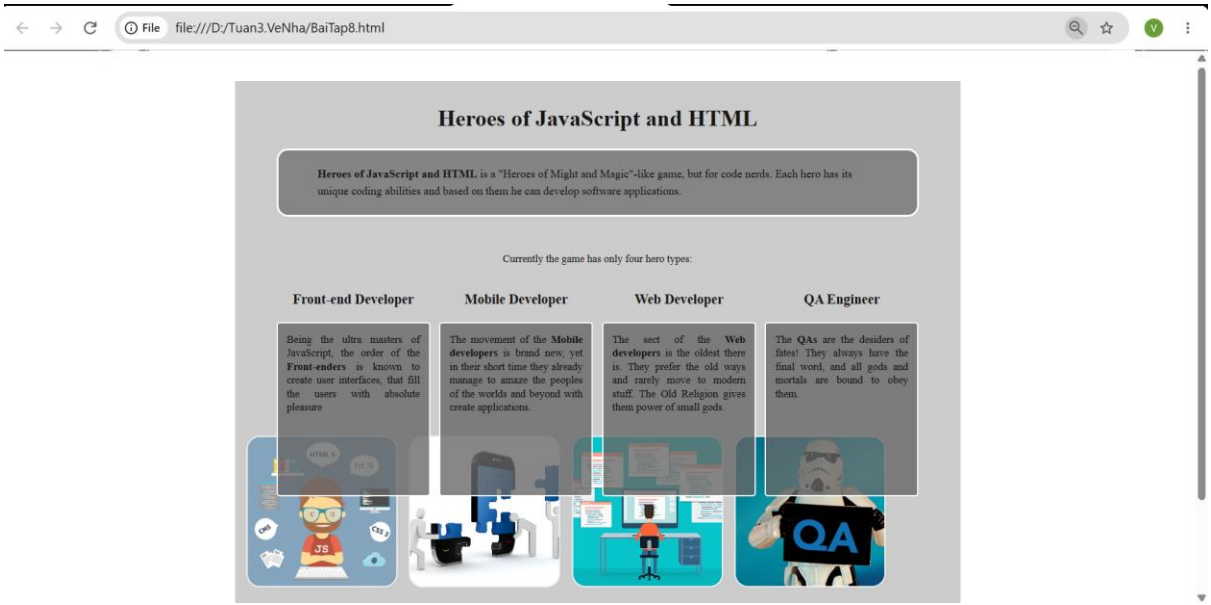

## 6. Bài tập 6



## 7. Bài tập 7

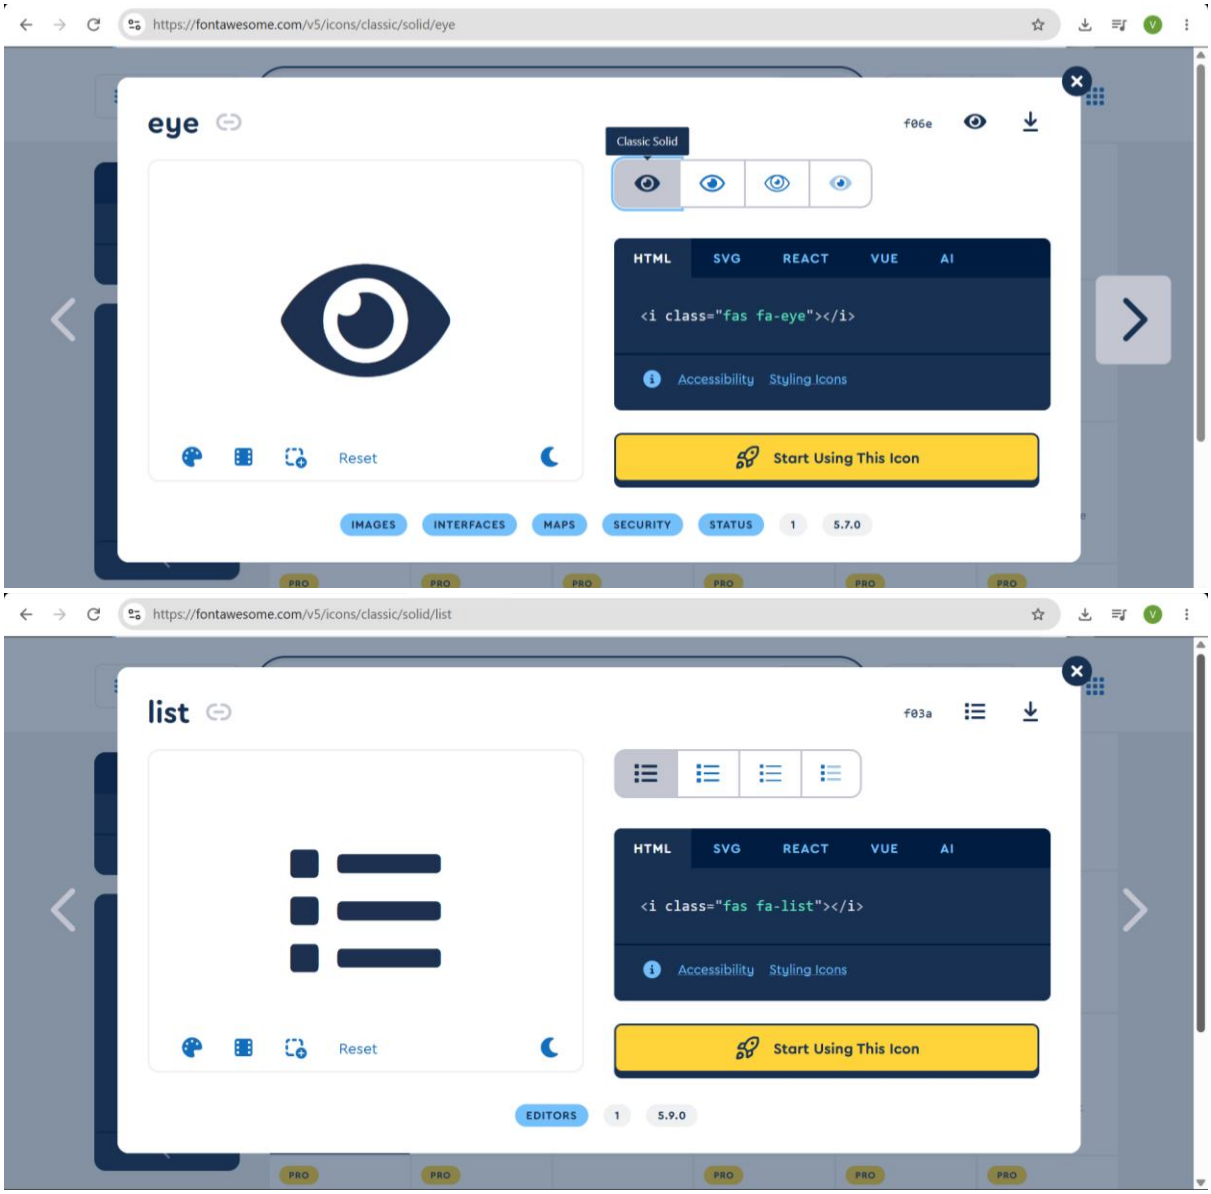



## 8. Bài tập 8




## 9. Bài tập 9

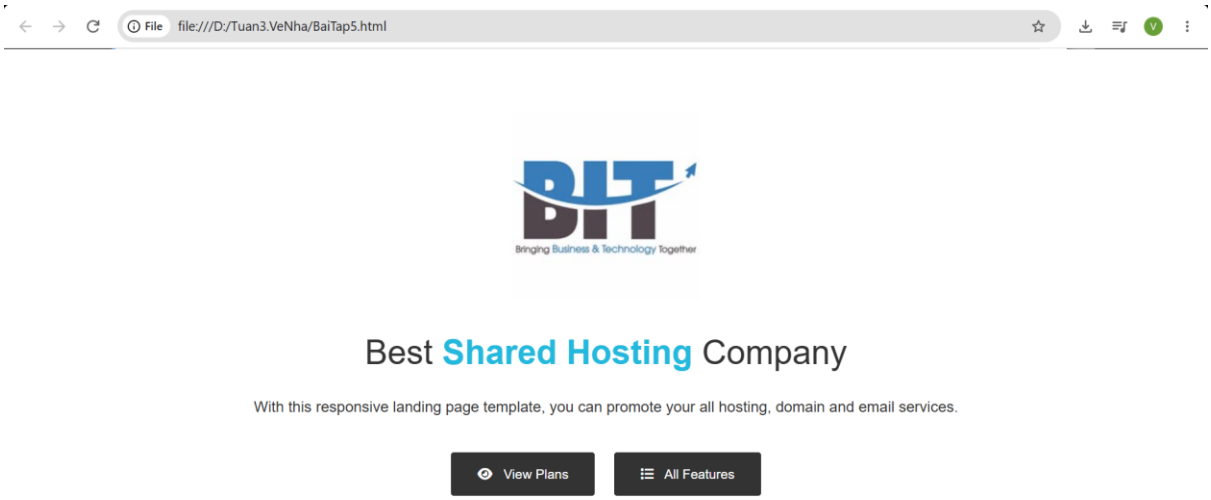
Em đã thêm 2 icon sau vào Bài tập 5:


https://fontawesome.com/v5/icons/classic/solid/eye
eye
f06e
Classic Solid
HTML
SVG
REACT
VUE
AI

Accessibility
Styling Icons
Reset
Start Using This Icon
IMAGES
INTERFACES
MAPS
SECURITY
STATUS
1
5.7.0
https://fontawesome.com/v5/icons/classic/solid/list
list
f03a
HTML
SVG
REACT
VUE
AI

Accessibility
Styling Icons
Reset
Start Using This Icon
EDITORS
1
5.9.0

Kết quả:


File
file:///D:/Tuan3.VeNha/BaiTap5.html
BIT
Bringing Business & Technology Together
Best Shared Hosting Company
With this responsive landing page template, you can promote your all hosting, domain and email services.
View Plans
All Features