


- ✔ **Video:** Examples and Intuitions II
10 min
 - ✔ **Reading:** Examples and Intuitions II
3 min
 - ✔ **Video:** Multiclass Classification
3 min
 - ✔ **Reading:** Multiclass Classification
3 min
- Review**
- ✔ **Reading:** Lecture Slides
10 min
 - ✔ **Quiz:** Neural Networks: Representation
5 questions
 - 🔒 **Programming Assignment:**
Multi-class Classification and
Neural Networks
3h

Multiclass Classification

To classify data into multiple classes, we let our hypothesis function return a vector of values. Say we wanted to classify our data into one of four categories. We will use the following example to see how this classification is done. This algorithm takes as input an image and classifies it accordingly:

Multiple output units: One-vs-all.

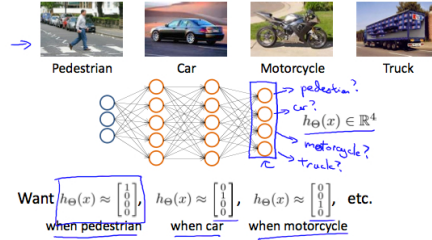

Andrew Ng

We can define our set of resulting classes as y :

רור רור רור רור

[0] [0] [0] [1]

Each $y^{(i)}$ represents a different image corresponding to either a car, pedestrian, truck, or motorcycle. The inner layers, each provide us with some new information which leads to our final hypothesis function. The setup looks like:

$$\begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} \rightarrow \begin{bmatrix} a_0^{(2)} \\ a_1^{(2)} \\ a_2^{(2)} \\ \vdots \end{bmatrix} \rightarrow \begin{bmatrix} a_0^{(3)} \\ a_1^{(3)} \\ a_2^{(3)} \\ \vdots \end{bmatrix} \rightarrow \dots \rightarrow \begin{bmatrix} h_\theta(x)_1 \\ h_\theta(x)_2 \\ h_\theta(x)_3 \\ h_\theta(x)_4 \end{bmatrix}$$

Our resulting hypothesis for one set of inputs may look like:

$$h_{\Theta}(x) = \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$$

In which case our resulting class is the third one down, or $h_{\Theta}(x)_3$, which represents the motorcycle.

✓ Complete