

C5W3L03 Beam Search

Beam search algorithm has hyperparameter called B (beam width), it is responsible for defining how many options beam search will look at

Y_hat is softmax among all possible vocabulary choices, but what's kept in memory is top 3 options defined as B=3

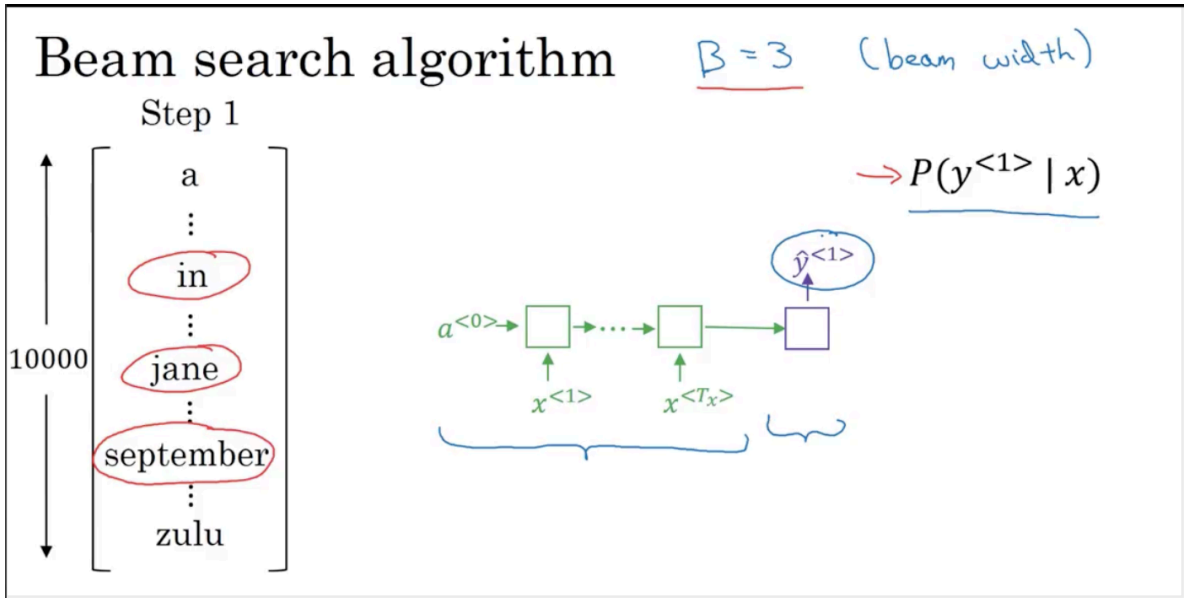

For every option that is being kept in memory we try to predict another word, thus looking at 3 * 10,000 possible combinations
Then we will take into account another top 3 combinations and forget about not useful ones (in the slide below we reject «September» so called branch or beam)

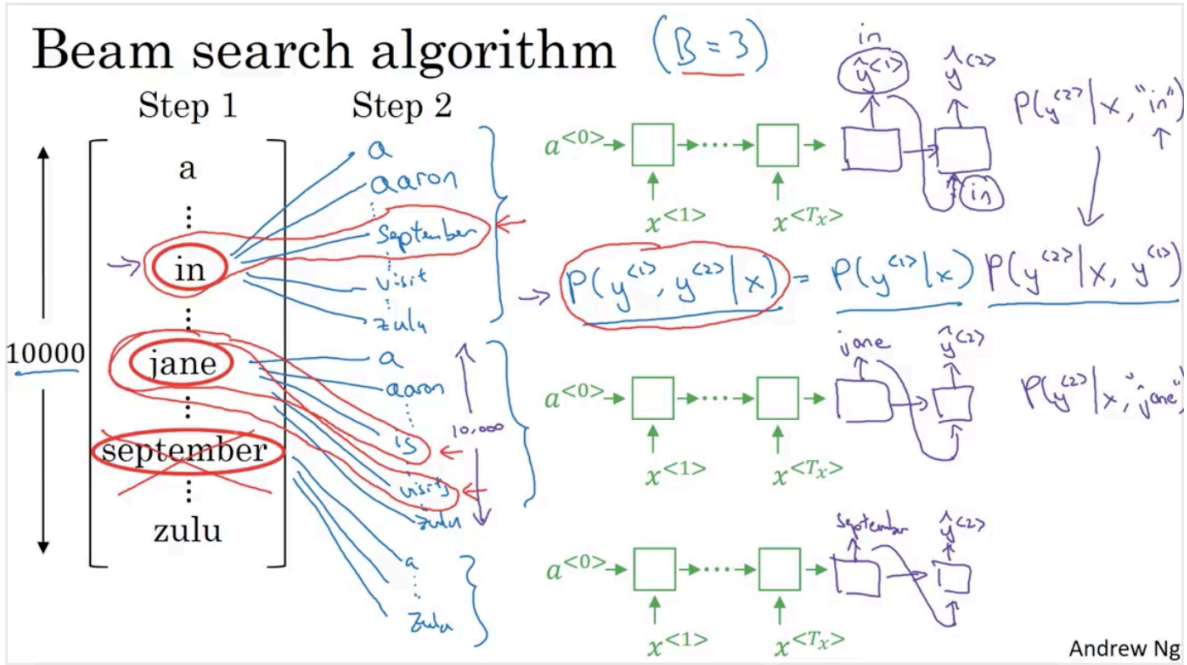

Another step of Beam search
Assume B = b
Note: if b=1 than Beam search becomes greedy search because we are not

taking into account our memorised before so called top b

