Zomato Restaurant Dataset Analysis

Data Science Internship Project

1. Project Overview

This project explores restaurant listings to understand ratings, cuisine preferences, location hotspots, and restaurant prices. Python, Pandas, Matplotlib and Seaborn were used for data cleaning and visualization.

2. Dataset and Cleaning

The original dataset contains 56,252 rows and 13 columns. After duplicate removal, 40,549 rows remain. Text fields were trimmed, rating values were converted to numeric, and price and vote fields were converted where possible. Missing values were retained where needed for analysis rather than inventing replacement values.

3. Key Findings

• Average available restaurant rating: 3.71 out of 5.

• Median listed cost for two: 450 (dataset currency units).


• Location with the most listings: BTM.

• Most frequently listed cuisine category: North Indian.


• The rating distribution is concentrated mainly around the middle-to-high range.

4. Visual Analysis


Restaurant Rating Distribution

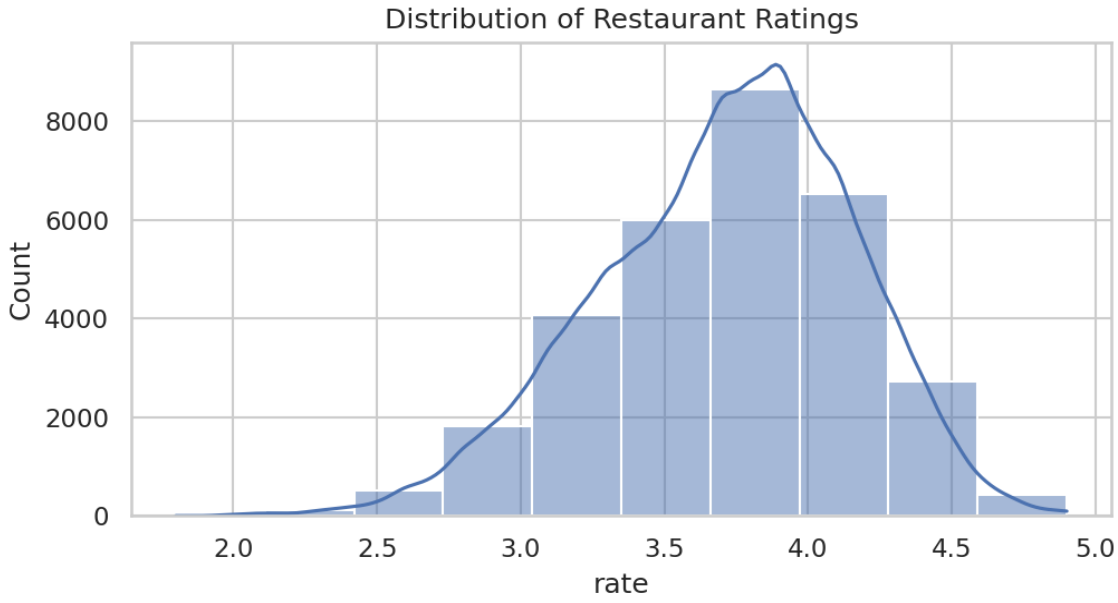

Restaurant Location Hotspots

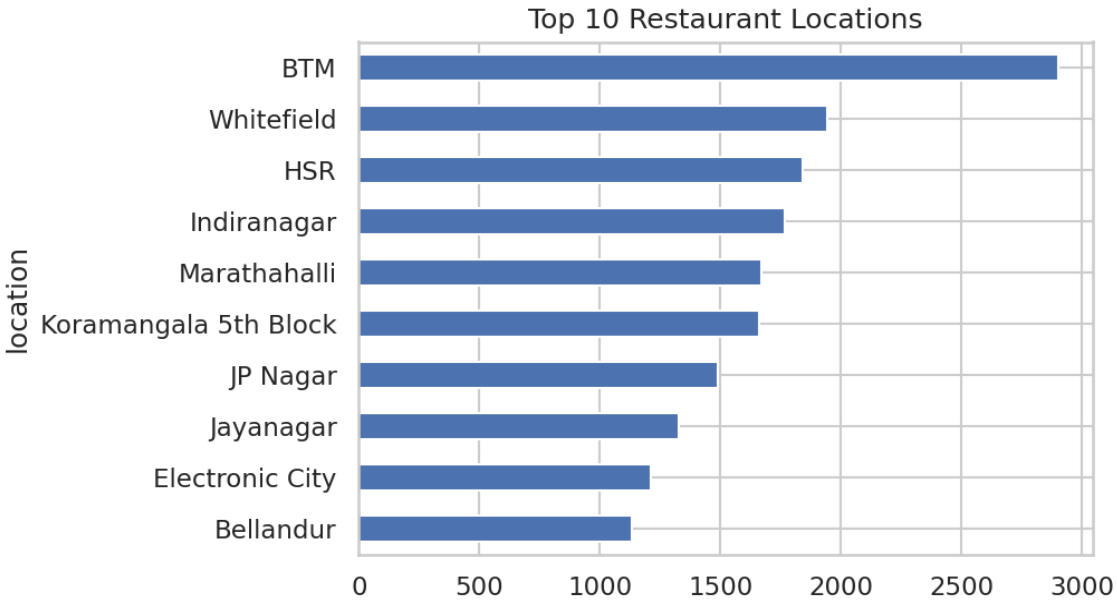

Restaurant Price vs Rating

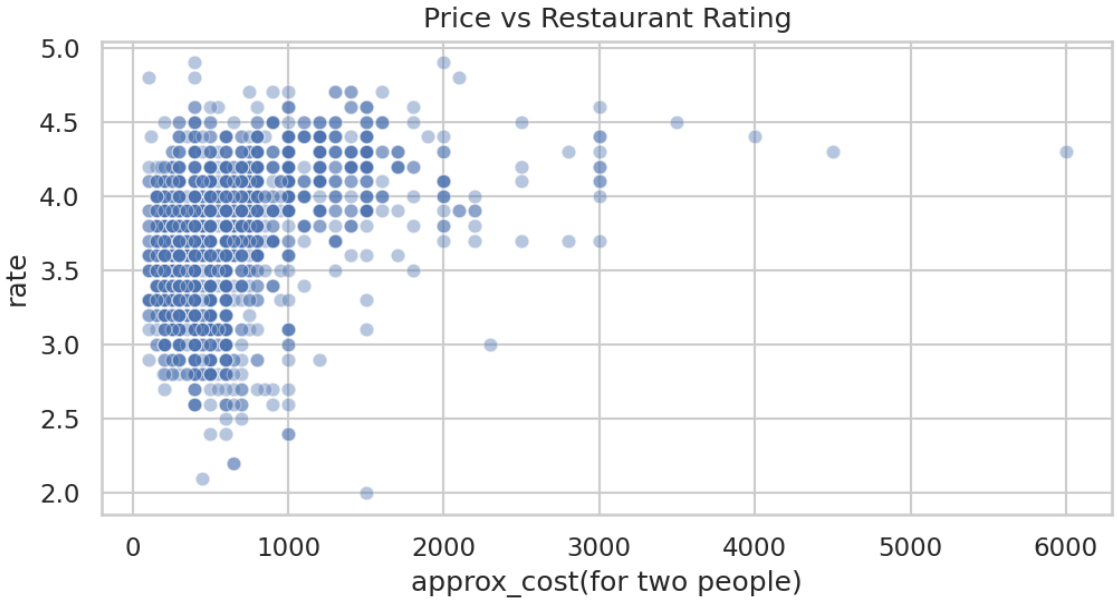

5. Business Recommendations

Restaurant partnerships

Partner with well-rated restaurants to strengthen selection and trust.

Cuisine-based discovery

Organize listings by cuisine and highlight popular dishes.

Location-based promotions

Use location hotspots to guide partnership and promotion efforts.

Price-based recommendations

Provide budget, mid-range and premium filters for different customers.

Restaurant quality improvement

Encourage restaurants to monitor feedback and improve service.

6. Conclusion

This analysis demonstrates how restaurant listings can support data-informed decisions about restaurant discovery, pricing and partnerships. The findings describe this dataset and should not be treated as proof of customer preferences across every market. The word cloud, when included in the notebook, represents liked-dish descriptions rather than individual customer reviews.