
1. Installation

In this exercise you will install the LaBB-CAT software.

> **Note**
>
> You should only follow these steps if you will be running LaBB-CAT on your own computer.
> If you are using a LaBB-CAT server that's already been installed for you elsewhere, you can skip with exercise.


After this you will have an empty LaBB-CAT database set up ready to set up.

1. You have a file called *install-labbcat.jar* - double click this file to start the installer.
   If you are using OS X, you may see a message that the file can't be opened:

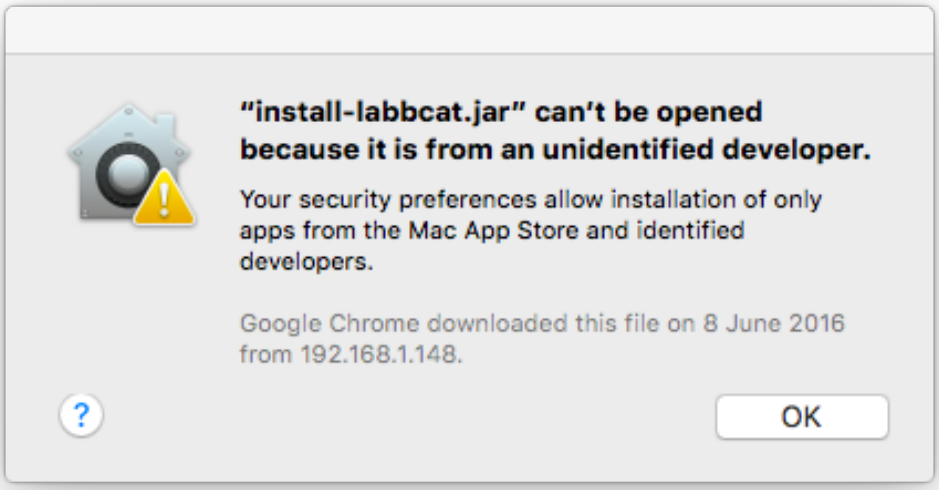


   If this happens:


   1. Click the Apple icon in the top left corner of the screen.
   2. Select *System Preferences*
   3. Click *Security & Privacy*
      Near the bottom it says "*install-labbcat.jar' ' was blocked from opening because it is not from an identified developer.*

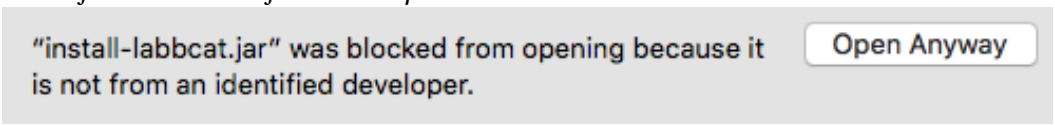

4. Click *Open Anyway*
   You may see another warning about the program being downloaded from the internet

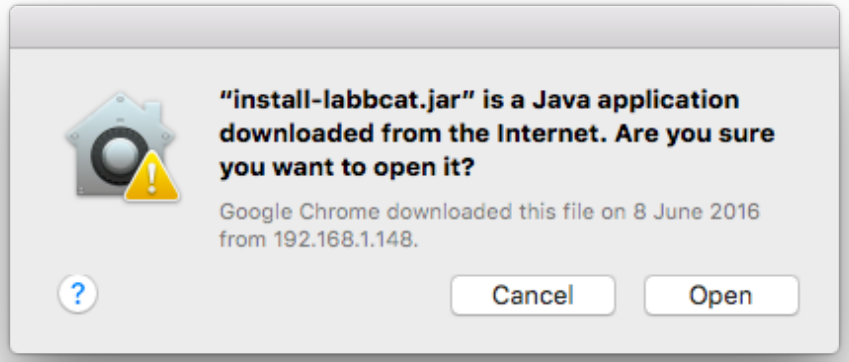

5. Click *Open*

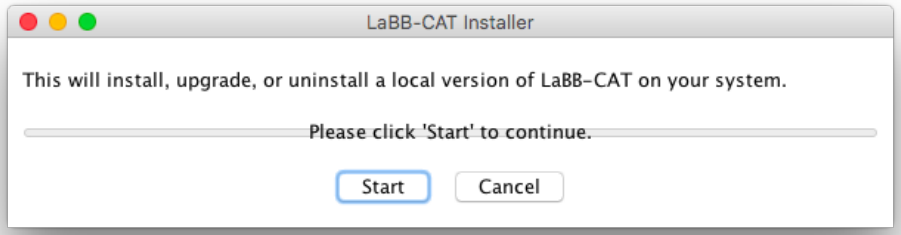

2. Click *Start*
   You will see the progress bar move as files are installed. Once this is finished, you'll see a message saying *Installation complete*.
3. Click *Finished* to close the installer.

The software is now installed. LaBB-CAT is a browser-based system, which means that it works as a mini web server on your computer, and you need to access it using your web browser.

Each time you want to use LaBB-CAT, you must start it up, and which you've finished, you close it down again.

To start LaBB-CAT, click the LaBB-CAT icon in your applications area.

- On Windows, open the *Start* menu and type LaBB-CAT.
- On OS X you will find LaBB-CAT in your *Applications* folder.

A window called “LaBB-CAT Server” will open, and after a short delay, your default web browser will open on a page called “LaBB-CAT” (The first time only, this page will initially display the LaBB-CAT licence).

Now that the software is installed, we will set up a basic structure for receiving data, in the following exercise.