

http://localhost:3000/



92

100

90

Performance

Accessibility

Best Practices **SEO**




Performance

Values are estimated and may vary. The <u>performance score</u> <u>is calculated</u> directly from these metrics. <u>See calculator.</u>

0-49

50-89

90-100



METRICS Expand view

First Contentful Paint

 $0.3 \, s$

Largest Contentful Paint

0.3 s

Total Blocking Time


0 ms

Cumulative Layout Shift

0.059

Speed Index

0.3 s







about:blank 1/23

Show audits relevant to: All FCP LCP TBT CLS

DIAGNOSTICS

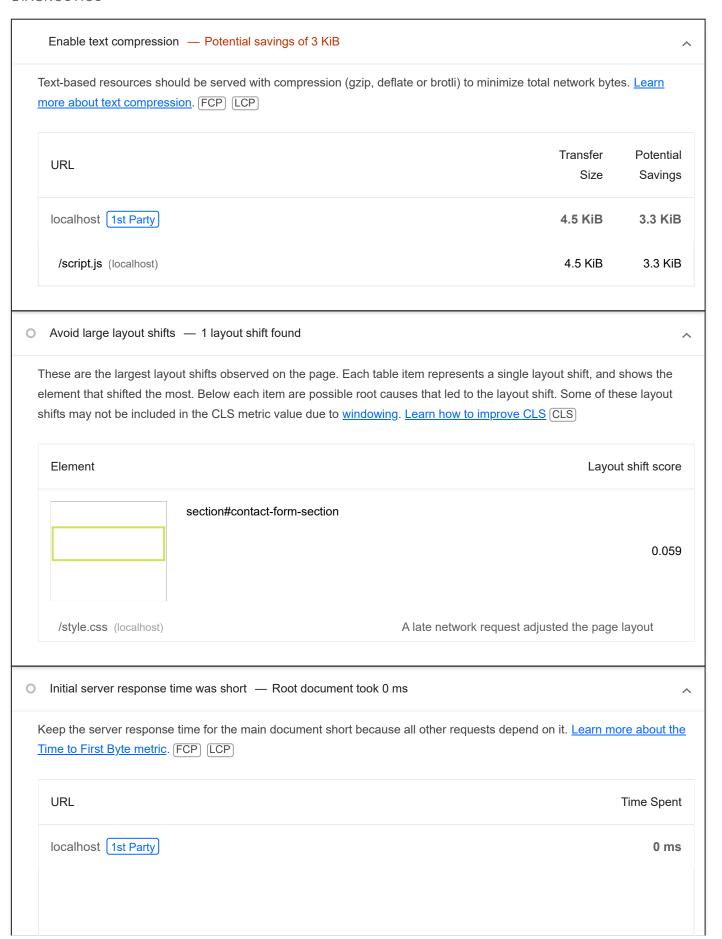

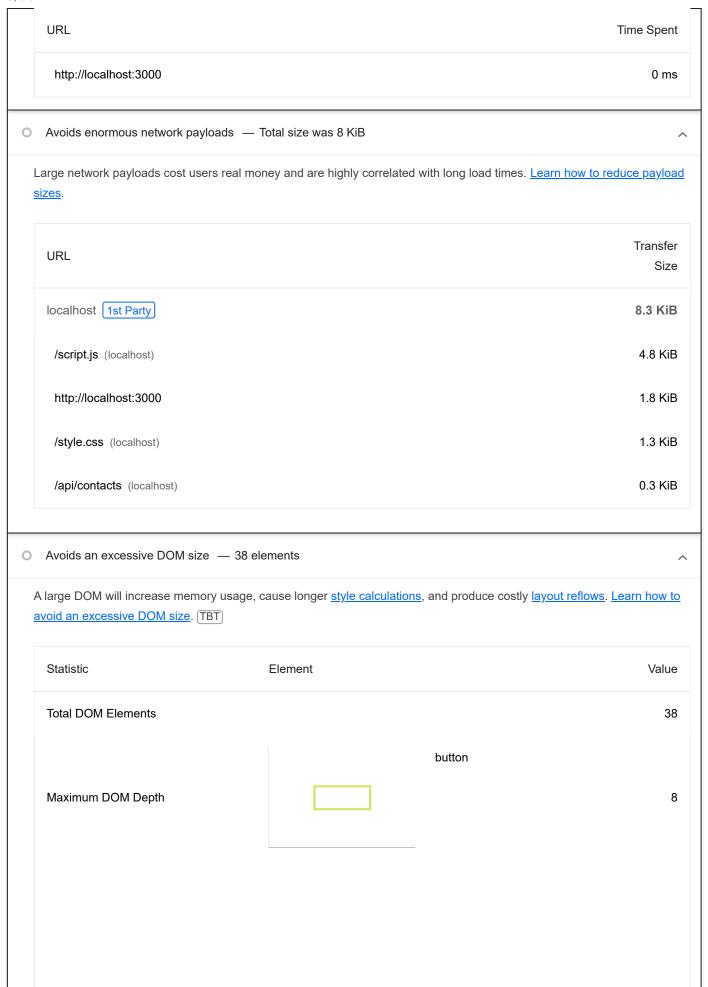

about:blank 3/23

Statistic	Element	Value
Maximum Child Elements	form#contact-form	6

O Avoid chaining critical requests — 2 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.

Maximum critical path latency: 25.816 ms

Initial Navigation

http://localhost:3000

/style.css (localhost) - 2.433 ms, 1.35 KiB

/script.js (localhost) - 2.03 ms, 4.80 KiB

JavaScript execution time — 0.0 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. (TBT)


URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	52 ms	7 ms	0 ms
http://localhost:3000	52 ms	7 ms	0 ms

Minimizes main-thread work — 0.1 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn how to minimize main-thread work TBT</u>

Category	Time Spent
Other	51 ms

about:blank 4/23

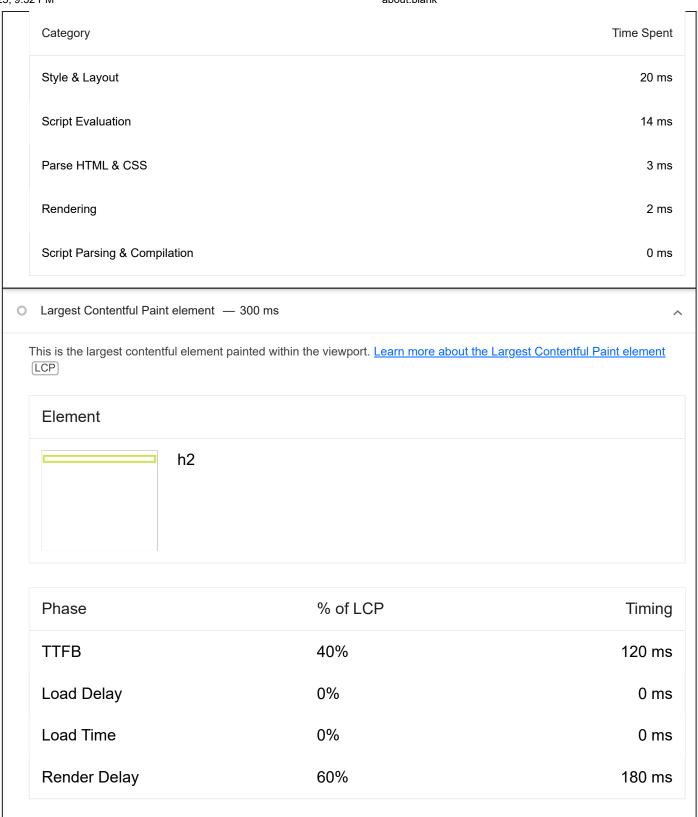

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (29)

Eliminate render-blocking resources	^

	the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critic eliminate render-blocking resources. FCP LCP	al
Properly size images		
Serve images that are a	appropriately-sized to save cellular data and improve load time. <u>Learn how to size images</u> . <u>FCP</u>	
Defer offscreen imag	es	
-	offscreen and hidden images after all critical resources have finished loading to lower time to offscreen images. FCP LCP	
Minify CSS		
Minifying CSS files can	reduce network payload sizes. <u>Learn how to minify CSS</u> . <u>FCP</u> <u>LCP</u>	
Minify JavaScript		
Minifying JavaScript file	es can reduce payload sizes and script parse time. <u>Learn how to minify JavaScript</u> . <u>FCP</u> <u>LCP</u>	
Reduce unused CSS		
	om stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed now to reduce unused CSS. FCP LCP	b
Reduce unused Java	Script	
	cript and defer loading scripts until they are required to decrease bytes consumed by network act	tiv
Efficiently encode im	ages	
Optimized images load	faster and consume less cellular data. <u>Learn how to efficiently encode images</u> . <u>FCP</u> <u>LCP</u>	
Serve images in next	-gen formats	
	P and AVIF often provide better compression than PNG or JPEG, which means faster download tion. Learn more about modern image formats. FCP LCP	s
Preconnect to require	ed origins	

about:blank 6/23

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party original Learn how to preconnect to required origins. [CP] FCP	gins.
Avoid multiple page redirects	^
Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. LCP FCP	
Use HTTP/2	^
HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. Learn more about HTTP/2. LCP	
Use video formats for animated content	^
Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats FCP LCP	
Remove duplicate modules in JavaScript bundles	^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP	
Avoid serving legacy JavaScript to modern browsers	^
Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feat detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn to use modern JavaScript FCP LCP	
O Preload Largest Contentful Paint image	^
If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <u>Learn more about preloading LCP elements</u> . <u>LCP</u>	<u> </u>
Uses efficient cache policy on static assets — 0 resources found	^
A long cache lifetime can speed up repeat visits to your page. <u>Learn more about efficient cache policies</u> .	
User Timing marks and measures	^
Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key use experiences. Learn more about User Timing marks.	r

about:blank 7/23

All text remains visible during webfont loads
Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. Learn more about font-display.
O Minimize third-party usage
Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. Learn how to minimize third-party impact. TBT
O Lazy load third-party resources with facades
Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. Learn how to defer third-parties with a facade. TBT
O Largest Contentful Paint image was not lazily loaded
Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <u>Learn more about optimal lazy loading</u> . <u>LCP</u>
Uses passive listeners to improve scrolling performance
Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn more about adopting passive event listeners</u> .
Avoids document.write()
For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. Learn how to avoid document.write().
Avoid long main-thread tasks
Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> (TBT)
Avoid non-composited animations
Animations which are not composited can be janky and increase CLS. <u>Learn how to avoid non-composited animations</u> <u>CLS</u>
Image elements have explicit width and height

about:blank 8/23

can speed up these return navigations. Learn more about the bfcache

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions (CLS)

Has a <meta name="viewport"> tag with width or initial-scale

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag.

Page didn't prevent back/forward cache restoration


Amany navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache)

92

Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so manual testing is also encouraged.

CONTRAST

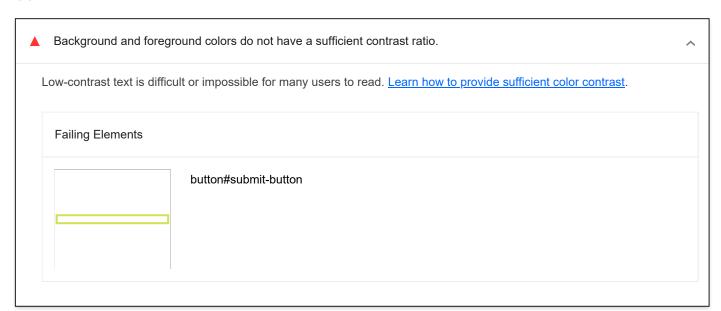

These are opportunities to improve the legibility of your content.

about:blank 9/23

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls</u> <u>focusable</u> .	
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.	
The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more about logical tab ordering.</u>	
Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering.</u>	
User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus tra	<u>ıps</u> .
The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technological section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for assistive technological section is a section of the page for a se</nav></main>	ogy.
Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
Custom controls have associated labels	^

about:blank 10/23

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.

Custom controls have ARIA roles

Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.

These items address areas which an automated testing tool cannot cover. Learn more in our guide on <u>conducting an accessibility</u> review.

PASSED AUDITS (11) Hide

[aria-hidden="true"] is not present on the document <body>

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.

Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <u>Learn how to make buttons more accessible</u>.

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. <u>Learn more about the viewport meta tag.</u>

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more about document titles</u>.

<html> element has a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.

html> element has a valid value for its [lang] attribute

Specifying a valid <u>BCP 47 language</u> helps screen readers announce text properly. <u>Learn how to use the lang attribute</u>.

about:blank 11/23

Form elements have associated labels Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels. Touch targets have sufficient size and spacing. Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets. Cells in a element that use the [headers] attribute refer to table cells within the same table. Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute. Heading elements appear in a sequentially-descending order Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order. Tables have different content in the summary attribute and <caption>. The summary attribute should describe the table structure, while <caption> should have the onscreen title. Accurate table

NOT APPLICABLE (45)

mark-up helps users of screen readers. Learn more about summary and caption.

O [accesskey] values are unique	
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <u>Learn more about access keys</u> .	
O [aria-*] attributes match their roles	
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. <u>Learn</u> how to match ARIA attributes to their roles.	
O Uses ARIA roles only on compatible elements	

about:blank 12/23

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfer with the accessibility of the web page. <u>Learn more about ARIA roles</u> .	e
o button, link, and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to make command elements more accessible</u> .	е
ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. <u>Learn more about conditional ARIA</u> <u>attributes</u> .	
Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles	<u>3</u> .
Elements with role="dialog" or role="alertdialog" have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
O [aria-hidden="true"] elements do not contain focusable descendents	^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being availa to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	ıble
ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusate for users who rely on screen readers. Learn more about input field labels.	ble
ARIA meter elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name meter elements</u> .	
ARIA progressbar elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements.	ng

about:blank 13/23

Elements use only permitted ARIA attributes
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. <u>Learn more about prohibited ARIA roles</u> .
O [role]s have all required [aria-*] attributes
Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more about roles</u> and required attributes.
Elements with an ARIA [role] that require children to contain a specific [role] have all required children.
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <u>Learn more about roles and required children elements</u> .
O [role]s are contained by their required parent element
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. <u>Learn more about ARIA roles and required parent element.</u>
O [role] values are valid
ARIA roles must have valid values in order to perform their intended accessibility functions. <u>Learn more about valid ARIA roles</u> .
Elements with the role=text attribute do not have focusable descendents.
Adding role=text around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the role=text attribute.
ARIA toggle fields have accessible names
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about toggle fields</u> .
ARIA tooltip elements have accessible names
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .
O ARIA treeitem elements have accessible names

about:blank 14/23

When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements.
O [aria-*] attributes have valid values
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more about valid values</u> for ARIA attributes.
O [aria-*] attributes are valid and not misspelled
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn more about valid ARIA attributes</u> .
O The page contains a heading, skip link, or landmark region
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <u>Learn more about bypass blocks</u> .
O <dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <u>Learn how to structure definition lists correctly</u>.</td></tr><tr><td>O Definition list items are wrapped in <d1> elements</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <d1> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</td></tr><tr><td>O ARIA IDs are unique</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn</u> how to fix duplicate ARIA IDs.</td></tr><tr><td>No form fields have multiple labels</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.</td></tr><tr><td>O <frame> Or <iframe> elements have a title</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more about frame titles</u>.</td></tr></tbody></table></script></dd></dt></dl>

about:blank 15/23

<html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.</html>
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. <u>Learn more about the lang attribute</u> .
Image elements have [alt] attributes
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.
O Image elements do not have [alt] attributes that are redundant text.
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute.
O Input buttons have discernible text.
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons.
<pre></pre>
When an image is being used as an <input/> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.
Links are distinguishable without relying on color.
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.
O Links have a discernible name
Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. <u>Learn how to make links accessible</u> .
Lists contain only elements and script supporting elements (<script> and <template>).</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <u>Learn more about proper list structure</u>.</td></tr><tr><td>List items (<1i>) are contained within , or <menu> parent elements</td></tr></tbody></table></script>

about:blank 16/23

Screen readers require list items (<1i>) to be contained within a parent , or <menu> to be announced properly. </menu> Learn more about proper list structure.	
The document does not use <meta http-equiv="refresh"/>	^
Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag.	
O <object> elements have alternate text</object>	^
Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers convened meaning to users. Learn more about alt text for object elements.</object>	/ey
Select elements have associated label elements.	^
Form elements without effective labels can create frustrating experiences for screen reader users. <u>Learn more about the select element</u> .	
O Skip links are focusable.	^
Including a skip link can help users skip to the main content to save time. Learn more about skip links.	
No element has a [tabindex] value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u> .	
elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.	^
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. <u>Learn more about table headers</u> .	
O [lang] attributes have a valid value	^
Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn how to use the lang attribute</u> .	<u>n</u>
<pre></pre>	^
When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more abvideo captions.	<u>oout</u>

about:blank 17/23



Best Practices

TRUST AND SAFETY

0	Ensure CSP is effective against XSS attacks			^
	A strong Content Security Policy (CSP) significantly reduce a CSP to prevent XSS	ces the risk of cross-site scripting	(XSS) attacks. <u>Learn how to u</u>	<u>ISE</u>
	Description	Directive	Severity	
	No CSP found in enforcement mode		High	
0	Use a strong HSTS policy			^
Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdrop attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS				
	Description	Directive	Severity	
	No HSTS header found		High	
			riigii	
0	Ensure proper origin isolation with COOP		T ligit	^
	Ensure proper origin isolation with COOP The Cross-Origin-Opener-Policy (COOP) can be used to ups. Learn more about deploying the COOP header.	isolate the top-level window from	-	^-)-
	Γhe Cross-Origin-Opener-Policy (COOP) can be used to	isolate the top-level window from	-	^-)-
	The Cross-Origin-Opener-Policy (COOP) can be used to ups. Learn more about deploying the COOP header.		n other documents such as pop)-

PASSED AUDITS (14) Hide

about:blank 18/23

Uses HTTPS All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS. Avoids deprecated APIs Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs. Avoids third-party cookies Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. Learn more about third-party cookies. Allows users to paste into input fields Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields. Avoids requesting the geolocation permission on page load Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission. Avoids requesting the notification permission on page load Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications. Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio. Serves images with appropriate resolution Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images. Has a <meta name="viewport"> tag with width or initial-scale

about:blank 19/23

2/25/25. 9:32 PM

about:blank A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. Page has the HTML doctype Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration. Properly defines charset A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding. No browser errors logged to the console Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit No issues in the Issues panel in Chrome Devtools Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue. Page has valid source maps Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn

more about source maps.

NOT APPLICABLE (3) Hide

Redirects HTTP traffic to HTTPS Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more. Document uses legible font sizes Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. Learn more about legible font sizes. **Detected JavaScript libraries**

20/23 about:blank

All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit.



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on

Core Web Vitals. Learn more about Google Search Essentials.

CONTENT BEST PRACTICES

▲ Doc

Document does not have a meta description

^

Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more about the meta description</u>.

Format your HTML in a way that enables crawlers to better understand your app's content.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more about</u> Structured Data.

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (6)

Page isn't blocked from indexing

TIIG

Search engines are unable to include your pages in search results if they don't have permission to crawl them. <u>Learn more</u> about crawler directives.

Document has a <title> element

^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a

about:blank 21/23

2/25/

O Document has a valid rel=canonical

25, 9:32 PM	about:blank	
page is relevant	to their search. <u>Learn more about document titles</u> .	
Page has suc	cessful HTTP status code	^
Pages with unsu	uccessful HTTP status codes may not be indexed properly. <u>Learn more about HTTP status codes</u> .	
Links have de	escriptive text	^
Descriptive link	text helps search engines understand your content. <u>Learn how to make links more accessible</u> .	
Links are crav	vlable	^
1	may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements line destination, so more pages of the site can be discovered. Learn how to make links crawlable	ıks
Document ha	s a valid hreflang	^
hreflang links te	Il search engines what version of a page they should list in search results for a given language or region. ut hreflang.	
NOT APPLICABLE	(3)	Hide
o robots.txt is v	alid	^
1	t file is malformed, crawlers may not be able to understand how you want your website to be crawled or more about robots.txt.	
 Image element 	nts have [alt] attributes	^
	nents should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty a more about the alt attribute.	alt

about:blank 22/23

Canonical links suggest which URL to show in search results. <u>Learn more about canonical links</u>.

^

Captured at Feb 25, 2025, 9:32
PM EST
Initial page load

Emulated Desktop with
Lighthouse 12.3.0

Custom throttling

Using Chromium 133.0.0.0 with devtools

Single page session

Generated by **Lighthouse** 12.3.0 | File an issue

about:blank 23/23