

ASSIGNMENT FOR DAY 1:

Name: Antonedei Wonimidei Otoro
Student ID: 615176

1. **Command:** git status (an operation on an empty folder)

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git status
fatal: not a git repository (or any of the parent directories): .git
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

2. **Command:** git init

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /Users/larabaantonedei/Desktop/Workspace/Modern_Async_Prog/Lesson1/.git/
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

3. **Command:** git status (an operation after initialising git)

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .idea/
        index.html

nothing added to commit but untracked files present (use "git add" to track)
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

Structure

Bookmarks

Git TODO Problems Terminal Profiler Services

Enable Auto Reset Color Scheme?: Do you know that you can automatically reset the bundled themes' color schemes? That way

4. **Command:** git add <filename>

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git add index.html
larabaantonedei@Larabas-MacBook-Air lesson1 % git status

On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   index.html


Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .idea/

larabaantonedei@Larabas-MacBook-Air lesson1 %
```

5. **Command:** git diff <filename>

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git diff index.html
diff --git a/index.html b/index.html
index 566549b..c75b3a0 100644
--- a/index.html
+++ b/index.html
@@ -5,6 +5,8 @@
     <title>Title</title>
   </head>
   <body>
-
+    <div class="main">
+      <h1>Hello World</h1>
+    </div>
   </body>
 </html>
\ No newline at end of file
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

6. File Creation: .gitignore

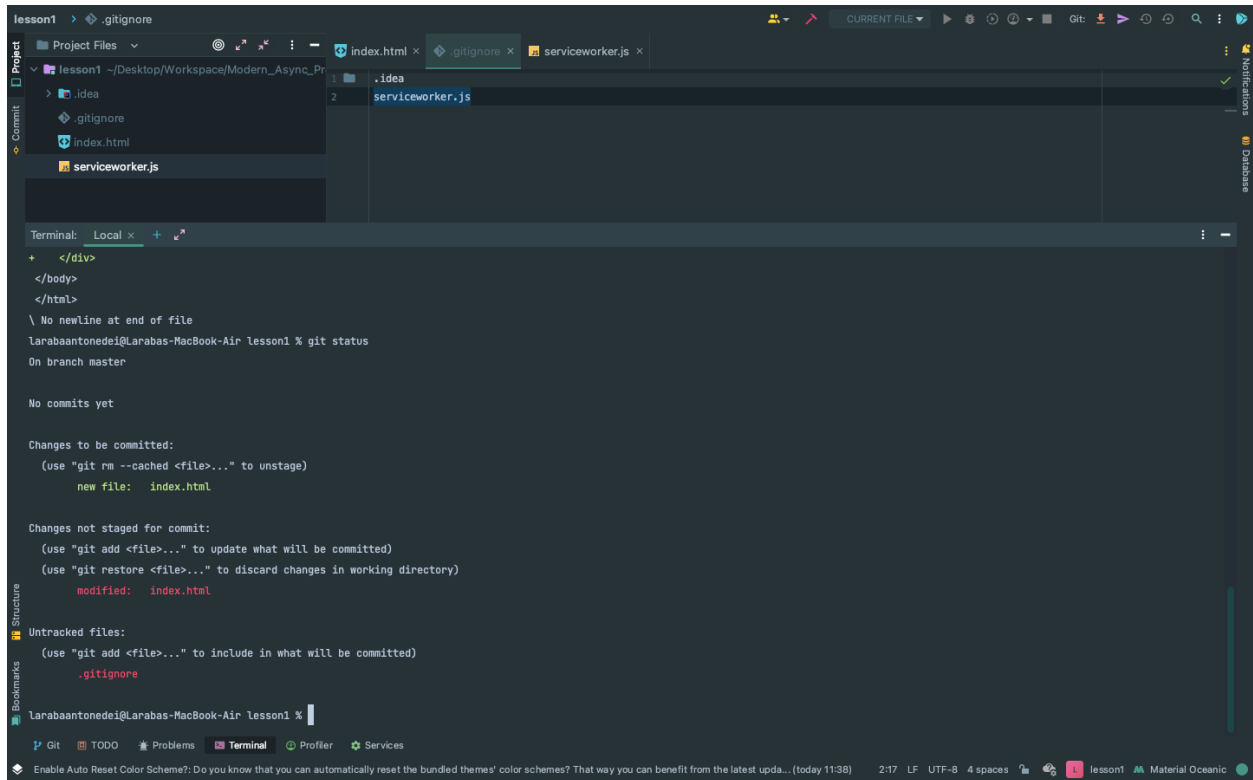

The screenshot shows the VS Code interface with the `.gitignore` file open in the editor. The file contains the following content:

```
1 .idea
2 serviceworker.js
```

The terminal window displays the output of the `git status` command:

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git status
On branch master


No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   index.html

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   index.html


Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .gitignore
```

7. Command: git commit -m "message"

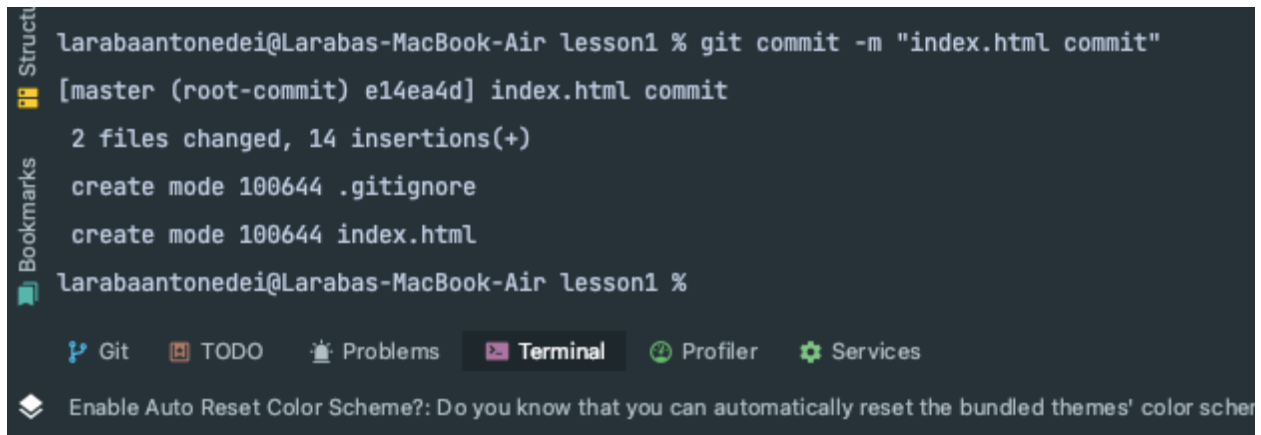

The screenshot shows the terminal output of the `git commit -m "index.html commit"` command:

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git commit -m "index.html commit"
[master (root-commit) e14ea4d] index.html commit
2 files changed, 14 insertions(+)
create mode 100644 .gitignore
create mode 100644 index.html
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

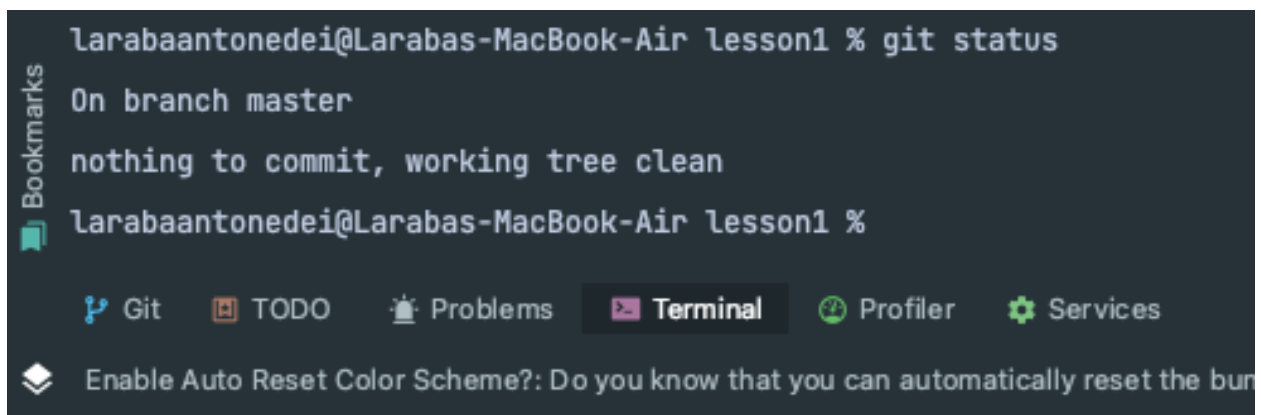

The screenshot shows the terminal output of the `git status` command after the commit:

```
larabaantonedei@Larabas-MacBook-Air lesson1 % git status
On branch master
nothing to commit, working tree clean
larabaantonedei@Larabas-MacBook-Air lesson1 %
```

