



Digital Signature Service Core Protocols, Elements, and Bindings Version 2.0

Committee Specification Draft 03 / Public Review Draft 03

13 February 2019

Specification URIs

This version:

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/csprd02/dss-core-v2.0-csprd03.docx>

(Authoritative)

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/csprd02/dss-core-v2.0-csprd03.html>

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/csprd02/dss-core-v2.0-csprd03.pdf>

Previous version:

N/A

Latest version:

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/dss-core-v2.0.docx> (Authoritative)

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/dss-core-v2.0.html>

<http://docs.oasis-open.org/dss-x/dss-core/v2.0/dss-core-v2.0.pdf>

Technical Committee:

OASIS Digital Signature Services eXtended (DSS-X) TC

Chair:

Andreas Kuehne (kuehne@trustable.de), Individual

Editors:

Andreas Kuehne (kuehne@trustable.de), Individual

Stefan Hagen (stefan@hagen.link), Individual

Additional artefacts:

This prose specification is one component of a Work Product that also includes:

- JSON and XML schemas: <http://docs.oasis-open.org/dss-x/dss-core/v2.0/csprd03/schema/>

Related work:

This specification replaces or supersedes:

- *Digital Signature Service Core Protocols, Elements, and Bindings Version 1.0*. Edited by Stefan Drees. 11 April 2007. OASIS Standard. <http://docs.oasis-open.org/dss/v1.0/oasis-dss-core-spec-v1.0-os.html>.

Declared XML namespaces:

- <http://docs.oasis-open.org/dss-x/ns/core>
- <http://docs.oasis-open.org/dss-x/ns/base>

Abstract:

This document defines JSON and XML based request/response protocols for signing and verifying documents and other data. It also defines a timestamp format, and a signature property for use with these protocols. Finally, it defines transport and security bindings for the protocols.

Status:

This document was last revised or approved by the OASIS Digital Signature Services eXtended (DSS-X) TC on the above date. The level of approval is also listed above. Check the "Latest version" location noted above for possible later revisions of this document. Any other numbered Versions and other technical work produced by the Technical Committee (TC) are listed at https://www.oasis-open.org/committees/tc_home.php?wg_abbrev=dss-x#technical.

TC members should send comments on this specification to the TC's email list. Others should send comments to the TC's public comment list, after subscribing to it by following the instructions at the "[Send A Comment](#)" button on the TC's web page at <https://www.oasis-open.org/committees/dss-x/>.

This specification is provided under the [RF on Limited Terms](#) Mode of the [OASIS IPR Policy](#), the mode chosen when the Technical Committee was established. For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the TC's web page (<https://www.oasis-open.org/committees/dss-x/ipr.php>).

Note that any machine-readable content ([Computer Language Definitions](#)) declared Normative for this Work Product is provided in separate plain text files. In the event of a discrepancy between any such plain text file and display content in the Work Product's prose narrative document(s), the content in the separate plain text file prevails.

Citation format:

When referencing this specification, the following citation format should be used:

[DSS-v2.0]

Digital Signature Service Core Protocols, Elements, and Bindings Version 2.0. Edited by Andreas Kuehne and Stefan Hagen. 07 January 2019. OASIS Committee Specification Draft 01 / Public Review Draft 02. <http://docs.oasis-open.org/dss-x/dss-core/v2.0/csprd02/dss-core-v2.0-csprd02.html>. Latest version: <http://docs.oasis-open.org/dss-x/dss-core/v2.0/dss-core-v2.0.html>.

Notices

Copyright © OASIS Open 2019. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full [Policy](#) may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard, to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS' procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The name "OASIS" is a trademark of [OASIS](#), the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <https://www.oasis-open.org/policies-guidelines/trademark> for above guidance.

Table of Contents

1	Introduction	11
1.1	IPR Policy	11
1.2	Terminology	11
1.2.1	Terms and Definitions	11
1.2.2	Abbreviated Terms	11
1.3	Normative References	11
1.4	Non-Normative References	13
1.5	Typographical Conventions	14
1.6	DSS Overview (Non-normative)	14
2	Design Considerations	16
2.1	Version 2.0 goal [non-normative]	16
2.2	Transforming DSS 1.0 into 2.0	16
2.2.1	Circumventing xs:any	16
2.2.2	Substituting the mixed Schema Attribute	17
2.2.3	Introducing the <code>NsPrefixMappingType</code> Component.....	17
2.2.4	Imported XML schemes	17
2.2.5	Syntax variants.....	18
2.2.6	JSON Syntax Extensions	18
2.3	Construction Principles	18
2.3.1	Multi Syntax approach.....	18
2.4	Schema Organization and Namespaces	19
2.5	DSS Component Overview.....	19
2.5.1	Schema Extensions.....	20
3	Data Type Models	22
3.1	Boolean Model	22
3.2	Integer Model	22
3.3	String Model.....	22
3.4	Binary Data Model	22
3.5	URI Model	22
3.6	Unique Identifier Model	22
3.7	Date and Time Model	22
3.8	Lang Model	22
4	Data Structure Models.....	23
4.1	Data Structure Models defined in this document.....	23
4.1.1	Component <code>NsPrefixMapping</code>	23
4.1.1.1	<code>NsPrefixMapping</code> – JSON Syntax	23
4.1.1.2	<code>NsPrefixMapping</code> – XML Syntax	24
4.1.2	Component <code>Any</code>	24
4.1.2.1	<code>Any</code> – JSON Syntax	24
4.1.2.2	<code>Any</code> – XML Syntax	25
4.1.3	Component <code>InternationalString</code>	25
4.1.3.1	<code>InternationalString</code> – JSON Syntax	25
4.1.3.2	<code>InternationalString</code> – XML Syntax.....	26

4.1.4 Component DigestInfo	26
4.1.4.1 DigestInfo – JSON Syntax	26
4.1.4.2 DigestInfo – XML Syntax	27
4.1.5 Component AttachmentReference	27
4.1.5.1 AttachmentReference – JSON Syntax	28
4.1.5.2 AttachmentReference – XML Syntax	29
4.1.6 Component Base64Data	29
4.1.6.1 Base64Data – JSON Syntax	30
4.1.6.2 Base64Data – XML Syntax	31
4.1.7 Component SignaturePtr	32
4.1.7.1 SignaturePtr – JSON Syntax	32
4.1.7.2 SignaturePtr – XML Syntax	33
4.1.8 Component Result	34
4.1.8.1 Result – JSON Syntax	34
4.1.8.2 Result – XML Syntax	35
4.1.9 Component OptionalInputs	36
4.1.9.1 OptionalInputs – JSON Syntax	36
4.1.9.2 OptionalInputs – XML Syntax	36
4.1.10 Component OptionalOutputs	36
4.1.10.1 OptionalOutputs – JSON Syntax	37
4.1.10.2 OptionalOutputs – XML Syntax	37
4.1.11 Component RequestBase	37
4.1.11.1 RequestBase – JSON Syntax	37
4.1.11.2 RequestBase – XML Syntax	38
4.1.12 Component ResponseBase	38
4.1.12.1 ResponseBase – JSON Syntax	38
4.1.12.2 ResponseBase – XML Syntax	39
4.2 Operation requests and responses	39
4.2.1 Component SignRequest	39
4.2.1.1 SignRequest – JSON Syntax	40
4.2.1.2 SignRequest – XML Syntax	40
4.2.2 Component SignResponse	41
4.2.2.1 SignResponse – JSON Syntax	41
4.2.2.2 SignResponse – XML Syntax	42
4.2.3 Component VerifyRequest	42
4.2.3.1 VerifyRequest – JSON Syntax	43
4.2.3.2 VerifyRequest – XML Syntax	44
4.2.4 Component VerifyResponse	44
4.2.4.1 VerifyResponse – JSON Syntax	44
4.2.4.2 VerifyResponse – XML Syntax	45
4.2.5 Component PendingRequest	45
4.2.5.1 PendingRequest – JSON Syntax	46
4.2.5.2 PendingRequest – XML Syntax	46
4.3 Optional data structures defined in this document	47
4.3.1 Component RequestID	47
4.3.1.1 RequestID – JSON Syntax	47
4.3.1.2 RequestID – XML Syntax	47
4.3.2 Component ResponseID	47

4.3.2.1 ResponseID – JSON Syntax	47
4.3.2.2 ResponseID – XML Syntax	47
4.3.3 Component OptionalInputsBase	48
4.3.3.1 OptionalInputsBase – JSON Syntax	48
4.3.3.2 OptionalInputsBase – XML Syntax	49
4.3.4 Component OptionalInputsSign	49
4.3.4.1 OptionalInputsSign – JSON Syntax	50
4.3.4.2 OptionalInputsSign – XML Syntax	52
4.3.5 Component OptionalInputsVerify	53
4.3.5.1 OptionalInputsVerify – JSON Syntax	54
4.3.5.2 OptionalInputsVerify – XML Syntax	56
4.3.6 Component OptionalOutputsBase	57
4.3.6.1 OptionalOutputsBase – JSON Syntax	57
4.3.6.2 OptionalOutputsBase – XML Syntax.....	57
4.3.7 Component OptionalOutputsSign	58
4.3.7.1 OptionalOutputsSign – JSON Syntax	58
4.3.7.2 OptionalOutputsSign – XML Syntax.....	59
4.3.8 Component OptionalOutputsVerify	59
4.3.8.1 OptionalOutputsVerify – JSON Syntax	60
4.3.8.2 OptionalOutputsVerify – XML Syntax.....	61
4.3.9 Component ClaimedIdentity	62
4.3.9.1 ClaimedIdentity – JSON Syntax.....	62
4.3.9.2 ClaimedIdentity – XML Syntax.....	63
4.3.10 Component Schemas.....	63
4.3.10.1 Schemas – JSON Syntax	64
4.3.10.2 Schemas – XML Syntax.....	64
4.3.11 Component IntendedAudience.....	64
4.3.11.1 IntendedAudience – JSON Syntax.....	65
4.3.11.2 IntendedAudience – XML Syntax.....	65
4.3.12 Component KeySelector	66
4.3.12.1 KeySelector – JSON Syntax	66
4.3.12.2 KeySelector – XML Syntax	67
4.3.13 Component X509Digest	67
4.3.13.1 X509Digest – JSON Syntax.....	68
4.3.13.2 X509Digest – XML Syntax	68
4.3.14 Component PropertiesHolder.....	69
4.3.14.1 PropertiesHolder – JSON Syntax.....	69
4.3.14.2 PropertiesHolder – XML Syntax.....	69
4.3.15 Component Properties	70
4.3.15.1 Properties – JSON Syntax	70
4.3.15.2 Properties – XML Syntax	71
4.3.16 Component Property	71
4.3.16.1 Property – JSON Syntax.....	71
4.3.16.2 Property – XML Syntax	72
4.3.17 Component IncludeObject.....	72
4.3.17.1 IncludeObject – JSON Syntax.....	72
4.3.17.2 IncludeObject – XML Syntax.....	73
4.3.18 Component SignaturePlacement	73

4.3.18.1 SignaturePlacement – JSON Syntax	74
4.3.18.2 SignaturePlacement – XML Syntax	75
4.3.19 Component DocumentWithSignature	75
4.3.19.1 DocumentWithSignature – JSON Syntax	76
4.3.19.2 DocumentWithSignature – XML Syntax	76
4.3.20 Component SignedReferences	77
4.3.20.1 SignedReferences – JSON Syntax	77
4.3.20.2 SignedReferences – XML Syntax	77
4.3.21 Component SignedReference	78
4.3.21.1 SignedReference – JSON Syntax	78
4.3.21.2 SignedReference – XML Syntax	79
4.3.22 Component VerifyManifestResults	79
4.3.22.1 VerifyManifestResults – JSON Syntax	79
4.3.22.2 VerifyManifestResults – XML Syntax	80
4.3.23 Component ManifestResult	80
4.3.23.1 ManifestResult – JSON Syntax	80
4.3.23.2 ManifestResult – XML Syntax	81
4.3.24 Component UseVerificationTime	82
4.3.24.1 UseVerificationTime – JSON Syntax	82
4.3.24.2 UseVerificationTime – XML Syntax	83
4.3.25 Component AdditionalTimeInfo	83
4.3.25.1 AdditionalTimeInfo – JSON Syntax	83
4.3.25.2 AdditionalTimeInfo – XML Syntax	84
4.3.26 Component VerificationTimeInfo	85
4.3.26.1 VerificationTimeInfo – JSON Syntax	85
4.3.26.2 VerificationTimeInfo – XML Syntax	86
4.3.27 Component AdditionalKeyInfo	86
4.3.27.1 AdditionalKeyInfo – JSON Syntax	87
4.3.27.2 AdditionalKeyInfo – XML Syntax	88
4.3.28 Component ProcessingDetails	89
4.3.28.1 ProcessingDetails – JSON Syntax	89
4.3.28.2 ProcessingDetails – XML Syntax	90
4.3.29 Component Detail	90
4.3.29.1 Detail – JSON Syntax	91
4.3.29.2 Detail – XML Syntax	92
4.3.30 Component SigningTimeInfo	92
4.3.30.1 SigningTimeInfo – JSON Syntax	92
4.3.30.2 SigningTimeInfo – XML Syntax	93
4.3.31 Component SigningTimeBoundaries	93
4.3.31.1 SigningTimeBoundaries – JSON Syntax	93
4.3.31.2 SigningTimeBoundaries – XML Syntax	94
4.3.32 Component AugmentedSignature	94
4.3.32.1 AugmentedSignature – JSON Syntax	95
4.3.32.2 AugmentedSignature – XML Syntax	96
4.3.33 Component ReturnTransformedDocument	96
4.3.33.1 ReturnTransformedDocument – JSON Syntax	96
4.3.33.2 ReturnTransformedDocument – XML Syntax	96
4.3.34 Component TransformedDocument	97

4.3.34.1 TransformedDocument – JSON Syntax	97
4.3.34.2 TransformedDocument – XML Syntax	97
4.4 Request/Response related data structures defined in this document	97
4.4.1 Component InputDocuments	97
4.4.1.1 InputDocuments – JSON Syntax	98
4.4.1.2 InputDocuments – XML Syntax	99
4.4.2 Component DocumentBase	99
4.4.2.1 DocumentBase – JSON Syntax	100
4.4.2.2 DocumentBase – XML Syntax	101
4.4.3 Component Document	101
4.4.3.1 Document – JSON Syntax	101
4.4.3.2 Document – XML Syntax	102
4.4.4 Component TransformedData	102
4.4.4.1 TransformedData – JSON Syntax	103
4.4.4.2 TransformedData – XML Syntax	104
4.4.5 Component DocumentHash	104
4.4.5.1 DocumentHash – JSON Syntax	105
4.4.5.2 DocumentHash – XML Syntax	106
4.4.6 Component SignatureObject	106
4.4.6.1 SignatureObject – JSON Syntax	107
4.4.6.2 SignatureObject – XML Syntax	108
4.5 Referenced Data Structure Models from other documents	108
4.5.1 Component NameID	108
4.5.1.1 NameID – JSON Syntax	109
4.5.1.2 NameID – XML Syntax	110
4.5.2 Component Transforms	110
4.5.2.1 Transforms – JSON Syntax	110
4.5.2.2 Transforms – XML Syntax	111
4.5.3 Component Transform	111
4.5.3.1 Transform – JSON Syntax	112
4.5.3.2 Transform – XML Syntax	113
4.6 Element / JSON name lookup tables	113
5 Data Processing Model for Signing	122
5.1 Processing for XML Signatures	122
5.1.1 Sub process ‘process references’	122
5.1.2 Sub process ‘create XML signature’	123
5.1.2.1 XML Signatures Variant Optional Input IncludeObject	124
5.2 Processing for CMS Signatures	125
5.2.1 Sub process ‘process digest’	125
5.2.2 Sub process ‘create CMS signature’	126
5.3 General Timestamp Processing	127
5.3.1 Sub process ‘add Timestamp’	127
5.3.1.1 Processing for CMS signatures time-stamping	127
5.3.1.2 Processing for XML Timestamps on XML signatures	128
5.3.1.3 Processing for RFC 3161 Timestamps on XML signatures	128
6 Data Processing Model for Verification	129
6.1 Processing for XML Signature Verification	130

6.1.1	Sub process 'retrieve XML signature'	130
6.1.2	Sub process 'recalculate references'	130
6.1.3	Sub process 'verify XML signature'	131
6.1.3.1	Processing for RFC 3161 timestamp tokens on XML Signatures	132
6.1.3.2	Processing for XML timestamp tokens on XML signatures	133
6.2	Processing for CMS Signature Verification	133
6.2.1	Sub process 'retrieve CMS signature'	133
6.2.2	Sub process 'verify CMS signature'	134
6.2.2.1	Processing for RFC 3161 Timestamp tokens on CMS Signatures	134
6.3	General Processing	135
6.3.1	Multi-Signature Creation	135
6.3.2	Multi-Signature Verification	135
6.3.3	Sub process 'augment Signature'	136
6.3.4	Sub process 'timestamp Signature'	137
6.3.5	Task 'build VerifyResponse'	138
7	Asynchronous Processing Model	140
7.1	Asynchronous-only Processing	140
7.2	Enforcing Asynchronous Processing	141
8	DSS Core Bindings	142
8.1	HTTP POST Transport Binding	142
8.2	SOAP 1.2 Transport Binding	142
8.3	Security Bindings	143
9	DSS-Defined Identifiers	144
9.1	Signature Type Identifiers	144
9.1.1	XML Signature	144
9.1.2	XML TimeStampToken	144
9.1.3	RFC 3161 TimeStampToken	144
9.1.4	CMS Signature	144
9.1.5	PGP Signature	144
9.2	ResultMinors	144
10	Security Considerations	146
10.1	Well-Known Attack Vectors	146
10.1.1	XML Parsing Vulnerabilities [non-normative]	146
10.1.2	XML Canonicalization Vulnerabilities [non-normative]	146
10.1.3	Injection Attacks [non-normative]	146
10.1.4	JSON Deserialization Through Evaluation Attacks [non-normative]	146
11	Conformance	148
11.1	Conformance as a DSS version 2.0 document	148
11.1.1	Conformance for JSON format	148
11.1.2	Conformance for XML format	148
11.1.3	Conformance for DSS Server	148
11.1.4	Conformance for DSS Client	148
	Appendix A. Acknowledgments	149
	Appendix B. Index of Components and Elements	150
	Appendix C. List of Figures	153

Appendix D. Revision History.....	154
-----------------------------------	-----

1 Introduction

[All text is normative unless otherwise labeled]

1.1 IPR Policy

This specification is provided under the [RF on Limited Terms](#) Mode of the [OASIS IPR Policy](#), the mode chosen when the Technical Committee was established. For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the TC's web page (<https://www.oasis-open.org/committees/dss-x/ipr.php>).

1.2 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#) and [\[RFC8174\]](#).

1.2.1 Terms and Definitions

For the purposes of this document no specific terms or definitions have been identified as deviating from the usual meaning in the context of XML / JSON schema, digital signatures or transport.

1.2.2 Abbreviated Terms

ASN.1	— Abstract Syntax Notation One
URI	— (IETF) Uniform Resource Identifier
XML	— (W3C) Extensible Markup Language
XSD	— (W3C) XML Schema

1.3 Normative References

[DSBXSD]	A. Kuehne, S. Hagen. <i>DSS 2.0 Base XML Schema</i> . OASIS.
[DSIGRWXSD]	A. Kuehne, S. Hagen. <i>DSS 2.0 adapted XMLDSig XML Schema</i> . OASIS.
[DSS1Async]	A. Kuehne. <i>Asynchronous Processing Abstract Profile</i> . OASIS, oasis-dss-profiles-asynchronous_processing-spec-v1.0-os.html
[DSS1Core]	S. Hagen. <i>DSS 1.0 Core Protocols</i> . OASIS, oasis-dss-core-spec-v1.0-os.html .
[DSS2JSON]	A. Kuehne, S. Hagen. <i>DSS 2.0 Core JSON Schema</i> . OASIS.
[DSS2XSD]	A. Kuehne, S. Hagen. <i>DSS 2.0 Core XML Schema</i> . OASIS.
[ESIFrame]	TR 119 102 V1.2.1 Electronic Signatures and Infrastructures (ESI); The framework for standardization of signatures; Definitions and abbreviations http://www.etsi.org/deliver/etsi_tr/119000_119099/119001/01.02.01_60/tr_119001v010201p.pdf
[ISO 32000-1]	ISO 32000-1:2008(E) : Document management - Portable document format - Part 1: PDF 1.7, 2008-07-01, International Organization for Standardization, Geneva, Switzerland.
[ISO14533-4]	ISO/CD stage 14533-4:2018 : Long term signature profiles - Part 4, 2018-07-16, International Organization for Standardization, Geneva, Switzerland.
[RFC2119]	Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, http://www.rfc-editor.org/info/rfc2119 .

- [RFC2396] T. Berners-Lee et al. *Uniform Resource Identifiers (URI): Generic Syntax*. IETF RFC 2396, August 1998.
<http://www.ietf.org/rfc/rfc2396.txt>.
- [RFC 2440] J. Callas, L. Donnerhackle, H. Finney, R. Thayer. *OpenPGP Message Format*. IETF RFC 2440, November 1998.
<http://www.ietf.org/rfc/rfc2440.txt>.
- [RFC 2616] R. Fielding et al. *Hypertext Transfer Protocol – HTTP/1.1*. IETF RFC 2616, June 1999.
<http://www.ietf.org/rfc/rfc2616.txt>.
- [RFC 2648] R. Moats. *A URN Namespace for IETF Documents*. IETF RFC 2648, August 1999.
<http://www.ietf.org/rfc/rfc2648.txt>.
- [RFC 2822] P. Resnick. *Internet Message Format*. IETF RFC 2822, April 2001.
<http://www.ietf.org/rfc/rfc2822.txt>
- [RFC 3161] C. Adams, P. Cain, D. Pinkas, R. Zuccherato. *Internet X.509 Public Key Infrastructure Time-Stamp Protocol (TSP)*. IETF RFC 3161, August 2001.
<http://www.ietf.org/rfc/rfc3161.txt>.
- [RFC 5652] R. Housley. *Cryptographic Message Syntax*. IETF RFC 5652, September 2009.
<http://www.ietf.org/rfc/rfc5652.txt>.
(Remark: As used in DSS, all implementations based upon RFC 5652 and previous releases of CMS will suffice. For the sake of simplicity the "urn:ietf:rfc:3369" is used throughout the document to indicate a CMS message as specified in RFC 5652 or RFC 3369 or any version (including PKCS #7).
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<http://www.rfc-editor.org/info/rfc8174>>.
- [RFC8259] T. Bray, Ed., Google, Inc., The JavaScript Object Notation (JSON) Data Interchange Format, ISSN: 2070-1721, December 2017.
<https://tools.ietf.org/html/rfc8259>.
- [SAML2RWXSD] A. Kuehne, S. Hagen. *DSS 2.0 adapted SAML 2.0 XML Schema*. OASIS.
- [SOAP] M. Gudgin et al. *SOAP Version 1.2 Part 1: Messaging Framework*. W3C Recommendation, June 2003.
<http://www.w3.org/TR/xmlschema-1/>
- [SOAPAtt] H. F. Nielsen, H. Ruellan *SOAP Message Transmission Optimization Mechanism*, W3C Working Group Note, 8 June 2004
<http://www.w3.org/TR/soap12-af/>
- [SOAPMtom] Martin Gudgin, Noah Mendelsohn *SOAP 1.2 Attachment Feature*, W3C Recommendation 25 January 2005
<http://www.w3.org/TR/soap12-mtom/>
- [WS-I-Att] Ch. Ferris, A. Karmarkar, C. K. Liu *Attachments Profile Version 1.0*, The Web Services-Interoperability Organization (WS-I), 20 April 2006
<http://www.ws-i.org/Profiles/AttachmentsProfile-1.0.html>
- [XML] Extensible Markup Language (XML) 1.0 (Fifth Edition), T. Bray, J. Paoli, M. Sperberg-McQueen, E. Maler, F. Yergeau, Editors, W3C Recommendation, November 26, 2008, <http://www.w3.org/TR/2008/REC-xml-20081126/>. Latest version available at <http://www.w3.org/TR/xml>.
- [XML-C14N] J. Boyer. *Canonical XML Version 1.0*. W3C Recommendation, March 2001.
<http://www.w3.org/TR/xml-c14n>
- [XML-xcl-c14n] Exclusive XML Canonicalization Version 1.0. W3C Recommendation 18 July 2002 <http://www.w3.org/TR/2002/REC-xml-exc-c14n-20020718/>
- [XML-ns] T. Bray, D. Hollander, A. Layman. *Namespaces in XML*. W3C Recommendation, January 1999.
<http://www.w3.org/TR/1999/REC-xml-names-19990114>
- [XML-NT-Document] <http://www.w3.org/TR/2004/REC-xml-20040204/#NT-document>

[XML-PROLOG]	Tim Bray, Jean Paoli, C. M. Sperberg-McQueen, et al. Prolog and Document Type Declaration in Extensible Markup Language (XML) 1.0 (Third Edition), W3C Recommendation, 04 February 2004, http://www.w3.org/TR/REC-xml/#sec-prolog-dtd
[xml:id]	xml:id, Version 1.0, W3C Recommendation, 9 September 2005, http://www.w3.org/TR/xml-id/
[XMLDSIG]	D. Eastlake et al. XML-Signature Syntax and Processing. W3C Recommendation, February 2002. http://www.w3.org/TR/2002/REC-xmlsig-core-20020212/
[XML-Schema-1]	W3C XML Schema Definition Language (XSD) 1.1 Part 1: Structures, S. Gao, M. Sperberg-McQueen, H. Thompson, N. Mendelsohn, D. Beech, M. Maloney, Editors, W3C Recommendation, April 5, 2012, http://www.w3.org/TR/2012/REC-xmlschema11-1-20120405/ . Latest version available at http://www.w3.org/TR/xmlschema11-1/ .
[XML-Schema-2]	W3C XML Schema Definition Language (XSD) 1.1 Part 2: Datatypes, D. Peterson, S. Gao, A. Malhotra, M. Sperberg-McQueen, H. Thompson, Paul V. Biron, Editors, W3C Recommendation, April 5, 2012, http://www.w3.org/TR/2012/REC-xmlschema11-2-20120405/ . Latest version available at http://www.w3.org/TR/xmlschema11-2/ .
[XPath]	XML Path Language (XPath) Version 1.0. W3C Recommendation 16 November 1999 http://www.w3.org/TR/xpath
[XPath20]	XML Path Language (XPath) 2.0, A. Berglund, S. Boag, D. Chamberlin, M. Fernandez, M. Kay, J. Robie, J. Simeon, Editors, W3C Recommendation, January 23, 2007, http://www.w3.org/TR/2007/REC-xpath20-20070123/ . Latest version available at http://www.w3.org/TR/xpath20/ .
[XPath30]	XML Path Language (XPath) 3.0, J. Robie, D. Chamberlin, M. Dyck, J. Snelson, Editors, W3C Recommendation, April 8, 2014, http://www.w3.org/TR/2014/REC-xpath-30-20140408/ . Latest version available at http://www.w3.org/TR/xpath-30/ .
[XPath31]	XML Path Language (XPath) 3.1, J. Robie, M. Dyck, J. Spiegel, Editors, W3C Recommendation, March 21, 2017, https://www.w3.org/TR/2017/REC-xpath-31-20170321/ . Latest version available at https://www.w3.org/TR/xpath-31/ .

1.4 Non-Normative References

[ASN.1]	Introduction to ASN.1. https://www.itu.int/en/ITU-T/asn1/Pages/introduction.aspx
[CHPGW]	DSS Extension for Local Signature Computation Version 1.0, Working Draft for Committee Specification 04. https://www.oasis-open.org/committees/download.php/62576/localsig-v1.0-csprd04.pdf
[ISO8601]	Data elements and interchange formats — Information interchange — Representation of dates and times, International Standard, ISO 8601:2004(E), December 1, 2004, https://www.iso.org/standard/40874.html .
[ISO639-1]	Codes for the representation of names of languages — Part 1: Alpha-2 code, International Standard, ISO 639-1:2002 (en), https://www.iso.org/obp/ui#iso:std:iso:639:-1 .
[JENSEN-2009]	Meiko Jensen, Lijun Liao, and Jörg Schwenk. 2009. The curse of namespaces in the domain of XML signature. In Proceedings of the 2009 ACM workshop on Secure web services (SWS '09). ACM, New York, NY, USA, 29-36. DOI: https://doi.org/10.1145/1655121.1655129
[RFC7049]	C. Bormann, University Bremen TZI, Concise Binary Object Representation (CBOR), ISSN: 2070-1721, October 2013. https://tools.ietf.org/html/rfc7049
[RFC7515]	M. Jones, Microsoft, JSON Web Signature (JWS), ISSN: 2070-1721, May 2015. https://tools.ietf.org/html/rfc7515 .

1.5 Typographical Conventions

Keywords defined by this specification use this `monospaced font`.

Normative source code uses this paragraph style.

Text following the special symbol («) – an opening Guillemet (or French quotation mark) – within this specification identifies automatically testable requirements to aid assertion tools. Every such statement is separated from the following text with the special end symbol (») – a closing Guillemet and has been assigned a reference that follows that end symbol in one of the three patterns:

1. [DSS-section#-local#] if it applies regardless of syntax
2. [JDSS-section#-local#] if it applies only to JSON syntax
3. [XDSS-section#-local#] if it applies only to XML syntax

Some sections of this specification are illustrated with non-normative examples.

Example 1: text describing an example uses this paragraph style

```
Non-normative examples use this paragraph style.
```

All examples in this document are non-normative and informative only.

Representation-specific text is indented and marked with vertical lines.

Representation-Specific Headline

Normative representation-specific text

All other text is normative unless otherwise labelled e.g. like:

Non-normative Comment:

This is a pure informative comment that may be present, because the information conveyed is deemed useful advice or common pitfalls learned from implementer or operator experience and often given including the rationale.

1.6 DSS Overview (Non-normative)

This specification describes two request/response protocols:

1. signing protocol
2. verifying protocol

Using the first protocol a client can send documents (or document hashes) to a server and receive back a signature on the documents. Using the second protocol a client can send documents (or document hashes) and a signature to a server and receive back an answer on whether the signature is valid or not.

The top-level components for the signing protocol are

- `SignRequest` (see section 4.2.1) as input and
- `SignResponse` (see section 4.2.2) as output.

For the verification protocol the top-level components are

- `VerifyRequest` (see section 4.2.3) as input and
- `VerifyResponse` (see section 4.2.4) as output.

Additionally, this version of the core includes asynchronous requests initially specified in the Asynchronous Processing Abstract Profile [\[DSSAsync\]](#).

The elements in which the protocols are formulated are provided in a semantic level and also in JSON and XML syntax. Provided are additional mappings from the generic to the specific entities.

These protocol operations could be useful in a variety of contexts – for example, they could allow clients to access a single corporate key for signing press releases, with centralized access control, auditing and

archiving of signature requests. They could also allow clients to create and verify signatures without the need for complex client software and security-sensitive configuration.

The signing and verifying protocols are chiefly designed to support the creation and verification of XML signatures [XMLDSIG], XML timestamps (see [DSS1Core], section 5.1), binary timestamps [RFC 3161] and CMS signatures [RFC 5652]. These protocols are intended to be extensible to other types of signatures and timestamps, such as PGP signatures [RFC 2440].

It is expected that the signing and verifying protocols will be *profiled* to meet many different application scenarios. In anticipation of this, these protocols have only a minimal set of required elements, which deal with transferring “input documents” and signatures back and forth between client and server. The input documents to be signed or verified can be transferred in their entirety or the client can hash the documents themselves and only send the hash values to save bandwidth and protect the confidentiality of the document content.

All functionality besides transferring input documents and signatures is relegated to a framework of “optional inputs” and “optional outputs”. This document defines a number of optional inputs and outputs. Profiles of these protocols can pick and choose which optional inputs and outputs to support and can introduce their own optional inputs and outputs when they need functionality not anticipated by this specification.

Examples of optional inputs to the signing protocol include: what type of signature to produce, which key to sign with, who the signature is intended for, and what signed and unsigned properties to place in the signature. Examples of optional inputs to the verifying protocol include: the time for which the client would like to know the signature’s validity status, additional validation data necessary to verify the signature (such as certificates and CRLs), and requests for the server to return information such as the signer’s name or the signing time.

The signing and verifying protocol messages must be transferred over some underlying protocol(s) which provide message transport and security. A *binding* specifies how to use the signing and verifying protocols with some underlying protocol such as HTTP POST or TLS. Section 7 [Asynchronous Processing Model](#) provides an initial set of bindings.

The previous version of specification ([DSS1Core]) defines two elements that are related to these protocols. First, an XML timestamp element is defined in [DSS1Core], section 5.1. The signing and verifying protocols can be used to create and verify both XML and binary timestamps; a profile for doing so is defined in [XML-TSP]. Second, a `RequesterIdentity` element is defined in (see [DSS1Core], section 5.2). This element can be used as a signature property in an XML signature, to give the name of the end-user who requested the signature. These elements remain unchanged and are not repeated in this specification.

2 Design Considerations

2.1 Version 2.0 goal [non-normative]

The main changes of this version of the DSS/X core document compared to version 1.0 are:

- Considering the set of comments and bug reports arrived since version DSS 1.0 became standard
- Inclusion of requirements that became known only after publication of version 1.0
- Simplification of the core schema, e.g. by dropping elements seldom used
- Support for syntaxes other than XML
- Support transport formats other than SOAP
- Integration of the 'Asynchronous Processing Profile' [\[DSSAsync\]](#) into the core

Define a semantic model that can be mapped to different syntaxes. In this document the focus is on XML and JSON, but support for other syntaxes should be possible. Therefore, only the common denominator of syntax features can be used:

- Focus on Base64 as the most versatile way to transport documents and signatures
- Avoid the use of XML specifics (like e.g. mixed content)
- Provide namespace / URI for XPath evaluation explicitly
- Avoid `xs:any` by replacing it with an enumeration of possible types, and if that is not feasible, use base64 blobs as a fall back

To support implementers and to ease the use of the protocol with common frameworks the following list of requirements was compiled:

- One unique object model for all transport syntaxes
- Define type and cardinality of `OptionalInputs` and `OptionalOutputs` child elements explicitly
- Rearrange sequences and choices to produce a strongly typed object model

Regardless of the use of JSON as a transport syntax the handling of JSON signatures will not be covered by this document. Specific profiles will address signatures e.g. conformant to [\[RFC7515\]](#).

The provided schemes of DSS-X version 2 reflect these requirements. The XML schemes of version 1 and 2 share many similarities but are not compatible.

2.2 Transforming DSS 1.0 into 2.0

This section describes the several actions taken to fulfil the goals listed in the previous section.

2.2.1 Circumventing `xs:any`

The XML schema type 'any' allows an object to contain arbitrary structures. This comes handy for writers of specifications as an extension point because the structures transported don't need to be defined upfront. But this advantage at the specification stage comes with a price at the implementation stage. The structures intended to be supported by a client or a server system **MUST** be known to be implementable. But the usual tools for schema support leave the task of handling the content of an any type to the developer. Without extensive testing problems with unexpected content may occur at runtime, even while using typed languages.

As a successor of the `OptionalInputs` element (see section 2.7 of version 1.0 of this document) the component `OptionalInputsVerify` (see section 4.3.5) defines its child elements and their cardinality explicitly. When using additional profiles, the relevant components of the core schema can be redefined using the XML schema's 'redefine' element or JSON schema's 'allOf' as described in section 2.5.1 .

Another usage scenario for 'xs:any' is the transport of unknown data objects. As sample use case is the Property component (see section 4.3.16). This component is intended to contain signature attributes of unknown structure. In this version of the specification the 'xs:any' type is replaced by a structure containing base64-encoded data and meta data (component `Any`, see section 4.1.2). When using XML as

the transport syntax this seems to be a disadvantage. But direct XML fragment copying may introduce namespace problems and security concerns. Most importantly the cherry-picking of transport syntax features would inhibit a transport independent object model, both on the client and the server side. More complex programming and testing would be inevitable.

2.2.2 Substituting the mixed Schema Attribute

Mixing sub-elements and text within a single element is a great advantage of XML. But when XML is applied for serializing an object model this 'markup language' feature is of little use. Other serialization syntaxes (like JSON) don't support such a feature. There is the need to substitute the 'mixed' construct to become syntax independent. The substitution is done by removing the mixed attribute and introduce an additional 'value' element to contain the textual content.

2.2.3 Introducing the `NsPrefixMappingType` Component

Namespaces are an outstanding feature of the XML world. A replacement is required for all syntaxes that don't such a feature. The use of naming conventions and prefixes are used to avoid naming collisions. A special challenge is the use of XPath-Expression as elements. The XPath expression itself is represented as a simple string. But the expression may depend on namespace/prefix mappings that are defined within the namespace context of the XML element. The `NsPrefixMappingType` component (see section 4.1.1) represents the required namespace/prefix mapping. It is recommended to use this element for XML syntax, too. This simplifies the handling on the consumer side and circumvents problems with namespace prefix assignments handled by web frameworks.

2.2.4 Imported XML schemes

A special challenge is imposed by the imported schemes, like the [XMLDSIG] scheme, that uses features not supportable by the mentioned 'multi-syntax' approach. For example, the [XMLDSIG] type 'Transform' is defined like this:

```
<xs:complexType name="TransformType" mixed="true">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:any namespace="##other" processContents="lax"/>
    <!-- (1,1) elements from (0,unbounded) namespaces -->
    <xs:element name="XPath" type="string"/>
  </xs:choice>
  <xs:attribute name="Algorithm" type="xs:anyURI" use="required"/>
</xs:complexType>
```

Most of the restrictions listed above do apply here:

- The `complexType` may contain mixed content (child elements **and** text). This concept is not supported by JSON. The workaround for this limitation is to drop the 'mixed' attribute and to introduce a 'value' element.
- The `choice` construct is mapped in an untyped way by Java's JAXB framework. Therefore, the `choice` element is changed to a `sequence`.
- The `any` type is replaced by a base64 encoded blob.
- The option to provide arbitrary namespace / prefix mappings to support the evaluation of XPath expression is not available in e.g. JSON syntax. Therefore, an element mapping prefixes to namespaces (of type `dsb:NsPrefixMappingType`) is added.

```

<xs:complexType name="TransformType">
  <xs:sequence>
    <xs:element maxOccurs="1" minOccurs="0" name="value" type="string"/>
    <xs:element maxOccurs="1" minOccurs="0" name="Base64Content"
      type="xs:base64Binary"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="XPath"
      type="string"/>
    <xs:element maxOccurs="unbounded" minOccurs="0" name="NsPrefixMapping"
      type="dsb:NsPrefixMappingType"/>
  </xs:sequence>
  <xs:attribute name="Algorithm" type="xs:string" use="required"/>
</xs:complexType>

```

To apply the necessary changes to the imported schemes the XML schema language provides the `override` functionality to change existing schemes. But Java's JAXB framework's schema compiler does not support `override` so the adapted schemes are provided alongside DSS-X core schemes.

2.2.5 Syntax variants

This version of the DSS/X core document handles the representation of requests and response elements according to the JSON and XML syntax. The general semantics of the elements is discussed in the element's main section. Details of the JSON or XML formats are discussed in specific subsections

- Component – JSON Syntax
- Component – XML Syntax

2.2.6 JSON Syntax Extensions

JSON, as described in [\[RFC8259\]](#), defines a text format for serializing structured data. Objects are serialized as an unordered collection of name/value pairs.

JSON does not define any semantics around the name/value pairs that make up an object, nor does it define an extensibility mechanism for adding control information to a payload.

DSS's JSON format extends JSON by defining general conventions for name/value pairs that annotate a JSON object, property or array. DSS defines a set of canonical annotations for control information such as ids, types, and links, and custom annotations MAY be used to add domain-specific information to the payload.

Annotations are used in JSON to capture control information that cannot be predicted as well as a mechanism to provide values where a computed value would be wrong.

2.3 Construction Principles

2.3.1 Multi Syntax approach

In the years since DSS 1.0 became standard many other formats (like JSON) became popular for data interchange. Nevertheless, XML is still an important and commonly used format. To support these developments DSS 2.0 is taking a multi-syntax approach:

- For each structural component there is semantic section describing the elements, restrictions and relations to other components in a syntax-neutral way.
- Following the semantic definition there are syntax-specific sections describing the mapping of the given requirements to [XML](#) and [JSON](#).
- Schemes are provided for XML and JSON.
- Element name mappings are given for JSON.

Subsequent versions of this protocol may define additional syntax mappings, e.g. for [ASN.1](#) or [CBOR](#).

The restriction of this approach is limitation to the common denominator of capabilities of the used transfer formats. The section 'Transforming DSS 1.0 into 2.0' targets these limitations. The imported schema files defined by other parties are also affected. An example is the 'Component Transform', that

was originally defined in [XMLDSIG] and the aspects described in 2.2.1 Circumventing xs:any, 2.2.2 Substituting the mixed Schema Attribute and 2.2.3 Introducing the NsPrefixMappingType Component apply.

2.4 Schema Organization and Namespaces

The structures described in this specification are contained in the schema file [Core2.0-XSD]. All schema listings in the current document are excerpts from the schema file. In the case of a disagreement between the schema file and this document, the schema file shall take precedence.

This schema is associated with the following XML namespace

```
http://docs.oasis-open.org/dss-x/ns/base
```

and

```
http://docs.oasis-open.org/dss-x/ns/core
```

If a future version of this specification is needed, it will use a different namespace.

Conventional XML namespace prefixes are used in the schema:

- The prefix `dss2`: stands for the DSS core version 2.0 namespace [DSS2XSD].refDSS2XSD
- The prefix `dsb`: stands for the DSS base namespace [DSBXSD].refDSS2XSD
- The prefix `ds-rw`: stands for a namespace of elements based on the W3C XML Signature [XMLDSIG].
- The prefix `xs`: stands for the W3C XML Schema namespace [Schema1].
- The prefix `saml2-rw`: stands for a namespace of elements based on the OASIS SAML 2 Schema namespace [SAMLCore2.0].

Applications MAY use different namespace prefixes, and MAY use whatever namespace defaulting/scoping conventions they desire, as long as they are compliant with the Namespaces in XML specification [XML-ns].

The following schema fragment defines the XML namespaces and other header information for the DSS core schema:


```
<xs:schema xmlns:dss2="http://docs.oasis-open.org/dss-x/ns/core"
  xmlns:dsb="http://docs.oasis-open.org/dss-x/ns/base"
  xmlns:ds-rw="http://docs.oasis-open.org/dss-x/ns/xmlsig/rewritten"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:saml-rw="http://docs.oasis-open.org/dss-x/ns/SAML 1.0/assertion/rewritten"
  xmlns:saml2-rw="http://docs.oasis-open.org/dss-x/ns/saml2/rewritten"
  targetNamespace="http://docs.oasis-open.org/dss-x/ns/core"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">
  <xs:annotation>
    <xs:documentation xml:lang="en">This Schema defines the Digital Signature Service Core
    Protocols, Elements, and Bindings Committee Draft 1 for Public Review</xs:documentation>
  </xs:annotation>
  <xs:import namespace="http://docs.oasis-open.org/dss-x/ns/xmlsig/rewritten"
    schemaLocation="xmlsig-core-schema-dss-rw.xsd"/>
  <xs:import namespace="http://docs.oasis-open.org/dss-x/ns/SAML 1.0/assertion/rewritten"
    schemaLocation="oasis-sstc-saml-schema-protocol-1.1-dss-rw.xsd"/>
  <xs:import namespace="http://docs.oasis-open.org/dss-x/ns/saml2/rewritten"
    schemaLocation="saml-schema-assertion-2.0-dss-rw.xsd"/>
  <xs:import namespace="http://www.w3.org/XML/1998/namespace"
    schemaLocation="http://www.w3.org/2001/xml.xsd"/>
```

2.5 DSS Component Overview

The DSS core is designed to be extended by profiles to support additional functionalities. The DSS specification comes with a set of profiles (see <https://www.oasis-open.org/standards#dssv1.0>). With version 2.0 there will be extensions to augment the use cases beyond the sign and verify scope of the previous version. The extensions will define other requests and responses while using e.g. the

ResultType. A sample for an extension is the ChipGateway Protocol (c.f. clause 3.4 of [CHPGW]). To support this approach, the DSS 2.0 schema is split into a generic 'base' and the more specific 'core' schema.

Figure 1:Component overview

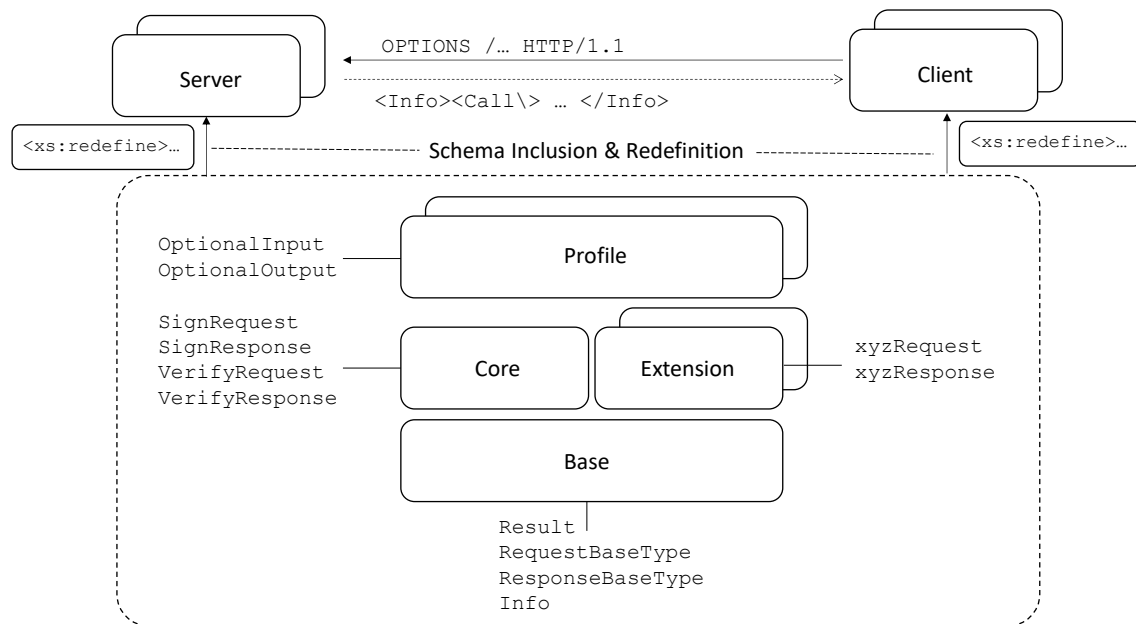

The diagram above shows the relationship between the different building blocks.

2.5.1 Schema Extensions

Most profiles define additional `OptionalInputs` or `OptionalOutputs`. To support a type-safe extension of the set of optional elements it is recommended to use the XML schema `redefine` mechanism to extend the core schema and derive the related JSON schema from it:

```
<xs:redefine schemaLocation="core-schema.xsd">
  <xs:complexType name="dss:OptionalOutputsVerifyType">
    <xs:complexContent>
      <xs:extension base="dss:OptionalOutputsVerifyType">
        <xs:group ref="prf:optionalOutputGroup"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:redefine>
```

The snippet above extends the set of sub-components of `OptionalOutputsVerifyType` with the group of elements of the profile.

In a similar way extension of the core's JSON scheme can be performed by using the 'allOf' keyword:

```

"dss2-OptionalOutputsVerifyType": {
  "allOf": [
    { "$ref": "#/definitions/prf-OptionalElement" },
    {
      "type": "object",
      "properties": {
        "policy": {
          "type": "array",
          "items": {
            "type": "string"
          }
        },
        // [...]
      }
    }
  ]
}

```

With this mechanism it is possible to extend the core schema to specific requirements while preserving the advantage of type safety and tool / IDE support. This sample illustrates the use of 'extension'. in the same way `restriction` can be applied. In more complex scenarios (e.g. multiple profiles apply, need for extending **and** restriction the core schema) the use of other techniques (e.g. XSLT) may be required.

It may be useful to process a profile (or a set of profiles) using a distinct endpoint. This enables the server instance to provide a specific WSDL including an appropriate schema with all profile-related elements.

3 Data Type Models

3.1 Boolean Model

The boolean data type is used to specify a true or false

3.2 Integer Model

The integer data type is used to specify a numeric value without a fractional component.

3.3 String Model

The string data type can represent characters, line feeds, carriage returns, and tab characters.

3.4 Binary Data Model

The base64Binary type holds Base64-encoded binary data

3.5 URI Model

Uniform Resource Identifier (URI) is a string of characters used to identify a resource

3.6 Unique Identifier Model

A unique identifier is a numeric or alphanumeric string that is associated with a single entity within a given system.

3.7 Date and Time Model

The specific concept of date and time used in this document is defined in this section and noted in subsequent usage as:

DateTime

« All date time values inside a DSS document MUST adhere to the ISO 8601 [ISO8601] basic or extended Format (as given there in section 4.3.2 “Complete representations” and with the addition of decimal fractions for seconds, similar to ibid. section 4.2.2.4 “Representations with decimal fraction” but with the full stop (.) being the preferred separator for DSS). » [DSS-3.7-1].

3.8 Lang Model

The specific concept of language used in this document is defined in this section and noted in subsequent usage as:

Language

« All language values inside a DSS document MUST adhere to the ISO 639-1 [ISO639-1] format (as given there in section 4 “Two-letter language code”. » [DSS-3.8-1].

4 Data Structure Models

4.1 Data Structure Models defined in this document

The XML elements of this section are defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/base'.

[namespace http://docs.oasis-open.org/dss-x/ns/base explanation]

4.1.1 Component NsPrefixMapping

The NsPrefixMapping component defines the mapping of namespace URIs to namespace prefixes. This is required to evaluate XPath expression when using transport syntaxes that don't support namespace.

Below follows a list of the sub-components that constitute this component:

The NamespaceURI element MUST contain one instance of a URI. [sub component NamespaceURI details]

The NamespacePrefix element MUST contain one instance of a string. [sub component NamespacePrefix details]

Non-normative Comment:

[component NsPrefixMapping non normative details]

4.1.1.1 NsPrefixMapping – JSON Syntax

The NsPrefixMappingType JSON object SHALL implement in JSON syntax the requirements defined in the NsPrefixMapping component.

Properties of the JSON object SHALL implement the sub-components of NsPrefixMapping using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
NamespaceURI	uri	[]
NamespacePrefix	pre	[]

The NsPrefixMappingType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-NsPrefixMappingType": {
  "type": "object",
  "properties": {
    "uri": {
      "type": "string"
    },
    "pre": {
      "type": "string"
    }
  },
  "required": ["uri", "pre"]
}
```

[component NsPrefixMapping JSON schema details]

4.1.1.2 NsPrefixMapping – XML Syntax

The XML type NsPrefixMappingType SHALL implement the requirements defined in the NsPrefixMapping component.

The NsPrefixMappingType XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="NsPrefixMappingType">
  <xs:sequence>
    <xs:element name="NamespaceURI" type="xs:anyURI"/>
    <xs:element name="NamespacePrefix" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of NsPrefixMappingType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component NsPrefixMapping XML schema details]

4.1.2 Component Any

This element MAY hold a set of base64 encoded arbitrary data. To help the processing of the data it may be qualified by the mime type element.

This component extends the component 4.1.6. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

Non-normative Comment:

This component was introduced in DSS core version 1.0 and is used as a placeholder for arbitrary data. In version 1.0 there were different ways defined to represent the data, e.g. as inline XML, encapsulated XML or base64 encoded. The expansion of the scope to different syntaxes limits the options to base64 encoded data or attachments as represented in Base64Data. In this version the component Any does not use additional subcomponents.

4.1.2.1 Any – JSON Syntax

The AnyType JSON object SHALL implement in JSON syntax the requirements defined in the Any component.

The AnyType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-AnyType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
    "val": {
      "type": "string"
    },
    "attRef": {
      "$ref": "#/definitions/dsb-AttachmentReferenceType"
    },
    "transforms": {
      "$ref": "#/definitions/dsigrw-TransformsType"
    },
    "mimeType": {
      "type": "string"
    },
    "idRef": {
      "type": "string"
    }
  }
}
```



```

    }
  }
}

```

[component Any JSON schema details]

4.1.2.2 Any – XML Syntax

The XML type AnyType SHALL implement the requirements defined in the Any component.
 The AnyType XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```

<xs:complexType name="AnyType">
  <xs:complexContent>
    <xs:extension base="dsb:Base64DataType"/>
  </xs:complexContent>
</xs:complexType>

```

Each child element of AnyType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name.

4.1.3 Component InternationalString

This element attaches an element to a human-readable string to specify the string’s language.

Below follows a list of the sub-components that constitute this component:

- || The value element MUST contain one instance of a string. The human readable string. In non-XML representations the value element contains the textual content.
- || The lang element MUST contain one instance of a ISO language descriptor. This element identifies the language of the value element.

Non-normative Comment:

| [component InternationalString non normative details]

4.1.3.1 InternationalString – JSON Syntax

The InternationalStringType JSON object SHALL implement in JSON syntax the requirements defined in the InternationalString component.
 Properties of the JSON object SHALL implement the sub-components of InternationalString using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
value	value	[]
lang	lang	[]

The InternationalStringType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```

"dsb-InternationalStringType": {
  "type": "object",
  "properties": {
    "value": {
      "type": "string"
    },
    "lang": {
      "type": "string"
    }
  }
}

```

```

    },
    "required": ["lang"]
  }

```

[\[component InternationalString JSON schema details\]](#)

4.1.3.2 InternationalString – XML Syntax

The XML type `InternationalStringType` SHALL implement the requirements defined in the `InternationalString` component.

The `InternationalStringType` XML element is defined in XML Schema [\[DSBXSD\]](#), and is copied below for information.

```

<xs:complexType name="InternationalStringType">
  <xs:simpleContent>
    <xs:extension base="xs:string">
      <xs:attribute ref="xml:lang" use="required"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>

```

Each child element of `InternationalStringType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component InternationalString XML schema details\]](#)

4.1.4 Component DigestInfo

The `DigestInfo` component holds a digest value and an identification of the used digest algorithm. The `DigestMethod` isn't strongly typed intentionally to support a broad variety of identifiers.

Below follows a list of the sub-components that constitute this component:

The `DigestMethod` element MUST contain one instance of a string. The string describes the digest algorithm in an appropriate way for the server side processing. Depending on the signature format this may be an OID (e.g. '2.16.840.1.101.3.4.2.1'), an URI (e.g. 'http://www.w3.org/2001/04/xmlenc#sha256') or a descriptive string ('SHA-256').

The `DigestValue` element MUST contain one instance of base64 encoded binary data. [\[sub component DigestValue details\]](#)

Non-normative Comment:

[\[component DigestInfo non normative details\]](#)

4.1.4.1 DigestInfo – JSON Syntax

The `DigestInfoType` JSON object SHALL implement in JSON syntax the requirements defined in the `DigestInfo` component.

Properties of the JSON object SHALL implement the sub-components of `DigestInfo` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>DigestMethod</code>	alg	[]
<code>DigestValue</code>	val	[]

The `DigestInfoType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```

"dsb-DigestInfoType": {
  "type": "object",
  "properties": {
    "alg": {
      "type": "string"
    },
    "val": {
      "type": "string"
    }
  },
  "required": ["alg", "val"]
}

```

[component DigestInfo JSON schema details]

4.1.4.2 DigestInfo – XML Syntax

The XML type `DigestInfoType` SHALL implement the requirements defined in the `DigestInfo` component.

The `DigestInfoType` XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```

<xs:complexType name="DigestInfoType">
  <xs:sequence>
    <xs:element name="DigestMethod" type="xs:string"/>
    <xs:element name="DigestValue" type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>

```

Each child element of `DigestInfoType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component DigestInfo XML schema details]

4.1.5 Component AttachmentReference

Applications MAY support SOAP 1.2 attachment feature [SOAPAtt] or other attachment specifications (e.g. [SOAPMtom]) to transmit documents.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `DigestInfo` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.4. An element of this type can be used to ensure the integrity of the attachment data. If these elements are supplied the server SHOULD compute a message digest using the algorithm given in `DigestMethod` over the binary data in the octet stream and compare it against the supplied `DigestValue`. If the comparison fails, then a `RequesterError` qualified by a `GeneralError` and an appropriate message containing the `AttRefURI` is returned.

The `AttRefURI` element MUST contain one instance of a URI. SOAP 1.2 attachment feature [SOAPAtt] states that any secondary part ("attachment") can be referenced by a URI of any URI scheme. `AttRefURI` refers to such a secondary part ("attachment") and MUST resolve within the compound SOAP message. The default encapsulation mechanism is MIME as specified in the WS-I Attachments Profile [WS-I-Att] (cf. swaRef, http://www.w3.org/Profiles/AttachmentsProfile-1.0.html#Referencing_Attachments_from_the_SOAP_Envelope).

Non-normative Comment:

[component AttachmentReference non normative details]

4.1.5.1 AttachmentReference – JSON Syntax

The `AttachmentReferenceType` JSON object SHALL implement in JSON syntax the requirements defined in the `AttachmentReference` component.

Properties of the JSON object SHALL implement the sub-components of `AttachmentReference` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>DigestInfo</code>	<code>di</code>	[]
<code>AttRefURI</code>	<code>attURI</code>	[]

The `AttachmentReferenceType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-AttachmentReferenceType": {
  "type": "object",
  "properties": {
    "di": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-DigestInfoType"
      }
    },
    "attURI": {
      "type": "string"
    }
  },
  "required": ["attURI"]
}
```

[component AttachmentReference JSON schema details]

4.1.5.2 AttachmentReference – XML Syntax

The XML type `AttachmentReferenceType` SHALL implement the requirements defined in the `AttachmentReference` component.

The `AttachmentReferenceType` XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="AttachmentReferenceType">
  <xs:sequence>
    <xs:element name="DigestInfo" type="dsb:DigestInfoType"
      maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="AttRefURI" type="xs:anyURI" use="required"/>
</xs:complexType>
```

Each child element of `AttachmentReferenceType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component AttachmentReference XML schema details\]](#)

4.1.6 Component Base64Data

The `Base64Data` component is a generic holder for arbitrary data. In addition to the data itself it also contains additional elements to qualify the `MimeType` of the data. It also offers an `Id` / `Reference` pair to implement a deduplication strategy, useful especially for bigger data blobs. The content is contained inside the mutually exclusive elements `Value` or `AttRefURI`.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Value` element, if present, MUST contain one instance of base64 encoded binary data. This element holds an instance of generic content. This could be a document to be signed, a signature, a schema or other data.

The OPTIONAL `AttRef` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.5. This element allows to reference content that is transferred in a non-inlined way. These mechanisms may take advantage of optimizations (e.g. optimized transfer encodings). The content of MAY be integrity-protected by a message digest.

The OPTIONAL `Transforms` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in section 4.5.2. This subcomponent can be used to specify additionally transformations of the data represented by this `Base64Data` component (after base64 decoding of the transport element, if necessary). For example, this may be a decryption step.

The OPTIONAL `MimeType` element, if present, MUST contain one instance of a string. This element is denoting the type of the arbitrary data in the value element or the referenced attachment.

The OPTIONAL `Id` element, if present, MUST contain one instance of a unique identifier. This identifier gives the binary data a unique label within a particular message. Using this identifier and the `IdRef` element it is possible to avoid redundant content.

The OPTIONAL `IdRef` element, if present, MUST contain one instance of a unique identifier reference. This element identifies another binary data element within a particular message. This enables the de-duplication of (possible big) data elements.

Non-normative Comment:

There are different standards defined for handling and referencing an attachment. Maybe there will be more to come. Therefore, the attachment reference mechanism is somehow generic here. Note: If MIME is used as encapsulation mechanism, the MIME content-type is available via a MIME header. However, the MIME headers may not be available to implementations and the SOAP 1.2 attachment feature is not restricted to MIME. Further the MIME header is not secured by the `AttachmentReference`'s `DigestInfo`, which is calculated over the binary attachment data (not including the MIME headers). Implementers may choose to annotate the `Value` element to take advantage of the mechanism defined in MTOM [SOAPMtom] for SOAP calls. This obsoletes the use of the `AttRef` element.

4.1.6.1 Base64Data – JSON Syntax

The `Base64DataType` JSON object SHALL implement in JSON syntax the requirements defined in the `Base64Data` component.

Properties of the JSON object SHALL implement the sub-components of `Base64Data` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Value	<code>val</code>	[]
AttRef	<code>attRef</code>	[]
Transforms	<code>transforms</code>	[]
MimeType	<code>contentType</code>	[]
Id	<code>ID</code>	[]

IdRef	idRef	
--------------	-------	---

The Base64DataType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-Base64DataType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
    "val": {
      "type": "string"
    },
    "attRef": {
      "$ref": "#/definitions/dsb-AttachmentReferenceType"
    },
    "transforms": {
      "$ref": "#/definitions/dsigrw-TransformsType"
    },
    "mimeType": {
      "type": "string"
    },
    "idRef": {
      "type": "string"
    }
  }
}
```

[component Base64Data JSON schema details]

4.1.6.2 Base64Data – XML Syntax

The XML type Base64DataType SHALL implement the requirements defined in the Base64Data component.

The Base64DataType XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="Base64DataType">
  <xs:sequence>
    <xs:choice minOccurs="0">
      <xs:element name="Value" type="xs:base64Binary"/>
      <xs:element name="AttRef" type="dsb:AttachmentReferenceType"/>
    </xs:choice>
    <xs:element name="Transforms" type="ds-rw:TransformsType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="MimeType" type="xs:string" use="optional"/>
  <xs:attribute name="ID" type="xs:ID" use="optional"/>
  <xs:attribute name="IDREF" type="xs:IDREF" use="optional"/>
</xs:complexType>
```

Each child element of Base64DataType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. The elements 'Id' and 'IdRef' have slightly different names ('ID' and 'IDREF') within XML syntax to match the XML schema standards for unique identifiers and their reference.

4.1.7 Component SignaturePtr

The `SignaturePtr` component is used to point to a signature in an input (for a verify request) or output (for a sign response) data object. The signature may be enveloped in a document. There may be multiple signatures contained within a single object. The `XPath` element will identify a specific instance.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `NsPrefixMapping` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.1. [\[sub component NsPrefixMapping details\]](#)

The `WhichData` element MUST contain one instance of a unique identifier reference. This element identifies the `Base64Data` component holding the signature or the enveloping document.

The OPTIONAL `XPath` element, if present, MUST contain one instance of a string. This element identifies the signature element being pointed at within the selected data object. Depending on the syntax specified in the `XPathQualifier` element the `XPath` expression is interpreted. In case of an XML `XPath` the `XPath` expression is evaluated from the root node (see section 5.1 of [XPATH]) of the XML document identified by `WhichData`. The context node for the `XPath` evaluation is the document's `DocumentElement` (see section 2.1 Well-Formed XML Documents [XML]). Regarding namespace declarations for the expression necessary for evaluation see section 1 of [XPATH].

The OPTIONAL `XPathQualifier` element, if present, MUST contain one instance of a URI. Its default value is '<http://www.w3.org/TR/2010/REC-xpath20-20101214/>'. The `XPathQualifier` element MAY be used to specify the details of how the `XPath` element is to be interpreted. If this element is missing, the default [XPATH-v2] is assumed. The present document explicitly specifies the following URIs and signature identification strategies:

- <http://www.w3.org/TR/1999/REC-xpath-19991116/> - is applicable for XML-based data objects and specifies that the `XPath` element is to be interpreted according to [XPATH-v1].
- <http://www.w3.org/TR/2010/REC-xpath20-20101214/> - is applicable for XML-based data objects and specifies that the `XPath` element is to be interpreted according to [XPATH-v2].
- <http://www.w3.org/TR/2014/REC-xpath-30-20140408/> - is applicable for XML-based data objects and specifies that the `XPath` element is to be interpreted according to [XPATH-v3].
- <https://www.w3.org/TR/2017/REC-xpath-31-20170321/> - is applicable for XML-based data objects and specifies that the `XPath` element is to be interpreted according to [XPATH-v3.1].
- `urn:iso:std:iso:32000:-1` - is applicable for PDF-based documents and specifies that the `XPath` element is to be interpreted as field name of the signature directory (see [ISO 32000-1], Table 252), which identifies a given PDF-signature.
- `urn:iso:std:iso:14533:-4:clause:D` - is applicable for other types of data objects and specifies that the `XPath` element is to be interpreted as specified in Annex D of [ISO14533-4].

Note, that this element allows to identify signature objects (signatures, time-stamp tokens, evidence records etc.) embedded within ZIP-based containers and individual `SignerInfo`-structures within a CMS-based `SignedData` container according to [\[RFC5652\]](#).

Non-normative Comment:

[\[component SignaturePtr non normative details\]](#)

4.1.7.1 SignaturePtr – JSON Syntax

The `SignaturePtrType` JSON object SHALL implement in JSON syntax the requirements defined in the `SignaturePtr` component.

Properties of the JSON object SHALL implement the sub-components of `SignaturePtr` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
NsPrefixMapping	nsDecl	[]
WhichData	whichData	[]
XPath	xPath	[]
XPathQualifier	xPathQual	[]

The SignaturePtrType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-SignaturePtrType": {
  "type": "object",
  "properties": {
    "xpathQualifier": {
      "type": "string"
    },
    "xpath": {
      "type": "string"
    },
    "nsDecl": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-NsPrefixMappingType"
      }
    },
    "whichData": {
      "type": "string"
    },
    "XPath": {
      "type": "string"
    },
    "XPathQual": {
      "type": "string",
      "default": "http://www.w3.org/TR/2010/REC-xpath20-20101214/"
    }
  },
  "required": ["whichData"]
}
```

[component SignaturePtr JSON schema details]

4.1.7.2 SignaturePtr – XML Syntax

The XML type SignaturePtrType SHALL implement the requirements defined in the SignaturePtr component.

The SignaturePtrType XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="SignaturePtrType">
  <xs:sequence>
    <xs:element name="NsPrefixMapping" type="dsb:NsPrefixMappingType"
      maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="WhichData" type="xs:IDREF" use="required"/>
  <xs:attribute name="XPath" type="xs:string" use="optional"/>
</xs:complexType>
```

```
<xs:attribute name="XPathQualifier" type="xs:anyURI"
default="http://www.w3.org/TR/2010/REC-xpath20-20101214/" use="optional"/>
</xs:complexType>
```

Each child element of `SignaturePtrType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component SignaturePtr XML schema details\]](#)

4.1.8 Component Result

The `Result` element is returned with every response message.

Below follows a list of the sub-components that constitute this component:

The `ResultMajor` element MUST contain one instance of a URI. Its value is limited to an item of the following set:

urn:oasis:names:tc:dss:1.0:resultmajor:Success
urn:oasis:names:tc:dss:1.0:resultmajor:RequesterError
urn:oasis:names:tc:dss:1.0:resultmajor:ResponderError
urn:oasis:names:tc:dss:1.0:resultmajor:InsufficientInformation
urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultmajor:Pending

The `ResultMajor` element describes the most significant component of the result code. The set values MAY be extended.

The OPTIONAL `ResultMinor` element, if present, MUST contain a URI.

The OPTIONAL `ResultMessage` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.1.3. It represents a message which MAY be returned to an operator, logged by the client, used for debugging, etc.

The OPTIONAL `ProblemReference` element, if present, MUST contain a string. In the case of processing problems, the server may want to give a reference to processing details (e.g. for debugging purposes) but doesn't want to disclose sensitive information this element can be used. It may contain a random string that links the current request to internal logs, processing protocols or crash dumps.

Non-normative Comment:

[\[component Result non normative details\]](#)

4.1.8.1 Result – JSON Syntax

The `ResultType` JSON object SHALL implement in JSON syntax the requirements defined in the `Result` component.

Properties of the JSON object SHALL implement the sub-components of `Result` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
ResultMajor	maj	[]
ResultMinor	min	[]
ResultMessage	msg	[]
ProblemReference	pRef	[]

The `ResultType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```

"dsb-ResultType": {
  "type": "object",
  "properties": {
    "maj": {
      "type": "string",
      "enum": ["urn:oasis:names:tc:dss:1.0:resultmajor:Success",
"urn:oasis:names:tc:dss:1.0:resultmajor:RequesterError",
"urn:oasis:names:tc:dss:1.0:resultmajor:ResponderError",
"urn:oasis:names:tc:dss:1.0:resultmajor:InsufficientInformation",
"urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultmajor:Pending"]
    },
    "min": {
      "type": "string"
    },
    "msg": {
      "$ref": "#/definitions/dsb-InternationalStringType"
    },
    "pRef": {
      "type": "string"
    }
  },
  "required": ["maj"]
}

```

[\[component Result JSON schema details\]](#)

4.1.8.2 Result – XML Syntax

The XML type ResultType SHALL implement the requirements defined in the Result component. The ResultType XML element is defined in XML Schema [\[DSBXSD\]](#), and is copied below for information.

```

<xs:complexType name="ResultType">
  <xs:sequence>
    <xs:element name="ResultMajor">
      <xs:simpleType>
        <xs:restriction base="xs:anyURI">
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:resultmajor:Success"/>
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:resultmajor:RequesterError"/>
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:resultmajor:ResponderError"/>
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:resultmajor:InsufficientInformation"/>
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultmajor:Pending"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="ResultMinor" type="xs:anyURI" minOccurs="0"/>
    <xs:element name="ResultMessage" type="dsb:InternationalStringType"
minOccurs="0"/>
    <xs:element name="ProblemReference" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

```

Each child element of ResultType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component Result XML schema details\]](#)

4.1.9 Component OptionalInputs

[component OptionalInputs normative details]

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `ServicePolicy` element, if present, MAY occur zero or more times containing a URI. This element allows the client to define a set of policies under which the server MUST perform the requested operation. The policy may include information on the characteristics of the server that are not covered by the `Profile` element. The `ServicePolicy` element may be used to select a specific policy if a service supports multiple policies for a specific profile, or as a sanity-check to make sure the server implements the policy the client expects.

The OPTIONAL `Language` element, if present, MUST contain a ISO language descriptor. The `Language` element indicates which language the client would like to receive `InternationalString` values in. The server should return appropriately localized strings, if possible.

The OPTIONAL `Other` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.2. The element `Other` may contain arbitrary content that may be specified in a profile and can be used to extend the Protocol.

Non-normative Comment:

[component OptionalInputs non normative details]

4.1.9.1 OptionalInputs – JSON Syntax

The component `OptionalInputs` is used as a base type only, not as a JSON instance.

[component OptionalInputs JSON schema details]

4.1.9.2 OptionalInputs – XML Syntax

The XML type `OptionalInputsType` SHALL implement the requirements defined in the `OptionalInputs` component.

The `OptionalInputsType` XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="OptionalInputsType">
  <xs:sequence>
    <xs:element name="ServicePolicy" type="xs:anyURI" maxOccurs="unbounded"
minOccurs="0"/>
    <xs:element name="Language" type="xs:language" maxOccurs="1"
minOccurs="0"/>
    <xs:element name="Other" type="dsb:AnyType" maxOccurs="unbounded"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `OptionalInputsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component OptionalInputs XML schema details]

4.1.10 Component OptionalOutputs

[component OptionalOutputs normative details]

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `AppliedPolicy` element, if present, MAY occur zero or more times containing a URI. This element lists the set of DSS policies used by the server.

The OPTIONAL `Other` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.2. Other may contain arbitrary content that may be specified in a profile and can be used to extend the Protocol.

Non-normative Comment:

[component `OptionalOutputs` non normative details]

4.1.10.1 `OptionalOutputs` – JSON Syntax

The component `OptionalOutputs` is used as a base type only, not as a JSON instance.

[component `OptionalOutputs` JSON schema details]

4.1.10.2 `OptionalOutputs` – XML Syntax

The XML type `OptionalOutputsType` SHALL implement the requirements defined in the `OptionalOutputs` component.

The `OptionalOutputsType` XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="OptionalOutputsType">
  <xs:sequence>
    <xs:element name="AppliedPolicy" type="xs:anyURI" maxOccurs="unbounded"
minOccurs="0"/>
    <xs:element name="Other" type="dsb:AnyType" maxOccurs="unbounded"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `OptionalOutputsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component `OptionalOutputs` XML schema details]

4.1.11 Component `RequestBase`

The `RequestBase` component is the base structure for request elements defined by the core protocol or profiles.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Profile` element, if present, MAY occur zero or more times containing a URI. This element indicates a set of DSS profiles. It is used by the client to select profiles the server supports.

The OPTIONAL `RequestID` element, if present, MUST contain one instance of a string. The `RequestID` element is used to correlate requests with responses. When present in a request, the server MUST return it in the response.

Non-normative Comment:

[component `RequestBase` non normative details]

4.1.11.1 `RequestBase` – JSON Syntax

The component `RequestBase` is abstract and therefore has no JSON definition.

[component `RequestBase` JSON schema details]

4.1.11.2 RequestBase – XML Syntax

The XML type `RequestBaseType` SHALL implement the requirements defined in the `RequestBase` component.

The `RequestBaseType` XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="RequestBaseType" abstract="true">
  <xs:sequence>
    <xs:element name="Profile" type="xs:anyURI" maxOccurs="unbounded"
minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="RequestID" type="xs:string" use="optional"/>
</xs:complexType>
```

Each child element of `RequestBaseType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component RequestBase XML schema details\]](#)

4.1.12 Component ResponseBase

The `ResponseBase` component is the base structure for response elements defined by the core protocol or profiles.

Below follows a list of the sub-components that constitute this component:

The `Result` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.8. [This element represents the status of the request.](#)

The OPTIONAL `AppliedProfile` element, if present, MAY occur zero or more times containing a URI. [This element lists the set of DSS profile applied by the server. This set MAY include the set of profiles requested by the client. But the server MAY use more comprehensive set of profiles and add additional profiles not requested by the client.](#)

The OPTIONAL `RequestID` element, if present, MUST contain one instance of a string. [The RequestID element is used to correlate this response with its request.](#)

The OPTIONAL `ResponseID` element, if present, MUST contain one instance of a string. [The ResponseID element is intended to correlate asynchronous calls \(see section 7\). The server fills this element with appropriate values.](#)

Non-normative Comment:

[\[component ResponseBase non normative details\]](#)

4.1.12.1 ResponseBase – JSON Syntax

The `ResponseBaseType` JSON object SHALL implement in JSON syntax the requirements defined in the `ResponseBase` component.

Properties of the JSON object SHALL implement the sub-components of `ResponseBase` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Result	result	[]
AppliedProfile	profile	[]
RequestID	reqID	[]

ResponseID	respID	
-------------------	--------	---

The ResponseBaseType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsb-ResponseBaseType": {
  "type": "object",
  "properties": {
    "result": {
      "$ref": "#/definitions/dsb-ResultType"
    },
    "profile": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "reqID": {
      "type": "string"
    },
    "respID": {
      "type": "string"
    }
  },
  "required": ["result"]
}
```

[\[component ResponseBase JSON schema details\]](#)

4.1.12.2 ResponseBase – XML Syntax

The XML type ResponseBaseType SHALL implement the requirements defined in the ResponseBase component.

The ResponseBaseType XML element is defined in XML Schema [DSBXSD], and is copied below for information.

```
<xs:complexType name="ResponseBaseType" abstract="true">
  <xs:sequence>
    <xs:element name="Result" type="dsb:ResultType"/>
    <xs:element name="AppliedProfile" type="xs:anyURI" maxOccurs="unbounded"
minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="RequestID" type="xs:string" use="optional"/>
  <xs:attribute name="ResponseID" type="xs:string" use="optional"/>
</xs:complexType>
```

Each child element of ResponseBaseType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component ResponseBase XML schema details\]](#)

4.2 Operation requests and responses

The XML elements of this section are defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/core'.

[\[category operation in namespace http://docs.oasis-open.org/dss-x/ns/core explanation\]](#)

4.2.1 Component SignRequest

The SignRequest component is sent by the client to request a signature or timestamp on some input documents.

This components extends the component 4.1.11. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL `InputDocuments` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.4.1. [\[sub component InputDocuments details\]](#)

The OPTIONAL `OptionalInputs` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.4. [It is intended to transport additional input elements of the signing request.](#)

Non-normative Comment:

[\[component SignRequest non normative details\]](#)

4.2.1.1 SignRequest – JSON Syntax

The `SignRequestType` JSON object SHALL implement in JSON syntax the requirements defined in the `SignRequest` component.

Properties of the JSON object SHALL implement the sub-components of `SignRequest` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>InputDocuments</code>	<code>inDocs</code>	[]
<code>OptionalInputs</code>	<code>optInp</code>	[]

The `SignRequestType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-SignRequestType": {
  "type": "object",
  "properties": {
    "profile": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "reqID": {
      "type": "string"
    },
    "inDocs": {
      "$ref": "#/definitions/dss2-InputDocumentsType"
    },
    "optInp": {
      "$ref": "#/definitions/dss2-OptionalInputsSignType"
    }
  }
}
```

[\[component SignRequest JSON schema details\]](#)

4.2.1.2 SignRequest – XML Syntax

The XML type `SignRequestType` SHALL implement the requirements defined in the `SignRequest` component.

The `SignRequestType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="SignRequestType">
  <xs:complexContent>
    <xs:extension base="dsb:RequestBaseType">
      <xs:sequence>
        <xs:element name="InputDocuments" type="dss2:InputDocumentsType"
minOccurs="0"/>
        <xs:element name="OptionalInputs" type="dss2:OptionalInputsSignType"
minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Each child element of `SignRequestType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component SignRequest XML schema details]

4.2.2 Component SignResponse

The `SignResponse` component returns the requested signature or timestamp to the requestor.

This components extends the component 4.1.12. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `OptionalOutputs` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.7. The `OptionalOutputs` element contains additional signing related outputs returned by the server.

The OPTIONAL `SignatureObject` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.6. The use cases described in this document assume zero or one signature being included within this element. Profiles may define processing rules how to handle unbounded cardinality.

Non-normative Comment:

[component SignResponse non normative details]

4.2.2.1 SignResponse – JSON Syntax

The `SignResponseType` JSON object SHALL implement in JSON syntax the requirements defined in the `SignResponse` component.

Properties of the JSON object SHALL implement the sub-components of `SignResponse` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>OptionalOutputs</code>	<code>optOutp</code>	[]
<code>SignatureObject</code>	<code>sigObj</code>	[]

The `SignResponseType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SignResponseType": {
  "type": "object",
  "properties": {
    "result": {
```

```

    "$ref": "#/definitions/dsb-ResultType"
  },
  "profile": {
    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "reqID": {
    "type": "string"
  },
  "respID": {
    "type": "string"
  },
  "optOutp": {
    "$ref": "#/definitions/dss2-OptionalOutputsSignType"
  },
  "sigObj": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/dss2-SignatureObjectType"
    }
  }
}
}

```

[component SignResponse JSON schema details]

4.2.2.2 SignResponse – XML Syntax

The XML type `SignResponseType` SHALL implement the requirements defined in the `SignResponse` component.

The `SignResponseType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="SignResponseType">
  <xs:complexContent>
    <xs:extension base="dsb:ResponseBaseType">
      <xs:sequence>
        <xs:element name="OptionalOutputs" type="dss2:OptionalOutputsSignType"
minOccurs="0"/>
        <xs:element name="SignatureObject" type="dss2:SignatureObjectType"
maxOccurs="unbounded" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of `SignResponseType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component SignResponse XML schema details]

4.2.3 Component VerifyRequest

The `VerifyRequest` component is sent by the client to verify a signature or timestamp on some input documents.

This components extends the component 4.1.11. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL `InputDocuments` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.4.1. [\[sub component InputDocuments details\]](#)

The OPTIONAL `OptionalInputs` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.5. [\[sub component OptionalInputs details\]](#)

The OPTIONAL `SignatureObject` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.6. [The SignatureObject element contains a signature or timestamp, or else contains a SignaturePtr that points to an XML signature in one of the input documents.](#)

Non-normative Comment:

[\[component VerifyRequest non normative details\]](#)

4.2.3.1 VerifyRequest – JSON Syntax

The `VerifyRequestType` JSON object SHALL implement in JSON syntax the requirements defined in the `VerifyRequest` component.

Properties of the JSON object SHALL implement the sub-components of `VerifyRequest` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
InputDocuments	<code>inDocs</code>	[]
OptionalInputs	<code>optInp</code>	[]
SignatureObject	<code>sigObj</code>	[]

The `VerifyRequestType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-VerifyRequestType": {
  "type": "object",
  "properties": {
    "profile": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "reqID": {
      "type": "string"
    },
    "inDocs": {
      "$ref": "#/definitions/dss2-InputDocumentsType"
    },
    "optInp": {
      "$ref": "#/definitions/dss2-OptionalInputsVerifyType"
    },
    "sigObj": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-SignatureObjectType"
      }
    }
  }
}
```

```

    }
  }
}

```

[\[component VerifyRequest JSON schema details\]](#)

4.2.3.2 VerifyRequest – XML Syntax

The XML type `VerifyRequestType` SHALL implement the requirements defined in the `VerifyRequest` component.

The `VerifyRequestType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```

<xs:complexType name="VerifyRequestType">
  <xs:complexContent>
    <xs:extension base="dsb:RequestBaseType">
      <xs:sequence>
        <xs:element name="InputDocuments" type="dss2:InputDocumentsType"
minOccurs="0"/>
        <xs:element name="OptionalInputs" type="dss2:OptionalInputsVerifyType"
minOccurs="0"/>
        <xs:element name="SignatureObject" type="dss2:SignatureObjectType"
maxOccurs="unbounded" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of `VerifyRequestType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component VerifyRequest XML schema details\]](#)

4.2.4 Component VerifyResponse

The `VerifyResponse` component is returned by the server to provide the results of verification.

This components extends the component 4.1.12. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

- || The OPTIONAL `OptionalOutputs` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.8. [\[sub component OptionalOutputs details\]](#)

Non-normative Comment:

- || [\[component VerifyResponse non normative details\]](#)

4.2.4.1 VerifyResponse – JSON Syntax

The `VerifyResponseType` JSON object SHALL implement in JSON syntax the requirements defined in the `VerifyResponse` component.

Properties of the JSON object SHALL implement the sub-components of `VerifyResponse` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>OptionalOutputs</code>	<code>optOutp</code>	[]

The `VerifyResponseType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```

"dss2-VerifyResponseType": {
  "type": "object",
  "properties": {
    "result": {
      "$ref": "#/definitions/dsb-ResultType"
    },
    "profile": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "reqID": {
      "type": "string"
    },
    "respID": {
      "type": "string"
    },
    "optOutp": {
      "$ref": "#/definitions/dss2-OptionalOutputsVerifyType"
    }
  }
}

```

[component VerifyResponse JSON schema details]

4.2.4.2 VerifyResponse – XML Syntax

The XML type VerifyResponseType SHALL implement the requirements defined in the VerifyResponse component.

The VerifyResponseType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="VerifyResponseType">
  <xs:complexContent>
    <xs:extension base="dsb:ResponseBaseType">
      <xs:sequence>
        <xs:element name="OptionalOutputs"
          type="dss2:OptionalOutputsVerifyType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of VerifyResponseType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component VerifyResponse XML schema details]

4.2.5 Component PendingRequest

The PendingRequest component is sent by the client to retrieve the result of a previous request. The client MUST provide the ResponseID received with the initial response. The Profile element MUST NOT be present as the profile selection was done with the initial request.

This components extends the component 4.1.11. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL `ClaimedIdentity` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.9. [This element allows the authentication of the requestor.](#)

Non-normative Comment:

[\[component PendingRequest non normative details\]](#)

4.2.5.1 PendingRequest – JSON Syntax

The `PendingRequestType` JSON object SHALL implement in JSON syntax the requirements defined in the `PendingRequest` component.

Properties of the JSON object SHALL implement the sub-components of `PendingRequest` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>ClaimedIdentity</code>	<code>claimedIdentity</code>	[]

The `PendingRequestType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-PendingRequestType": {
  "type": "object",
  "properties": {
    "profile": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "reqID": {
      "type": "string"
    },
    "claimedIdentity": {
      "$ref": "#/definitions/dss2-ClaimedIdentityType"
    }
  }
}
```

[\[component PendingRequest JSON schema details\]](#)

4.2.5.2 PendingRequest – XML Syntax

The XML type `PendingRequestType` SHALL implement the requirements defined in the `PendingRequest` component.

The `PendingRequestType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="PendingRequestType">
  <xs:complexContent>
    <xs:extension base="dsb:RequestBaseType">
      <xs:sequence>
        <xs:element name="ClaimedIdentity" type="dss2:ClaimedIdentityType"
maxOccurs="1" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Each child element of `PendingRequestType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component PendingRequest XML schema details\]](#)

4.3 Optional data structures defined in this document

The XML elements of this section are defined in the XML namespace `'http://docs.oasis-open.org/dss-x/ns/core'`.

[\[category optionals in namespace http://docs.oasis-open.org/dss-x/ns/core explanation\]](#)

4.3.1 Component RequestID

[\[component RequestID normative details\]](#)

Below follows a list of the sub-components that constitute this component:

- || The `value` element MUST contain one instance of a string. [\[sub component value details\]](#)

Non-normative Comment:

[\[component RequestID non normative details\]](#)

4.3.1.1 RequestID – JSON Syntax

The component `RequestID` is derived from the string type.

[\[component RequestID JSON schema details\]](#)

4.3.1.2 RequestID – XML Syntax

The XML type `RequestID` SHALL implement the requirements defined in the `RequestID` component.

The `RequestID` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:simpleType name="RequestID">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
```

Each child element of `RequestID` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component RequestID XML schema details\]](#)

4.3.2 Component ResponseID

[\[component ResponseID normative details\]](#)

Below follows a list of the sub-components that constitute this component:

- || The `value` element MUST contain one instance of a string. [\[sub component value details\]](#)

Non-normative Comment:

[\[component ResponseID non normative details\]](#)

4.3.2.1 ResponseID – JSON Syntax

The component `ResponseID` is derived from the string type.

[\[component ResponseID JSON schema details\]](#)

4.3.2.2 ResponseID – XML Syntax

The XML type `ResponseID` SHALL implement the requirements defined in the `ResponseID` component.

The `ResponseID` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:simpleType name="ResponseID">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
```

Each child element of ResponseID XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component ResponseID XML schema details\]](#)

4.3.3 Component OptionalInputsBase

The OptionalInputsBase contains a common set of additional inputs associated with the processing of the request. Profiles will specify the allowed optional inputs and their default values. If a server doesn't recognize or can't handle any optional input, it MUST reject the request with a ResultMajor code of RequesterError and a ResultMinor code of NotSupported. All request messages can contain an OptionalInputSign or OptionalInputVerify element depending on the method called. The OptionalInputsBase component defines the elements that are common to all optional inputs defined in this document. Several optional inputs are defined in this document, and profiles can define additional ones.

This components extends the component 4.1.9. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL ClaimedIdentity element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.9. This element indicates the identity of the client who is making a request. The server may use this to parameterize any aspect of its processing. Profiles that make use of this element MUST define its semantics.

The OPTIONAL Schemas element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.10. The Schemas element provides a mechanism for transporting XML schemas required for validating an XML document along with the request message.

The OPTIONAL AddTimestamp element, if present, MAY occur zero or more times containing a URI. The AddTimestamp element indicates that the client wishes the server to embed a timestamp token as a property or attribute of the resultant or the supplied signature. The timestamp token will be applied to the signature value in the case of CMS/PKCS7 signatures or the <ds:SignatureValue> element in the case of XML signatures. Note: Procedures for handling other forms of timestamp may be defined in profiles of the Core. In particular, the DSS AdES profile [DSS-AdES-P] defines procedures for generating timestamps over the content which is about to be signed (sometimes called content timestamps), and the DSS Timestamp profile [DSS-TS-P] defines procedures for handling standalone timestamps.

The OPTIONAL EnforceAsynchronousProcessing element, if present, MUST contain a boolean. Its default value is 'false'. [\[sub component EnforceAsynchronousProcessing details\]](#)

The OPTIONAL Nonce element, if present, MUST contain an integer. The Nonce element MAY be used to provide a large random number to enable the client correlate a timestamp request with the response.

Non-normative Comment:

[\[component OptionalInputsBase non normative details\]](#)

4.3.3.1 OptionalInputsBase – JSON Syntax

The component OptionalInputsBase is abstract and therefore has no JSON definition. [\[component OptionalInputsBase JSON schema details\]](#)

4.3.3.2 OptionalInputsBase – XML Syntax

The XML type `OptionalInputsBaseType` SHALL implement the requirements defined in the `OptionalInputsBase` component.

The `OptionalInputsBaseType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="OptionalInputsBaseType" abstract="true">
  <xs:complexContent>
    <xs:extension base="dsb:OptionalInputsType">
      <xs:sequence>
        <xs:element name="ClaimedIdentity" type="dss2:ClaimedIdentityType"
maxOccurs="1" minOccurs="0"/>
        <xs:element name="Schemas" type="dss2:SchemasType" maxOccurs="1"
minOccurs="0"/>
        <xs:element name="AddTimestamp" type="xs:anyURI" maxOccurs="unbounded"
minOccurs="0"/>
        <xs:element name="EnforceAsynchronousProcessing" type="xs:boolean"
default="false" maxOccurs="1" minOccurs="0"/>
        <xs:element name="Nonce" type="xs:integer" maxOccurs="1"
minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Each child element of `OptionalInputsBaseType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalInputsBase XML schema details\]](#)

4.3.4 Component OptionalInputsSign

The `OptionalInputsSign` component defines a set of additional inputs associated with the processing of a signing request. The `OptionalInputsSign` component contains additional inputs associated with the processing of a signing request. Profiles MAY specify the allowed optional inputs and their default values. The definition of an optional input MAY include a default value, so that a client may omit the `OptionalInputsSign` yet still get service from any profile-compliant DSS server. If a server doesn't recognize or can't handle any optional input, it MUST reject the request with a `ResultMajor` code of `RequesterError` and a `ResultMinor` code of `NotSupported`.

This components extends the component 4.3.3. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `SignatureType` element, if present, MUST contain a URI. The `SignatureType` element indicates the type of signature or timestamp to produce (such as a XML signature, a XML timestamp, a RFC 3161 timestamp, a CMS signature, etc.). See section 7.1 for some URI references that MAY be used as the value of this element.

The OPTIONAL `IntendedAudience` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.11. This element gives a hint regarding the target audience of the requested signature.

The OPTIONAL `KeySelector` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.12. The `KeySelector` provides details which key or sets of keys the client is expecting to be used.

The OPTIONAL `Properties` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.14. The `Properties` element is used to instruct the server to add certain signed or unsigned properties (aka “signature attributes”) into the signature. The client MAY send the server a particular value to use for each property, or leave the value up to the server to determine. The server MAY add additional properties, even if these aren’t requested by the client.

The OPTIONAL `IncludeObject` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.17. The `IncludeObject` element is used to request the creation of an XMLDSig enveloping signature.

The OPTIONAL `IncludeEContent` element, if present, MUST contain a boolean. Its default value is ‘false’. If the value of the `IncludeEContent` is ‘true’ a CMS signature includes enveloped (or ‘encapsulated’) content.

The OPTIONAL `SignaturePlacement` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.18. The `SignaturePlacement` element is used to request the creation of an XMLDSig enveloped signature placed within a document. The resulting document with the enveloped signature is placed in the optional output `DocumentWithSignature`.

The OPTIONAL `SignedReferences` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.20. The `SignedReferences` element gives the client greater control over how the `<ds:Reference>` elements of a XMLDSig signature are formed.

The OPTIONAL `SignatureAlgorithm` element, if present, MUST contain a string. The `SignatureAlgorithm` element MAY be used to request a specific signing algorithm. This may be useful to narrow down the set of algorithms the server may apply. Support for specific signature algorithms may change over time and the use of other input elements, especially `Profile` and `ServicePolicy`. The use of the `SignatureAlgorithm` value is context specific, maybe different when requesting a CMS or XML signature.

The OPTIONAL `SignatureQualityLevel` element, if present, MUST contain a URI. Legal and regulatory frameworks distinguish signatures by their level of quality, where a higher level of quality usually implies stronger restrictions on holder identification, protection of private key and certification of signature creation device and software. A server MAY be able to generate signatures of different quality levels. This element allows the requester to define a minimum signature quality level. Values for this URI may be specified by profiles.

Non-normative Comment:

[component `OptionalInputsSign` non normative details]

4.3.4.1 `OptionalInputsSign` – JSON Syntax

The `OptionalInputsSignType` JSON object SHALL implement in JSON syntax the requirements defined in the `OptionalInputsSign` component.

Properties of the JSON object SHALL implement the sub-components of `OptionalInputsSign` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
SignatureType	sigType	[]
IntendedAudience	aud	[]
KeySelector	keySel	[]
Properties	props	[]
IncludeObject	incObj	[]
IncludeEContent	incContent	[]
SignaturePlacement	sigPlacement	[]
SignedReferences	signedRefs	[]
SignatureAlgorithm	sigAlgo	[]
SignatureQualityLevel	quality	[]

The `OptionalInputsSignType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-OptionalInputsSignType": {
  "type": "object",
  "properties": {
    "policy": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "lang": {
      "type": "string"
    },
    "other": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-AnyType"
      }
    },
    "claimedIdentity": {
      "$ref": "#/definitions/dss2-ClaimedIdentityType"
    },
    "schemas": {
      "$ref": "#/definitions/dss2-SchemasType"
    },
    "addTimestamp": {
      "type": "array",
      "items": {
```

```

        "type": "string"
      },
    },
    "enforceAsync": {
      "type": "boolean"
    },
    "nonce": {
      "type": "integer"
    },
    "sigType": {
      "type": "string"
    },
    "aud": {
      "$ref": "#/definitions/dss2-IntendedAudienceType"
    },
    "keySel": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-KeySelectorType"
      }
    },
    "props": {
      "$ref": "#/definitions/dss2-PropertiesHolderType"
    },
    "incObj": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-IncludeObjectType"
      }
    },
    "incContent": {
      "type": "boolean",
      "default": "false"
    },
    "sigPlacement": {
      "$ref": "#/definitions/dss2-SignaturePlacementType"
    },
    "signedRefs": {
      "$ref": "#/definitions/dss2-SignedReferencesType"
    },
    "sigAlgo": {
      "type": "string"
    },
    "quality": {
      "type": "string"
    }
  }
}

```

[component OptionalInputsSign JSON schema details]

4.3.4.2 OptionalInputsSign – XML Syntax

The XML type `OptionalInputsSignType` SHALL implement the requirements defined in the `OptionalInputsSign` component.

The `OptionalInputsSignType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="OptionalInputsSignType">
```

```

<xs:complexContent>
  <xs:extension base="dss2:OptionalInputsBaseType">
    <xs:sequence>
      <xs:element name="SignatureType" type="xs:anyURI" maxOccurs="1"
minOccurs="0"/>
      <xs:element name="IntendedAudience" type="dss2:IntendedAudienceType"
maxOccurs="1" minOccurs="0"/>
      <xs:element name="KeySelector" type="dss2:KeySelectorType"
maxOccurs="unbounded" minOccurs="0"/>
      <xs:element name="Properties" type="dss2:PropertiesHolderType"
maxOccurs="1" minOccurs="0"/>
      <xs:element name="IncludeObject" type="dss2:IncludeObjectType"
maxOccurs="unbounded" minOccurs="0"/>
      <xs:element name="IncludeEContent" type="xs:boolean" default="false"
maxOccurs="1" minOccurs="0"/>
      <xs:element name="SignaturePlacement"
type="dss2:SignaturePlacementType" maxOccurs="1" minOccurs="0"/>
      <xs:element name="SignedReferences" type="dss2:SignedReferencesType"
maxOccurs="1" minOccurs="0"/>
      <xs:element name="SignatureAlgorithm" type="xs:string" maxOccurs="1"
minOccurs="0"/>
      <xs:element name="SignatureQualityLevel" type="xs:anyURI"
maxOccurs="1" minOccurs="0"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

Each child element of OptionalInputsSignType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalInputsSign XML schema details\]](#)

4.3.5 Component OptionalInputsVerify

The OptionalInputsVerify component defines a set of additional inputs associated with the processing of a verification request. Profiles MAY specify the allowed optional inputs and their default values. The definition of an optional input MAY include a default value, so that a client may omit the OptionalInputsVerify yet still get service from any profile-compliant DSS server. If a server doesn't recognize or can't handle any optional input, it MUST reject the request with a ResultMajor code of RequesterError and a ResultMinor code of NotSupported.

This components extends the component 4.3.3. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL `UseVerificationTime` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.24.

The `UseVerificationTime` element instructs the server to attempt to determine the signature's validity at the specified time, instead of a time determined by the server policy.

The OPTIONAL `ReturnVerificationTimeInfo` element, if present, MUST contain a boolean. Its default value is 'false'. This element can be used by the client to obtain the time instant used by the server to validate the signature.

The OPTIONAL `AdditionalKeyInfo` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.27. This element provides the server with additional data (such as certificates and CRLs) which it can use to validate the signature. These options are not allowed in multi-signature verification.

The OPTIONAL `ReturnProcessingDetails` element, if present, MUST contain a boolean. Its default value is 'false'. This element instructs the server to return a `ProcessingDetails` element. It is not allowed in multi-signature verification.

The OPTIONAL `ReturnSigningTimeInfo` element, if present, MUST contain a boolean. Its default value is 'false'. This element allows the client to instruct the server to return the time instant associated to the signature creation as a `SigningTimeInfo` element.

The OPTIONAL `ReturnSignerIdentity` element, if present, MUST contain a boolean. Its default value is 'false'.

The OPTIONAL `ReturnAugmentedSignature` element, if present, MUST contain a URI. This element allows the client to instruct the server to return an `Component AugmentedSignature` optional output component, containing an augmented signature. This document does not define values for this element, but profiles may provide a set of URIs.

The OPTIONAL `ReturnTimestampedSignature` element, if present, MAY occur zero or more times containing a URI. It indicates that the client wishes the server to update the signature after its verification by embedding a signature timestamp token as an unauthenticated attribute (see "unauthAttrs" in section 9.1 [RFC 3852]) or *unsigned* property (see section 6.2.5 "The UnsignedSignatureProperties element" and section 7.3 "The SignatureTimeStamp element" [XAdES]) of the supplied signature. The timestamp token will be on the signature value in the case of CMS/PKCS7 signatures or the `<ds:SignatureValue>` element in the case of XML signatures.

The OPTIONAL `VerifyManifests` element, if present, MUST contain a boolean. Its default value is 'false'. This element is allowed in multi-signature verification requests.

Non-normative Comment:

[component `OptionalInputsVerify` non normative details]

4.3.5.1 OptionalInputsVerify – JSON Syntax

The `OptionalInputsVerifyType` JSON object SHALL implement in JSON syntax the requirements defined in the `OptionalInputsVerify` component.

Properties of the JSON object SHALL implement the sub-components of `OptionalInputsVerify` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>UseVerificationTime</code>	<code>useVerificationTime</code>	[]
<code>ReturnVerificationTimeInfo</code>	<code>returnVerificationTime</code>	[]
<code>AdditionalKeyInfo</code>	<code>addKeyInfo</code>	[]

ReturnProcessingDetails	returnProcDetails	[]
ReturnSigningTimeInfo	returnSigningTime	[]
ReturnSignerIdentity	returnSigner	[]
ReturnAugmentedSignature	returnAugmented	[]
ReturnTimestampedSignature	returnTimestamped	[]
VerifyManifests	verifyManifests	[]

The OptionalInputsVerifyType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-OptionalInputsVerifyType": {
  "type": "object",
  "properties": {
    "policy": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "lang": {
      "type": "string"
    },
    "other": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-AnyType"
      }
    },
    "claimedIdentity": {
      "$ref": "#/definitions/dss2-ClaimedIdentityType"
    },
    "schemas": {
      "$ref": "#/definitions/dss2-SchemasType"
    },
    "addTimestamp": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "enforceAsync": {
      "type": "boolean"
    },
    "nonce": {
      "type": "integer"
    },
    "useVerificationTime": {
      "$ref": "#/definitions/dss2-UseVerificationTimeType"
    },
    "returnVerificationTime": {
      "type": "boolean",
      "default": "false"
    },
    "addKeyInfo": {
```

```

    "type": "array",
    "items": {
      "$ref": "#/definitions/dss2-AdditionalKeyInfoType"
    }
  },
  "returnProcDetails": {
    "type": "boolean",
    "default": "false"
  },
  "returnSigningTime": {
    "type": "boolean",
    "default": "false"
  },
  "returnSigner": {
    "type": "boolean",
    "default": "false"
  },
  "returnAugmented": {
    "type": "string"
  },
  "returnTimestamped": {
    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "verifyManifests": {
    "type": "boolean",
    "default": "false"
  }
}

```

[component OptionalInputsVerify JSON schema details]

4.3.5.2 OptionalInputsVerify – XML Syntax

The XML type OptionalInputsVerifyType SHALL implement the requirements defined in the OptionalInputsVerify component.

The OptionalInputsVerifyType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="OptionalInputsVerifyType">
  <xs:complexContent>
    <xs:extension base="dss2:OptionalInputsBaseType">
      <xs:sequence>
        <xs:element name="UseVerificationTime"
type="dss2:UseVerificationTimeType" maxOccurs="1" minOccurs="0"/>
        <xs:element name="ReturnVerificationTimeInfo" type="xs:boolean"
default="false" maxOccurs="1" minOccurs="0"/>
        <xs:element name="AdditionalKeyInfo" type="dss2:AdditionalKeyInfoType"
maxOccurs="unbounded" minOccurs="0"/>
        <xs:element name="ReturnProcessingDetails" type="xs:boolean"
default="false" maxOccurs="1" minOccurs="0"/>
        <xs:element name="ReturnSigningTimeInfo" type="xs:boolean"
default="false" maxOccurs="1" minOccurs="0"/>
        <xs:element name="ReturnSignerIdentity" type="xs:boolean"
default="false" maxOccurs="1" minOccurs="0"/>
        <xs:element name="ReturnAugmentedSignature" type="xs:anyURI"
maxOccurs="1" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```



```

        <xs:element name="ReturnTimestampedSignature" type="xs:anyURI"
maxOccurs="unbounded" minOccurs="0"/>
        <xs:element name="VerifyManifests" type="xs:boolean" default="false"
maxOccurs="1" minOccurs="0"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

Each child element of `OptionalInputsVerifyType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalInputsVerify XML schema details\]](#)

4.3.6 Component `OptionalOutputsBase`

The `OptionalOutputsBase` contains a common set of additional outputs associated with the processing of the request. The client MAY request the server to respond with certain optional outputs by sending certain optional inputs. The server MAY also respond with outputs the client didn't request, depending on the server's profile and policy.

This components extends the component 4.1.10. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Schemas` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.10. The `Schemas` element is typically used as an optional input in a `VerifyRequest`. However, there are situations where it may be used as an optional output. For example, a service that makes use of the `ReturnUpdatedSignature` mechanism may, after verifying a signature over an input document, generate a signature over a document of a different schema than the input document. In this case the `Schemas` element MAY be used to communicate the XML schemas required for validating a returned XML document.

Non-normative Comment:

[\[component OptionalOutputsBase non normative details\]](#)

4.3.6.1 `OptionalOutputsBase` – JSON Syntax

The component `OptionalOutputsBase` is abstract and therefore has no JSON definition.

[\[component OptionalOutputsBase JSON schema details\]](#)

4.3.6.2 `OptionalOutputsBase` – XML Syntax

The XML type `OptionalOutputsBaseType` SHALL implement the requirements defined in the `OptionalOutputsBase` component.

The `OptionalOutputsBaseType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```

<xs:complexType name="OptionalOutputsBaseType" abstract="true">
  <xs:complexContent>
    <xs:extension base="dsb:OptionalOutputsType">
      <xs:sequence>
        <xs:element name="Schemas" type="dss2:SchemasType" maxOccurs="1"
minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of `OptionalOutputsBaseType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalOutputsBase XML schema details\]](#)

4.3.7 Component `OptionalOutputsSign`

The `OptionalOutputsSignType` component defines a set of additional outputs associated with the processing of a signing request. This document does not define any additional outputs but profiles may extend the set of additional outputs.

This components extends the component 4.3.6. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The `OPTIONAL DocumentWithSignature` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.19. The use cases described in this document assume zero or one document including a signature being returned by this element. Profiles may define processing rules how to handle unbounded cardinality.

Non-normative Comment:

[\[component OptionalOutputsSign non normative details\]](#)

4.3.7.1 `OptionalOutputsSign` – JSON Syntax

The `OptionalOutputsSignType` JSON object SHALL implement in JSON syntax the requirements defined in the `OptionalOutputsSign` component.

Properties of the JSON object SHALL implement the sub-components of `OptionalOutputsSign` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>DocumentWithSignature</code>	<code>docWithSignature</code>	<code>[]</code>

The `OptionalOutputsSignType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-OptionalOutputsSignType": {
  "type": "object",
  "properties": {
    "policy": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "other": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-AnyType"
      }
    },
    "schemas": {
      "$ref": "#/definitions/dss2-SchemasType"
    },
    "docWithSignature": {
      "type": "array",
      "items": {
```

```

        "$ref": "#/definitions/dss2-DocumentWithSignatureType"
    }
}
}
}

```

[\[component OptionalOutputsSign JSON schema details\]](#)

4.3.7.2 OptionalOutputsSign – XML Syntax

The XML type `OptionalOutputsSignType` SHALL implement the requirements defined in the `OptionalOutputsSign` component.

The `OptionalOutputsSignType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```

<xs:complexType name="OptionalOutputsSignType">
  <xs:complexContent>
    <xs:extension base="dss2:OptionalOutputsBaseType">
      <xs:sequence>
        <xs:element name="DocumentWithSignature"
          type="dss2:DocumentWithSignatureType" maxOccurs="unbounded" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of `OptionalOutputsSignType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalOutputsSign XML schema details\]](#)

4.3.8 Component OptionalOutputsVerify

The `OptionalOutputsVerify` component defines a set of additional outputs associated with the processing of a verification request.

This component extends the component 4.3.6. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `VerifyManifestResults` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.22. [\[sub component VerifyManifestResults details\]](#)

The OPTIONAL `SigningTimeInfo` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.30. The `SigningTimeInfo` element returns the signature's creation date and time. When there's no way for the server to determine the signing time, the server MUST omit this element.

The OPTIONAL `VerificationTimeInfo` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.26. In addition to the verification time, the server MAY include in the `VerificationTimeInfo` element any other relevant time instants that may have been used when determining the verification time or that may be useful for its qualification.

The OPTIONAL `ProcessingDetails` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.28. The `ProcessingDetails` element elaborates on what signature verification steps succeeded or failed.

The OPTIONAL `SignerIdentity` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in section 4.5.1. The `SignerIdentity` element contains an indication of who performed the signature.

The OPTIONAL `AugmentedSignature` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.32. This element contains the processed signature.

The OPTIONAL `TimestampedSignature` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.32. The `TimestampedSignature` element contains the returned timestamped signature.

Non-normative Comment:

[\[component OptionalOutputsVerify non normative details\]](#)

4.3.8.1 OptionalOutputsVerify – JSON Syntax

The `OptionalOutputsVerifyType` JSON object SHALL implement in JSON syntax the requirements defined in the `OptionalOutputsVerify` component.

Properties of the JSON object SHALL implement the sub-components of `OptionalOutputsVerify` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>VerifyManifestResults</code>	<code>result</code>	[]
<code>SigningTimeInfo</code>	<code>signingTimeInfo</code>	[]
<code>VerificationTimeInfo</code>	<code>verificationTimeInfo</code>	[]
<code>ProcessingDetails</code>	<code>procDetails</code>	[]
<code>SignerIdentity</code>	<code>signerIdentity</code>	[]
<code>AugmentedSignature</code>	<code>augSig</code>	[]
<code>TimestampedSignature</code>	<code>timestampedSig</code>	[]

The `OptionalOutputsVerifyType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-OptionalOutputsVerifyType": {
  "type": "object",
  "properties": {
    "policy": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "other": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-AnyType"
      }
    },
    "schemas": {
      "$ref": "#/definitions/dss2-SchemasType"
    },
    "result": {
      "$ref": "#/definitions/dss2-VerifyManifestResultsType"
    },
    "signingTimeInfo": {
      "$ref": "#/definitions/dss2-SigningTimeInfoType"
    },
    "verificationTimeInfo": {
      "$ref": "#/definitions/dss2-VerificationTimeInfoType"
    },
    "procDetails": {
      "$ref": "#/definitions/dss2-ProcessingDetailsType"
    },
    "signerIdentity": {
      "$ref": "#/definitions/saml2rw-NameIDType"
    },
    "augSig": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-AugmentedSignatureType"
      }
    },
    "timestampedSig": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-AugmentedSignatureType"
      }
    }
  }
}
```

[component `OptionalOutputsVerify` JSON schema details]

4.3.8.2 `OptionalOutputsVerify` – XML Syntax

The XML type `OptionalOutputsVerifyType` SHALL implement the requirements defined in the `OptionalOutputsVerify` component.

The `OptionalOutputsVerifyType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="OptionalOutputsVerifyType">
  <xs:complexContent>
    <xs:extension base="dss2:OptionalOutputsBaseType">
      <xs:sequence>
        <xs:element name="VerifyManifestResults"
type="dss2:VerifyManifestResultsType" maxOccurs="1" minOccurs="0"/>
        <xs:element name="SigningTimeInfo" type="dss2:SigningTimeInfoType"
maxOccurs="1" minOccurs="0"/>
        <xs:element name="VerificationTimeInfo"
type="dss2:VerificationTimeInfoType" maxOccurs="1" minOccurs="0"/>
        <xs:element name="ProcessingDetails" type="dss2:ProcessingDetailsType"
maxOccurs="1" minOccurs="0"/>
        <xs:element name="SignerIdentity" type="saml2-rw:NameIDType"
maxOccurs="1" minOccurs="0"/>
        <xs:element name="AugmentedSignature"
type="dss2:AugmentedSignatureType" maxOccurs="unbounded" minOccurs="0"/>
        <xs:element name="TimestampedSignature"
type="dss2:AugmentedSignatureType" maxOccurs="unbounded" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of `OptionalOutputsVerifyType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component OptionalOutputsVerify XML schema details\]](#)

4.3.9 Component ClaimedIdentity

This element indicates the identity of the client who is making a request. The server may use this to parameterize any aspect of its processing. Profiles that make use of this element MUST define its semantics.

Below follows a list of the sub-components that constitute this component:

The `Name` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in section 4.5.1. The claimed identity may be authenticated using the security binding, according to section 6, or using authentication data provided in the `SupportingInfo` element. The server MUST check that the asserted `Name` is authenticated before relying upon the `Name`.

The OPTIONAL `SupportingInfo` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.1.2. The `SupportingInfo` element can be used by profiles to carry information related to the claimed identity. One possible use of `SupportingInfo` is to carry authentication data that authenticates the request as originating from the claimed identity (examples of authentication data include a password or SAML Assertion, a signature or MAC calculated over the request using a client key).

Non-normative Comment:

[\[component ClaimedIdentity non normative details\]](#)

4.3.9.1 ClaimedIdentity – JSON Syntax

The `ClaimedIdentityType` JSON object SHALL implement in JSON syntax the requirements defined in the `ClaimedIdentity` component.

Properties of the JSON object SHALL implement the sub-components of `ClaimedIdentity` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Name	name	[]
SupportingInfo	suppInfo	[]

The ClaimedIdentityType JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-ClaimedIdentityType": {
  "type": "object",
  "properties": {
    "name": {
      "$ref": "#/definitions/saml2rw-NameIDType"
    },
    "suppInfo": {
      "$ref": "#/definitions/dsb-AnyType"
    }
  },
  "required": ["name"]
}
```

[\[component ClaimedIdentity JSON schema details\]](#)

4.3.9.2 ClaimedIdentity – XML Syntax

The XML type ClaimedIdentityType SHALL implement the requirements defined in the ClaimedIdentity component.

The ClaimedIdentityType XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="ClaimedIdentityType">
  <xs:sequence>
    <xs:element name="Name" type="saml2-rw:NameIDType"/>
    <xs:element name="SupportingInfo" type="dsb:AnyType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of ClaimedIdentityType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component ClaimedIdentity XML schema details\]](#)

4.3.10 Component Schemas

The Schemas component provides an in band mechanism for communicating XML schemas required for validating an XML document.

Below follows a list of the sub-components that constitute this component:

The `Schema` element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in this document in section 4.4.3. [\[sub component Schema details\]](#)

Non-normative Comment:

Note: It is recommended to use `xml:id` as defined in [\[xml:id\]](#) as `id` in the payload being referenced by a `<ds:Reference>`, because the schema then does not have to be supplied for identifying the `Id` elements.

4.3.10.1 Schemas – JSON Syntax

The `SchemasType` JSON object SHALL implement in JSON syntax the requirements defined in the `Schemas` component.

Properties of the JSON object SHALL implement the sub-components of `Schemas` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>Schema</code>	<code>schema</code>	[]

The `SchemasType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-SchemasType": {
  "type": "object",
  "properties": {
    "schema": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentType"
      }
    }
  },
  "required": ["schema"]
}
```

[\[component Schemas JSON schema details\]](#)

4.3.10.2 Schemas – XML Syntax

The XML type `SchemasType` SHALL implement the requirements defined in the `Schemas` component.

The `SchemasType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="SchemasType">
  <xs:sequence>
    <xs:element name="Schema" type="dss2:DocumentType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `SchemasType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component Schemas XML schema details\]](#)

4.3.11 Component IntendedAudience

The `IntendedAudience` element tells the server who the target audience of this signature is. The server MAY use this to parameterize any aspect of its processing (for example, the server MAY choose to sign with a key that it knows a particular recipient trusts).

Below follows a list of the sub-components that constitute this component:

The `Recipient` element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in section 4.5.1. [\[sub component Recipient details\]](#)

Non-normative Comment:

[\[component IntendedAudience non normative details\]](#)

4.3.11.1 IntendedAudience – JSON Syntax

The `IntendedAudienceType` JSON object SHALL implement in JSON syntax the requirements defined in the `IntendedAudience` component.

Properties of the JSON object SHALL implement the sub-components of `IntendedAudience` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Recipient	<code>recipient</code>	[]

The `IntendedAudienceType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-IntendedAudienceType": {
  "type": "object",
  "properties": {
    "recipient": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/saml2rw-NameIDType"
      }
    }
  },
  "required": ["recipient"]
}
```

[\[component IntendedAudience JSON schema details\]](#)

4.3.11.2 IntendedAudience – XML Syntax

The XML type `IntendedAudienceType` SHALL implement the requirements defined in the `IntendedAudience` component.

The `IntendedAudienceType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="IntendedAudienceType">
  <xs:sequence>
    <xs:element name="Recipient" type="saml2-rw:NameIDType"
      maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `IntendedAudienceType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component IntendedAudience XML schema details\]](#)

4.3.12 Component KeySelector

The `KeySelector` component holds data that selects a specific key or certificate or group of certificates. Only one of its sub-components MUST be present. But a `KeySelector` component can occur multiple times as a sub-component in the `OptionalInputsSign` component

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `X509Digest` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.3.13. [\[sub component X509Digest details\]](#)

The OPTIONAL `X509SubjectName` element, if present, MUST contain one instance of a string. The `X509SubjectName` element contains an X.509 subject distinguished name that SHOULD be represented as a string that complies with section 3 of RFC4514 [LDAP-DN].

The OPTIONAL `X509SKI` element, if present, MUST contain one instance of base64 encoded binary data. The `X509SKI` element contains the base64 encoded plain (i.e. non-DER-encoded) value of a X509 V.3 SubjectKeyIdentifier extension.

The OPTIONAL `X509Certificate` element, if present, MUST contain one instance of base64 encoded binary data. The `X509Certificate` element contains a base64-encoded [X509V3] certificate.

The OPTIONAL `KeyName` element, if present, MUST contain one instance of a string. It selects a key to be used for signing in a generic way. Usually the client knows about the valid values for `KeyName`.

Non-normative Comment:

[\[component KeySelector non normative details\]](#)

4.3.12.1 KeySelector – JSON Syntax

The `KeySelectorType` JSON object SHALL implement in JSON syntax the requirements defined in the `KeySelector` component.

Properties of the JSON object SHALL implement the sub-components of `KeySelector` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>X509Digest</code>	<code>x509Digest</code>	[]
<code>X509SubjectName</code>	<code>sub</code>	[]
<code>X509SKI</code>	<code>ski</code>	[]
<code>X509Certificate</code>	<code>cert</code>	[]
<code>KeyName</code>	<code>name</code>	[]

The `KeySelectorType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-KeySelectorType": {
  "type": "object",
  "properties": {
    "x509Digest": {
      "$ref": "#/definitions/dss2-X509DigestType"
    },
  },
}
```

```

    "sub": {
      "type": "string"
    },
    "ski": {
      "type": "string"
    },
    "cert": {
      "type": "string"
    },
    "name": {
      "type": "string"
    }
  },
  "minProperties": 1,
  "maxProperties": 1
}

```

[\[component KeySelector JSON schema details\]](#)

4.3.12.2 KeySelector – XML Syntax

The XML type `KeySelectorType` SHALL implement the requirements defined in the `KeySelector` component.

The `KeySelectorType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```

<xs:complexType name="KeySelectorType">
  <xs:choice>
    <xs:element name="X509Digest" type="dss2:X509DigestType"/>
    <xs:element name="X509SubjectName" type="xs:string"/>
    <xs:element name="X509SKI" type="xs:base64Binary"/>
    <xs:element name="X509Certificate" type="xs:base64Binary"/>
    <xs:element name="KeyName" type="xs:string"/>
  </xs:choice>
</xs:complexType>

```

Each child element of `KeySelectorType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component KeySelector XML schema details\]](#)

4.3.13 Component X509Digest

The `X509Digest` component contains a base64-encoded digest of a certificate. The digest algorithm URI is identified with a required `Algorithm` element. The input to the digest MUST be the raw octets that would be base64-encoded of a `X509Certificate`.

Below follows a list of the sub-components that constitute this component:

The `value` element MUST contain one instance of base64 encoded binary data. [\[sub component value details\]](#)

The `Algorithm` element MUST contain one instance of a string. The string describes the digest algorithm in an appropriate way for the server side processing. Depending on the signature format this may be an OID (e.g. '2.16.840.1.101.3.4.2.1'), an URI (e.g. 'http://www.w3.org/2001/04/xmlenc#sha256') or a descriptive string ('SHA-256').

Non-normative Comment:

[\[component X509Digest non normative details\]](#)

4.3.13.1 X509Digest – JSON Syntax

The `X509DigestType` JSON object SHALL implement in JSON syntax the requirements defined in the `X509Digest` component.

Properties of the JSON object SHALL implement the sub-components of `X509Digest` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
value	value	[]
Algorithm	alg	[]

The `X509DigestType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-X509DigestType": {
  "type": "object",
  "properties": {
    "value": {
      "type": "string"
    },
    "alg": {
      "type": "string"
    }
  },
  "required": ["alg"]
}
```

[\[component X509Digest JSON schema details\]](#)

4.3.13.2 X509Digest – XML Syntax

The XML type `X509DigestType` SHALL implement the requirements defined in the `X509Digest` component.

The `X509DigestType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="X509DigestType">
  <xs:simpleContent>
    <xs:extension base="xs:base64Binary">
      <xs:attribute name="Algorithm" type="xs:string" use="required"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Each child element of `X509DigestType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component X509Digest XML schema details\]](#)

4.3.14 Component PropertiesHolder

The `PropertiesHolder` component is used to request that the server add certain signed or unsigned properties (aka “signature attributes”) into the signature. The client can send the server a particular value to use for each property, or leave the value up to the server to determine. The server can add additional properties, even if these aren’t requested by the client.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `SignedProperties` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.15.

[These properties will be covered by the signature.](#)

The OPTIONAL `UnsignedProperties` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.15.

[These properties will not be covered by the signature.](#)

Non-normative Comment:

[\[component PropertiesHolder non normative details\]](#)

4.3.14.1 PropertiesHolder – JSON Syntax

The `PropertiesHolderType` JSON object SHALL implement in JSON syntax the requirements defined in the `PropertiesHolder` component.

Properties of the JSON object SHALL implement the sub-components of `PropertiesHolder` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>SignedProperties</code>	<code>signedProps</code>	[]
<code>UnsignedProperties</code>	<code>unsignedProps</code>	[]

The `PropertiesHolderType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-PropertiesHolderType": {
  "type": "object",
  "properties": {
    "signedProps": {
      "$ref": "#/definitions/dss2-PropertiesType"
    },
    "unsignedProps": {
      "$ref": "#/definitions/dss2-PropertiesType"
    }
  }
}
```

[\[component PropertiesHolder JSON schema details\]](#)

4.3.14.2 PropertiesHolder – XML Syntax

The XML type `PropertiesHolderType` SHALL implement the requirements defined in the `PropertiesHolder` component.

The `PropertiesHolderType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="PropertiesHolderType">
  <xs:sequence>
    <xs:element name="SignedProperties" type="dss2:PropertiesType"
minOccurs="0"/>
    <xs:element name="UnsignedProperties" type="dss2:PropertiesType"
minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `PropertiesHolderType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component PropertiesHolder XML schema details\]](#)

4.3.15 Component Properties

[\[component Properties normative details\]](#)

Below follows a list of the sub-components that constitute this component:

The `Property` element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in this document in section 4.3.16. [\[sub component Property details\]](#)

Non-normative Comment:

[\[component Properties non normative details\]](#)

4.3.15.1 Properties – JSON Syntax

The `PropertiesType` JSON object SHALL implement in JSON syntax the requirements defined in the `Properties` component.

Properties of the JSON object SHALL implement the sub-components of `Properties` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Property	<code>prop</code>	<code>[]</code>

The `PropertiesType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-PropertiesType": {
  "type": "object",
  "properties": {
    "prop": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-PropertyType"
      }
    }
  },
  "required": ["prop"]
}
```

[\[component Properties JSON schema details\]](#)

4.3.15.2 Properties – XML Syntax

The XML type `PropertiesType` SHALL implement the requirements defined in the `Properties` component.

The `PropertiesType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="PropertiesType">
  <xs:sequence>
    <xs:element name="Property" type="dss2:PropertyType"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `PropertiesType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component Properties XML schema details]

4.3.16 Component Property

[component Property normative details]

Below follows a list of the sub-components that constitute this component:

The `Identifier` element MUST contain one instance of a string.

The OPTIONAL `Value` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.1.2. The `Value` element contains arbitrary content wrapped in an `Any` component.

Non-normative Comment:

[component Property non normative details]

4.3.16.1 Property – JSON Syntax

The `PropertyType` JSON object SHALL implement in JSON syntax the requirements defined in the `Property` component.

Properties of the JSON object SHALL implement the sub-components of `Property` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Identifier	<code>id</code>	[]
Value	<code>val</code>	[]

The `PropertyType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-PropertyType": {
  "type": "object",
  "properties": {
    "id": {
      "type": "string"
    },
    "val": {
      "$ref": "#/definitions/dsb-AnyType"
    }
  },
  "required": ["id"]
}
```

```
}
```

[component Property JSON schema details]

4.3.16.2 Property – XML Syntax

The XML type `PropertyType` SHALL implement the requirements defined in the `Property` component.

The `PropertyType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="PropertyType">
  <xs:sequence>
    <xs:element name="Identifier" type="xs:string"/>
    <xs:element name="Value" type="dsb:AnyType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `PropertyType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. . Therefore it occurs in the XML schema, too.

4.3.17 Component IncludeObject

The `IncludeObject` component is used to request the creation of an XMLDSig enveloping signature. Multiple occurrences of this optional input can be present in a single `SignRequest` message. Each occurrence will cause the inclusion of an object inside the signature being created.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `WhichData` element, if present, MUST contain one instance of a unique identifier reference. This element identifies the input `Base64Data` component which will be inserted into the returned signature.

The OPTIONAL `HasObjectTagsAndAttributesSet` element, if present, MUST contain one instance of a boolean. Its default value is 'false'. [sub component `HasObjectTagsAndAttributesSet` details]

The OPTIONAL `ObjId` element, if present, MUST contain one instance of a string. It sets the `Id` attribute on the returned `<ds:Object>`.

The OPTIONAL `createReference` element, if present, MUST contain one instance of a boolean. Its default value is 'true'. If the `createReference` element is set to false inhibits the creation of the `<ds:Reference>` associated to the `RefURI` element of the input document referred by the `WhichData` element, effectively allowing clients to include `<ds:Object>` elements not covered/protected by the signature being created.

Non-normative Comment:

[component `IncludeObject` non normative details]

4.3.17.1 IncludeObject – JSON Syntax

The `IncludeObjectType` JSON object SHALL implement in JSON syntax the requirements defined in the `IncludeObject` component.

Properties of the JSON object SHALL implement the sub-components of `IncludeObject` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>WhichData</code>	<code>whichData</code>	[]

HasObjectTagsAndAttributesSet	hasObjectTagsAndAttributesSet	[]
ObjId	objId	[]
createReference	createRef	[]

The IncludeObjectType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-IncludeObjectType": {
  "type": "object",
  "properties": {
    "whichData": {
      "type": "string"
    },
    "hasObjectTagsAndAttributesSet": {
      "type": "boolean",
      "default": "false"
    },
    "objId": {
      "type": "string"
    },
    "createRef": {
      "type": "boolean",
      "default": "true"
    }
  }
}
```

[component IncludeObject JSON schema details]

4.3.17.2 IncludeObject – XML Syntax

The XML type IncludeObjectType SHALL implement the requirements defined in the IncludeObject component.

The IncludeObjectType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="IncludeObjectType">
  <xs:attribute name="WhichData" type="xs:IDREF"/>
  <xs:attribute name="HasObjectTagsAndAttributesSet" type="xs:boolean"
default="false"/>
  <xs:attribute name="ObjId" type="xs:string" use="optional"/>
  <xs:attribute name="createReference" type="xs:boolean" default="true"
use="optional"/>
</xs:complexType>
```

Each child element of IncludeObjectType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component IncludeObject XML schema details]

4.3.18 Component SignaturePlacement

The SignaturePlacement component is used to request the creation of an XMLDSig enveloped signature placed within an input document. The resulting document with the enveloped signature is placed in the optional output DocumentWithSignature element. The server places the signature in the document identified using the WhichData element. In the case of a non-XML input document then the server will return an error unless alternative procedures are defined by a profile or in the server policy for handling such a situation.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `XPathAfter` element, if present, MUST contain one instance of a string. This element holds an XPath expression which identifies an element, inside the XML input document, after which the signature will be inserted.

The OPTIONAL `XPathFirstChildOf` element, if present, MUST contain one instance of a string. This element holds an XPath expression which identifies an element, in the XML input document, which the signature will be inserted as the first child of.

The OPTIONAL `NsPrefixMapping` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.1. [sub component `NsPrefixMapping` details]

The OPTIONAL `WhichData` element, if present, MUST contain one instance of a unique identifier reference. The `WhichData` element identifies the input `Base64Data` component containing the document the signature will be inserted into.

The OPTIONAL `CreateEnvelopedSignature` element, if present, MUST contain one instance of a boolean. Its default value is 'true'. If the `CreateEnvelopedSignature` element is set to true a reference having an enveloped signature transform is created.

Non-normative Comment:

[component `SignaturePlacement` non normative details]

4.3.18.1 `SignaturePlacement` – JSON Syntax

The `SignaturePlacementType` JSON object SHALL implement in JSON syntax the requirements defined in the `SignaturePlacement` component.

Properties of the JSON object SHALL implement the sub-components of `SignaturePlacement` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>XPathAfter</code>	<code>xPathAfter</code>	[]
<code>XPathFirstChildOf</code>	<code>xPathFirstChildOf</code>	[]
<code>NsPrefixMapping</code>	<code>nsDecl</code>	[]
<code>WhichData</code>	<code>whichData</code>	[]
<code>CreateEnvelopedSignature</code>	<code>createEnvelopedSignature</code>	[]

The `SignaturePlacementType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SignaturePlacementType": {
  "type": "object",
  "properties": {
    "xpathFirstChildOf": {
      "type": "string"
    },
    "xpathAfter": {
      "type": "string"
    },
    "XPathAfter": {
      "type": "string"
    },
    "XPathFirstChildOf": {
      "type": "string"
    }
  }
}
```

```

    "nsDecl": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-NsPrefixMappingType"
      }
    },
    "whichData": {
      "type": "string"
    },
    "createEnvelopedSignature": {
      "type": "boolean",
      "default": "true"
    }
  }
}

```

[component SignaturePlacement JSON schema details]

4.3.18.2 SignaturePlacement – XML Syntax

The XML type SignaturePlacementType SHALL implement the requirements defined in the SignaturePlacement component.

The SignaturePlacementType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="SignaturePlacementType">
  <xs:sequence>
    <xs:choice>
      <xs:element name="XPathAfter" type="xs:string"/>
      <xs:element name="XPathFirstChildOf" type="xs:string"/>
    </xs:choice>
    <xs:element name="NsPrefixMapping" type="dsb:NsPrefixMappingType"
maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="WhichData" type="xs:IDREF"/>
  <xs:attribute name="CreateEnvelopedSignature" type="xs:boolean"
default="true"/>
</xs:complexType>

```

Each child element of SignaturePlacementType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component SignaturePlacement XML schema details]

4.3.19 Component DocumentWithSignature

The DocumentWithSignature component contains a Document with the signature inserted as requested with the SignaturePlacement component.

Below follows a list of the sub-components that constitute this component:

The `Document` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.4.3. [This contains the input document with a signature inserted in some fashion.](#)

The OPTIONAL `WhichDoc` element, if present, MUST contain one instance of a URI. [\[sub component WhichDoc details\]](#)

Non-normative Comment:

[\[component DocumentWithSignature non normative details\]](#)

4.3.19.1 DocumentWithSignature – JSON Syntax

The `DocumentWithSignatureType` JSON object SHALL implement in JSON syntax the requirements defined in the `DocumentWithSignature` component.

Properties of the JSON object SHALL implement the sub-components of `DocumentWithSignature` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Document	<code>doc</code>	[]
WhichDoc	<code>whichDoc</code>	[]

The `DocumentWithSignatureType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-DocumentWithSignatureType": {
  "type": "object",
  "properties": {
    "doc": {
      "$ref": "#/definitions/dss2-DocumentType"
    },
    "whichDoc": {
      "type": "string"
    }
  },
  "required": ["doc"]
}
```

[\[component DocumentWithSignature JSON schema details\]](#)

4.3.19.2 DocumentWithSignature – XML Syntax

The XML type `DocumentWithSignatureType` SHALL implement the requirements defined in the `DocumentWithSignature` component.

The `DocumentWithSignatureType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="DocumentWithSignatureType">
  <xs:sequence>
    <xs:element name="Document" type="dss2:DocumentType"/>
  </xs:sequence>
  <xs:attribute name="WhichDoc" type="xs:anyURI" use="optional"/>
</xs:complexType>
```

Each child element of `DocumentWithSignatureType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component DocumentWithSignature XML schema details\]](#)

4.3.20 Component SignedReferences

The SignedReferences component gives the client greater control over how the <ds:Reference> elements are formed.

Below follows a list of the sub-components that constitute this component:

The SignedReference element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in this document in section 4.3.21. [sub component SignedReference details]

Non-normative Comment:

[component SignedReferences non normative details]

4.3.20.1 SignedReferences – JSON Syntax

The SignedReferencesType JSON object SHALL implement in JSON syntax the requirements defined in the SignedReferences component.

Properties of the JSON object SHALL implement the sub-components of SignedReferences using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
SignedReference	signedRef	[]

The SignedReferencesType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SignedReferencesType": {
  "type": "object",
  "properties": {
    "signedRef": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-SignedReferenceType"
      }
    }
  },
  "required": ["signedRef"]
}
```

[component SignedReferences JSON schema details]

4.3.20.2 SignedReferences – XML Syntax

The XML type SignedReferencesType SHALL implement the requirements defined in the SignedReferences component.

The SignedReferencesType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="SignedReferencesType">
  <xs:sequence>
    <xs:element name="SignedReference" type="dss2:SignedReferenceType"
      maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of SignedReferencesType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component SignedReferences XML schema details]

4.3.21 Component SignedReference

Each SignedReference component refers to an input DocumentBase component and allows multiple <ds:Reference> elements to be based on a single or multiple input documents. Furthermore, the client can request additional transforms to be applied to each <ds:Reference>, and can set each <ds:Reference> element's Id or URI attribute. These aspects of the <ds:Reference> can only be set through the SignedReference component; they cannot be set through the input documents, since they are aspects of the reference to the input document, not the input document itself.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL Transforms element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in section 4.5.2. The Transforms element requests the server to perform additional transforms on this reference.

The WhichDocument element MUST contain one instance of a unique identifier reference. This defines which input DocumentBase component this reference refers to.

The OPTIONAL RefURI element, if present, MUST contain one instance of a URI. If this element is present, the corresponding <ds:Reference> element's URI attribute is set to its value. If it is not present, the URI attribute is omitted in the corresponding <ds:Reference>.

The OPTIONAL RefId element, if present, MUST contain one instance of a string. This element sets the Id attribute of the corresponding <ds:Reference>.

Non-normative Comment:

[component SignedReference non normative details]

4.3.21.1 SignedReference – JSON Syntax

The SignedReferenceType JSON object SHALL implement in JSON syntax the requirements defined in the SignedReference component.

Properties of the JSON object SHALL implement the sub-components of SignedReference using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Transforms	transforms	[]
WhichDocument	whichDoc	[]
RefURI	refURI	[]
RefId	refId	[]

The SignedReferenceType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SignedReferenceType": {
  "type": "object",
  "properties": {
    "transforms": {
      "$ref": "#/definitions/dsigrw-TransformsType"
    },
    "whichDoc": {
      "type": "string"
    },
    "refURI": {
      "type": "string"
    }
  }
}
```

```

    },
    "refId": {
      "type": "string"
    }
  },
  "required": ["whichDoc"]
}

```

[component SignedReference JSON schema details]

4.3.21.2 SignedReference – XML Syntax

The XML type SignedReferenceType SHALL implement the requirements defined in the SignedReference component.

The SignedReferenceType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="SignedReferenceType">
  <xs:sequence>
    <xs:element name="Transforms" type="ds-rw:TransformsType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="WhichDocument" type="xs:IDREF" use="required"/>
  <xs:attribute name="RefURI" type="xs:anyURI" use="optional"/>
  <xs:attribute name="RefId" type="xs:string" use="optional"/>
</xs:complexType>

```

Each child element of SignedReferenceType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component SignedReference XML schema details]

4.3.22 Component VerifyManifestResults

The results of verifying individual <ds:Reference>'s within a <ds:Manifest> are returned in the VerifyManifestResults component.

Below follows a list of the sub-components that constitute this component:

The ManifestResult element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in this document in section 4.3.23. [sub component ManifestResult details]

Non-normative Comment:

[component VerifyManifestResults non normative details]

4.3.22.1 VerifyManifestResults – JSON Syntax

The VerifyManifestResultsType JSON object SHALL implement in JSON syntax the requirements defined in the VerifyManifestResults component.

Properties of the JSON object SHALL implement the sub-components of VerifyManifestResults using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
ManifestResult	result	[]

The VerifyManifestResultsType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```

"dss2-VerifyManifestResultsType": {
  "type": "object",

```

```

    "properties": {
      "result": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/dss2-ManifestResultType"
        }
      },
      "required": ["result"]
    }
  }
}

```

[component VerifyManifestResults JSON schema details]

4.3.22.2 VerifyManifestResults – XML Syntax

The XML type `VerifyManifestResultsType` SHALL implement the requirements defined in the `VerifyManifestResults` component.

The `VerifyManifestResultsType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="VerifyManifestResultsType">
  <xs:sequence>
    <xs:element name="ManifestResult" type="dss2:ManifestResultType"
      maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

Each child element of `VerifyManifestResultsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component VerifyManifestResults XML schema details]

4.3.23 Component ManifestResult

The `VerifyManifestResults` component is comprised of one or more `ManifestResult`

Below follows a list of the sub-components that constitute this component:

The `ReferenceXpath` element MUST contain one instance of a string. This element identifies the manifest reference, in the XML signature, to which this result pertains.

The `Status` element MUST contain one instance of a URI. Its value is limited to an item of the following set:

urn:oasis:names:tc:dss:1.0:manifeststatus:Valid

urn:oasis:names:tc:dss:1.0:manifeststatus:Invalid

This element indicates the manifest validation outcome.

The OPTIONAL `NsPrefixMapping` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.1. [sub component NsPrefixMapping details]

Non-normative Comment:

[component ManifestResult non normative details]

4.3.23.1 ManifestResult – JSON Syntax

The `ManifestResultType` JSON object SHALL implement in JSON syntax the requirements defined in the `ManifestResult` component.

Properties of the JSON object SHALL implement the sub-components of `ManifestResult` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
ReferenceXPath	xPath	[]
Status	status	[]
NsPrefixMapping	nsDecl	[]

The ManifestResultType JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-ManifestResultType": {
  "type": "object",
  "properties": {
    "xpath": {
      "type": "string"
    },
    "status": {
      "type": "string",
      "enum": ["urn:oasis:names:tc:dss:1.0:manifeststatus:Valid",
"urn:oasis:names:tc:dss:1.0:manifeststatus:Invalid"]
    },
    "nsDecl": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-NsPrefixMappingType"
      }
    }
  },
  "required": ["xpath", "status"]
}
```

[\[component ManifestResult JSON schema details\]](#)

4.3.23.2 ManifestResult – XML Syntax

The XML type ManifestResultType SHALL implement the requirements defined in the ManifestResult component.

The ManifestResultType XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="ManifestResultType">
  <xs:sequence>
    <xs:element name="ReferenceXPath" type="xs:string"/>
    <xs:element name="Status">
      <xs:simpleType>
        <xs:restriction base="xs:anyURI">
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:manifeststatus:Valid"/>
          <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:manifeststatus:Invalid"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="NsPrefixMapping" type="dsb:NsPrefixMappingType"
maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `ManifestResultType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component ManifestResult XML schema details\]](#)

4.3.24 Component UseVerificationTime

This `UseVerificationTime` component instructs the server to attempt to determine the signature's validity at the specified time, instead of a time determined by the server policy.

Below follows a list of the sub-components that constitute this component:

- The OPTIONAL `CurrentTime` element, if present, MUST contain one instance of a boolean. Its default value is 'false'. This element instructs the server to use its current time (normally the time associated with the server-side request processing).
- The OPTIONAL `SpecificTime` element, if present, MUST contain one instance of a date/time value. The `SpecificTime` element allows the client to manage manually the time instant used in the verification process. It SHOULD be expressed as UTC time (Coordinated Universal Time) to reduce confusion with the local time zone use.
- The OPTIONAL `Base64Content` element, if present, MUST contain base64 encoded binary data. The `Base64Content` element allows the provision of additional date/time data.

Non-normative Comment:

[\[component UseVerificationTime non normative details\]](#)

4.3.24.1 UseVerificationTime – JSON Syntax

The `UseVerificationTimeType` JSON object SHALL implement in JSON syntax the requirements defined in the `UseVerificationTime` component.

Properties of the JSON object SHALL implement the sub-components of `UseVerificationTime` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>CurrentTime</code>	<code>currTime</code>	[]
<code>SpecificTime</code>	<code>specTime</code>	[]
<code>Base64Content</code>	<code>b64Content</code>	[]

The `UseVerificationTimeType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-UseVerificationTimeType": {
  "type": "object",
  "properties": {
    "currTime": {
      "type": "boolean",
      "default": "false"
    },
    "specTime": {
      "type": "integer",
      "format": "utc-millisec"
    },
    "b64Content": {
      "type": "string"
    }
  },
  "minProperties": 1,
```

```
"maxProperties": 1
}
```

[component UseVerificationTime JSON schema details]

4.3.24.2 UseVerificationTime – XML Syntax

The XML type UseVerificationTimeType SHALL implement the requirements defined in the UseVerificationTime component.

The UseVerificationTimeType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="UseVerificationTimeType">
  <xs:choice>
    <xs:element name="CurrentTime" type="xs:boolean" default="false"/>
    <xs:element name="SpecificTime" type="xs:dateTime"/>
    <xs:element name="Base64Content" type="xs:base64Binary" maxOccurs="1"
minOccurs="0"/>
  </xs:choice>
</xs:complexType>
```

Each child element of UseVerificationTimeType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component UseVerificationTime XML schema details]

4.3.25 Component AdditionalTimeInfo

The AdditionalTimeInfo component contains other time instant(s) relevant in the context of the verification time determination.

Below follows a list of the sub-components that constitute this component:

The value element MUST contain one instance of a date/time value. [sub component value details]

The Type element MUST contain one instance of a URI. Its value is limited to an item of the following set:

urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signatureTimestamp
urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signatureTimemark
urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signedObjectTimestamp
urn:oasis:names:tc:dss:1.0:additionaltimeinfo:claimedSigningTime

The Type attribute qualifies the kind of time information included in the response. This specification defines the listed types, whose values MUST satisfy the format defined as xs:dateTime and SHOULD be expressed as UTC time (Coordinated Universal Time). Profiles MAY include and define new values for the Type attribute.

The OPTIONAL Ref element, if present, MUST contain one instance of a string. It allows to establish references to the source of the time information, and SHOULD be used when there is a need to disambiguate several AdditionalTimeInfo components with the same Type attribute.

Non-normative Comment:

[component AdditionalTimeInfo non normative details]

4.3.25.1 AdditionalTimeInfo – JSON Syntax

The AdditionalTimeInfoType JSON object SHALL implement in JSON syntax the requirements defined in the AdditionalTimeInfo component.

Properties of the JSON object SHALL implement the sub-components of AdditionalTimeInfo using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
value	value	[]
Type	type	[]
Ref	ref	[]

The AdditionalTimeInfoType JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-AdditionalTimeInfoType": {
  "type": "object",
  "properties": {
    "value": {
      "type": "integer",
      "format": "utc-millisec"
    },
    "type": {
      "type": "string",
      "format": "uri"
    },
    "ref": {
      "type": "string"
    }
  },
  "required": ["type"]
}
```

[\[component AdditionalTimeInfo JSON schema details\]](#)

4.3.25.2 AdditionalTimeInfo – XML Syntax

The XML type AdditionalTimeInfoType SHALL implement the requirements defined in the AdditionalTimeInfo component.

The AdditionalTimeInfoType XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="AdditionalTimeInfoType">
  <xs:simpleContent>
    <xs:extension base="xs:dateTime">
      <xs:attribute name="Type" use="required">
        <xs:simpleType>
          <xs:restriction base="xs:anyURI">
            <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signatureTimestamp"/>
            <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signatureTimemark"/>
            <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:additionaltimeinfo:signedObjectTimestamp"/>
            <xs:enumeration
value="urn:oasis:names:tc:dss:1.0:additionaltimeinfo:claimedSigningTime"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:attribute>
      <xs:attribute name="Ref" type="xs:string" use="optional"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

Each child element of `AdditionalTimeInfoType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component AdditionalTimeInfo XML schema details\]](#)

4.3.26 Component `VerificationTimeInfo`

The `VerificationTimeInfo` component allows the client to obtain the time instant used by the server to validate the signature.

Below follows a list of the sub-components that constitute this component:

The `VerificationTime` element MUST contain one instance of a date/time value. This time instant used by the server when verifying the signature. It SHOULD be expressed as UTC time (Coordinated Universal Time) to reduce confusion with the local time zone use.

The OPTIONAL `AdditionalTimeInfo` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.25. The `AdditionalTimeInfo` element can contain any other time instant(s) relevant in the context of the verification time determination.

Non-normative Comment:

[\[component VerificationTimeInfo non normative details\]](#)

4.3.26.1 `VerificationTimeInfo` – JSON Syntax

The `VerificationTimeInfoType` JSON object SHALL implement in JSON syntax the requirements defined in the `VerificationTimeInfo` component.

Properties of the JSON object SHALL implement the sub-components of `VerificationTimeInfo` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>VerificationTime</code>	<code>verificationTime</code>	[]
<code>AdditionalTimeInfo</code>	<code>additionalTimeInfo</code>	[]

The `VerificationTimeInfoType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-VerificationTimeInfoType": {
  "type": "object",
  "properties": {
    "verificationTime": {
      "type": "integer",
      "format": "utc-millisec"
    },
    "additionalTimeInfo": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-AdditionalTimeInfoType"
      }
    }
  },
  "required": ["verificationTime"]
}
```

[\[component VerificationTimeInfo JSON schema details\]](#)

4.3.26.2 VerificationTimeInfo – XML Syntax

The XML type `VerificationTimeInfoType` SHALL implement the requirements defined in the `VerificationTimeInfo` component.

The `VerificationTimeInfoType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="VerificationTimeInfoType">
  <xs:sequence>
    <xs:element name="VerificationTime" type="xs:dateTime"/>
    <xs:element name="AdditionalTimeInfo" type="dss2:AdditionalTimeInfoType"
      maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `VerificationTimeInfoType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component VerificationTimeInfo XML schema details\]](#)

4.3.27 Component AdditionalKeyInfo

The `AdditionalKeyInfo` component provides the server with additional data (such as certificates and CRLs) which it can use to validate the signature.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `X509Digest` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.3.13. This element contains a base64-encoded digest of a certificate.

The OPTIONAL `X509SubjectName` element, if present, MUST contain one instance of a string. This element contains an X.509 subject distinguished name that is represented as a string.

The OPTIONAL `X509SKI` element, if present, MUST contain one instance of base64 encoded binary data. This element contains the base64 encoded value of a X509 V.3 SubjectKeyIdentifier.

The OPTIONAL `X509Certificate` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. This element MAY contain certificates useful to build a certificate chain.

The OPTIONAL `KeyName` element, if present, MUST contain one instance of a string. It contains a string value to identify the key.

The OPTIONAL `X509CRL` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. The `X509CRL` element holds a CRL useful for validation.

The OPTIONAL `OCSPResponse` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. This element can be used by the client to provide available OCSP information. The server MAY consider this information.

The OPTIONAL `PoE` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. This element can be used by the client to provide 'Proof of Existence' data. Valid information MAY be considered within the validation process.

Non-normative Comment:

[component `AdditionalKeyInfo` non normative details]

4.3.27.1 `AdditionalKeyInfo` – JSON Syntax

The `AdditionalKeyInfoType` JSON object SHALL implement in JSON syntax the requirements defined in the `AdditionalKeyInfo` component.

Properties of the JSON object SHALL implement the sub-components of `AdditionalKeyInfo` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>X509Digest</code>	<code>x509Digest</code>	[]
<code>X509SubjectName</code>	<code>sub</code>	[]
<code>X509SKI</code>	<code>ski</code>	[]
<code>X509Certificate</code>	<code>cert</code>	[]
<code>KeyName</code>	<code>name</code>	[]
<code>X509CRL</code>	<code>crl</code>	[]
<code>OCSPResponse</code>	<code>ocsp</code>	[]

PoE	poe	
-----	-----	---

The AdditionalKeyInfoType JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-AdditionalKeyInfoType": {
  "type": "object",
  "properties": {
    "ocspresponse": {
      "$ref": "#/definitions/dsb-Base64DataType"
    },
    "x509Digest": {
      "$ref": "#/definitions/dss2-X509DigestType"
    },
    "sub": {
      "type": "string"
    },
    "ski": {
      "type": "string"
    },
    "cert": {
      "$ref": "#/definitions/dsb-Base64DataType"
    },
    "name": {
      "type": "string"
    },
    "crl": {
      "$ref": "#/definitions/dsb-Base64DataType"
    },
    "ocsp": {
      "$ref": "#/definitions/dsb-Base64DataType"
    },
    "poe": {
      "$ref": "#/definitions/dsb-Base64DataType"
    }
  },
  "minProperties": 1,
  "maxProperties": 1
}
```

[component AdditionalKeyInfo JSON schema details]

4.3.27.2 AdditionalKeyInfo – XML Syntax

The XML type AdditionalKeyInfoType SHALL implement the requirements defined in the AdditionalKeyInfo component.

The AdditionalKeyInfoType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="AdditionalKeyInfoType">
  <xs:choice>
    <xs:element name="X509Digest" type="dss2:X509DigestType"/>
    <xs:element name="X509SubjectName" type="xs:string"/>
    <xs:element name="X509SKI" type="xs:base64Binary"/>
    <xs:element name="X509Certificate" type="dsb:Base64DataType"/>
    <xs:element name="KeyName" type="xs:string"/>
    <xs:element name="X509CRL" type="dsb:Base64DataType"/>
    <xs:element name="OCSPResponse" type="dsb:Base64DataType"/>
    <xs:element name="PoE" type="dsb:Base64DataType"/>
  </xs:choice>
```



```
</xs:complexType>
```

Each child element of `AdditionalKeyInfoType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component AdditionalKeyInfo XML schema details\]](#)

4.3.28 Component ProcessingDetails

The `ProcessingDetails` component elaborates on what signature verification steps succeeded or failed.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `ValidDetail` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.29. The `ValidDetail` element holds verification details that were evaluated and found to be valid.

The OPTIONAL `IndeterminateDetail` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.29. The `IndeterminateDetail` element holds verification details that could not be evaluated or were evaluated and returned an indeterminate result.

The OPTIONAL `InvalidDetail` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.29. The optional `InvalidDetail` element holds verification details that were evaluated and found to be invalid.

Non-normative Comment:

[\[component ProcessingDetails non normative details\]](#)

4.3.28.1 ProcessingDetails – JSON Syntax

The `ProcessingDetailsType` JSON object SHALL implement in JSON syntax the requirements defined in the `ProcessingDetails` component.

Properties of the JSON object SHALL implement the sub-components of `ProcessingDetails` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>ValidDetail</code>	<code>valid</code>	[]
<code>IndeterminateDetail</code>	<code>indeterminate</code>	[]
<code>InvalidDetail</code>	<code>invalid</code>	[]

The `ProcessingDetailsType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-ProcessingDetailsType": {
  "type": "object",
  "properties": {
    "valid": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DetailType"
      }
    },
    "indeterminate": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DetailType"
      }
    },
    "invalid": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DetailType"
      }
    }
  }
}
```

```

    "indeterminate": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DetailType"
      }
    },
    "invalid": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DetailType"
      }
    }
  }
}

```

[component ProcessingDetails JSON schema details]

4.3.28.2 ProcessingDetails – XML Syntax

The XML type `ProcessingDetailsType` SHALL implement the requirements defined in the `ProcessingDetails` component.

The `ProcessingDetailsType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="ProcessingDetailsType">
  <xs:sequence>
    <xs:element name="ValidDetail" type="dss2:DetailType"
      maxOccurs="unbounded" minOccurs="0"/>
    <xs:element name="IndeterminateDetail" type="dss2:DetailType"
      maxOccurs="unbounded" minOccurs="0"/>
    <xs:element name="InvalidDetail" type="dss2:DetailType"
      maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

```

Each child element of `ProcessingDetailsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component ProcessingDetails XML schema details]

4.3.29 Component Detail

[component Detail normative details]

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Code` element, if present, MUST contain a URI. This URI which more precisely specifies why this detail is valid, invalid, or indeterminate. It must be a value defined by some other specification, since this specification defines no values for this element.

The OPTIONAL `Message` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.1.3. This is a human-readable message which MAY be logged, used for debugging, etc.

The OPTIONAL `Base64Content` element, if present, MUST contain base64 encoded binary data.

The `Type` element MUST contain one instance of a URI. The `Type` URI identifies the detail. It may be a value defined by this specification, or a value defined by some other specification. Multiple detail elements of the same `Type` may appear in a single `ProcessingDetails` component. For example, when a signature contains a certificate chain that certifies the signing key, there may be details of the same `Type` present for each certificate in the chain, describing how each certificate was processed.

Non-normative Comment:

Multiple detail elements of the same `Type` may appear in a single `ProcessingDetails`. For example, when a signature contains a certificate chain that certifies the signing key, there may be details of the same `Type` present for each certificate in the chain, describing how each certificate was processed.

4.3.29.1 Detail – JSON Syntax

The `DetailType` JSON object SHALL implement in JSON syntax the requirements defined in the `Detail` component.

Properties of the JSON object SHALL implement the sub-components of `Detail` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Code	<code>code</code>	[]
Message	<code>msg</code>	[]
Base64Content	<code>b64Content</code>	[]
Type	<code>type</code>	[]

The `DetailType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-DetailType": {
  "type": "object",
  "properties": {
    "code": {
      "type": "string"
    },
    "msg": {
      "$ref": "#/definitions/dsb-InternationalStringType"
    },
    "b64Content": {
      "type": "string"
    },
    "type": {
      "type": "string",
```

```

    "format": "uri"
  },
  "required": ["type"]
}

```

[component Detail JSON schema details]

4.3.29.2 Detail – XML Syntax

The XML type `DetailType` SHALL implement the requirements defined in the `Detail` component.

The `DetailType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="DetailType">
  <xs:sequence>
    <xs:element name="Code" type="xs:anyURI" minOccurs="0"/>
    <xs:element name="Message" type="dsb:InternationalStringType"
minOccurs="0"/>
    <xs:element name="Base64Content" type="xs:base64Binary" maxOccurs="1"
minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="Type" type="xs:anyURI" use="required"/>
</xs:complexType>

```

Each child element of `DetailType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component Detail XML schema details]

4.3.30 Component SigningTimeInfo

This `SigningTimeInfo` component allows the client to obtain the time instant associated to the signature creation.

Below follows a list of the sub-components that constitute this component:

The `SigningTime` element MUST contain one instance of a date/time value. This element returns the time value considered by the server to be the signature creation time.

The OPTIONAL `SigningTimeBoundaries` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in this document in section 4.3.31. This element returns the trusted time values considered as lower and upper limits for the signing time.

Non-normative Comment:

[component SigningTimeInfo non normative details]

4.3.30.1 SigningTimeInfo – JSON Syntax

The `SigningTimeInfoType` JSON object SHALL implement in JSON syntax the requirements defined in the `SigningTimeInfo` component.

Properties of the JSON object SHALL implement the sub-components of `SigningTimeInfo` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
SigningTime	<code>signingTime</code>	[]
SigningTimeBoundaries	<code>bounds</code>	[]

The `SigningTimeInfoType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SigningTimeInfoType": {
  "type": "object",
  "properties": {
    "signingTime": {
      "type": "integer",
      "format": "utc-millisec"
    },
    "bounds": {
      "$ref": "#/definitions/dss2-SigningTimeBoundariesType"
    }
  },
  "required": ["signingTime"]
}
```

[component `SigningTimeInfo` JSON schema details]

4.3.30.2 `SigningTimeInfo` – XML Syntax

The XML type `SigningTimeInfoType` SHALL implement the requirements defined in the `SigningTimeInfo` component.

The `SigningTimeInfoType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="SigningTimeInfoType">
  <xs:sequence>
    <xs:element name="SigningTime" type="xs:dateTime"/>
    <xs:element name="SigningTimeBoundaries"
      type="dss2:SigningTimeBoundariesType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `SigningTimeInfoType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component `SigningTimeInfo` XML schema details]

4.3.31 Component `SigningTimeBoundaries`

This element returns the trusted time values considered as lower and upper limits for the signing time.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `LowerBoundary` element, if present, MUST contain a date/time value. [sub component `LowerBoundary` details]

The OPTIONAL `UpperBoundary` element, if present, MUST contain a date/time value. [sub component `UpperBoundary` details]

Non-normative Comment:

[component `SigningTimeBoundaries` non normative details]

4.3.31.1 `SigningTimeBoundaries` – JSON Syntax

The `SigningTimeBoundariesType` JSON object SHALL implement in JSON syntax the requirements defined in the `SigningTimeBoundaries` component.

Properties of the JSON object SHALL implement the sub-components of `SigningTimeBoundaries` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
LowerBoundary	lowerBound	[]
UpperBoundary	upperBound	[]

The `SigningTimeBoundariesType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SigningTimeBoundariesType": {
  "type": "object",
  "properties": {
    "lowerBound": {
      "type": "integer",
      "format": "utc-millisec"
    },
    "upperBound": {
      "type": "integer",
      "format": "utc-millisec"
    }
  }
}
```

[component `SigningTimeBoundaries` JSON schema details]

4.3.31.2 `SigningTimeBoundaries` – XML Syntax

The XML type `SigningTimeBoundariesType` SHALL implement the requirements defined in the `SigningTimeBoundaries` component.

The `SigningTimeBoundariesType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="SigningTimeBoundariesType">
  <xs:sequence>
    <xs:element name="LowerBoundary" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="UpperBoundary" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

Each child element of `SigningTimeBoundariesType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component `SigningTimeBoundaries` XML schema details]

4.3.32 Component `AugmentedSignature`

The `AugmentedSignature` component contains the resulting augmented signature or timestamp or, in the case of a signature being enveloped in an output document, a pointer to the signature. The `DocumentWithSignature` element is available to hold an enveloping signature.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `SignatureObject` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.6. This element contains an augmented signature or timestamp or points to a signature enveloped in another document. The use cases described in this document assume zero or one augmented or timestamped signature being included within this element. Profiles may define processing rules how to handle unbounded cardinality.

The OPTIONAL `DocumentWithSignature` element, if present, MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.3.19. This element serves as a holder for documents enveloping the augmented signature. The use cases described in this document assume zero or one document including a signature being returned by this element. Profiles may define processing rules how to handle unbounded cardinality.

The OPTIONAL `Type` element, if present, MUST contain one instance of a URI. The URI defines what type of 'augmentation' was applied to the signature.

Non-normative Comment:

[component `AugmentedSignature` non normative details]

4.3.32.1 `AugmentedSignature` – JSON Syntax

The `AugmentedSignatureType` JSON object SHALL implement in JSON syntax the requirements defined in the `AugmentedSignature` component.

Properties of the JSON object SHALL implement the sub-components of `AugmentedSignature` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>SignatureObject</code>	<code>sigObj</code>	[]
<code>DocumentWithSignature</code>	<code>docWithSignature</code>	[]
<code>Type</code>	<code>type</code>	[]

The `AugmentedSignatureType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-AugmentedSignatureType": {
  "type": "object",
  "properties": {
    "sigObj": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-SignatureObjectType"
      }
    },
    "docWithSignature": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentWithSignatureType"
      }
    },
    "type": {
      "type": "string",
      "format": "uri"
    }
  }
}
```

```
}
```

[\[component AugmentedSignature JSON schema details\]](#)

4.3.32.2 AugmentedSignature – XML Syntax

The XML type `AugmentedSignatureType` SHALL implement the requirements defined in the `AugmentedSignature` component.

The `AugmentedSignatureType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="AugmentedSignatureType">
  <xs:sequence>
    <xs:element name="SignatureObject" type="dss2:SignatureObjectType"
      maxOccurs="unbounded" minOccurs="0"/>
    <xs:element name="DocumentWithSignature"
      type="dss2:DocumentWithSignatureType" maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="Type" type="xs:anyURI" use="optional"/>
</xs:complexType>
```

Each child element of `AugmentedSignatureType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component AugmentedSignature XML schema details\]](#)

4.3.33 Component ReturnTransformedDocument

The `ReturnTransformedDocument` component instructs the server to return an input document to which the XML signature transforms specified by a particular `<ds:Reference>` have been applied. The `<ds:Reference>` is indicated by the zero-based `WhichReference` attribute (0 means the first `<ds:Reference>` in the signature, 1 means the second, and so on). Multiple occurrences of this optional input can be present in a single verify request message. Each occurrence will generate a corresponding optional output.

Below follows a list of the sub-components that constitute this component:

The `WhichReference` element MUST contain one instance of an integer. To match outputs to inputs, each `TransformedDocument` will contain a `WhichReference` attribute which matches the corresponding optional input.

Non-normative Comment:

[\[component ReturnTransformedDocument non normative details\]](#)

4.3.33.1 ReturnTransformedDocument – JSON Syntax

The component `ReturnTransformedDocument` is not used as JSON object directly.

[\[component ReturnTransformedDocument JSON schema details\]](#)

4.3.33.2 ReturnTransformedDocument – XML Syntax

The XML type `ReturnTransformedDocumentType` SHALL implement the requirements defined in the `ReturnTransformedDocument` component.

The `ReturnTransformedDocumentType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="ReturnTransformedDocumentType">
  <xs:attribute name="WhichReference" type="xs:integer" use="required"/>
</xs:complexType>
```


Each child element of `ReturnTransformedDocumentType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component ReturnTransformedDocument XML schema details\]](#)

4.3.34 Component TransformedDocument

The `TransformedDocument` component contains a document corresponding to the specified `<ds:Reference>`, after all the transforms in the reference have been applied.

Below follows a list of the sub-components that constitute this component:

The `Document` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.4.3. [This element contains the transformed document.](#)

The `WhichReference` element MUST contain one instance of an integer. [To match outputs to inputs, each TransformedDocument will contain a WhichReference element which matches the corresponding optional input.](#)

Non-normative Comment:

[\[component TransformedDocument non normative details\]](#)

4.3.34.1 TransformedDocument – JSON Syntax

The component `TransformedDocument` is not used as JSON object directly.

[\[component TransformedDocument JSON schema details\]](#)

4.3.34.2 TransformedDocument – XML Syntax

The XML type `TransformedDocumentType` SHALL implement the requirements defined in the `TransformedDocument` component.

The `TransformedDocumentType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="TransformedDocumentType">
  <xs:sequence>
    <xs:element name="Document" type="dss2:DocumentType"/>
  </xs:sequence>
  <xs:attribute name="WhichReference" type="xs:integer" use="required"/>
</xs:complexType>
```

Each child element of `TransformedDocumentType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component TransformedDocument XML schema details\]](#)

4.4 Request/Response related data structures defined in this document

The XML elements of this section are defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/core'.

[\[category request in namespace http://docs.oasis-open.org/dss-x/ns/core explanation\]](#)

4.4.1 Component InputDocuments

This element is used to send input documents to a DSS server, whether for signing or verifying. An input document can be any piece of data that can be used as input to a signature or timestamp calculation. An input document can even be a signature or timestamp (for example, a pre-existing signature can be counter-signed or timestamped). An input document could also be a `<ds:Manifest>`, allowing the client

to handle manifest creation while using the server to create the rest of the signature. Manifest validation is supported by an optional input / output.

Below follows a list of the sub-components that constitute this component:

The `Document` element MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.3. [\[sub component Document details\]](#)

The `TransformedData` element MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.4. It contains the binary output of a chain of transforms applied by a client.

The `DocumentHash` element MAY occur zero or more times containing a sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.4.5. It contains a set of digest algorithm and the corresponding hashes. It will be processed on the result of the required transformation steps.

Non-normative Comment:

[\[component InputDocuments non normative details\]](#)

4.4.1.1 InputDocuments – JSON Syntax

The `InputDocumentsType` JSON object SHALL implement in JSON syntax the requirements defined in the `InputDocuments` component.

Properties of the JSON object SHALL implement the sub-components of `InputDocuments` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>Document</code>	<code>doc</code>	[]
<code>TransformedData</code>	<code>transformed</code>	[]
<code>DocumentHash</code>	<code>docHash</code>	[]

The `InputDocumentsType` JSON object is defined in the JSON schema [\[DSBJSON\]](#) and is provided below as a service to the reader.

```
"dss2-InputDocumentsType": {
  "type": "object",
  "properties": {
    "doc": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentType"
      }
    },
    "transformed": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-TransformedDataType"
      }
    },
    "docHash": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentHashType"
      }
    }
  }
}
```

```
}  
}  
}
```

[\[component InputDocuments JSON schema details\]](#)

4.4.1.2 InputDocuments – XML Syntax

The XML type `InputDocumentsType` SHALL implement the requirements defined in the `InputDocuments` component.

The `InputDocumentsType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```
<xs:complexType name="InputDocumentsType">  
  <xs:sequence>  
    <xs:sequence maxOccurs="unbounded" minOccurs="0">  
      <xs:element name="Document" type="dss2:DocumentType"/>  
    </xs:sequence>  
    <xs:sequence maxOccurs="unbounded" minOccurs="0">  
      <xs:element name="TransformedData" type="dss2:TransformedDataType"/>  
    </xs:sequence>  
    <xs:sequence maxOccurs="unbounded" minOccurs="0">  
      <xs:element name="DocumentHash" type="dss2:DocumentHashType"/>  
    </xs:sequence>  
  </xs:sequence>  
</xs:complexType>
```

Each child element of `InputDocumentsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component InputDocuments XML schema details\]](#)

4.4.2 Component DocumentBase

The `DocumentBaseType` forwards its elements to the components `DocumentType`, `TransformedDataType` and `DocumentHashType`. The `DocumentBaseType` contains the basic information shared by the inheriting components and remaining persistent during the process from input document retrieval until digest calculation for the relevant document.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Id` element, if present, MUST contain one instance of a unique identifier. This identifier gives the input document a unique label within a particular request message. Through this identifier, an optional input can refer to a single input document. Using this identifier and the `IdRef` element it is possible to avoid redundant content.

The OPTIONAL `RefURI` element, if present, MUST contain one instance of a URI. This specifies the value for a `<ds:Reference>` element's `URI` attribute when referring to this input document. The `RefURI` element SHOULD be specified. Not more than one `RefURI` element may be omitted in a single signing request.

The OPTIONAL `RefType` element, if present, MUST contain one instance of a URI. This specifies the value for a `<ds:Reference>` element's `Type` attribute when referring to this input document.

The OPTIONAL `SchemaRefs` element, if present, MUST contain one instance of a unique identifier reference. The identified schemas are to be used to process the `Id` element during parsing and for XPath evaluation. If anything else but `Schema` are referred to, the server MUST report an error. If a referred to `Schema` is not used by the XML document instance this MAY be ignored or reported to the client in the subcomponent `ResultMessage`. The Document is assumed to be valid against the first `Schema` referred to by `SchemaRefs`. If a `Schemas` element is referred to first by `SchemaRefs` the document is assumed to be valid against the first `Schema` inside `SchemaRefs`. In both cases, the remaining schemas may occur in any order and are used either directly or indirectly by the first schema. If present, the server MUST use the schemas to identify the `Id` element and MAY also perform complete validation against the schemas.

Non-normative Comment:

It is recommended to use `xml:id` as defined in [xml:id] as `id` in the payload being referenced by a `<ds:Reference>`, because the schema then does not have to be supplied for identifying the `ID` attributes.

4.4.2.1 DocumentBase – JSON Syntax

The `DocumentBaseType` JSON object SHALL implement in JSON syntax the requirements defined in the `DocumentBase` component.

Properties of the JSON object SHALL implement the sub-components of `DocumentBase` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Id	<code>ID</code>	[]
RefURI	<code>refURI</code>	[]
RefType	<code>refType</code>	[]
SchemaRefs	<code>schemaRefs</code>	[]

The `DocumentBaseType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-DocumentBaseType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
  },
}
```

```

    "refURI": {
      "type": "string"
    },
    "refType": {
      "type": "string"
    },
    "schemaRefs": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentType"
      }
    }
  }
}

```

[component DocumentBase JSON schema details]

4.4.2.2 DocumentBase – XML Syntax

The XML type `DocumentBaseType` SHALL implement the requirements defined in the `DocumentBase` component.

The `DocumentBaseType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="DocumentBaseType" abstract="true">
  <xs:attribute name="ID" type="xs:ID" use="optional"/>
  <xs:attribute name="RefURI" type="xs:anyURI" use="optional"/>
  <xs:attribute name="RefType" type="xs:anyURI" use="optional"/>
  <xs:attribute name="SchemaRefs" type="xs:IDREFS" use="optional"/>
</xs:complexType>

```

Each child element of `DocumentBaseType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component DocumentBase XML schema details]

4.4.3 Component Document

The `Document` component contains input data for DSS processing.

This components extends the component 4.4.2. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The `Base64Data` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. [sub component Base64Data details]

Non-normative Comment:

[component Document non normative details]

4.4.3.1 Document – JSON Syntax

The `DocumentType` JSON object SHALL implement in JSON syntax the requirements defined in the `Document` component.

Properties of the JSON object SHALL implement the sub-components of `Document` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
---------	-------------------------------	----------

Base64Data	b64Data	
-------------------	---------	---

The `DocumentType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-DocumentType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
    "refURI": {
      "type": "string"
    },
    "refType": {
      "type": "string"
    },
    "schemaRefs": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentType"
      }
    },
    "b64Data": {
      "$ref": "#/definitions/dsb-Base64DataType"
    }
  },
  "required": ["b64Data"]
}
```

[\[component Document JSON schema details\]](#)

4.4.3.2 Document – XML Syntax

The XML type `DocumentType` SHALL implement the requirements defined in the `Document` component.

The `DocumentType` XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```
<xs:complexType name="DocumentType">
  <xs:complexContent>
    <xs:extension base="dss2:DocumentBaseType">
      <xs:sequence>
        <xs:element name="Base64Data" type="dsb:Base64DataType" maxOccurs="1"
minOccurs="1"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Each child element of `DocumentType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component Document XML schema details\]](#)

4.4.4 Component TransformedData

[\[component TransformedData normative details\]](#)

This component extends the component 4.4.2. The inherited sub-components are not repeated here. Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Transforms` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in section 4.5.2. This is the sequence of transforms applied by the client. It specifies the value for a `<ds:Reference>` element's `<ds:Transforms>` child element. In other words, this specifies transforms that the client has already applied to the input document before the server will hash it. This component is required on a `SignRequest`, optional on a `VerifyRequest`.

The `Base64Data` element MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. This element gives the binary output of a sequence of transforms to be hashed at the server side.

The OPTIONAL `WhichReference` element, if present, MUST contain one instance of an integer. As there may be multiple `TransformedDataType` / `DocumentHashType` components of the same document having the same URI [RFC 2396] and `RefType` on a `SignRequest` or `VerifyRequest` - their correspondence to an already existing `<ds:Reference>` however needs to be established on a `VerifyRequest` only. There is a need to disambiguate such cases. This element hence offers a way to clearly identify the `<ds:Reference>` when URI and `RefType` match multiple components. The corresponding `<ds:Reference>` is indicated by this zero-based `WhichReference` element (0 means the first `<ds:Reference>` in the signature, 1 means the second, and so on). This component is ignored on a `SignRequest`, optional on a `VerifyRequest`.

Non-normative Comment:

It may be possible to establish the `<ds:References>` / `TransformedDataType` / `DocumentHashType` correspondence by comparing the optionally supplied chain of transforms to those of the `<ds:References>` having the same URI and `RefType` in the supplied `<ds:Signature>` if this chain of transform has been supplied. This can be quite expensive and even outnumber the advantages of `TransformedDataType` / `DocumentHashType`.

4.4.4.1 TransformedData – JSON Syntax

The `TransformedDataType` JSON object SHALL implement in JSON syntax the requirements defined in the `TransformedData` component.

Properties of the JSON object SHALL implement the sub-components of `TransformedData` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Transforms	<code>transforms</code>	[]
Base64Data	<code>b64Data</code>	[]
WhichReference	<code>whichRef</code>	[]

The `TransformedDataType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-TransformedDataType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
    "refURI": {
      "type": "string"
    },
    "refType": {
```

```

    "type": "string"
  },
  "schemaRefs": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/dss2-DocumentType"
    }
  },
  "transforms": {
    "$ref": "#/definitions/dsigrw-TransformsType"
  },
  "b64Data": {
    "$ref": "#/definitions/dsb-Base64DataType"
  },
  "whichRef": {
    "type": "integer"
  }
},
"required": ["b64Data"]
}

```

[component TransformedData JSON schema details]

4.4.4.2 TransformedData – XML Syntax

The XML type TransformedDataType SHALL implement the requirements defined in the TransformedData component.

The TransformedDataType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="TransformedDataType">
  <xs:complexContent>
    <xs:extension base="dss2:DocumentBaseType">
      <xs:sequence>
        <xs:element name="Transforms" type="ds-rw:TransformsType"
minOccurs="0"/>
        <xs:element name="Base64Data" type="dsb:Base64DataType"/>
      </xs:sequence>
      <xs:attribute name="WhichReference" type="xs:integer" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of TransformedDataType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component TransformedData XML schema details]

4.4.5 Component DocumentHash

The DocumentHash component represents a document that will not be transported to the server but just the calculated digest of it. This may be useful to limit the amount of data transferred or to ensure privacy of the document.

This components extends the component 4.4.2. The inherited sub-components are not repeated here.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Transforms` element, if present, MUST contain a sub-component. A given element MUST satisfy the requirements specified in section 4.5.2. It specifies the value for a `<ds:Reference>` element's `<ds:Transforms>` child element when referring to this document hash. In other words, this specifies transforms that the client has already applied to the input document before hashing it. This component is required on a `SignRequest`, optional on a `VerifyRequest`. This component is required on a `SignRequest`, optional on a `VerifyRequest`.

The `DigestInfos` element MUST occur 1 or more times containing a sub-component. Each instance MUST satisfy the requirements specified in this document in section 4.1.4. This element MAY contain more than one `DigestInfo` sub-component to represent the digest values calculated with different digest algorithms. This may be useful when a requestor doesn't know upfront which digest algorithms are supported / accepted by the server for signing. In the case of a verification request the client may not be able to parse the signature and instead calculate the digest for a comprehensive set of digest algorithms.

The OPTIONAL `WhichReference` element, if present, MUST contain one instance of an integer. As there may be multiple `TransformedDataType` / `DocumentHashType` components of the same document having the same URI [RFC 2396] and `RefType` on a `SignRequest` or `VerifyRequest` - their correspondence to an already existing `<ds:Reference>` however needs to be established on a `VerifyRequest` only. There is a need to disambiguate such cases. This element hence offers a way to clearly identify the `<ds:Reference>` when URI and `RefType` match multiple components. The corresponding `<ds:Reference>` is indicated by this zero-based `WhichReference` element (0 means the first `<ds:Reference>` in the signature, 1 means the second, and so on).

Non-normative Comment:

[component `DocumentHash` non normative details]

4.4.5.1 DocumentHash – JSON Syntax

The `DocumentHashType` JSON object SHALL implement in JSON syntax the requirements defined in the `DocumentHash` component.

Properties of the JSON object SHALL implement the sub-components of `DocumentHash` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Transforms	<code>transforms</code>	[]
DigestInfos	<code>dis</code>	[]
WhichReference	<code>whichRef</code>	[]

The `DocumentHashType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-DocumentHashType": {
  "type": "object",
  "properties": {
    "ID": {
      "type": "string"
    },
    "refURI": {
      "type": "string"
    },
    "refType": {
      "type": "string"
    }
  }
}
```

```

    },
    "schemaRefs": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dss2-DocumentType"
      }
    },
    "transforms": {
      "$ref": "#/definitions/dsigrw-TransformsType"
    },
    "dis": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsb-DigestInfoType"
      }
    },
    "whichRef": {
      "type": "integer"
    }
  },
  "required": ["dis"]
}

```

[component DocumentHash JSON schema details]

4.4.5.2 DocumentHash – XML Syntax

The XML type DocumentHashType SHALL implement the requirements defined in the DocumentHash component.

The DocumentHashType XML element is defined in XML Schema [DSS2XSD], and is copied below for information.

```

<xs:complexType name="DocumentHashType">
  <xs:complexContent>
    <xs:extension base="dss2:DocumentBaseType">
      <xs:sequence>
        <xs:element name="Transforms" type="ds-rw:TransformsType"
minOccurs="0"/>
        <xs:element name="DigestInfos" type="dsb:DigestInfoType"
maxOccurs="unbounded" minOccurs="1"/>
      </xs:sequence>
      <xs:attribute name="WhichReference" type="xs:integer" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Each child element of DocumentHashType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component DocumentHash XML schema details]

4.4.6 Component SignatureObject

The SignatureObject component contains a signature or timestamp of some sort. This element is returned in a sign response message, and sent in a verify request message.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `Base64Signature` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.6. A base64 encoding of some arbitrary signature, such as a XML signature [XMLDSIG], PGP [RFC 2440] or CMS [RFC 5652] signature or a RFC 3161 timestamp [RFC 3161]. The type of signature is specified by the `MimeType` element of the `Base64DataType` component. Profiles MAY define the handling of additional types.

The OPTIONAL `SignaturePtr` element, if present, MUST contain one instance of a sub-component. This element MUST satisfy the requirements specified in this document in section 4.1.7. This element is used to point to an XML signature in an input (for a verify request) or output (for a sign response) document in which a signature is enveloped.

The OPTIONAL `SchemaRefs` element, if present, MUST contain one instance of a unique identifier reference. The identified schemas are to be used to process the `Id` elements during parsing and for XPath evaluation. If anything else but `<Schema>` are referred to, the server MUST report an error. If a referred to `<Schema>` is not used by the XML document instance this MAY be ignored or reported to the client in the subcomponent `ResultMessage` (for the definition of `Schemas` subcomponent (see section 4.3.10)

The OPTIONAL `WhichDoc` element, if present, MUST contain one instance of a URI. The use cases described in this document assume exactly one signature (or timestamp) being created by a signing request. Profiles may define processing rules how to create multiple signature as a response to a single request. For these use case this element provides a way to link a created signature back to an input document within the signing request. As the input document does not reside within the same document the use of the ID / IDREF mechanism is not possible. Therefore, this element is an instance of a URI. Profiles using this element MUST define the way how the value is constructed.

Non-normative Comment:

Proposed format of the `WhichDoc` element: scheme 'dssReq', the path contains the value of the value of the `RequestId`, the fragment contains the ID element of the referenced Document. An example is 'dssReq:req-12234#doc-3'.

4.4.6.1 SignatureObject – JSON Syntax

The `SignatureObjectType` JSON object SHALL implement in JSON syntax the requirements defined in the `SignatureObject` component.

Properties of the JSON object SHALL implement the sub-components of `SignatureObject` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Base64Signature	b64Sig	[]
SignaturePtr	sigPtr	[]
SchemaRefs	schemaRefs	[]
WhichDoc	whichDoc	[]

The `SignatureObjectType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dss2-SignatureObjectType": {
  "type": "object",
  "properties": {
    "b64Sig": {
```

```

    "$ref": "#/definitions/dsb-Base64DataType"
  },
  "sigPtr": {
    "$ref": "#/definitions/dsb-SignaturePtrType"
  },
  "schemaRefs": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/dss2-DocumentBaseType"
    }
  },
  "whichDoc": {
    "type": "string"
  }
},
"minProperties": 1
}

```

[component [SignatureObject JSON schema details](#)]

4.4.6.2 SignatureObject – XML Syntax

The XML type `SignatureObjectType` SHALL implement the requirements defined in the `SignatureObject` component.

The `SignatureObjectType` XML element is defined in XML Schema [\[DSS2XSD\]](#), and is copied below for information.

```

<xs:complexType name="SignatureObjectType">
  <xs:choice>
    <xs:element name="Base64Signature" type="dsb:Base64DataType"/>
    <xs:element name="SignaturePtr" type="dsb:SignaturePtrType"/>
  </xs:choice>
  <xs:attribute name="SchemaRefs" type="xs:IDREFS" use="optional"/>
  <xs:attribute name="WhichDoc" type="xs:anyURI" use="optional"/>
</xs:complexType>

```

Each child element of `SignatureObjectType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component SignatureObject XML schema details\]](#)

4.5 Referenced Data Structure Models from other documents

4.5.1 Component NameID

The `NameID` component is used when an element serves to represent an entity by a string-valued name. This component reflects the structure 'NameID' defined in the SAML2 specification [\[CLAUSE FOR LINK TO THE SAML2 SPEC\]](#). This section provides the definition required to support the DSS-X 2.0 multi-syntax approach.

Below follows a list of the sub-components that constitute this component:

The `value` element MUST contain one instance of a string. In non-XML representations the `value` element contains the actual identifier

The OPTIONAL `Format` element, if present, MUST contain one instance of a URI. The `Format` element represents the classification of string-based identifier information.

The OPTIONAL `SPProvidedID` element, if present, MUST contain one instance of a string. The `SPProvidedID` element defines the alternative identifier of the principal most recently set by the service provider or affiliation, if any

The OPTIONAL `NameQualifier` element, if present, MUST contain one instance of a string. The `NameQualifier` element contains the security or administrative domain that qualifies the name. This attribute provides a means to federate names from disparate user stores without collision.

The OPTIONAL `SPNameQualifier` element, if present, MUST contain one instance of a string. The `SPNameQualifier` element further qualifies a name with the name of a service provider or affiliation of providers. This attribute provides an additional means to federate names on the basis of the relying party or parties.

Non-normative Comment:

[component `NameID` non normative details]

4.5.1.1 `NameID` – JSON Syntax

The `NameIDType` JSON object SHALL implement in JSON syntax the requirements defined in the `NameID` component.

Properties of the JSON object SHALL implement the sub-components of `NameID` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>value</code>	<code>value</code>	[]
<code>Format</code>	<code>format</code>	[]
<code>SPProvidedID</code>	<code>provId</code>	[]
<code>NameQualifier</code>	<code>nameQual</code>	[]
<code>SPNameQualifier</code>	<code>spNameQual</code>	[]

The `NameIDType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"saml2rw-NameIDType": {
  "type": "object",
  "properties": {
    "spnameQualifier": {
      "type": "string"
    },
    "spprovidedID": {
      "type": "string"
    },
    "value": {
      "type": "string"
    },
    "format": {
```

```

    "type": "string"
  },
  "provId": {
    "type": "string"
  },
  "nameQual": {
    "type": "string"
  },
  "spNameQual": {
    "type": "string"
  }
}
}

```

[[component NameID JSON schema details](#)]

4.5.1.2 NameID – XML Syntax

The XML element is defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/saml2/rewritten'. The XML type NameIDType SHALL implement the requirements defined in the NameID component.

The NameIDType XML element is defined in XML Schema [[SAML2RWXSD](#)], and is copied below for information.

```

<complexType name="NameIDType">
  <simpleContent>
    <extension base="string">
      <attributeGroup ref="saml2-rw:IDNameQualifiers"/>
      <xs:attribute name="Format" type="anyURI" use="optional"/>
      <xs:attribute name="SPProvidedID" type="string" use="optional"/>
    </extension>
  </simpleContent>
</complexType>

```

Each child element of NameIDType XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. The element 'value' is represented by the component's XML tag text content. [[component NameID XML schema details](#)]

4.5.2 Component Transforms

This component reflects the structure 'Transforms' defined in the XMLDSig specification [[CLAUSE FOR LINK TO THE XMLDSig SPEC](#)]. This section provides the definition required to support the DSS-X 2.0 multi-syntax approach.

Below follows a list of the sub-components that constitute this component:

The Transform element MUST occur 1 or more times containing sub-component. Each instance MUST satisfy the requirements specified in section 4.5.3. [[sub component Transform details](#)]

Non-normative Comment:

[[component Transforms non normative details](#)]

4.5.2.1 Transforms – JSON Syntax

The TransformsType JSON object SHALL implement in JSON syntax the requirements defined in the Transforms component.

Properties of the JSON object SHALL implement the sub-components of Transforms using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
Transform	transform	[]

The `TransformsType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsigrw-TransformsType": {
  "type": "object",
  "properties": {
    "transform": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/dsigrw-TransformType"
      }
    }
  },
  "required": ["transform"]
}
```

[component Transforms JSON schema details]

4.5.2.2 Transforms – XML Syntax

The XML element is defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/xmlsig/rewritten'. The XML type `TransformsType` SHALL implement the requirements defined in the `Transforms` component.

The `TransformsType` XML element is defined in XML Schema [DSIGRWXSD], and is copied below for information.

```
<complexType name="TransformsType">
  <sequence>
    <xs:element name="Transform" type="ds-rw:TransformType"
maxOccurs="unbounded"/>
  </sequence>
</complexType>
```

Each child element of `TransformsType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [component Transforms XML schema details]

4.5.3 Component Transform

This component reflects the structure 'Transforms' defined in the XMLDSig specification [CLAUSE FOR LINK TO THE XMLDSig SPEC]. This section provides the definition required to support the DSS-X 2.0 multi-syntax approach. See section 'Transforming DSS 1.0 into 2.0' for a detailed discussion of the applied changes.

Below follows a list of the sub-components that constitute this component:

The OPTIONAL `value` element, if present, MUST contain a string. This string holds the text content part of a 'mixed' XML element.

The OPTIONAL `Base64Content` element, if present, MUST contain base64 encoded binary data.

The OPTIONAL `XPath` element, if present, MAY occur zero or more times containing a string. [sub component XPath details]

The OPTIONAL `NsPrefixMapping` element, if present, MAY occur zero or more times containing sub-component. If present each instance MUST satisfy the requirements specified in this document in section 4.1.1. This list has no direct correspondence in the XMLDSig schema definition. It is used to represent the XML namespace prefix definitions in other syntaxes than XML.

The `Algorithm` element MUST contain one instance of a URI. [sub component Algorithm details]

Non-normative Comment:

[component Transform non normative details]

4.5.3.1 Transform – JSON Syntax

The `TransformType` JSON object SHALL implement in JSON syntax the requirements defined in the `Transform` component.

Properties of the JSON object SHALL implement the sub-components of `Transform` using JSON-specific names mapped as shown in the table below.

Element	Implementing JSON member name	Comments
<code>value</code>	<code>val</code>	[]
<code>Base64Content</code>	<code>b64Content</code>	[]
<code>XPath</code>	<code>xPath</code>	[]
<code>NsPrefixMapping</code>	<code>nsDecl</code>	[]
<code>Algorithm</code>	<code>alg</code>	[]

The `TransformType` JSON object is defined in the JSON schema [DSBJSON] and is provided below as a service to the reader.

```
"dsigrw-TransformType": {
  "type": "object",
  "properties": {
    "xpath": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "val": {
      "type": "string"
    },
    "b64Content": {
      "type": "string"
    },
    "XPath": {
```



```

    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "nsDecl": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/dsb-NsPrefixMappingType"
    }
  },
  "alg": {
    "type": "string"
  }
},
"required": ["alg"]
}

```

[\[component Transform JSON schema details\]](#)

4.5.3.2 Transform – XML Syntax

The XML element is defined in the XML namespace 'http://docs.oasis-open.org/dss-x/ns/xmlsig/rewritten'. The original definition of this element uses the 'mixed' content attribute. To support non-XML syntax using a common object model the attribute is dropped and a 'value' component is introduced. The XML type `TransformType` SHALL implement the requirements defined in the Transform component.

The `TransformType` XML element is defined in XML Schema [\[DSIGRWXSD\]](#), and is copied below for information.

```

<xs:complexType name="TransformType">
  <xs:sequence>
    <xs:element name="value" type="string" maxOccurs="1" minOccurs="0"/>
    <xs:element name="Base64Content" type="xs:base64Binary" maxOccurs="1"
minOccurs="0"/>
    <xs:element name="XPath" type="string" maxOccurs="unbounded"
minOccurs="0"/>
    <xs:element name="NsPrefixMapping" type="dsb:NsPrefixMappingType"
maxOccurs="unbounded" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="Algorithm" type="xs:anyURI" use="required"/>
</xs:complexType>

```

Each child element of `TransformType` XML element SHALL implement in XML syntax the sub-component that has a name equal to its local name. [\[component Transform XML schema details\]](#)

4.6 Element / JSON name lookup tables

The subsequent table allows to find the names of a component's element for a given JSON member name.

JSON member name	mapped from element name
additionalTimeInfo	<code>AdditionalTimeInfo</code>
addKeyInfo	<code>AdditionalKeyInfo</code>
alg	<code>Algorithm</code>

	DigestMethod
attRef	AttRef
attURI	AttRefURI
aud	IntendedAudience
augSig	AugmentedSignature
b64Content	Base64Content
b64Data	Base64Data
b64Sig	Base64Signature
bounds	SigningTimeBoundaries
cert	X509Certificate
claimedIdentity	ClaimedIdentity
code	Code
createEnvelopedSignature	CreateEnvelopedSignature
createRef	createReference
crl	X509CRL
currTime	CurrentTime
di	DigestInfo
dis	DigestInfos
doc	Document
docWithSignature	DocumentWithSignature
format	Format
hasObjectTagsAndAttributesSet	HasObjectTagsAndAttributesSet
ID	Id
id	Identifier
idRef	IdRef
incContent	IncludeEContent
incObj	IncludeObject
indeterminate	IndeterminateDetail
inDocs	InputDocuments

invalid	InvalidDetail
keySel	KeySelector
lowerBound	LowerBoundary
maj	ResultMajor
contentType	MimeType
min	ResultMinor
msg	ResultMessage Message
name	Name KeyName
nsDecl	NsPrefixMapping
objId	ObjId
ocsp	OCSPResponse
optInp	OptionalInputs
optOutp	OptionalOutputs
poe	PoE
pre	NamespacePrefix
pRef	ProblemReference
procDetails	ProcessingDetails
profile	AppliedProfile
prop	Property
props	Properties
provId	SPProvidedID
quality	SignatureQualityLevel
recipient	Recipient
ref	Ref
refId	RefId
refType	RefType
refURI	RefURI

reqID	RequestID
respID	ResponseID
result	Result VerifyManifestResults ManifestResult
returnAugmented	ReturnAugmentedSignature
returnProcDetails	ReturnProcessingDetails
returnSigner	ReturnSignerIdentity
returnSigningTime	ReturnSigningTimeInfo
returnTimestamped	ReturnTimestampedSignature
returnVerificationTime	ReturnVerificationTimeInfo
schema	Schema
schemaRefs	SchemaRefs
sigAlgo	SignatureAlgorithm
signedProps	SignedProperties
signedRef	SignedReference
signedRefs	SignedReferences
signerIdentity	SignerIdentity
signingTime	SigningTime
signingTimeInfo	SigningTimeInfo
sigObj	SignatureObject
sigPlacement	SignaturePlacement
sigPtr	SignaturePtr
sigType	SignatureType
ski	X509SKI
specTime	SpecificTime
status	Status
sub	X509SubjectName
suppInfo	SupportingInfo

timestampedSig	TimestampedSignature
transform	Transform
transforms	Transforms
type	Type
unsignedProps	UnsignedProperties
upperBound	UpperBoundary
uri	NamespaceURI
useVerificationTime	UseVerificationTime
val	value DigestValue Value
valid	ValidDetail
verificationTime	VerificationTime
verificationTimeInfo	VerificationTimeInfo
verifyManifests	VerifyManifests
whichData	WhichData
whichDoc	WhichDoc WhichDocument
whichRef	WhichReference
x509Digest	X509Digest
xPath	XPath ReferenceXpath
xPathAfter	XPathAfter
xPathFirstChildOf	XPathFirstChildOf
xPathQual	XPathQualifier

The subsequent table allows to find the abbreviated JSON member names for a given element name.

Element	Implementing JSON member name
AdditionalKeyInfo	addKeyInfo
AdditionalTimeInfo	additionalTimeInfo

Algorithm	alg
AppliedProfile	profile
AttRef	attRef
AttRefURI	attURI
AugmentedSignature	augSig
Base64Content	b64Content
Base64Data	b64Data
Base64Signature	b64Sig
ClaimedIdentity	claimedIdentity
Code	code
CreateEnvelopedSignature	createEnvelopedSignature
createReference	createRef
CurrentTime	currTime
DigestInfo	di
DigestInfos	dis
DigestMethod	alg
DigestValue	val
Document	doc
DocumentWithSignature	docWithSignature
Format	format
HasObjectTagsAndAttributesSet	hasObjectTagsAndAttributesSet
Id	ID
Identifier	id
IdRef	idRef
IncludeEContent	incContent
IncludeObject	incObj
IndeterminateDetail	indeterminate
InputDocuments	inDocs
IntendedAudience	aud

InvalidDetail	invalid
KeyName	name
KeySelector	keySel
LowerBoundary	lowerBound
ManifestResult	result
Message	msg
MimeType	contentType
Name	name
NamespacePrefix	pre
NamespaceURI	uri
NsPrefixMapping	nsDecl
ObjId	objId
OCSPPResponse	ocsp
OptionalInputs	optInp
OptionalOutputs	optOutp
PoE	poe
ProblemReference	pRef
ProcessingDetails	procDetails
Properties	props
Property	prop
Recipient	recipient
Ref	ref
ReferenceXpath	xPath
RefId	refId
RefType	refType
RefURI	refURI
RequestID	reqID
ResponseID	respID
Result	result


ResultMajor	maj
ResultMessage	msg
ResultMinor	min
ReturnAugmentedSignature	returnAugmented
ReturnProcessingDetails	returnProcDetails
ReturnSignerIdentity	returnSigner
ReturnSigningTimeInfo	returnSigningTime
ReturnTimestampedSignature	returnTimestamped
ReturnVerificationTimeInfo	returnVerificationTime
Schema	schema
SchemaRefs	schemaRefs
SignatureAlgorithm	sigAlgo
SignatureObject	sigObj
SignaturePlacement	sigPlacement
SignaturePtr	sigPtr
SignatureQualityLevel	quality
SignatureType	sigType
SignedProperties	signedProps
SignedReference	signedRef
SignedReferences	signedRefs
SignerIdentity	signerIdentity
SigningTime	signingTime
SigningTimeBoundaries	bounds
SigningTimeInfo	signingTimeInfo
SpecificTime	specTime
SPProvidedID	provId
Status	status
SupportingInfo	suppInfo
TimestampedSignature	timestampedSig

Transform	transform
Transforms	transforms
Type	type
UnsignedProperties	unsignedProps
UpperBoundary	upperBound
UseVerificationTime	useVerificationTime
ValidDetail	valid
value	val
Value	val
VerificationTime	verificationTime
VerificationTimeInfo	verificationTimeInfo
VerifyManifestResults	result
VerifyManifests	verifyManifests
WhichData	whichData
WhichDoc	whichDoc
WhichDocument	whichDoc
WhichReference	whichRef
X509Certificate	cert
X509CRL	crl
X509Digest	x509Digest
X509SKI	ski
X509SubjectName	sub
XPath	xPath
XPathAfter	xPathAfter
XPathFirstChildOf	xPathFirstChildOf
XPathQualifier	xPathQual

5 Data Processing Model for Signing

The following process diagram illustrates the major building blocks of the processing of a signing request. The sub processes are described in the next chapters.

Figure 2: Signing Overview

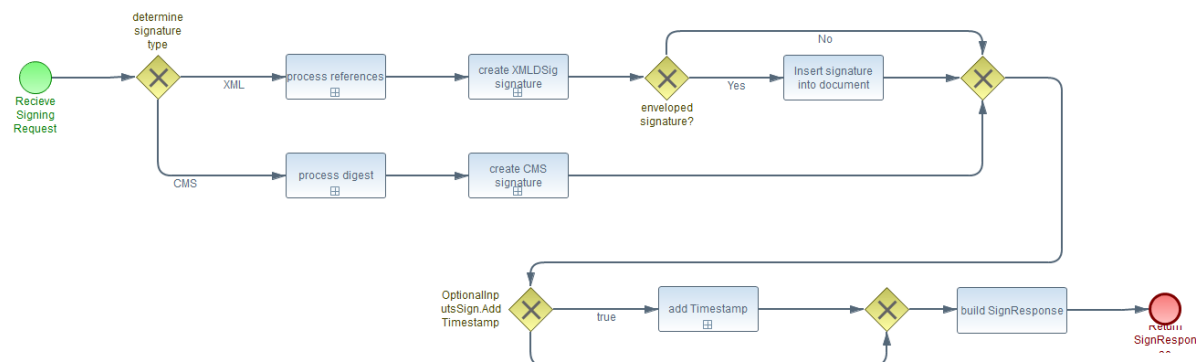

The workflow splits into the sections for XMLDSig and CMS signature processing. The input component for a signing request is `SignRequest` (see section 4.2.1). The signature will be selected by the server considering a given `SignatureType` element of `OptionalInputsSign` and its configuration and policies. « Profiles MAY introduce additional signature types and thus MUST define the adequate processing steps. » [DSS-5-1]

If the element `AddTimestamp` of `OptionalInputsSign` is set to 'true' the sub-process 'add Timestamp' adds a timestamp to the signature.

The task of building the `SignResponse` component is shared between all signature formats.

5.1 Processing for XML Signatures


The first sub-process 'process references' of the XML signature creation is the processing of the references. The second sub-process handles the creation of the XML signature. These two sub-processes are described in detail below.

If the element `CreateEnvelopedSignature` of `SignaturePlacement` is set to `true` the signature will be inserted into the document and location selected by `SignaturePlacement`.

5.1.1 Sub process 'process references'

The following process diagram illustrates the processing steps for the assembly of references.

Figure 3: Process References

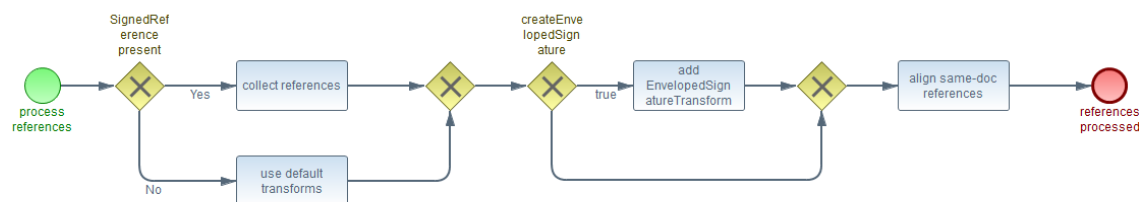

The input documents are read from the `Base64Data` element of the referred `Document` component into an octet stream. « This data MUST be a well-formed XML Document as defined in [XML] section 2.1. » [DSS-5.1.1-1]

If the optional input `SignedReferences` is present each `SignedReference` element controls the creation of a corresponding `<ds:Reference>`. The task ‘collect references’ handles the `SignedReferences`.

Otherwise there will be a `<ds:Reference>` element for each given input document. The set of transforms and their parameter will be selected by the server. The task ‘use default transforms’ select this set of `<ds:Reference>`.

Note: Transforms can be applied as a server implementation MAY choose to increase robustness of the Signatures created. These Transforms may reflect idiosyncrasies of different parsers or solve encoding issues or the like. Servers MAY choose not to apply transforms in basic processing and extract the binary data for direct hashing or canonicalize the data directly if certain optional inputs are not to be implemented.

If the element `CreateEnvelopedSignature` of `SignaturePlacement` is set to `true` the list of transforms will be prepended with an `EnvelopedSignatureTransform` entry. The task ‘add EnvelopedSignatureTransform’ processes the corresponding `<ds:Reference>`.

« The `RefURI` attribute of `<ds:Reference>` element MUST be set to include a “same-document” URI which references either:

- The whole `Document` containing the signature (by using a `RefURI=""`)
- The relevant parts of the `Document` to be covered/protected by the signature (by using a “same-document” `RefURI` attribute having a value starting with “#”, like `RefURI="#some-id"`, `RefURI="#xpointer(/)"`, `RefURI="#xpointer(/DocumentElement/ToBeSignedElement)"` or the like).


If the result of evaluating the expression included in the `RefURI` attribute doesn’t fit in any of the options described above, the server MUST reject the request using a `ResultMajor RequesterError` which MAY be qualified by a `ResultMinor urn:oasis:names:tc:dss:1.0:resultminor:InvalidRefURI`.

» [DSS-5.1.1-2]

This alignment will be performed by the task ‘align same-doc references’.

5.1.2 Sub process ‘create XML signature’

Figure 4: Create XML Signature

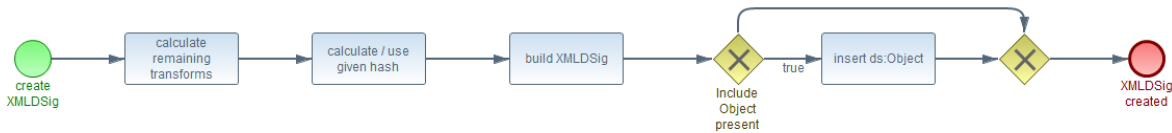

The first task ('calculate remaining transforms') of this section applies the given set of transforms. If a `TransformedData` element is provided by the client these calculations **MUST** be respected and just the remaining set of transforms must be processed by the server. « The case of a `Document` as base for a reference processing all transform steps **MUST** be applied. » [DSS-5.1.2-1]

Note: « As required in [XMLDSIG] if the end result is an XML node set, the server **MUST** attempt to convert the node set back into an octet stream using Canonical XML [XML-C14N]. » [DSS-5.1.2-2]

The 'calculate / use given hash' task computes the digest upon the transformation output. If a `DocumentHash` element is provided by the client the hash values are used as input for the following steps. The `DocumentHash` **MAY** contain digests of different algorithms. The server selects the appropriate hash algorithm. If no appropriate algorithms (according to policy or technical restrictions of the server) is supplied by the client the server rejects the request with a `ResultMajor` code of `RequesterError` and a `ResultMinor` code of `InappropriateHashAlgorithm`.

Performing the task 'build XMLDSig' the server forms a set of `<ds:Reference>` with the elements and attributes set as follows:

- If the `Document` has a `RefURI` attribute, the `<ds:Reference>` element's `URI` attribute is set to the value of the `RefURI` attribute, else this attribute is omitted.
« A signature **MUST NOT** be created if more than one `RefURI` is omitted in the set of input documents and the server **MUST** report a `RequesterError` by setting `ResultMajor` `RequesterError` qualified by a `ResultMinor`. » [DSS-5.1.2-3]
- If the `Document` has a `RefType` attribute, the `<ds:Reference>` element's `Type` attribute is set to the value of the `RefType` attribute, else this attribute is omitted.
- The `<ds:DigestMethod>` element is set to the hash method used.
- The `<ds:DigestValue>` element is set to the hash value that is to be calculated as per [XMLDSIG].
- The `<ds:Transforms>` element is set to the sequence of transforms applied by the server in step b. « This sequence **MUST** describe the effective transform as a reproducible procedure from parsing until hash. » [DSS-5.1.2-4]
- « References resulting from processing of optional inputs **MUST** be included. » [DSS-5.1.2-5] In doing so, the server **MAY** reflect the ordering of the `Document` elements.

The server creates an XML signature using these `<ds:Reference>` elements according to the processing rules in [XMLDSIG].

The last task 'insert ds:Object' handles the creation of an enveloping signature. If one or more optional input elements `IncludeObject` are present they will cause the inclusion of an object inside the signature being created.

5.1.2.1 XML Signatures Variant Optional Input `IncludeObject`

An enveloping signature is a signature having `<ds:Object>`s which are referenced by `<ds:Reference>`s having a same-document URI.

For each `<IncludeObject>` the server creates a new `<ds:Object>` element containing the document, as identified using the `WhichData` element, as its child. This object is carried within the enveloping signature. The ordering of the `<IncludeObject>` optional inputs **MAY** be ignored by the server.

« This `<Document>` MUST include a “same-document” `RefURI` attribute (having a value starting with “#”) which references either:

- The whole newly-created `<ds:Object>`.
- The relevant parts of the newly-created `<ds:Object>`'s contents to be covered/protected by the signature.

» [DSS-5.1.2.1-1] « If the result of evaluating the expression included in the `RefURI` element doesn't fit in any of the options described above, the server MUST reject the request using a `ResultMajorRequesterError` which MAY be qualified by a `ResultMinor` `urn:oasis:names:tc:dss:1.0:resultminor:InvalidRefURI` » [DSS-5.1.2.1-2]

Note: If the server does not support the ordering of `<ds:Object>`, it is recommended either to use ID-based referencing to the `<ds:Object>` (using the client-generated ID included in the `ObjId` attribute) or to rely on expressions based on `<ds:Object>`'s contents that allow to unambiguously refer to the included object or their relevant parts.

The URI in the `RefURI` element of this `<Document>` should at least reference the relevant parts of the Object to be included in the calculation for the corresponding reference. « Clients MUST generate requests in a way that some `<ds:Reference>`'s URI values actually will reference the `<ds:Object>` generated by the server once this element will have been included in the `<ds:Signature>` produced by the server. » [DSS-5.1.2.1-3]

« For each `IncludeObject` the server MUST carry out the following steps before performing Basic Processing:

1. The server identifies the `Base64Data` component that is to be placed into a `<ds:Object>` as indicated by the `WhichData` element.
2. The data to be carried in the enveloping signature is extracted and decoded.
3. If the `hasObjectTagsAndAttributesSet` element is `false` or not present the server builds the `<ds:Object>` as follows:
 - a. The server generates the new `<ds:Object>` and sets its `Id` attribute to the value indicated in `ObjId` element of the optional input if present.
 - b. The `WhichData` element points to a `Base64Data` component. The `<ds:Object>`'s MIME Type is to be set to the value of `Base64Data`'s MIME Type value and the `Encoding` is to be set to <http://www.w3.org/TR/xmlschema-2/#base64Binary>
4. The server splices the to-be-enveloped documents as `<ds:Object>(s)` into the `<ds:Signature>`, which is to be returned.
5. If `CreateReference` is set to `true` generate a `ds:Reference` element referencing the spliced `<ds:Object>` and exclude this `<Document>` from the set of `<Document>s` ready for further processing. Otherwise just exclude this `<Document>` from the set of `<Document>s` ready for further processing.


» [DSS-5.1.2.1-4]

5.2 Processing for CMS Signatures

5.2.1 Sub process ‘process digest’

The following process diagram illustrates the processing steps required to calculate the digest for a CMS signature.

Figure 5: Process Digest

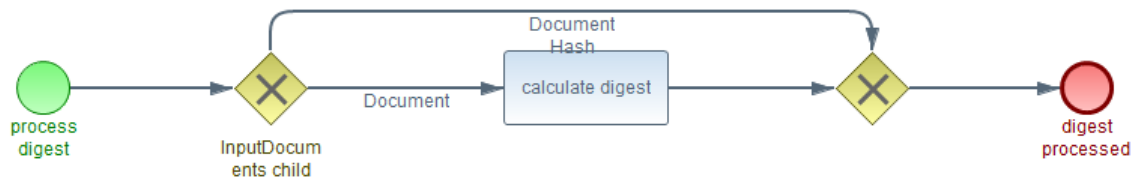


The `SignRequest` component **MUST** contain either a single `Document` (not having `RefURI` or `RefType` set) or a single `DocumentHash` component not having `RefURI`, `RefType`, `Transforms`. If the `InputDocuments` component contains a `Document` element, the server hashes the octet stream represented by the `Document`. This is performed by the task 'calculate digest'. If the `InputDocuments` component contains a `DocumentHash` element, the server uses the hash values as an input for the following steps. The `DocumentHash` **MAY** contain digests of different algorithms. The server selects the appropriate hash algorithm. If no appropriate algorithms (according to policy or technical restrictions of the server) is supplied by the client the server rejects the request with a `ResultMajor` code of `RequesterError` and a `ResultMinor` code of `InappropriateHashAlgorithm`.

5.2.2 Sub process 'create CMS signature'

The following process diagram illustrates the processing steps to create a CMS signature.

Figure 6: Create CMS signature

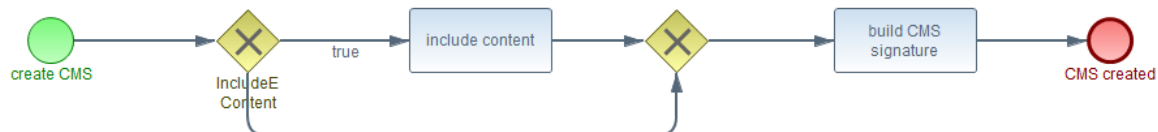

If the `InputDocuments` component contains a `Document` element and the `IncludeEContent` element of the `OptionalInputsSign` component is set to `true`, then the task 'include content' creates a CMS structure with the document enveloped within the signature. For CMS details in this context please refer to [RFC 3852] sections 5.1 "SignedData Type" and 5.2 "EncapsulatedContentInfo Type".

« Otherwise the resulting signature **MUST** be detached (aka. external or "without eContent"). » [DSS-5.2.2-1]

The following task 'build CMS signature' builds a `SignedData` structure containing the `SignerInfo` computed as follows:

The server forms a `SignerInfo` structure based on the input document. The components of the `SignerInfo` are set as follows:

- The `digestAlgorithm` field is set to the OID value for the hash method that was used in the previous processing step.
- The `signedAttributes` field's message-digest attribute contains the hash value that was calculated / provided in previous processing step. Other `signedAttributes` **MAY** be added by the server, according to its profile or policy, or according to the `Properties` optional input.


- The remaining fields (`sid`, `signatureAlgorithm`, and `signature`) are filled in as per a normal CMS signature.

5.3 General Timestamp Processing

5.3.1 Sub process 'add Timestamp'

The following process diagram illustrates the processing steps to insert a timestamp.

Figure 7: Add Timestamp

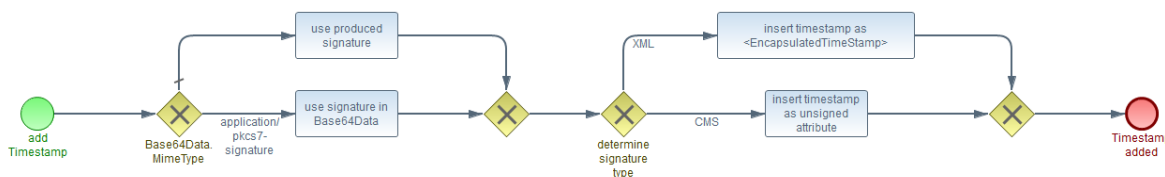

The `AddTimestamp` element of `OptionalInputsSign` indicates that the client wishes the server to embed a timestamp token as a property or attribute of the resultant or the supplied signature. The timestamp token will be applied to the signature value in the case of CMS/PKCS7 signatures or the `<ds:SignatureValue>` element in the case of XML signatures.

Note: Procedures for handling other forms of timestamp may be defined in profiles of the Core. In particular, the DSS AdES profile [DSS-AdES-P] defines procedures for generating timestamps over the content which is about to be signed (sometimes called content timestamps), and the DSS Timestamp profile [DSS-TS-P] defines procedures for handling standalone timestamps.

The `Type` element, if present, indicates what type of timestamp to apply. « Profiles that use this optional input MUST define the allowed values, and the default value, for the `Type` attribute (unless only a single type of timestamp is supported, in which case the `Type` attribute can be omitted). » [DSS-5.3.1-1]

Two scenarios for the timestamping of both CMS and XML signatures are supported by this Optional Input. They are as follows:

- Create and embed a timestamp token into the signature being created as part of this `SignRequest`.
- Create and embed a timestamp token into an existing signature, without verification, which is passed in the `InputDocuments` element of this `SignRequest`.

The following subsections specify the use of RFC 3161 timestamps with CMS signatures and the use of XML Timestamps or RFC 3161 timestamps with XML Signature. These subsections address both scenarios.

Note: The server SHOULD not verify the incoming signature before adding the timestamp. If a client wishes that its signatures be verified as a condition of time stamping, the client SHOULD use the `AddTimestamp` optional input of the Verify protocol.

5.3.1.1 Processing for CMS signatures time-stamping

If the `MimeType` element of the `Base64Data` component is set to `'application/pkcs7-signature'` a timestamp token is created and embedded into the existing signature, without verification, which is passed in the `InputDocuments` component of this `SignRequest`. Otherwise a timestamp token is created and embedded into the signature being created as part of the processing of this `SignRequest`.

« In both scenarios, the timestamp token created by the server SHALL be created according to [RFC 3161]. » [DSS-5.3.1.1-1] The `MessageImprint` field within the `TstInfo` structure of the timestamp token will be derived from the signature value of the just-created or incoming signature depending on the scenario. « The timestamp SHALL be embedded in the CMS signature as an unsigned attribute with the object identifier (see Appendix A of [RFC 3161]):

{iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1) pkcs-9(9) smime(16) id-aa(2) 14} » [DSS-5.3.1.1-2]

The signature and its embedded timestamp is returned as the first element in the `SignatureObject` list of the `SignResponse` component.

5.3.1.2 Processing for XML Timestamps on XML signatures

« If the type attribute in the optional input `AddTimestamp` is `urn:oasis:names:tc:dss:1.0:core:schema:XMLTimeStampToken` and signature being timestamped is an XML signature, then the XML signature MUST contain `<dss:timestamp>` as defined in [DSS1Core] section 5.1, placed in a `<xades:XMLTimeStamp>` within a `<xades:SignatureTimeStamp>` as defined in [XAdES]. » [DSS-5.3.1.2-1]

« The `<dss:timestamp>` MUST contain `<ds:Signature>` with at least two `<ds:Reference>` elements:

- One with the `Type` attribute set to `urn:oasis:names:tc:dss:1.0:core:schema:XMLTimeStampToken` and referencing a `<ds:Object>` element whose content is a `<TSTInfo>` element.
- The other referencing the `<ds:SignatureValue>` being timestamped.

» [DSS-5.3.1.2-2]

The present specification defines a format for XML timestamp tokens. In addition, XAdES defines a mechanism for incorporating signature timestamps in XML signatures. « The present document mandates that signature timestamps in XML format MUST follow the syntax defined in [DSS1Core] section 5.1. » [DSS-5.3.1.2-3] « These time-stamp tokens MUST be added to XML signatures as specified by XAdES. » [DSS-5.3.1.2-4]

« The signature and its embedded timestamp SHALL be returned as the first element in the `SignatureObject` list of the `SignResponse`. » [DSS-5.3.1.2-5]

5.3.1.3 Processing for RFC 3161 Timestamps on XML signatures

« If the type attribute in this optional input `AddTimestamp` is

`urn:ietf:rfc:3161`


and signature being timestamped is an XML signature then the XML signature MUST contain an RFC 3161, placed in a `<xades:EncapsulatedTimeStamp>` within a `<xades:SignatureTimeStamp>` as defined in [XAdES]. » [DSS-5.3.1.3-1]

6 Data Processing Model for Verification

A DSS server that verifies XML signatures SHOULD perform the following steps, upon receiving a verification with the top-level component `VerifyRequest` (see section 4.2.3). These steps may be changed or overridden by the optional inputs, or by the profile or policy the server is operating under. The results of the verification process are return to the caller within a `VerifyResponse` component (see section 4.2.4). For more details on multi-signature verification, see section 6.3.1 [Multi-Signature Verification](#).

The following process diagram illustrates the major buildings blocks of the processing of a verification request. The sub processes are described in the following sub-chapters.

Figure 8: Verification Overview

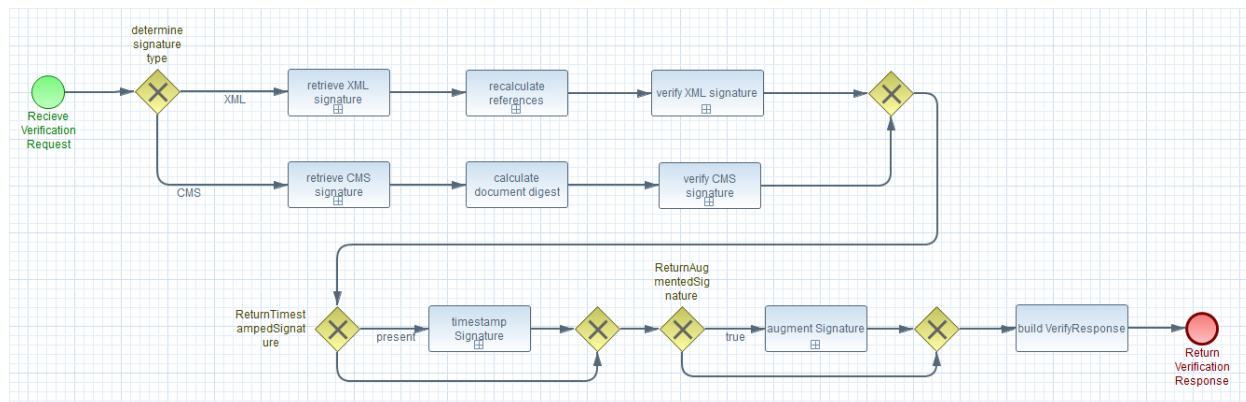


The workflow splits into the sections for XMLDSig and CMS signature processing. « The processing path will be selected by the server considering a given `SignatureType` element of `OptionalInputsVerify` and its configuration and policies. » [DSS-6-1] Profiles may introduce additional signature types and MUST define the adequate processing steps.

- If the element `ReturnTimestampedSignature` of `OptionalInputsVerify` is present, the sub-process 'timestamp Signature' adds a timestamp to the signature.
- If the element `ReturnAugmentedSignature` of `OptionalInputsVerify` is 'true' the sub-process 'augment Signature' inserts the augmented signature into the `OptionalOutputsVerify`.

6.1 Processing for XML Signature Verification

6.1.1 Sub process 'retrieve XML signature'

Figure 9: Retrieve XML Signature

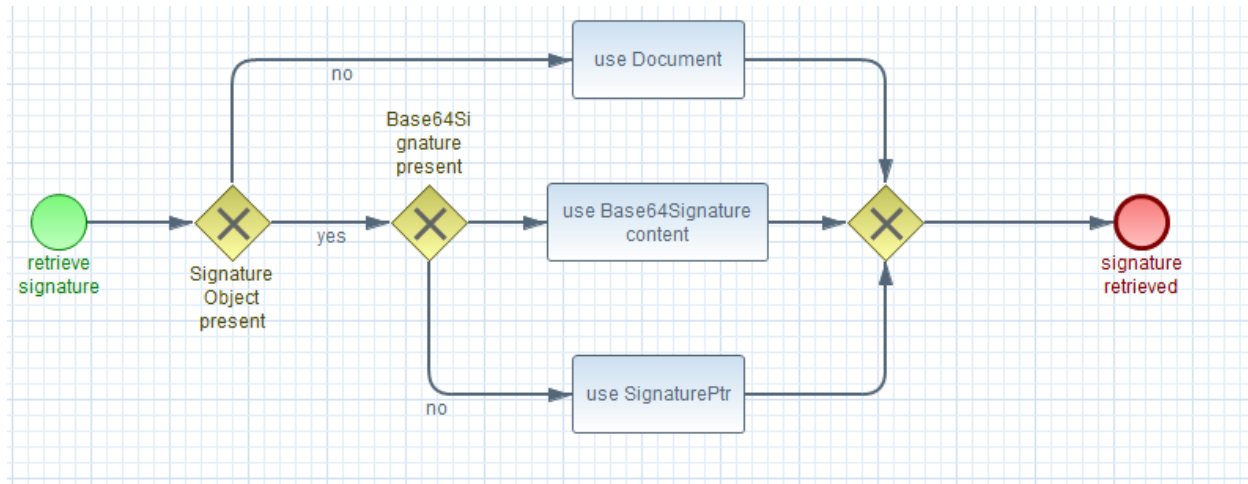


The server retrieves one or more `<ds:Signature>` objects as follows:

- For all instances of `SignatureObject` that are present, the server retrieves either the `<ds:Signature>` that is a child element of the `SignatureObject` (see: Note at the end of this section), or those `<ds:Signature>` objects which are pointed to by the `SignaturePtr` in the `SignatureObject`.
- If the `SignaturePtr` points to an input document but not a specific element in that document, the pointed-to input document must be a `Document` element containing XML.
- « If the `SignatureObject` is omitted, there MUST be only a single `Document` element. » [DSS-6.1.1-1] This case is handled as if a `SignaturePtr` pointing to the single `Document` was present: the server will search and find every `<ds:Signature>` element in this input document and verify each `<ds:Signature>` according to the steps below.

6.1.2 Sub process 'recalculate references'

Figure 10: Recalculate References

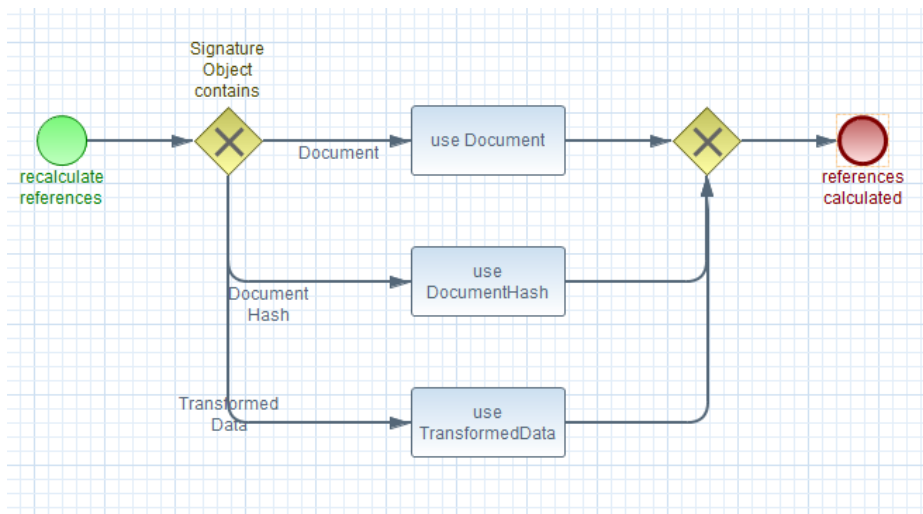


For each `<ds:Reference>` in the `<ds:Signature>`, the server finds the input document with matching `RefURI` and `RefType` values (omitted attributes match omitted attributes).

- If the `<ds:Reference>` uses a same-document URI, the XPointer should be evaluated against the input document the `<ds:Signature>` is contained within, or against the `<ds:Signature>` itself if it is contained within a `SignatureObject` element.
- The `SchemaRef` element or optional input `Schema` of the input document or `SignatureObject` will be used, if present, to identify ID attributes when evaluating the XPointer expression.
- If the `<ds:Reference>` uses an external URI and the corresponding input document is not present, the server will skip the `<ds:Reference>`, and later return a result code such as `ReferencedDocumentNotPresent` to indicate this. The `RefURI` MAY be omitted in at most one of the set of Input documents.
- If the input document is a `Document`, the server extracts and decodes as described in component `Document` (see section 4.4.3) depending of the form of the input document).
- If the input document is a `TransformedData`, the server MAY check that the `<ds:Transforms>` (if supplied) match between the `TransformedData` and the `<ds:Reference>` and then hashes the resultant data object according to `<ds:DigestMethod>`. « The server MUST check that the result matches `<ds:DigestValue>`. » [DSS-6.1.2-1]
- If the input document is a `DocumentHash`, the server MAY check that the `<ds:Transforms>`, `<ds:DigestMethod>` (if supplied) and `<ds:DigestValue>` elements match between the `DocumentHash` and the `<ds:Reference>`. If no appropriate algorithms (according to policy or technical restrictions of the server) is supplied by the client the server rejects the request with a `ResultMajor` code of `RequesterError` and a `ResultMinor` code of `InappropriateHashAlgorithm`.
- « If the combination of `RefURI` and `RefType` matches more than one input document all of them MUST be either a `TransformedData` or a `DocumentHash` otherwise a `RequesterError` is issued qualified by result minor of `ReferencedDocumentNotPresent`. » [DSS-6.1.2-2] Only one of them is allowed to have a `WhichReference` value that matches the order of the `<ds:Reference>` within the `<ds:SignedInfo>` in question otherwise a `RequesterError` is issued qualified by result minor of `ReferencedDocumentNotPresent`.

6.1.3 Sub process 'verify XML signature'

Figure 11: Verify XML Signature

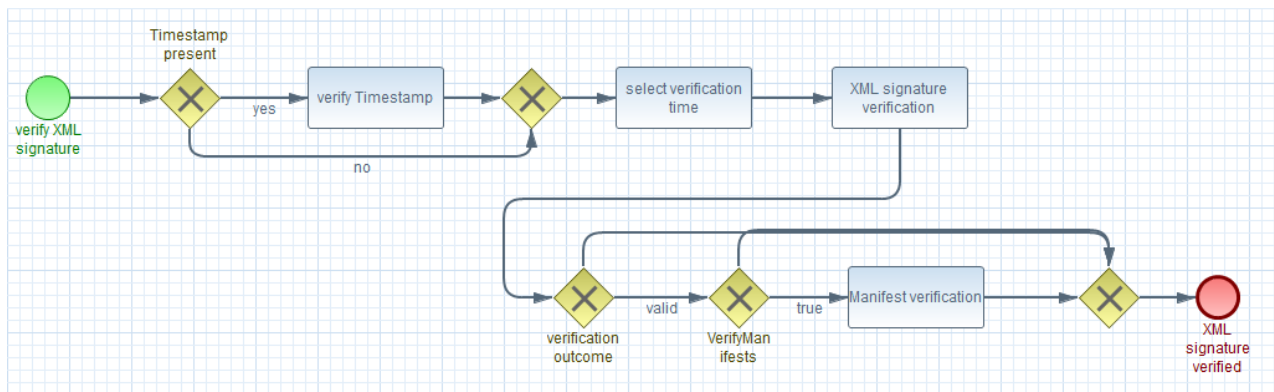

« If one or more timestamps are present on the given signature this / these timestamps MUST be verified. » [DSS-6.1.3-1] The 'time of existence' asserted by the timestamp MAY be used to decide the verification time. For details see the following sections.

The server verifies the validity of the signature at a particular time (i.e. current time, assumed signing time or other time), depending on the server policy. This behaviour MAY be altered by using the optional input UseVerificationTime.

If the VerifyManifests element of OptionalInputsVerify is set to 'true' the server validates the manifests in an XML signature. In accordance with [XMLDSIG] section 5.1, DSS Manifest validation does not affect a signature's core validation. The results of verifying individual <ds:Reference>'s within a <ds:Manifest> are returned in the VerifyManifestResults within the OptionalOutputsVerify. If the optional input VerifyManifests is set to 'true' and the XMLDSig core validation succeeds, then the returned ResultMinor is

urn:oasis:names:tc:dss:1.0:resultminor:valid:hasManifestResults

In case of a negative XMLDSig core validation no attempt is made to verify manifests.

If the signature validates correctly, the server returns one of the first three ResultMinor codes listed in section 9.2, depending on the relationship of the signature to the input documents (not including the relationship of the signature to those XML elements that were resolved through XPointer evaluation; the client will have to inspect those relationships manually). If the signature fails to validate correctly, the server returns some other code; either one defined in section 9.2 of this specification, or one defined by some profile of this specification.

6.1.3.1 Processing for RFC 3161 timestamp tokens on XML Signatures

The present section describes the processing rules for verifying an RFC 3161 timestamp token embedded within an XML signature as an unsigned property. This XML signature may be passed in on a Verify call within an instance of SignatureObject or embedded within a Document's child.

The server shall verify the timestamp token performing the steps detailed below. If any one of them results in failure, then the timestamp token SHOULD be rejected.

1. Extract the timestamp token embedded in the incoming signature as defined in 5.3.1.2 [Processing for XML Timestamps on XML signatures](#).
2. Verify that the token's public verification certificate is authorized for time stamping by examining the Extended Key Usage field for the presence of the time stamping OID "1.3.6.1.5.5.7.3.8".
3. Process the signature timestamp as defined in [XAdES] Annex G.2.2.16.1.3.
4. Verify that the public verification certificate conforms to all relevant aspects of the relying-party's policy including algorithm usage, policy OIDs, time accuracy tolerances, and the Nonce value.
5. Set the Result element as appropriate.
urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:InvalidSignatureTimestamp MAY be used to indicate that the signature is valid but the timestamp against that signature is invalid.

6.1.3.2 Processing for XML timestamp tokens on XML signatures

The present section describes the processing rules for verifying and XML Signature timestamp token embedded within an XML signature using the incorporation mechanisms specified in XAdES (i.e., in the `<xades:XMLTimeStamp>` `<xades:SignatureTimeStamp>` element's child). This XML signature may be passed in on a `Verify` call within an instance of `SignatureObject` or embedded within a `Document`'s child.

The server shall verify the timestamp token performing the steps detailed below. If any one of them results in failure, then the timestamp token **SHOULD** be rejected.


6. Extract the timestamp token embedded in the incoming signature as defined in 5.3.1.2 [Processing for XML Timestamps on XML signatures](#).
7. Verify that the verification key and algorithms used conforms to all relevant aspects of the applicable policy. Should this key come within a public certificate, verify that the certificate conforms to all relevant aspects of the applicable policy including algorithm usage, policy OIDs, and time accuracy tolerances.
8. Verify that the aforementioned verification key is consistent with the `ds:SignedInfo/SignatureMethod/@Algorithm` attribute value.
9. Verify the timestamp token signature in accordance with the rules defined in **[XMLDSIG]**.
10. Verify that the `<ds:SignedInfo>` element contains at least two `<ds:Reference>` elements.
11. Verify that one of the `<ds:Reference>` elements has its `Type` attribute set to `"urn:oasis:names:tc:dss:1.0:core:schema:XMLTimeStampToken"`.
Take this one and proceed as indicated below:
 - a. Retrieve the referenced data object. Verify that it references a `<ds:Object>` element, which in turn envelopes a `<TSTInfo>` element.
 - b. Verify that the `<TSTInfo>` element has a valid layout as per the present specification.
 - c. Extract the digest value and associated algorithm from its `<ds:DigestValue>` and `<ds:DigestMethod>` elements respectively.
 - d. Recalculate the digest of the retrieved data object as specified by **[XMLDSIG]** with the digest algorithm indicated in `<ds:DigestMethod>`, and compare this result with the contents of `<ds:DigestValue>`.
12. Take each of the other `<ds:Reference>` elements and for each validate the hash as specified in **[XMLDSIG]**.
13. Check that for one of the `<ds:Reference>` elements the retrieved data object is actually the `<ds:SignatureValue>` element and that it contains its digest after canonicalization.
14. Set the `Result` element as appropriate. Minor Error
`urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:InvalidSignatureTimestamp` MAY be used to indicate that the signature is valid but the timestamp against that signature is invalid.

6.2 Processing for CMS Signature Verification

A DSS server that verifies CMS signatures **SHOULD** perform the following steps, upon receiving a `VerifyRequest`. These steps may be changed or overridden by the optional inputs, or by the profile or policy the server is operating under.

6.2.1 Sub process 'retrieve CMS signature'


Figure 12: Retrieve CMS Signature

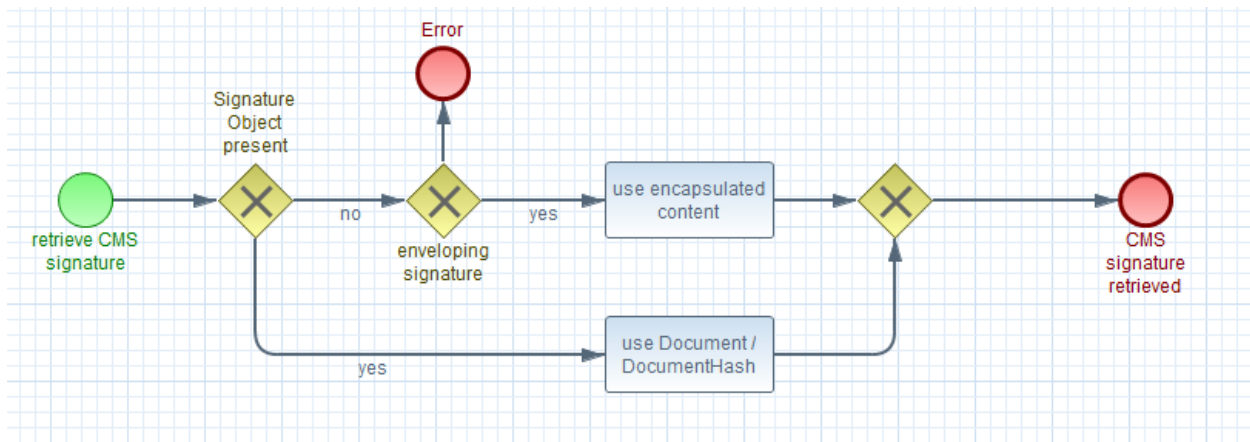

1. The server retrieves the CMS signature by decoding the `Base64Signature` children of all instances of `SignatureObject`.
2. The server retrieves the input data. « If the CMS signature is detached, there MUST be a single input document: i.e. a single `Document` or `DocumentHash` element. » [DSS-6.2.1-1] « Otherwise, if the CMS signature is enveloping, it contains its own input data and there MUST NOT be any input documents present. » [DSS-6.2.1-2]
3. The CMS signature and input data are verified in the conventional way (see [RFC 5652] for details).
4. If the signature validates correctly, the server returns the first `ResultMinor` code listed in section 9.2. If the signature fails to validate correctly, the server returns some other code; either one defined in section 9.2 of this specification, or one defined by some profile of this specification.

6.2.2 Sub process ‘verify CMS signature’

Figure 13: Verify CMS Signature

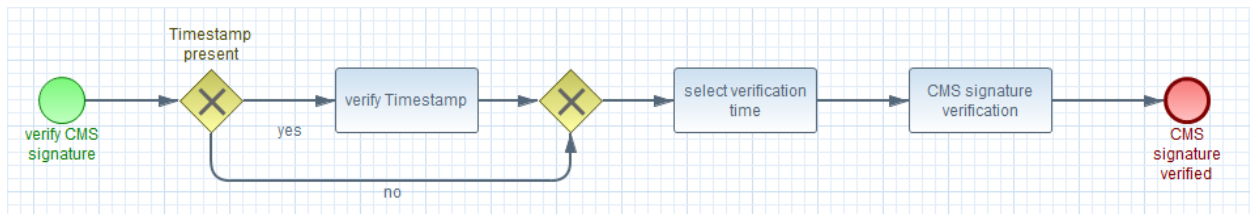

« If one or more timestamps are present on the given signature this / these timestamps MUST be verified. » [DSS-6.2.2-1] The ‘time of existence’ asserted by the timestamp MAY be used to decide the verification time. For details see the following section.

The server verifies the validity of the signature at a particular time (i.e. current time, assumed signing time or other time), depending on the server policy. This behaviour MAY be altered by using the optional input `UseVerificationTime`.

If the signature validates correctly, the server returns one of the first three `ResultMinor` codes listed in section 4.1.8 **Component Result**. If the signature fails to validate correctly, the server returns some other code; either one defined in section 4.1.8 **Component Result** of this specification, or one defined by some profile of this specification.

6.2.2.1 Processing for RFC 3161 Timestamp tokens on CMS Signatures.

The present section describes the processing rules for verifying a CMS RFC3161 timestamp token passed in on a `Verify` call within an element `SignatureObject` of the `VerifyRequest` component. In the CMS case, since the "signature timestamp" is embedded in the signature as an unsigned attribute,

only the time stamped signature is required for verification processing. As such, no additional input is required.

The processing by the server is broken down into the following steps:

15. The signature timestamp is embedded in the incoming signature as an unsigned attribute whose object identifier is 1.2.840.11359.1.9.16.2.14. Extract and verify the timestamp token.
16. Verify that the token's public verification certificate is authorized for time stamping by examining the Extended Key Usage field for the presence of the time stamping OID "1.3.6.1.5.5.7.3.8".
17. Validate that the `TstInfo` structure has a valid layout as defined in **[RFC 3161]**.
18. Extract the `MessageImprint` hash value and associated algorithm from the `TstInfo` structure which will be compared against the hash value derived in the next step.
19. Recalculate the hash of the signature value field of the signature in which the timestamp is embedded.
20. Compare the hash values from the two previous steps, and if they are equivalent, then this timestamp is valid for the signature that was time stamped.
21. Verify that the public verification certificate conforms to all relevant aspects of the relying-party's policy including algorithm usage, policy OIDs, time accuracy tolerances, and the Nonce value.
22. Set the `Result` element as defined in this specification. Minor Error
`urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:InvalidSignatureTimestamp` MAY be used to indicate that the signature is valid but the timestamp against that signature is invalid.

6.3 General Processing

The following processing is shared between all signature types.

6.3.1 Multi-Signature Creation

This specification focusses on the use cases that produce one signature or timestamp as a result of one signing request. There are use cases where the processing of multiple documents in a single signing request to produce multiple signature for these documents. This may be useful especially when user interaction is involved in signature creation, e.g. by requesting a PIN entry. On the other hand, there are several restrictions apply to this approach:

- All signature MUST be of the same type produced with the same set of optional inputs and profiles
- There MUST be a clear relationship between a single input document and the corresponding signature
- The handling of processing errors requires additional description, especially in the case of partial processing
- The asynchronous processing model described in this document (see section 7) cannot be used to return partial results

This document enables profiles to define required processing step by extending the maximum cardinality of the `SignatureObject` and `DocumentWithSignature` elements to 'unbounded' and adding a `WhichDoc` element to the corresponding components.

6.3.2 Multi-Signature Verification

« If a client requests verification of an entire input document, either using a `SignaturePtr` without an `XPath` or a missing `SignaturePtr`, then the server MUST determine whether the input document contains zero, one, or more than one signature elements. » **[DSS-6.3.1-1]** If zero, the server SHOULD return a `ResultMajor` code of `RequesterError`.

« If more than one signature element is present, the server MUST either reject the request with a `ResultMajor` code of `RequesterError` and a `ResultMinor` code of `NotSupported`, or accept the request and verify all signatures. » [DSS-6.3.1-2]

If the server accepts the request in the multi-signature case (or if only a single signature is present) and one of the signatures fails to verify, the server should return one of the `ResultMinor` error codes in section 9.2, reflecting the first error encountered.

If all of the signatures verify correctly, the server should return the `Success` `ResultMajor` code and the following `ResultMinor` code:

`urn:oasis:names:tc:dss:1.0:resultminor:ValidMultiSignatures`

Non-normative Note:


Multiple signatures may be present in multiple instances of the `SignatureObject` component or within signature containers (e.g. XMLDSig documents or CMS files). So even with just one `SignatureObject` component present multiple signatures need to be processed.

Only certain optional inputs and outputs are allowed when performing multi-signature verification. See section 5.3 [General processing](#) for details.

6.3.3 Sub process ‘augment Signature’

The presence of the `ReturnAugmentedSignature` element of `OptionalInputsVerify` instructs the server to return an `AugmentedSignature` output, containing a new or augmented signature. With multiple signature files provided in the verification request the server applies the augmentation to all signatures. The set of resulting signatures will be included in multiple instances of `AugmentedSignature` optional output elements.

Figure 14: Augment Signature

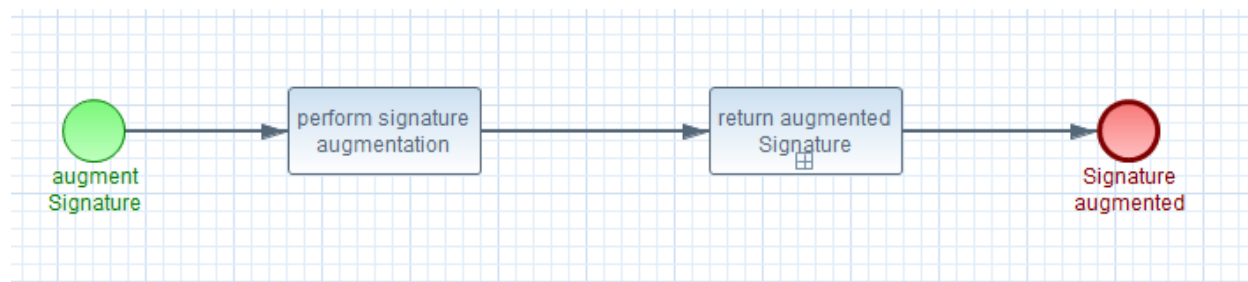


The `Type` element of `ReturnAugmentedSignature` defines the process of “augmenting” a signature. For example, the augmented signature may be the original signature with some additional unsigned signature properties added to it (such as timestamps, counter-signatures, or additional information for use in verification), or the augmented signature could be an entirely new signature calculated on the same input documents as the input signature. « Profiles that use this optional input MUST define the allowed values and their semantics, and the default value of `ReturnAugmentedSignature` (unless only a single type of augmented signature is supported, in which case the element can be omitted). » [DSS-6.3.1-1]

Multiple occurrences of this optional input can be present in a single verify request message. « If multiple occurrences are present, each occurrence MUST have a different value. » [DSS-6.3.1-2] Each occurrence will generate a corresponding `AugmentedSignature` optional output. « These optional outputs SHALL be distinguishable based on their `Type` element, which will match each output with an input. » [DSS-6.3.1-3]

A DSS server SHOULD perform the following steps to return the augmented signature in a `AugmentedSignature` component appropriately. These steps may be changed or overridden by a profile or policy the server is operating under. (e.g. for PDF documents enveloping CMS signatures).

Figure 15: Build AugmentedSignature component

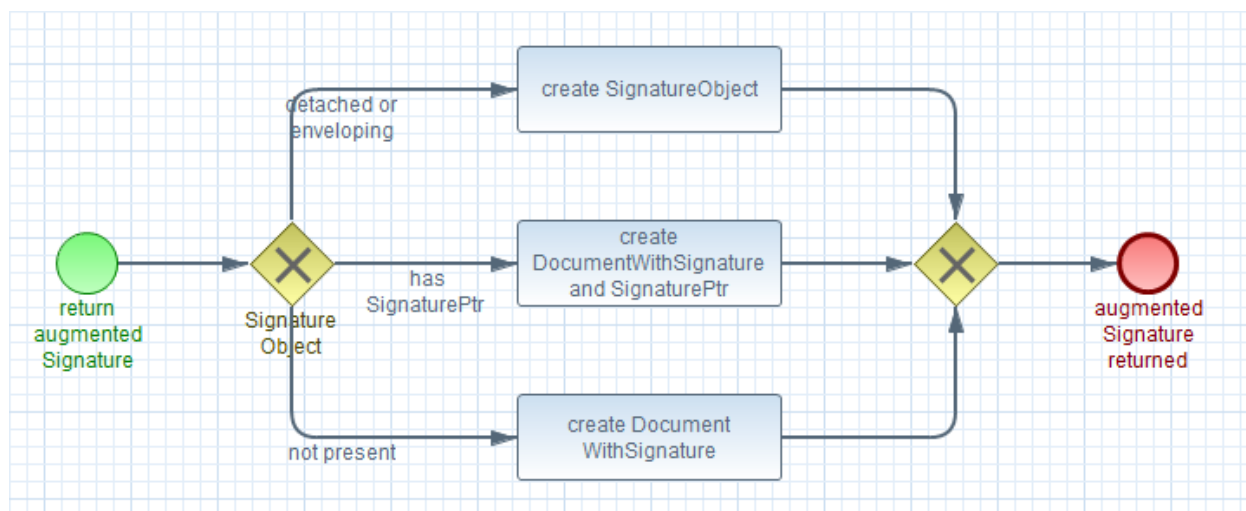

- « If the detached or enveloping signature to be augmented appears within a `Base64Signature` then the `AugmentedSignature` optional output MUST contain the modified `SignatureObject` with the augmented signature. » [DSS-6.3.1-4]
- « If the signature to be augmented is enveloped, and if the `VerifyRequest` contains a `SignatureObject` with a `SignaturePtr` pointing to an `InputDocument` enveloping the signature then the server MUST produce an `AugmentedSignature` component with its subcomponents `SignatureObject` and `DocumentWithSignature` used. The `DocumentWithSignature` contains the document that envelopes the augmented signature, second a `SignatureObject` having a `SignaturePtr` element that MUST point to the former `DocumentWithSignature`. » [DSS-6.3.1-5]
- « If there is no `SignatureObject` included in the request then the server MUST produce a `DocumentWithSignature` subcomponent containing the document with the augmented signature, only. » [DSS-6.3.1-6] No `SignatureObject` element will be generated.


If created the `DocumentWithSignature` subcomponent contains the input document with the given signature inserted. The server places the signature in the document and location identified using the `SignatureObject` / `SignaturePtr` component. « This Document MUST include a same-document `RefURI` element which references the data augmented (e.g. of the form `RefURI`). » [DSS-6.3.1-7]

6.3.4 Sub process ‘timestamp Signature’

If the `ReturnTimestampedSignature` element of `OptionalInputsVerify` is present the server augments the signature after its verification by embedding a signature timestamp token as an unauthenticated attribute (see "unauthAttrs" in section 9.1 [RFC 5652]) or *unsigned* property (see section 6.2.5 "The `UnsignedSignatureProperties` element" and section 7.3 "The `SignatureTimeStamp` element" [XAdES]) of the supplied signature.

The timestamp token will be on the signature value in the case of CMS/PKCS7 signatures or the `<ds:SignatureValue>` element in the case of XML signatures.

Figure 16: Timestamp Signature

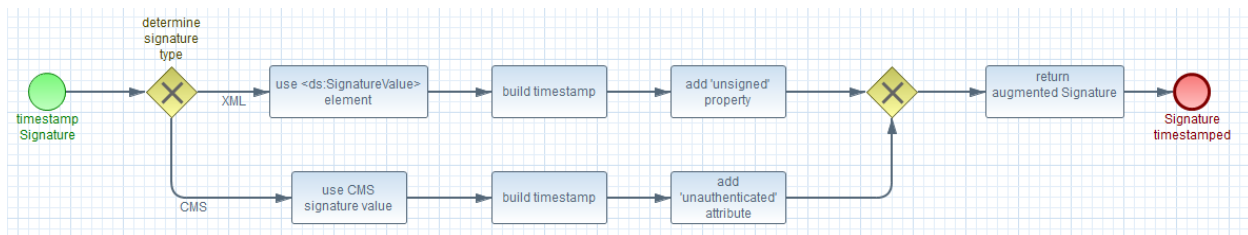

The value of `ReturnTimestampedSignature` indicates what type of timestamp to build. This document defines two values for it, namely:

- `urn:ietf:rfc:3161` for generating a RFC 3161 timestamp token on the signature
- `urn:oasis:names:tc:dss:1.0:core:schema:XMLTimeStampToken`, for generating a XML timestamp token as defined in section 5.3 [General Processing](#) of this document.

« Profiles that use this optional input MUST define the allowed values and the default value for the `Type` element (unless only a single type of timestamp is supported, in which case `Type` can be omitted). » [DSS-6.3.2-1]

The sub process of returning the augmented signatures is the same as described in the sub process 'augment Signature' (see section 6.3.3).

Note: Procedures for handling other forms of timestamp may be defined in profiles of the Core. In particular, the DSS XAdES profile [DSS-XAdES-P] defines procedures for handling timestamps against the document being signed, and the DSS Timestamp profile [DSS-TS-P] defines procedures for handling standalone timestamps.

6.3.5 Task 'build VerifyResponse'

The task of building the `VerifyResponse` is shared between all signature formats. The `OptionalInputsVerify` element, server configuration and applied policies may affect the set of elements included in the `OptionalOutputsVerify`.

If the `ReturnVerificationTimeInfo` element of `OptionalInputsVerify` is set to 'true' the server returns the `VerificationTimeInfo` within the `OptionalOutputsVerify`. It contains the verification time and optionally other relevant time instants that may have been used when determining the verification time or that may be useful for its qualification.

If the `ReturnSigningTimeInfo` element of `OptionalInputsVerify` is set to 'true' the server returns the `SigningTimeInfo` within the `OptionalOutputsVerify`. It allows the client to obtain the time instant associated to the signature creation. Depending on the applicable server policy, this signing time needs to be qualified, in order to avoid unacceptable measurement errors or false claims, using time boundaries associated to trustworthy time values (based on timestamps or time-marks created using trusted time sources). In this case, the server MAY include these values in the `LowerBoundary` and `UpperBoundary` elements, respectively.

Criteria for determining when a time instant can be considered trustworthy and for determining the maximum acceptable delays between the signing time and their boundaries (if any) is outside the scope of this specification.

« When there's no way for the server to determine the signing time, the server MUST omit the `SigningTimeInfo` output. » [DSS-6.3.3-1]

If the `ReturnSignerIdentity` element of `OptionalInputsVerify` is set to 'true' the server returns the `SignerIdentity` element within the `OptionalOutputsVerify`. The `SignerIdentity` optional output contains an indication of who performed the signature. This option is not allowed in multi-signature verification.

If the `ReturnTransformedDocument` element of `OptionalInputsVerify` is present, the server returns an input document to which the XML signature transforms specified by a particular `<ds:Reference>` have been applied. The `<ds:Reference>` is indicated by the zero-based

`WhichReference` element (0 means the first `<ds:Reference>` in the signature, 1 means the second, and so on). Multiple occurrences of this optional input can be present in a single verify request message. Each occurrence will generate a corresponding optional output. These options are not allowed in multi-signature verification.

The `TransformedDocument` element within the `OptionalOutputsVerify` contains a document corresponding to the specified `<ds:Reference>` after all the transforms in the reference have been applied. In other words, the hash value of the returned document should equal the `<ds:Reference>` element's `<ds:DigestValue>`. To match outputs to inputs, each `TransformedDocument` component will contain a `WhichReference` element which matches the corresponding `ReturnTransformedDocument` optional input element.

If the `ReturnProcessingDetails` element of `OptionalInputsVerify` is set to 'true' the server returns the `ProcessingDetails` element within the `OptionalOutputsVerify`. The `ProcessingDetails` element elaborates on what signature verification steps succeeded or failed. This option is not allowed in multi-signature verification.

7 Asynchronous Processing Model

The main functionality of the 'Asynchronous Processing Profile' [DSSAsync] is included in this version of the core. The asynchronous processing is selected by adding the profile identifier

`urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:1.0`

(defined in [DSS1Async]) to the requests set of Profile elements.

The server MAY decide that the processing of a request cannot be performed within a reasonable timeframe and therefore return an instance of the 'Component ResponseBase' with the ResultMajor value of

`urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultmajor:Pending`

and the ResponseID element set to a server generated value.

The client MAY initiate a request with the top-level component PendingRequest (see section 4.2.5) from time to time with the ResponseID of the initial response included in the RequestID element. The RequestID of the related request maybe reused but a client MUST NOT depend on such reuse of RequestID. The server may consider a given value of RequestID as not appropriate for internal request/response matching or may generally produce its own values for ResponseID.

If the server is still not able to return the requested response, it will respond with a ResultMajor of 'Pending' again. When the server finally succeeds with its processing the results will be delivered to the client with its next polling call. « In this case the ResultMajor value MUST NOT be Pending but the ResultMajor resulting from the request processing. » [DSS-7-1]

In response to a PendingRequest the server may response with the generic Response in cases where the service is unable to specialise down to SignResponse or VerificationResponse components. This will happen when the service doesn't recognise the given ResponseID. The ResultMinor is set to the special value of

`urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultminor:ResponseIdUnknown`

The ResultMajor code in this case is RequesterError. This result min or code shows up only in response to a PendingRequest.

Clients not able to perform the Asynchronous Processing Model MAY treat the Pending response as an error or try to perform the operation at later point in time. Even without referring to the ResponseID the server MAY be able to respond with full result immediately.

7.1 Asynchronous-only Processing

In case an asynchronous service is unable to reply in a synchronous manner and a requests to this service is made without profiling the call as asynchronous (using the given profile identifier within the Profile element), the service returns a ResultMajor of RequesterError and a ResultMinor of

`urn:oasis:names:tc:dss:1.0:profiles:asynchronousprocessing:resultminor:asynchronousOnly`

(as defined in [DSS1Async]).

7.2 Enforcing Asynchronous Processing

Once the server is able to reply with a full response immediately, e.g. by using cached responses of preceding processing results, it will not perform asynchronous processing at all. Even with the asynchronous profile included in the request it is the decision of the server to reply to the initial call with a 'Pending' or with the final response. The latter saves unnecessary network roundtrips.

On the other hand, it may simplify the processing on the client side if just one single execution path needs to be implemented. To enforce the server to use the asynchronous processing model unconditionally the optional input element `EnforceAsynchronousProcessing` set to `true`. This element will be ignored with a `PendingRequest` component.

8 DSS Core Bindings

Mappings from DSS messages into standard communications protocols are called DSS *bindings*.

Transport bindings specify how DSS messages are encoded and carried over some lower-level transport protocol. *Security bindings* specify how confidentiality, authentication, and integrity can be achieved for DSS messages in the context of some transport binding. Below we specify an initial set of bindings for DSS. Future bindings may be introduced by the OASIS DSS TC or by other parties.

8.1 HTTP POST Transport Binding

In this binding, the DSS request/response exchange occurs within an HTTP POST exchange [RFC 2616].

The following rules apply to the HTTP request:

1. The client may send an HTTP/1.0 or HTTP/1.1 request.
2. The Request URI may be used to indicate a particular service endpoint.
3. « The `Content-Type` header MUST be set to “application/xml” or “application/json”. » [DSS-8.1-1]
4. « The `Content-Length` header MUST be present and correct. » [DSS-8.1-2]
5. « The DSS request message MUST be sent in the body of the HTTP Request. » [DSS-8.1-3]

The following rules apply to the HTTP Response:

1. « The `Content-Type` header MUST be set to “text/xml” or “application/json”. » [DSS-8.1-4]
2. « The `Content-Length` header MUST be present and correct. » [DSS-8.1-5]
3. « The DSS response message MUST be sent in the body of the HTTP Response. » [DSS-8.1-6]
4. « The HTTP status code MUST be
 - a. either set to 200 if a DSS response message is returned.
 - b. or the status code can be set to
 - i. either 3xx to indicate a redirection
 - ii. or 4xx to indicate a low-level client error (such as a malformed request)
 - iii. or 5xx to indicate a low-level server error » [DSS-8.1-7]

8.2 SOAP 1.2 Transport Binding

In this binding, the DSS request/response exchange occurs using the SOAP 1.2 message protocol [SOAP].

The following rules apply to the SOAP request:

1. A single DSS `SignRequest` or `VerifyRequest` element will be transmitted within the body of the SOAP message.
2. « The client MUST NOT include any additional XML elements in the SOAP body. » [DSS-8.2-1]
3. « The character encoding UTF-8 MUST be used for the SOAP message. » [DSS-8.2-2]
4. Arbitrary SOAP headers may be present.

The following rules apply to the SOAP response:

1. « The server MUST return either a single DSS `SignResponse` or `VerifyResponse` element within the body of the SOAP message, or a SOAP fault code. » [DSS-8.2-3]
2. « The server MUST NOT include any additional XML elements in the SOAP body. » [DSS-8.2-4]
3. « If a DSS server cannot parse a DSS request, or there is some error with the SOAP envelope, the server MUST return a SOAP fault code » [DSS-8.2-5]. Otherwise, a DSS result code should be used to signal errors.

4. « The character encoding UTF-8 MUST be used for the SOAP message. » [DSS-8.2-6]
5. Arbitrary SOAP headers may be present.

« On receiving a DSS response in a SOAP message, the client MUST NOT send a fault code to the DSS server. » [DSS-8.2-7]

8.3 Security Bindings

It is good practice to use a security binding (e.g. TLS) to provide confidentiality, authentication and integrity.

The selection of security mechanism and the used parameters depends on many aspects of the usage scenario, for example:

- Required protection level of the content
- Technical limitations (e.g. introduced by mobile clients)
- Regulatory requirements
- Export restrictions

Moreover, these decisions always need to be reconsidered due to new results crypto analysis and known vulnerabilities. Therefore, details regarding protocols and cipher suites are out of scope of this document.

9 DSS-Defined Identifiers

The following sections define various URI-based identifiers. Where possible an existing URN is used to specify a protocol. In the case of IETF protocols the URN of the most current RFC that specifies the protocol is used (see [RFC 2648]). URI references created specifically for DSS have the following stem:

`http://docs.oasis-open.org/dss-x/ns/core`

9.1 Signature Type Identifiers

The following identifiers MAY be used as the content of the `SignatureType` optional input (see section 4.3.4 and 4.3.5).

9.1.1 XML Signature

- **URI:** `urn:ietf:rfc:3275`
- This refers to an XML signature per [XMLDSIG].

9.1.2 XML TimeStampToken

- **URI:** `urn:oasis:names:tc:dss:2.0:core:schema:XMLTimeStampToken`
- This refers to an XML timestamp containing an XML signature.

9.1.3 RFC 3161 TimeStampToken

- **URI:** `urn:ietf:rfc:3161`
- This refers to an XML timestamp containing an ASN.1 TimeStampToken, per [RFC 3161].

9.1.4 CMS Signature

- **URI:** `urn:ietf:rfc:3369`
- This refers to a CMS signature per [RFC 5652] or prior versions of CMS.

9.1.5 PGP Signature

- **URI:** `urn:ietf:rfc:2440`
- This refers to a PGP signature per [RFC 2440].

9.2 ResultMinors

The following list contains the values of ResultMinor that are defined in the preceding version of this standard ([DSS1Core]) and are used in this document.

Abbreviation	URI
OnAll Documents	<code>urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:OnAllDocuments</code>
NotAll Documents Referenced	<code>urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:NotAllDocumentsReferenced</code>
Incorrect Signature	<code>urn:oasis:names:tc:dss:1.0:resultminor:invalid:IncorrectSignature</code>

HasManifestResults	urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:HasManifestResults
InvalidSignatureTimestamp	urn:oasis:names:tc:dss:1.0:resultminor:valid:signature:InvalidSignatureTimestamp
ReferencedDocumentNotPresent	urn:oasis:names:tc:dss:1.0:resultminor:ReferencedDocumentNotPresent
KeyInfoNotProvided	urn:oasis:names:tc:dss:1.0:resultminor:KeyInfoNotProvided
MoreThanOneRefUriOmitted	urn:oasis:names:tc:dss:1.0:resultminor:MoreThanOneRefUriOmitted
InvalidRefURI	urn:oasis:names:tc:dss:1.0:resultminor:InvalidRefURI
NotSupported	urn:oasis:names:tc:dss:1.0:resultminor:NotSupported
InappropriateSignature	urn:oasis:names:tc:dss:1.0:resultminor:Inappropriate:signature
GeneralError	urn:oasis:names:tc:dss:1.0:resultminor:GeneralError
KeyLookupFailed	urn:oasis:names:tc:dss:1.0:resultminor:invalid:KeyLookupFailed
CrlNotAvailiable	urn:oasis:names:tc:dss:1.0:resultminor:CrlNotAvailiable
OcspNotAvailiable	urn:oasis:names:tc:dss:1.0:resultminor:OcspNotAvailiable
CertificateChainNotComplete	urn:oasis:names:tc:dss:1.0:resultminor:CertificateChainNotComplete
InappropriateHashAlgorithm	urn:oasis:names:tc:dssx:2.0:resultminor:Inappropriate:HashAlgorithm

10 Security Considerations

There are several potential avenues for attack when processing incoming DSS documents. The following list is non-exhaustive and should not and cannot replace a comprehensive security review.

A comprehensive security review considers the unique technology stack and processes specific to an implementation and not of all implementations.

10.1 Well-Known Attack Vectors

In the following subsections four well-known classes of attack vectors are highlighted:

1. XML Parsing Vulnerabilities
2. XML Canonicalization Vulnerabilities
3. Injection Attacks
4. JSON Deserialization Through Evaluation Attacks

The first two attack vector classes “XML Parsing Vulnerabilities” and “XML Canonicalization Vulnerabilities” can occur in any XML language and therefore do not rely on any specific DSS capabilities.

The third class, “Injection Attacks” applies to any format that is being processed in a deterministic way by an active processor with additional capabilities potentially being triggered by an unexpected and malicious payload.

“JSON Deserialization Through Evaluation Attacks” attack vectors consider processing programming languages and specifically collisions of constructs in the processing language used to consumer any JSON text and the allowed constructs in the JSON format.

In addition to the attack vectors listed and further detailed in the following non-normative subsections, DSS document processing requires interfaces to BASE64 and ASN.1 encoding and decoding in practical implementations, which MAY result in further attack vectors.

10.1.1 XML Parsing Vulnerabilities [non-normative]

There have been vulnerabilities in XML parsing libraries that can cause either denial of service or actual exploits. As an example, see Microsoft’s article on [XML Denial of Service Attacks and Defenses](#). The best defence for these types of attacks is, in short, to keep the XML parser up-to-date and ensure to perform full validation prior to attempting to process the document.

10.1.2 XML Canonicalization Vulnerabilities [non-normative]

Exploitation of the use of canonicalization as content extractor MAY impact an implementation that offers e.g. inclusion and processing of XML Fragments in payloads as described e.g. in [\[JENSEN-2009\]](#).

10.1.3 Injection Attacks [non-normative]

Any DSS content MAY be processed somewhere, thus injection attacks MAY occur in many places which are not specific to DSS. The best defence known, is to sanitize untrusted output (and anything inside a DSS document received from outside the client or server system boundaries should be considered untrusted). For more explanation on injection attacks, see e.g. [this OWASP article](#) (https://www.owasp.org/index.php/Top_10-2017_A1-Injection).

10.1.4 JSON Deserialization Through Evaluation Attacks [non-normative]

Generally, there are security issues with processing languages that are capable to evaluate text in that processing language during runtime and dynamically.

Sample vector for JavaScript:

“JSON is a subset of JavaScript that excludes assignment and invocation. Since JSON’s syntax is borrowed from JavaScript, it is possible to use that language’s “eval()” function to parse most JSON texts (but not all; certain characters such as U+2028 LINE SEPARATOR and U+2029 PARAGRAPH

SEPARATOR are legal in JSON but not JavaScript). This generally constitutes an unacceptable security risk, since the text could contain executable code along with data declarations. The same consideration applies to the use of eval()-like functions in any other programming language in which JSON texts conform to that language's syntax." (cf. [RFC8259](#) section 12 "Security Considerations").

11 Conformance

11.1 Conformance as a DSS version 2.0 document

To ease communication and subsequent resolution of any specific partial conformance violation, the preceding chapters already provide minimal requirements, that a specific instance component must fulfil, to permit conformance of the complete DSS version 2.0 document.

11.1.1 Conformance for JSON format

The following clause offers a simple two-step process, to either prove or disprove the conformance of a complete JSON document (formulated in terms specific to that implementation language) to this version of DSS:

« Conformance Clause 1: “Valid JSON DSS Document”

A JSON document instance conforms to this specification as a DSS document if it meets all of the following COUNT_ME conditions:

1. Is valid JSON
2. Validates against the JSON Schema

» **DSS-11.1.1-1]**

11.1.2 Conformance for XML format

The following clause offers a simple three step process, to either prove or disprove the conformance of a complete XML document (formulated in terms specific to that implementation language) to this version of DSS:

« Conformance Clause 1: “Valid XML DSS Document”

An XML document instance conforms to this specification as a DSS document if it meets all of the following three conditions:

1. Is well-formed XML.
2. Consists of a single root element instance as defined in the namespace `http://docs.oasis-open.org/dss-x/ns/core`.
3. Is valid XML.

» **[DSS-11.1.2-1]**

11.1.3 Conformance for DSS Server

« Conformance Clause 1: “Conforming DSS Server”

A DSS server instance conforms to this specification if the server fulfils all requirements on servers stated in the normative sections of this document. » **[DSS-11.1.3-1]**

11.1.4 Conformance for DSS Client

« Conformance Clause 1: “Conforming DSS Client”

A DSS client instance conforms to this specification if the client fulfils all requirements on clients stated in the normative sections of this document. » **[DSS-11.1.4-1]**

Appendix A. Acknowledgments

The following individuals have participated in the creation of this specification and are gratefully acknowledged:

Andreas Kuehne, Individual
Detlef Huehnlein, Individual
Ernst Jan van Nigtevecht, Sonnenglanz Consulting
Juan Carlos Cruellas, Univ Politecnica de Cataluna
Stefan Hagen, Individual

Appendix B. Index of Components and Elements

AdditionalKeyInfo

- KeyName, 97
- X509Certificate, 97
- X509CRL, 97
- X509Digest, 96
- X509SKI, 97
- X509SubjectName, 96

AdditionalTimeInfo

- Ref, 94
- Type, 94
- value, 93

Any, 23

AttachmentReference

- AttRefURI, 26
- DigestInfo, 26

AugmentedSignature

- SignatureObject, 104
- Type, 104

AugmentSignatureInstruction

- Type, 74

Base64

- AttRef, 28
- Id, 28
- IdRef, 28
- MimeType, 28
- Value, 28

ClaimedIdentity

- Name, 71
- SupportingInfo, 71

Detail

- Base64Content, 101
- Code, 100
- Message, 100
- Type, 101

DigestInfo

- DigestMethod, 25
- DigestValue, 25

Document

- Base64Data, 39

DocumentBase

- Id, 37
- RefType, 37
- RefURI, 37
- SchemaRefs, 37

DocumentHash

- DigestInfos, 43
- Transforms, 43
- WhichReference, 43

DocumentWithSignature

- Document, 86

IncludeObject

- createReference, 82
- hasObjectTagsAndAttributesSet, 82
- ObjId, 82
- WhichDocument, 82

InputDocuments

- Document, 36
- DocumentHash, 36
- TransformedData, 36

IntendedAudience

- Recipient, 75

InternationalString

- lang, 24
- value, 24

KeySelector

- KeyName, 76
- X509Certificate, 76
- X509Digest, 76
- X509SKI, 76
- X509SubjectName, 76

ManifestResult

- NsPrefixMapping, 90
- ReferenceXpath, 90
- Status, 90

NameID

- Format, 107
- NameQualifier, 108
- SPNameQualifier, 108

- SPProvidedID, 107
 - value, 107
- NsPrefixMapping
 - NamespacePrefix, 22
 - NamespaceURI, 22
- OptionalInputs
 - Language, 32
 - Other, 32
 - ServicePolicy, 32
- OptionalInputsBase
 - AddTimestamp, 57
 - ClaimedIdentity, 57
 - Schemas, 57
- OptionalInputsSign
 - IncludeEContent, 58
 - IncludeObject, 58
 - IntendedAudience, 58
 - KeySelector, 58
 - Nonce, 59
 - Properties, 58
 - SignatureAlgorithm, 59
 - SignaturePlacement, 59
 - SignatureQualityLevel, 59
 - SignatureType, 58
 - SignedReference, 59
- OptionalInputsVerify
 - AdditionalKeyInfo, 62
 - ReturnAugmentedSignature, 62
 - ReturnProcessingDetails, 62
 - ReturnSignerIdentity, 62
 - ReturnSigningTimeInfo, 62
 - ReturnTimestampedSignature, 63
 - ReturnTransformedDocument, 63
 - ReturnVerificationTimeInfo, 62
 - UseVerificationTime, 62
 - VerifyManifest, 63
- OptionalOutputs
 - AppliedPolicy, 33
 - Other, 33
- OptionalOutputsBase
 - DocumentWithSignature, 66
 - Schemas, 66
- TransformedDocument, 66
- OptionalOutputsVerify
 - AugmentedSignature, 69
 - ProcessingDetails, 69
 - SignerIdentity, 69
 - SigningTimeInfo, 69
 - TimestampedSignature, 69
 - VerificationTimeInfo, 69
 - VerifyManifestResults, 68
- PendingRequest
 - ClaimedIdentity, 54
- ProcessingDetails
 - IndeterminateDetail, 99
 - InvalidDetail, 99
 - ValidDetail, 99
- Properties
 - Property, 80
- PropertiesHolder
 - SignedProperties, 79
 - UnsignedProperties, 79
- Property
 - Property, 81
 - Value, 81
- RequestBase
 - Profile, 33
 - RequestID, 33
- RequestID
 - value, 55
- ResponseBase
 - AppliedProfile, 34
 - RequestID, 34
 - ResponseID, 34
 - Result, 34
- ResponseID
 - value, 56
- Result
 - ProblemReference, 30
 - ResultMajor, 29
 - ResultMessage, 30
 - ResultMinor, 30
- ReturnTransformedDocument
 - WhichReference, 105

- Schemas
 - Schema, 73
- SignatureObject
 - Base64Signature, 48
 - SchemaRefs, 48
 - SignaturePtr, 48
- SignaturePlacement
 - CreateEnvelopedSignature, 84
 - NsPrefixMapping, 84
 - WhichDocument, 84
 - XPathAfter, 84
 - XPathFirstChildOf, 84
- SignaturePtr
 - NsPrefixMapping, 49
 - WhichDocument, 49
 - XPath, 50
- SignedReference
 - RefId, 88
 - RefURI, 88
 - Transforms, 88
 - WhichDocument, 88
- SignedReferences
 - SignedReference, 87
- SigningTimeInfo
 - LowerBoundary, 102
 - SigningTime, 102
 - SigningTimeBoundaries, 102
 - UpperBoundary, 102
- SignRequests
 - InputDocuments, 45
 - OptionalInputs, 45
- SignResponse
 - OptionalOutputs, 46
 - SignatureObject, 46
- Transform
 - Algorithm, 111
 - Base64Content, 111
 - NsPrefixMapping, 111
 - value, 111
 - XPath, 111
- TransformedData
 - Base64Data, 41
 - Transforms, 40
 - WhichReference, 41
- TransformedDocument
 - Document, 106
 - WhichReference, 106
- Transforms
 - Transform, 110
- UseVerificationTime
 - Base64Content, 92
 - CurrentTime, 92
 - SpecificTime, 92
- VerificationTimeInfo
 - AdditionalTimeInfo, 95
 - VerificationTime, 95
- VerifyManifestResults
 - ManifestResult, 89
- VerifyRequest
 - InputDocuments, 51
 - OptionalInputs, 51
 - SignatureObject, 51
- VerifyResponse
 - OptionalOutputs, 52
- X509Digest
 - Algorithm, 78
 - value, 77

Appendix C. List of Figures

Figure 1:Component overview	20
Figure 2: Signing Overview	122
Figure 3: Process References.....	122
Figure 4: Create XML Signature.....	123
Figure 5: Process Digest	125
Figure 6: Create CMS signature	126
Figure 7: Add Timestamp	127
Figure 8: Verification Overview.....	129
Figure 9: Retrieve XML Signature	130
Figure 10: Recalculate References.....	130
Figure 11: Verify XML Signature	131
Figure 12: Retrieve CMS Signature	133
Figure 13: Verify CMS Signature.....	134
Figure 14: Augment Signature.....	136
Figure 15: Select Augmentation Target	137
Figure 16: Timestamp Signature	137

Appendix D. Revision History

Revision	Date	Editor	Changes Made
WD06	2018-06-10	Andreas Kuehne and Stefan Hagen	Initial Draft version with feedback from the TC
WD07	2018-08-12	Stefan Hagen	Minor editorial fixes
WD08	2018-08-13	Andreas Kuehne	Editorial fixes to ease reading for newcomers (grouping of elements)
WD09	2018-08-20	Stefan Hagen	Revision of namespaces
WD10	2018-08-21	Andreas Kuehne and Stefan Hagen	Fix for JSON Schema URL Encoded ref attribute, alphabetical ordering of references, application of OASIS conformance guidelines, addition of Security Considerations section, repair of broken links, and insertion of test assertion tags.
CD02	2019-01-21	Andreas Kuehne	Handled the remarks received from the public review of csprd01
CD03	2019-02-09	Andreas Kuehne	Added support for multi-signature creation per sign request by changing the related cardinalities to 'unbounded'