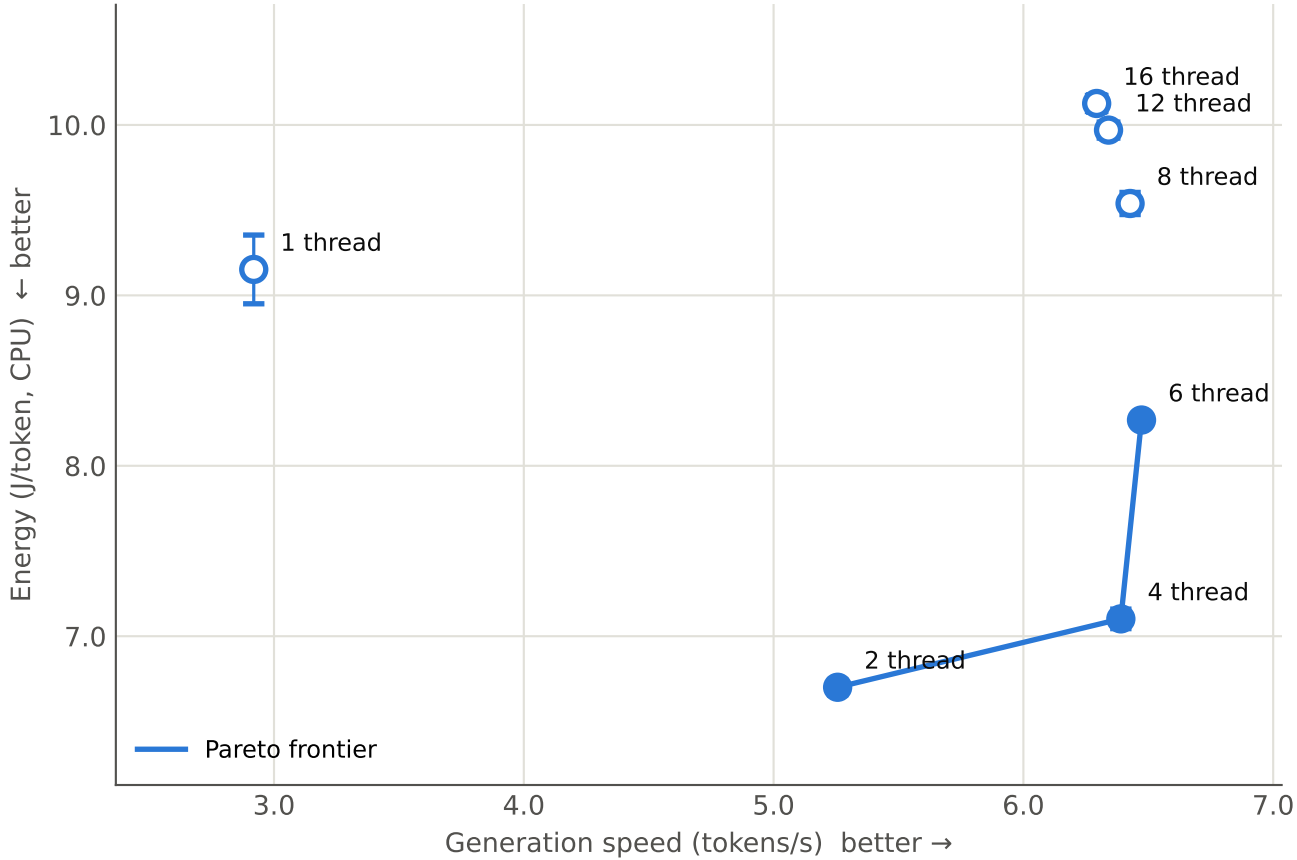

Each point is a thread count (8B-Q4_K_M); error bars are the between-session ±1 SD (n = 3). Filled points are Pareto-optimal.