

# Running Apache Spark jobs on Cloud Dataproc | Qwiklabs

Tuesday, November 10, 2020 4:13 PM

Clipped from:

[https://googlecourses.qwiklabs.com/course\\_sessions/71782/labs/11623](https://googlecourses.qwiklabs.com/course_sessions/71782/labs/11623)

## Overview

In this lab you will learn how to migrate Apache Spark code to Cloud Dataproc. You will follow a sequence of steps progressively moving more of the job components over to GCP services:

- Run original Spark code on Cloud Dataproc (Lift and Shift)
- Replace HDFS with Google Cloud Storage ( cloud-native)
- Automate everything so it runs on job-specific clusters ( cloud-optimized)

## Objectives

In this lab you will learn how to:

- Migrate existing Spark jobs to Cloud Dataproc
- Modify Spark jobs to use Cloud Storage instead of HDFS
- Optimize Spark jobs to run on Job specific clusters

*What will you use?*

- Cloud Dataproc
- Apache Spark

## Scenario

You are migrating an existing Spark workload to Cloud Dataproc and then progressively modifying the Spark code to make use of GCP native features and services.

## Lab setup

For each lab, you get a new GCP project and set of resources for a fixed time at no cost.

1. Make sure you signed into Qwiklabs using an **incognito window**.
2. Note the lab's access time (for example,

**02:00:00**

and make sure you can finish in that time block.

3. When ready, click


**START LAB**


4. Note your lab credentials. You will use them to sign in to Cloud Platform Console.


[Open Google Console](#)

**Caution:** When you are in the console, do not deviate from the lab instructions. Doing so may cause your

account to be blocked. [Learn more.](#)

**Username**  
 

**Password**  
 

**GCP Project ID**  
 

[New to labs? View our introductory video!](#)


5. Click **Open Google Console.**
6. Click **Use another account** and copy/paste credentials for **this** lab into the prompts.

1. Accept the terms and skip the recovery resource page.


[Activate Google Cloud Shell](#)

Google Cloud Shell is a virtual machine that is loaded with development tools. It offers a persistent 5GB home directory and runs on the Google Cloud. Google Cloud Shell provides command-line access to your GCP resources.

1. In GCP console, on the top right toolbar, click the Open Cloud Shell button.

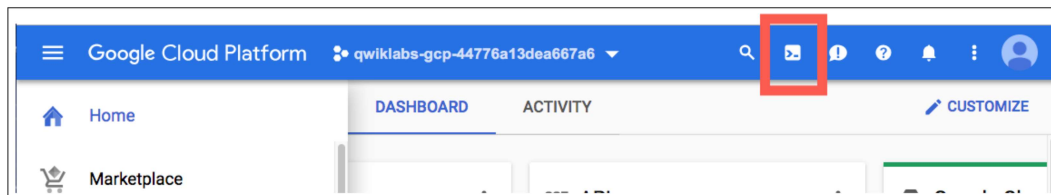

2. Click **Continue.**

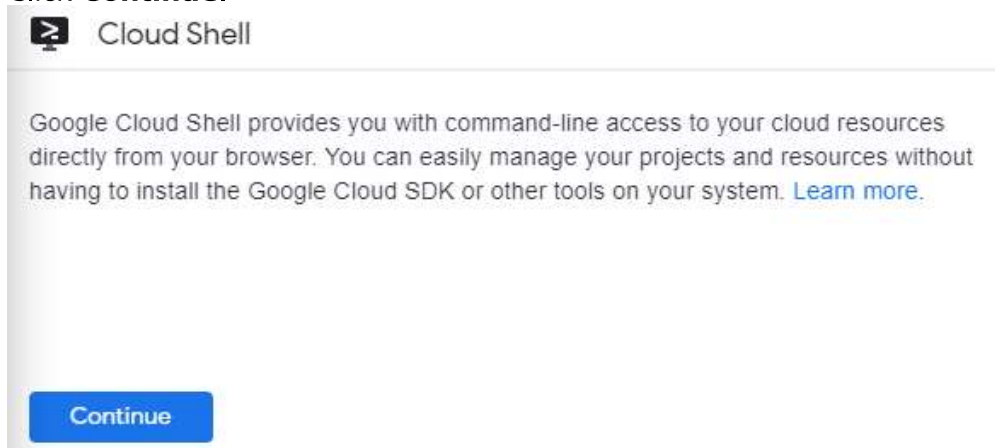

It takes a few moments to provision and connect to the environment. When you are connected, you are already authenticated, and the project is set to your *PROJECT\_ID*. For example:



```
Welcome to Cloud Shell! Type "help" to get started.
Your Cloud Platform project in this session is set to qwiklabs-gcp-44776a13dea667a6.
Use "gcloud config set project [PROJECT_ID]" to change to a different project.
google1623327_student@cloudshell:~ (quiklabs-gcp-44776a13dea667a6)$
```

**gcloud** is the command-line tool for Google Cloud Platform. It comes pre-installed on Cloud Shell and supports tab-completion.

You can list the active account name with this command:

```
gcloud auth list
```

Output:

```
Credentialed accounts:
- <myaccount>@<mydomain>.com (active)
```

Example output:

```
Credentialed accounts:
- google1623327_student@quiklabs.net
```

You can list the project ID with this command:

```
gcloud config list project
```

Output:

```
[core]
project = <project_ID>
```

Example output:

```
[core]
project = qwiklabs-gcp-44776a13dea667a6 Full documentation of gcloud is
available on Google Cloud gcloud Overview.
```

## Part 1: Lift and Shift

### Migrate existing Spark jobs to Cloud Dataproc

You will create a new Cloud Dataproc cluster and then run an imported Jupyter notebook that uses the cluster's default local Hadoop Distributed File system (HDFS) to store source data and then process that data just as you would on any Hadoop cluster using Spark. This demonstrates how many existing analytics workloads such as Jupyter notebooks containing Spark code require no changes when they are migrated to a Cloud Dataproc environment.

### Configure and start a Cloud Dataproc cluster

1. Go to **Navigation menu** > **IAM & Admin** > **IAM** and confirm that the default Service Account [xxxxxxx-compute@developer.gserviceaccount.com](#) exists. If not, then follow the below steps to add and assign the required permission.
  - On the **Navigation menu** > **IAM & admin** > **IAM**, Click **Add**.
  - For **New members**, paste the [xxxxxxx-compute@developer.gserviceaccount.com](#)

**Note:** The account prefix is the project number. You can get the project number from **Navigation menu** > **Home** page.

- For **Select a role**, select **Dataproc > Dataproc Worker**. Click **Save**.

The screenshot shows the Google Cloud Platform IAM & Admin console. On the left, the 'IAM' menu is expanded, showing 'PERMISSIONS' and 'RECOMMENDATIONS LOG'. The main panel displays 'Permissions for project "qwklabs-gcp-04-85be136db721"'. A dialog box titled 'Add members to "qwklabs-gcp-04-85be136db721" project' is open. It contains a 'New members' input field with the email '84360895421-compute@developer.gserviceaccount.com'. Below this, a 'Role' dropdown is set to 'Dataproc Worker', and a 'Condition' dropdown is set to 'Add condition'. A checkbox for 'Send notification email' is checked. At the bottom, there are 'SAVE' and 'CANCEL' buttons.

1. In the GCP Console, on the **Navigation menu**, in the **Big Data** section, click **Dataproc**.
2. Click **Create Cluster**.
3. Enter sparktopd for **Name**.
4. In the **Component gateway** section, select **Enable access to the web interfaces of default and selected optional components on the cluster**.
5. Click **Advanced options**.
6. In the **Image** section, click **Change**.
7. Select **1.4 (Debian 10, Hadoop 2.9, Spark 2.4)**.

This version includes Python3 which is required for the sample code used in this lab.

1. Click **Select**.
2. Under **Optional components**, click **Select component**.
3. Select **Anaconda** and **Jupyter Notebook**.
4. Click **Select** to close the Optional components dialog.
5. Scroll down to the end of the page and click **Create**.

The cluster should start in a couple of minutes. You can proceed to the next step without waiting for the Cloud Dataproc Cluster to fully deploy.

[Clone the source repository for the lab](#)

In the Cloud Shell you clone the Git repository for the lab and copy the required notebook files to the Google Cloud Storage bucket used by Cloud Dataproc as the home directory for Jupyter notebooks.

1. To clone the Git repository for the lab enter the following command in Cloud Shell:

```
git -C ~ clone https://github.com/GoogleCloudPlatform/training-data-analyst
```

1. To locate the default Google Cloud Storage bucket used by Cloud Dataproc enter the following command in Cloud Shell:

```
export DP_STORAGE=$(gcloud dataproc clusters describe sparktopd --region=us-central1 --format=json | jq -r '.config.configBucket')"
```

1. To copy the sample notebooks into the Jupyter working folder enter the following command in Cloud Shell:

```
gsutil -m cp ~/training-data-analyst/quests/sparktobq/*.ipynb
$DP_STORAGE/notebooks/jupyter
```

### Log in to the Jupyter Notebook

As soon as the cluster has fully started up you can connect to the Web interfaces. Click the refresh button to check as it may be deployed fully by the time you reach this stage.

1. On the Dataproc Clusters page wait for the cluster to finish starting and then click the name of your cluster to open the **Cluster details** page.
2. Click **Web Interfaces**.
3. Click the **Jupyter** link to open a new Jupyter tab in your browser.

This opens the Jupyter home page. Here you can see the contents of the /notebooks/jupyter directory in Google Storage that now includes the sample Jupyter notebooks used in this lab.

1. Click the **01\_spark.ipynb** notebook to open it.
2. Click **Cell** and then **Run All** to run all of the cells in the notebook.
3. Page back up to the top of the notebook and follow as the notebook completes runs each cell and outputs the results below them.

You can now step down through the cells and examine the code as it is processed so that you can see what the notebook is doing. In particular pay attention to where the data is saved and processed from.

The first code cell fetches the source data file, which is an extract from the KDD Cup competition from the Knowledge, Discovery, and Data (KDD) conference in 1999. The data relates to computer intrusion detection events.

```
!wget
http://kdd.ics.uci.edu/databases/kddcup99/kddcup.data\_10\_percent.gz
```

In the second code cell, the source data is copied to the default (local) Hadoop file system.

```
!hadoop fs -put kddcup* /
```

In the third code cell, the command lists contents of the default directory in the cluster's HDFS file system.

```
!hadoop fs -ls /
```

### Reading in data

The data are gzipped CSV files. In Spark, these can be read directly using the textFile method and then parsed by splitting each row on commas.

The Python Spark code starts in cell In[4]. In this cell Spark SQL is initialized and Spark is used to read in the source data as text and then returns the first 5 rows.

```
from pyspark.sql import SparkSession, SQLContext, Row

spark = SparkSession.builder.appName("kdd").getOrCreate()
sc = spark.sparkContext
data_file = "hdfs:///kddcup.data_10_percent.gz"
raw_rdd = sc.textFile(data_file).cache()
raw_rdd.take(5)
```

In cell In [5] each row is split, using , as a delimiter and parsed using a prepared inline schema in the code.

```
csv_rdd = raw_rdd.map(lambda row: row.split(","))
parsed_rdd = csv_rdd.map(lambda r: Row(
    duration=int(r[0]),
    protocol_type=r[1],
    service=r[2],
    flag=r[3],
    src_bytes=int(r[4]),
    dst_bytes=int(r[5]),
    wrong_fragment=int(r[7]),
    urgent=int(r[8]),
    hot=int(r[9]),
    num_failed_logins=int(r[10]),
    num_compromised=int(r[12]),
    su_attempted=r[14],
    num_root=int(r[15]),
    num_file_creations=int(r[16]),
    label=r[-1]
))
parsed_rdd.take(5)
```

#### Spark analysis

In cell In [6] a Spark SQL context is created and a Spark dataframe using that context is created using the parsed input data from the previous stage. Row data can be selected and displayed using the dataframe's .show() method to output a view summarizing a count of selected fields.

```
sqlContext = SQLContext(sc)
df = sqlContext.createDataFrame(parsed_rdd)
connections_by_protocol =
df.groupBy('protocol_type').count().orderBy('count', ascending=False)
connections_by_protocol.show()
```

The .show() method produces an output table similar to this:

```
+-----+-----+
|protocol_type| count|
+-----+-----+
|          icmp|283602|
|           tcp|190065|
|           udp| 20354|
+-----+-----+
```

SparkSQL can also be used to query the parsed data stored in the Dataframe. In cell In [7] a temporary table (connections) is registered that is then referenced inside the subsequent SparkSQL SQL query statement.

```
df.registerTempTable("connections")
attack_stats = sqlContext.sql("""
    SELECT
        protocol_type,
        CASE label
            WHEN 'normal.' THEN 'no attack'
            ELSE 'attack'
        END AS state,
        COUNT(*) as total_freq,
```

```

        ROUND(AVG(src_bytes), 2) as mean_src_bytes,
        ROUND(AVG(dst_bytes), 2) as mean_dst_bytes,
        ROUND(AVG(duration), 2) as mean_duration,
        SUM(num_failed_logins) as total_failed_logins,
        SUM(num_compromised) as total_compromised,
        SUM(num_file_creations) as total_file_creations,
        SUM(su_attempted) as total_root_attempts,
        SUM(num_root) as total_root_acceses
    FROM connections
    GROUP BY protocol_type, state
    ORDER BY 3 DESC
    """
)

```

attack\_stats.show()

You will see output similar to this truncated example when the query has finished:

```

+-----+-----+-----+-----+
|protocol_type|    state|total_freq|mean_src_bytes|
+-----+-----+-----+-----+
|          icmp|  attack|    282314|         932.14|
|          tcp|  attack|    113252|        9880.38|
|          tcp|no attack|     76813|        1439.31|
...
...
|          udp|  attack|      1177|          27.5|
+-----+-----+-----+-----+

```

And you can now also display this data visually using bar charts.

The last cell, In [8] uses the `%matplotlib` inline Jupyter magic function to redirect matplotlib to render a graphic figure inline in the notebook instead of just dumping the data into a variable. This cell displays a bar chart using the `attack_stats` query from the previous step.


`%matplotlib inline`

```

ax = attack_stats.toPandas().plot.bar(x='protocol_type',
subplots=True, figsize=(10,25))

```

The first part of the output should look like the following chart once all cells in the notebook have run successfully. You can scroll down in your notebook to see the complete output chart.

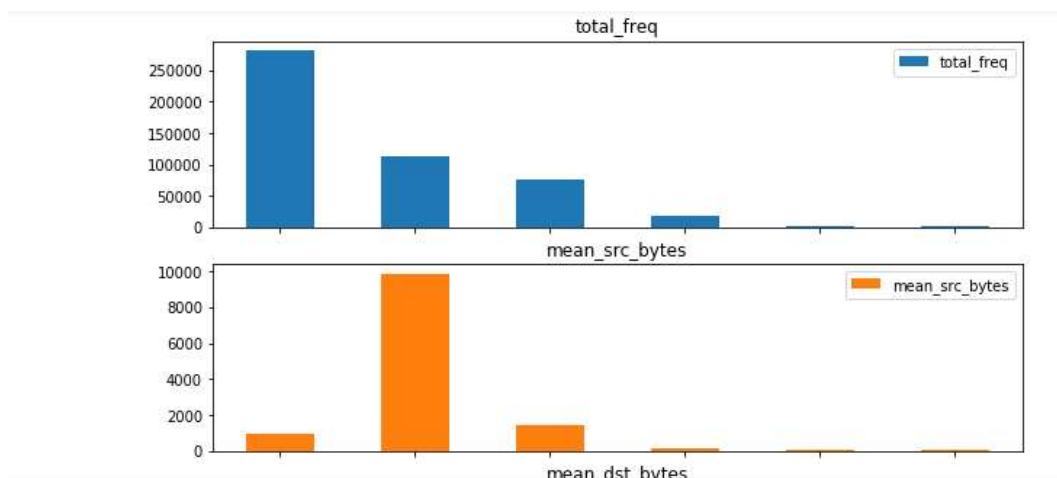

## Modify Spark jobs to use Cloud Storage instead of HDFS

Taking this original 'Lift & Shift' sample notebook you will now create a copy that decouples the storage requirements for the job from the compute requirements. In this case, all you have to do is replace the Hadoop file system calls with Google Storage calls by replacing `hdfs://` storage references with `gs://` references in the code and adjusting folder names as necessary.

You start by using the cloud shell to place a copy of the source data in a new Cloud Storage bucket.

1. In the Cloud Shell create a new storage bucket for your source data.

```
export PROJECT_ID=$(gcloud info --format='value(config.project)')
gsutil mb gs://$PROJECT_ID
```

1. In the Cloud Shell copy the source data into the bucket.

```
wget
http://kdd.ics.uci.edu/databases/kddcup99/kddcup.data\_10\_percent.gz
gsutil cp kddcup.data_10_percent.gz gs://$PROJECT_ID/
```

Make sure that the last command completes and the file has been copied to your new storage bucket.

1. Switch back to the `01_spark` Jupyter Notebook tab in your browser.
2. Click **File** and then select **Make a Copy**.
3. When the copy opens, click the **01\_spark-Copy1** title and rename it to `De-couple-storage`.
4. Open the Jupyter tab for `01_spark`.
5. Click **File** and then **Save and checkpoint** to save the notebook.
6. Click **File** and then **Close and Halt** to shutdown the notebook.

If you are prompted to confirm that you want to close the notebook click **Leave** or **Cancel**.

1. Switch back to the `De-couple-storage` Jupyter Notebook tab in your browser, if necessary.

You no longer need the cells that download and copy the data onto the cluster's internal HDFS file system so you will remove those first.

To delete a cell, you click in the cell to select it and then click the **cut selected cells** icon (the scissors) on the notebook toolbar.

1. Delete the initial comment cells and the first three code cells ( `In [1]`, `In [2]`, and `In [3]`) so that the notebook now starts with the section **Reading in Data**.

You will now change the code in the first cell ( still called `In[4]` unless you have rerun the notebook ) that defines the data file source location and reads in the source data. The cell currently contains the following code:

```
from pyspark.sql import SparkSession, SQLContext, Row

spark = SparkSession.builder.appName("kdd").getOrCreate()
sc = spark.sparkContext
data_file = "hdfs:///kddcup.data_10_percent.gz"
raw_rdd = sc.textFile(data_file).cache()
raw_rdd.take(5)
```



1. Replace the contents of cell In [4] with the following code. The only change here is create a variable to store a Google Cloud Storage bucket name and then to point the data\_file to the bucket we used to store the source data on Google Cloud Storage.

```
from pyspark.sql import SparkSession, SQLContext, Row
```

```
gcs_bucket='[Your-Bucket-Name]'  
spark = SparkSession.builder.appName("kdd").getOrCreate()  
sc = spark.sparkContext  
data_file = "gs://" + gcs_bucket + "//kddcup.data_10_percent.gz"  
raw_rdd = sc.textFile(data_file).cache()  
raw_rdd.take(5)
```

When you have replaced the code the first cell will look similar to the following, with your lab project ID as the bucket name:

```
In [2]: from pyspark.sql import SparkSession, SQLContext, Row  
  
gcs_bucket='qwiklabs-gcp-edd860dfa2e9d537'  
spark = SparkSession.builder.appName("kdd").getOrCreate()  
sc = spark.sparkContext  
data_file = "gs://" + gcs_bucket + "//kddcup.data_10_percent.gz"  
raw_rdd = sc.textFile(data_file).cache()  
raw_rdd.take(5)
```

1. In the cell you just updated replace the placeholder [Your-Bucket-Name] with the name of the storage bucket you created in the first step of this section. You created that bucket using the Project ID as the name, which you can copy here from the Qwiklabs lab login information panel on the left of this screen. Replace all of the placeholder text, including the brackets [ ].
2. Click **Cell** and then **Run All** to run all of the cells in the notebook.

You will see exactly the same output as you did when the file was loaded and run from internal cluster storage. Moving the source data files to Google Cloud Storage only requires that you repoint your storage source reference from hdfs:// to gs://.

### Part 3: Deploy Spark Jobs

Optimize Spark jobs to run on Job specific clusters.

You now create a standalone Python file, that can be deployed as a Cloud Dataproc Job, that will perform the same functions as this notebook. To do this you add magic commands to the Python cells in a copy of this notebook to write the cell contents out to a file. You will also add an input parameter handler to set the storage bucket location when the Python script is called to make the code more portable.

1. In the Jupyter Notebook menu click **File** and select **Make a Copy**.
2. When the copy opens, click the **De-couple-storage-Copy1** and rename it to PySpark-analysis-file.
3. Open the Jupyter tab for Decouple-storage.
4. Click **File** and then **Save and checkpoint** to save the notebook.
5. Click **File** and then **Close and Halt** to shutdown the notebook.

If you are prompted to confirm that you want to close the notebook click **Leave** or **Cancel**.

1. Switch back to the PySpark-analysis-file Jupyter Notebook tab in your browser, if necessary.
2. Click the first cell at the top of the notebook.
3. Click **Insert** and select **Insert Cell Above**.

4. Paste the following library import and parameter handling code into this new first code cell:

```
%%writefile spark_analysis.py
```

```
import matplotlib
matplotlib.use('agg')
```

```
import argparse
parser = argparse.ArgumentParser()
parser.add_argument("--bucket", help="bucket for input and output")
args = parser.parse_args()
```

```
BUCKET = args.bucket
```

The `%%writefile spark_analysis.py` Jupyter magic command creates a new output file to contain your standalone python script. You will add a variation of this to the remaining cells to append the contents of each cell to the standalone script file.

This code also imports the `matplotlib` module and explicitly sets the default plotting backend via `matplotlib.use('agg')` so that the plotting code runs outside of a Jupyter notebook.

1. For the remaining cells insert `%%writefile -a spark_analysis.py` at the start of each Python code cell. These are the five cells labelled **In [x]**.

```
%%writefile -a spark_analysis.py
```

For example the next cell should now look as follows.

```
%%writefile -a spark_analysis.py
```

```
from pyspark.sql import SparkSession, SQLContext, Row

spark = SparkSession.builder.appName("kdd").getOrCreate()
sc = spark.sparkContext
data_file = "gs://{}/kddcup.data_10_percent.gz".format(BUCKET)
raw_rdd = sc.textFile(data_file).cache()
#raw_rdd.take(5)
```

1. Repeat this step, inserting `%%writefile -a spark_analysis.py` at the start of each code cell until you reach the end.
  2. In the last cell, where the Pandas bar chart is plotted remove the `%matplotlib inline` magic command.
1. Make sure you have selected the last code cell in the notebook then, in the menu bar, click **Insert** and select **Insert Cell Below**.
  2. Paste the following code into the new cell.

```
%%writefile -a spark_analysis.py
```

```
ax[0].get_figure().savefig('report.png');
```

1. Add another new cell at the end of the notebook and paste in the following:

```
%%writefile -a spark_analysis.py
```

```
import google.cloud.storage as gcs
bucket = gcs.Client().get_bucket(BUCKET)
for blob in bucket.list_blobs(prefix='sparktodp/');
```

```
blob.delete()
bucket.blob('sparktdp/report.png').upload_from_filename('report.png')
```

1. Add a new cell at the end of the notebook and paste in the following:

```
%%writefile -a spark_analysis.py
```

```
connections_by_protocol.write.format("csv").mode("overwrite").save(
    "gs://{}/sparktdp/connections_by_protocol".format(BUCKET))
```

### Test Automation

You now test that the PySpark code runs successfully as a file by calling the local copy from inside the notebook, passing in a parameter to identify the storage bucket you created earlier that stores the input data for this job. The same bucket will be used to store the report data files produced by the script.

1. In the PySpark-analysis-file notebook add a new cell at the end of the notebook and paste in the following:

```
BUCKET_list = !gcloud info --format='value(config.project)'
BUCKET=BUCKET_list[0]
print('Writing to {}'.format(BUCKET))
!/opt/conda/anaconda/bin/python spark_analysis.py --bucket=$BUCKET
```

This code assumes that you have followed the earlier instructions and created a Cloud Storage Bucket using your lab Project ID as the Storage Bucket name. If you used a different name modify this code to set the BUCKET variable to the name you used.

1. Add a new cell at the end of the notebook and paste in the following:

```
!gsutil ls gs://$BUCKET/sparktdp/**
```

This lists the script output files that have been saved to your Cloud Storage bucket.

1. To save a copy of the Python file to persistent storage, add a new cell and paste in the following:

```
!gsutil cp spark_analysis.py gs://$BUCKET/sparktdp/spark_analysis.py
```

1. Click **Cell** and then **Run All** to run all of the cells in the notebook.

If the notebook successfully creates and runs the Python file you should see output similar to the following for the last two cells. This indicates that the script has run to completion saving the output to the Cloud Storage bucket you created earlier in the lab.

```
!gsutil ls gs://$BUCKET/sparktdp/**

gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/connections_by_protocol/
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/connections_by_protocol/_SUCCESS
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/connections_by_protocol/part-00000-cfe55725-9eb1-44fe-9355-7fb9a68b34e4-c000.csv
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/connections_by_protocol/part-00001-cfe55725-9eb1-44fe-9355-7fb9a68b34e4-c000.csv
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/connections_by_protocol/part-00002-cfe55725-9eb1-44fe-9355-7fb9a68b34e4-c000.csv
gs://qwiklabs-gcp-d2ecce8249d282ec/sparktdp/report.pdf

!gsutil cp spark_analysis.py gs://$BUCKET/sparktdp/spark_analysis.py

Copying file://spark_analysis.py [Content-Type=text/x-python]...
/ [1 files][ 2.7 KiB/ 2.7 KiB]
Operation completed over 1 objects/2.7 KiB.
```

Run the Analysis Job from Cloud Shell.

1. Switch to your Cloud Shell and copy the Python script from Cloud Storage so you can run it as a Cloud Dataproc Job.

```
gsutil cp gs://$PROJECT_ID/sparktodp/spark_analysis.py
spark_analysis.py
```

1. Create a launch script.

```
nano submit_onejob.sh
```

1. Paste the following into the script:

```
#!/bin/bash
gcloud dataproc jobs submit pyspark \
  --cluster sparktodp \
  --region us-central1 \
  spark_analysis.py \
  -- --bucket=$1
```

1. Press CTRL+X then Y and Enter key to exit and save.
2. Make the script executable:

```
chmod +x submit_onejob.sh
```

1. Launch the PySpark Analysis job:

```
./submit_onejob.sh $PROJECT_ID
```

1. In the Cloud Console tab navigate to the **Dataproc > Clusters** page if it is not already open.
2. Click **Jobs**.
3. Click the name of the job that is listed. You can monitor progress here as well as from the Cloud shell. Wait for the Job to complete successfully.
4. Navigate to your storage bucket and note that the output report, /sparktodp/report.png has an updated time-stamp indicating that the stand-alone job has completed successfully.

The storage bucket used by this Job for input and output data storage is the bucket that is used just the Project ID as the name.

1. Navigate back to the **Dataproc > Clusters** page.
2. Select the **sparktodp** cluster and click **Delete**. You don't need it any more.
3. Click **CONFIRM**.
4. Close both **Jupyter** tabs in your browser.

[End your lab](#)

When you have completed your lab, click **End Lab**. Qwiklabs removes the resources you've used and cleans the account for you.

You will be given an opportunity to rate the lab experience. Select the applicable number of stars, type a comment, and then click **Submit**.

The number of stars indicates the following:

- 1 star = Very dissatisfied
- 2 stars = Dissatisfied
- 3 stars = Neutral
- 4 stars = Satisfied
- 5 stars = Very satisfied

You can close the dialog box if you don't want to provide feedback.

For feedback, suggestions, or corrections, please use the **Support** tab.

