

Date / Time

Object-Oriented Programming

<https://softeng.polito.it/courses/09CBI>



SoftEng
<http://softeng.polito.it>

Version 1.1.2 - May 2021
© Marco Torchiano, 2021



cc creative commons

This work is licensed under the Creative Commons Attribution–NonCommercial–NoDerivatives 4.0 International License.

To view a copy of this license, visit

<http://creativecommons.org/licenses/by-nc-nd/4.0/>.

You are free: to copy, distribute, display, and perform the work

Under the following conditions:



Attribution. You must attribute the work in the manner specified by the author or licensor.



Non-commercial. You may not use this work for commercial purposes.



No Derivative Works. You may not alter, transform, or build upon this work.

For any reuse or distribution, you must make clear to others the license terms of this work.

- Any of these conditions can be waived if you get permission from the copyright holder.

Your fair use and other rights are in no way affected by the above.

Time and Date APIs

- There are several APIs that introduced in different steps following each other in time:
 - ♦ Time stamps (in `java.lang.System`)
 - ♦ `java.util.Date`
 - ♦ `java.util.Calendar`
 - ♦ `java.time`
-

System time stamps

- `System` class provides two methods:

`currentTimeMillis()`

- ♦ the difference, measured in milliseconds, between the current time and midnight, January 1, 1970 UTC

`nanoTime()`

- ♦ current value of the running JVM's high-resolution time source, in nanosecond
 - ♦ There is no absolute reference
-

Date

- Original date class `java.util.Date`
 - ♦ Encapsulate a `long` time-stamp
 - ♦ Unsuitable for internationalization
 - Several methods are deprecated

- May 6, 2015 would be: Deprecated

```
Date d = new Date(115,4,6) ;
```

```
String s = d.toString() ;
```

"Wed May 06 00:00:00 CEST 2015"

Calendar

- Abstract class, with one concrete implementation: `GregorianCalendar`
 - Represents a date with fields
 - ♦ `YEAR`, `MONTH`, `DAY_OF_MONTH`, `HOURL...`
 - Can be manipulate
 - ♦ `get(field)`
 - ♦ `set(field, value)`
 - ♦ `add(field, delta)`
-


New Date and Time

- Package `java.time`
 - ♦ Introduced in Java 8
- Guiding principles
 - ♦ Simplicity
 - ♦ Consistency
- All classes are immutable

Main classes

- Temporal points
 - ♦ `Instant`
 - ♦ `LocalDate`
 - ♦ `LocalDateTime`
 - ♦ `LocalTime`
 - ♦ `ZonedDateTime`
 - Temporal intervals
 - ♦ `Duration` (time based)
 - ♦ `Period` (date based)
-

Main classes

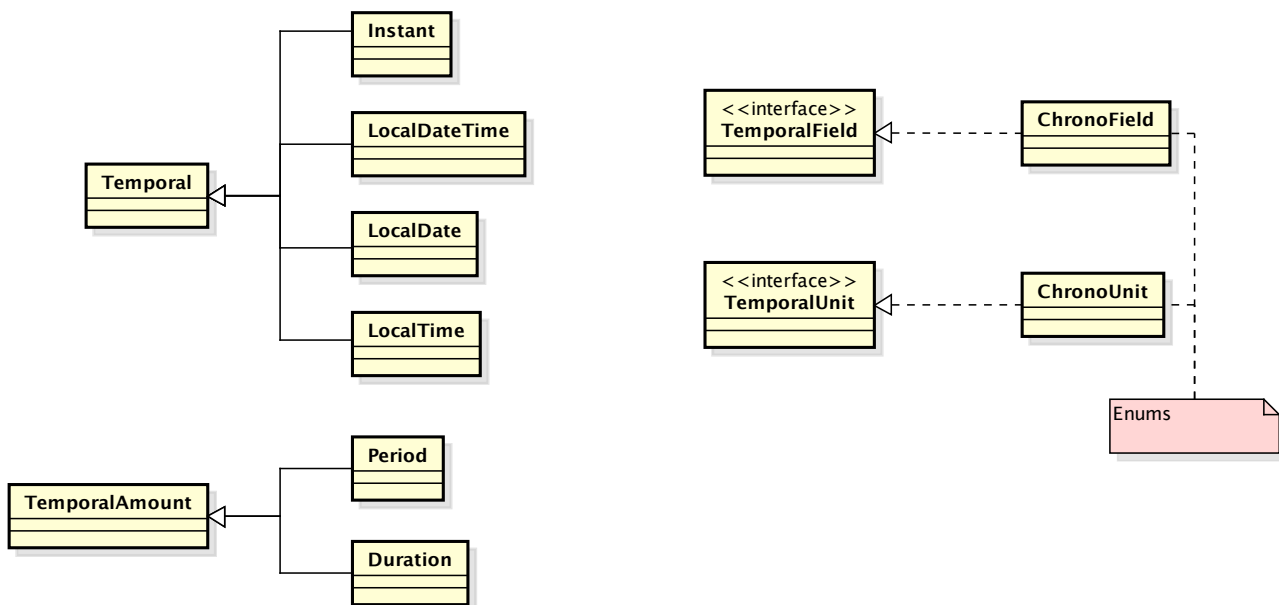

Time points factory methods

Method	Purpose
<code>of()</code>	Creates instance from a set of specific parameters, with validation
<code>from()</code>	Convert from another class with possible loss of information
<code>parse()</code>	Parses a string to build an instance
<code>now()</code>	Create an instance representing the current time / date. Can accept a <code>ZoneId</code>

Comparison

Method	Purpose
<code>isBefore()</code>	Checks if this time/date is before the specified time/date
<code>isAfter()</code>	Checks if this time/date is after the specified time/date
<code>isEqual()</code>	Checks if this time/date is the same as the specified time/date
<code>compareTo()</code>	Compares to to other time/date

Changing

Method	Purpose
<code>minus()</code>	Returns a new date/time built by removing a specific amount of date/time
<code>plus()</code>	Returns a new date/time built by adding a specific amount of date/time
<code>with()</code>	Returns a new date/time modified as specified by a temporal adjuster

plus / minus

- Plus/Minus

- ◆ `long amountToSubtract,`

- ◆ `TemporalUnit unit`

- E.g. `ChronoUnit.DAYS`

- Plus/Minus

- ◆ `TemporalAmount amount`

- Either a `Duration` or a `Period`

Temporal adjusters

- Factory methods in class

- `TemporalAdjusters`, e.g.

- ◆ `firstDayOfMonth()`

- ◆ `firstDayOfNextMonth()`

- ◆ `firstInMonth(DayOfWeek dayOfWeek)`

- ◆ `lastDayOfMonth()`

- ◆ ...

DoW and Month

- Are represented by enums:
 - ♦ `DayOfWeek`
 - ♦ `Month`
 - Can be converted to string
 - ♦ `getDisplayName(style, locale)`
 - ♦ style is one of
 - `TextStyle.FULL`
 - `TextStyle.NARROW`
 - `TextStyle.SHORT`
-

Locale

- Represents a specific geographical, political, or cultural region
 - Used to perform *locale-sensitive* operations
 - ♦ Date formats
 - ♦ DoW, Month names
 - ♦ Decimal separators
-

Locale definition

- Predefined constants, e.g.,
 - ◆ `Locale.US`, `Locale.ITALIAN`
 - Constructors
 - ◆ Language: 2 or 3 chars code
 - ◆ Country: 2 chars or 3 digits
 - ◆ Variant: optional additional spec
-

ISO-8601


PUBLIC SERVICE ANNOUNCEMENT:

OUR DIFFERENT WAYS OF WRITING DATES AS NUMBERS CAN LEAD TO ONLINE CONFUSION. THAT'S WHY IN 1988 ISO SET A GLOBAL STANDARD NUMERIC DATE FORMAT.

THIS IS **THE** CORRECT WAY TO WRITE NUMERIC DATES:


2013-02-27

THE FOLLOWING FORMATS ARE THEREFORE DISCOURAGED:

02/27/2013 02/27/13 27/02/2013 27/02/13
20130227 2013.02.27 27.02.13 27-02-13
27.2.13 2013.II.27. $27\frac{1}{2}$ -13 2013.158904109
MMXIII-II-XXVII MMXIII ^{LVII}/_{CCCLXV} 1330300800
 $((3+3)\times(111+1)-1)\times 3/3-1/3^3$ 2013
10/11011/1101 02/27/20/13 01237 ^{2 3 1 4}/_{5 6 7 8} 

Date/Time String Format

- Default format as defined by the ISO-8601 standard

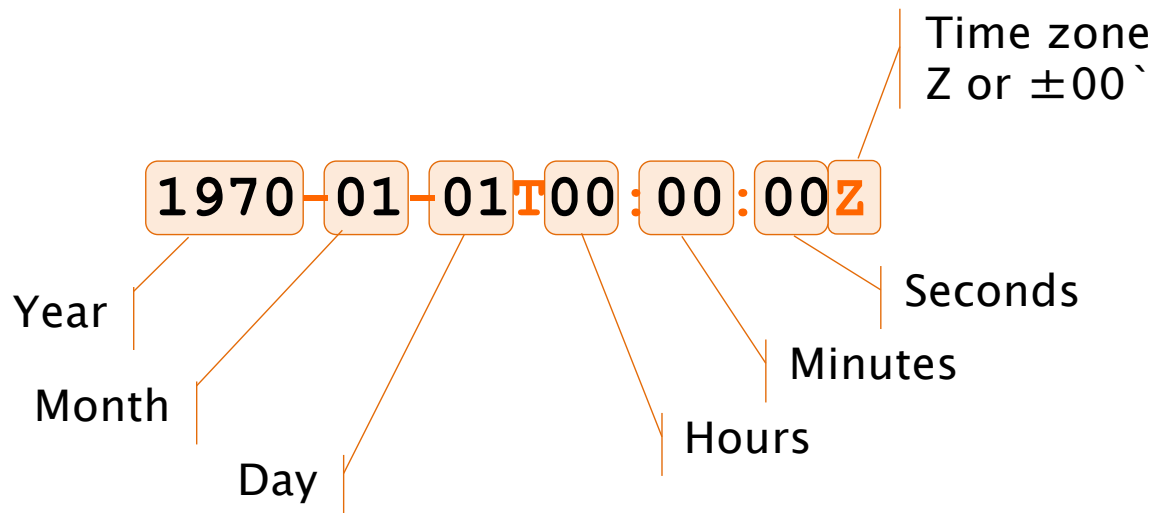

Time Intervals factory methods

Method	Purpose
of ()	Creates interval from specified amount of TemporalUnits
of Xxxx ()	Creates interval from specified amount of units (Xxxx is : Days, Hours, etc.)
between ()	Creates interval between two temporal points

Example: Elapsed Time

```
Instant start = Instant.now();  
//...  
Instant end = Instant.now();  
Duration elapsed =  
    Duration.between(start, end);  
System.out.println(elapsed);
```



PT2.005S

Summary

- Old **Date** class does not handle time zones correctly
 - New classes provide a consistent structure for both time and date measures:
 - ♦ They are immutable
 - ♦ Operations can be performed using existing methods
-