

OO Paradigm and UML



Object Oriented Programming

<https://softeng.polito.it/courses/09CBI>



SoftEng
<http://softeng.polito.it>

Version 2.4.3
© Maurizio Morisio, Marco Turchiano, 2021



Licensing Note



This work is licensed under the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License.

To view a copy of this license, visit

<http://creativecommons.org/licenses/by-nc-nd/4.0/>.

You are free: to copy, distribute, display, and perform the work

Under the following conditions:



Attribution. You must attribute the work in the manner specified by the author or licensor.



Non-commercial. You may not use this work for commercial purposes.



No Derivative Works. You may not alter, transform, or build upon this work.

- For any reuse or distribution, you must make clear to others the license terms of this work.
- Any of these conditions can be waived if you get permission from the copyright holder.

Your fair use and other rights are in no way affected by the above.

From procedural to object oriented programming paradigm


OBJECT ORIENTED PARADIGM

3

Programming paradigms

- Procedural (Pascal, C,...)
- Object-Oriented (C++, Java, C#,...)
- Functional (LISP, Haskell, SQL,...)
- Logic (Prolog)

Languages timeline

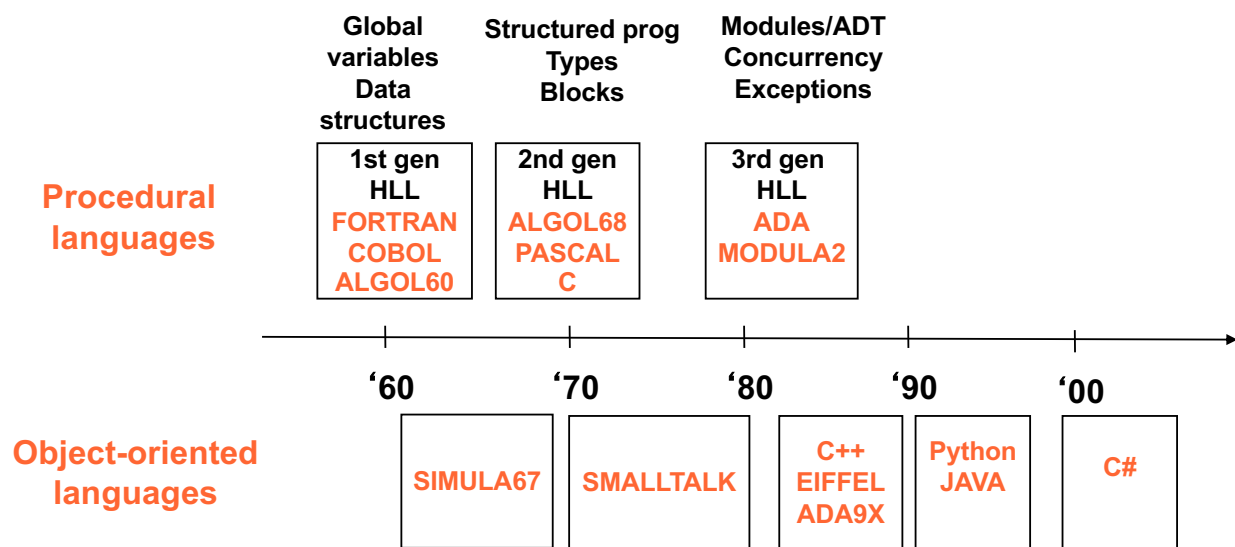

5

Example – Receipt

- Cash registers emit purchase receipts
- A receipt is made up of items
- Every item correspond to a product that has a name and a price
- Products' info is stored in a price list
- Any time a new product code is entered the corresponding item is added to the receipt
- After the last item is entered, a list of the items (with product name and price) are printed together with the total sum.

Example: Shop Receipt

- Input:
 - ♦ 13
 - ♦ 57
 - ♦ 123
 - ♦ 0 (end of receipt)
- Output

```
Receipt:
      ID13 : 16.62
      ID57 :  9.73
      ID123 :  0.06
-----
Number of items: 3
              Total: 26.41
```


7

Procedural (C)

```
float prices[MAX_LIST];
char* names[MAX_LIST];
int receipt[MAX_RCPT];
int n_items;
void add(int) { /* add item to receipt */ }
void print(){ /* print receipt */ }
void init() { /* initialize */ }
int read() { /* read item code */ }
int main(){
    init();
    int code;
    while( (code = read()) ){ add(code); }
    print();
}
```

8

Modules and relationships

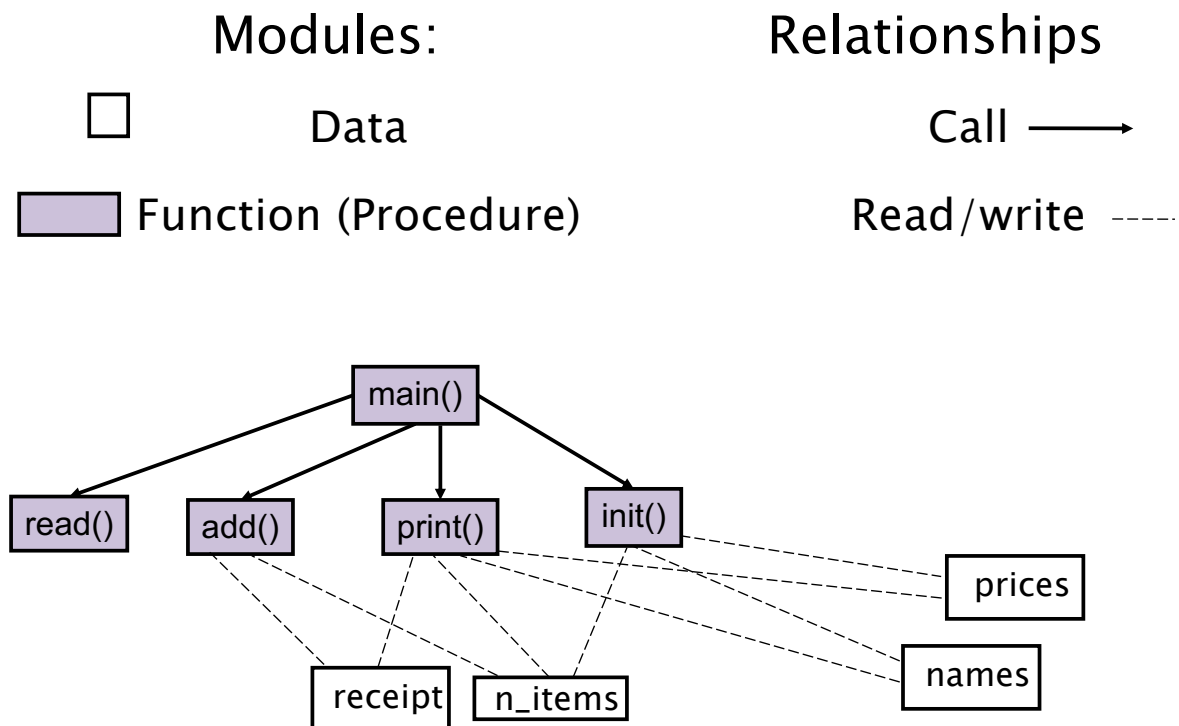

9


Problems

- No syntactic relationship between:
 - ♦ Arrays (**receipt**, **prices**, **names**)
 - ♦ Relative operations (**add**, **print**, **init**)
- Lack of link between coupled arrays (**prices**, **names**)
- No control over *size*:

```
for (i=0; i<=20; i++){ prices[i]=0; }
```
- No guarantee on initialization
 - ♦ Actually performed?

Objects – Encapsulation


- Bring together code and data
 - ♦ E.g. `add()` + `receipt` + `n_items`

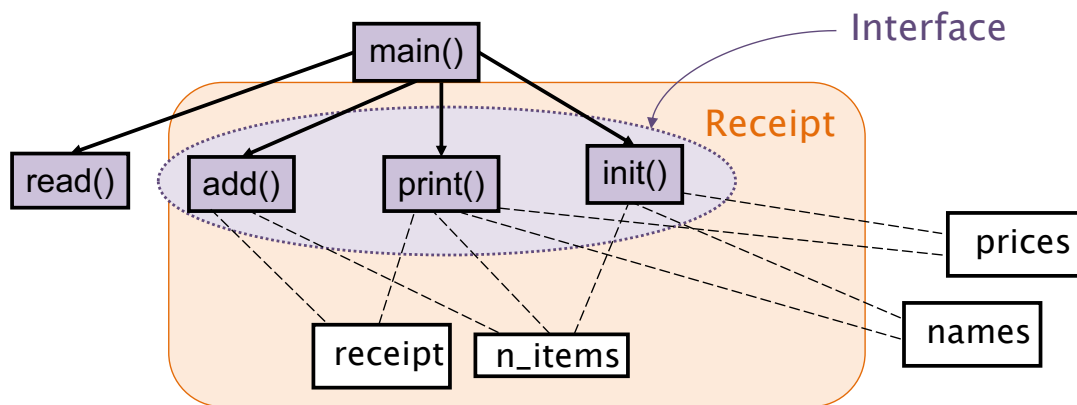

11

Objects – Information Hiding


- Hide object information from external modules
 - ♦ The only way to access data within an object is through its interface

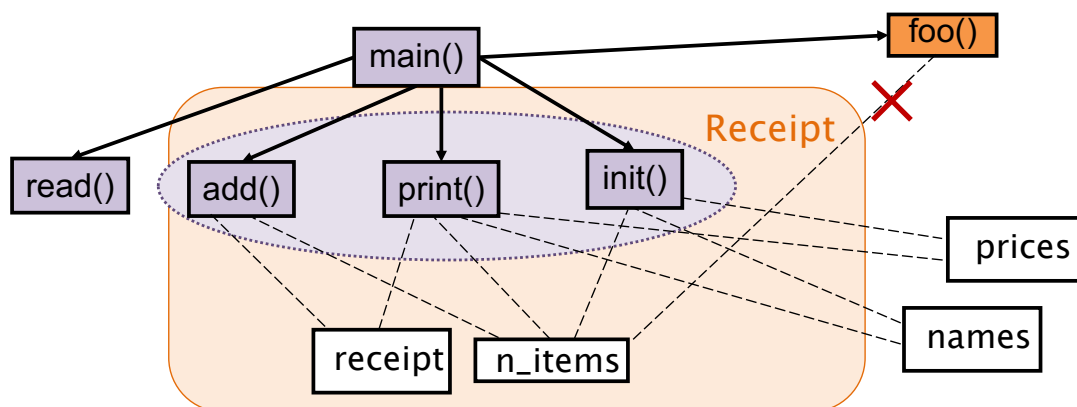

12

Objects


- Tie related data elements
 - ♦ E.g. **prices** + **names**

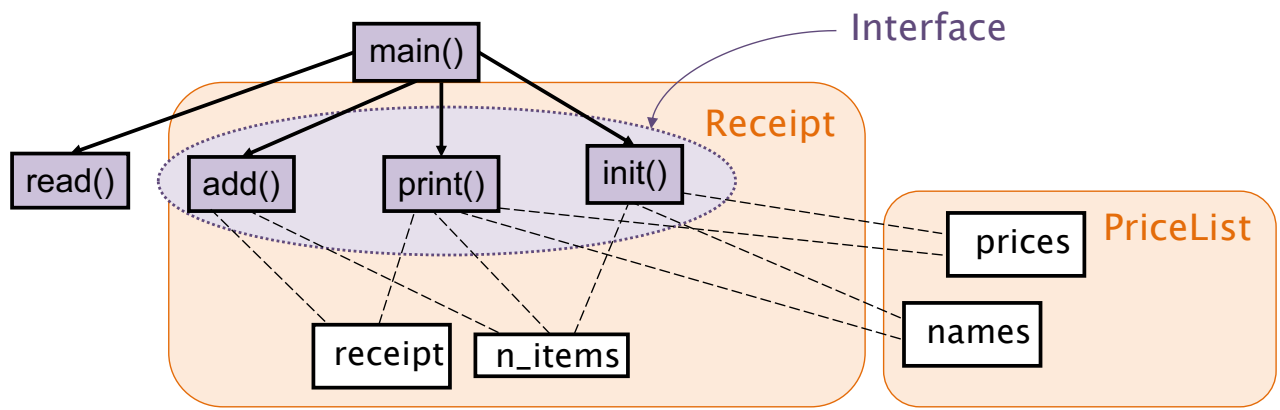

13

Objects

- Represent semantically consistent elements that map to problem-domain concepts
 - ♦ E.g., items and products

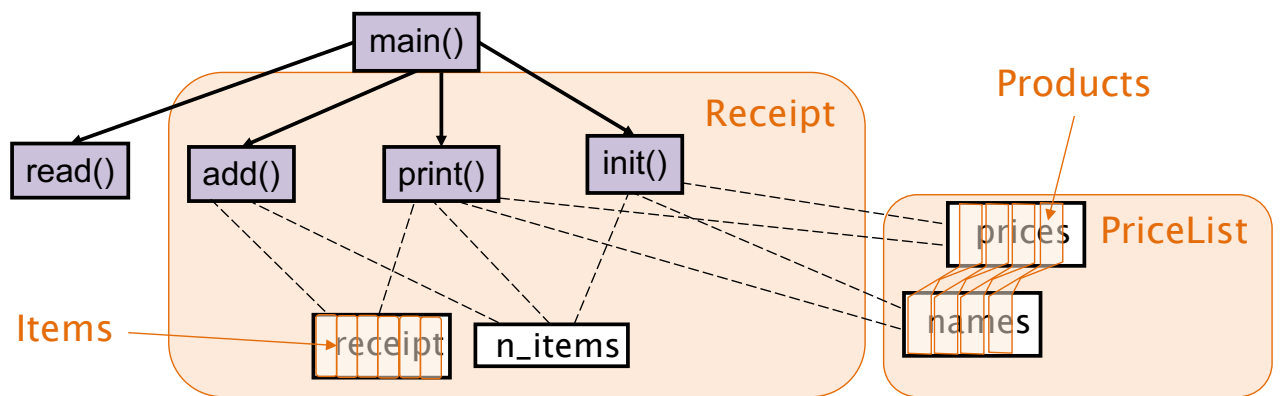


14

Classes

- Represent high level concepts
 - ♦ Often taken from problem domain
- Are instantiated into Objects
 - ♦ Define common features of Objects
- Are related to each other
 - ♦ Define links and communication patterns among their instances
- Can be defined by specialization
 - ♦ Specific classes inherit from general ones

15

Classes

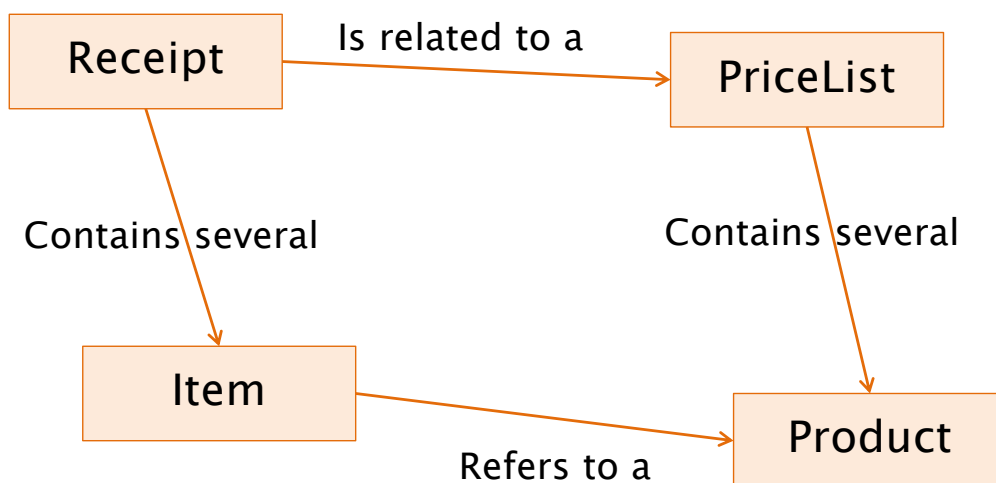

16

Object–Oriented approach

- Defines a new component type
 - ♦ Object (and class)
 - ♦ Both data and functions accessing it are within the same module
 - ♦ Allows defining a more precise interface
- Defines a new kind of relationship
 - ♦ Message passing
 - ♦ Read/write operations are limited to the same object scope

17

Why OO?

- Programs are getting too large to be fully comprehensible by any person
- There is a need for a way of managing very–large projects
- Object Oriented paradigm allows:
 - ♦ programmers to (re)use large blocks of code
 - ♦ without knowing all the picture
- OO makes code reuse a real possibility
- OO simplifies maintenance and evolution

18

When OO?


- Benefits only occur in larger programs
 - Analogous to structured programming
 - ♦ Programs < 30 lines, spaghetti is as understandable and faster to write than structured
 - ♦ Programs > 1000 lines, spaghetti is incomprehensible, probably doesn't work, not maintainable
 - Only programs > 1000 lines benefit from OO really
-

An engineering approach


- Given a system, with components and relationships among them, we have to:
 - ♦ Identify the components
 - ♦ Define component interfaces
 - ♦ Define how components interact with each other through their interfaces
 - ♦ Minimize relationships among components
-

Procedural vs. OO

Procedural

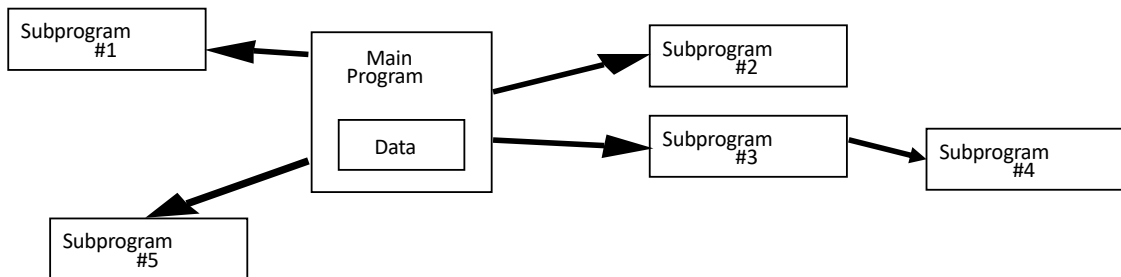

Object Oriented

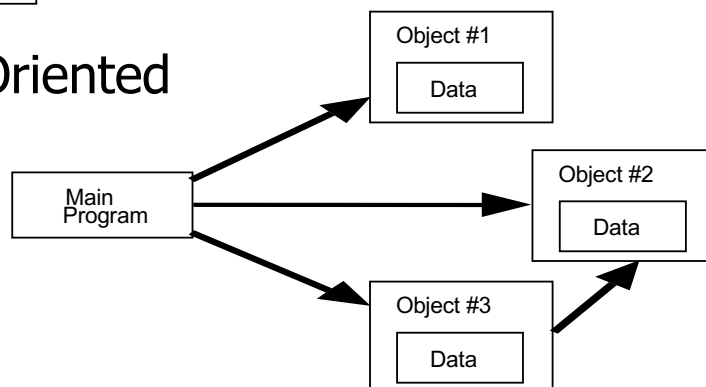


21

Interface

- Set of messages an object can receive
 - ♦ Each message is mapped to an internal “function” within the object
 - ♦ The object is responsible for the association (message → function)
 - ♦ Any other message is illegal
- The interface
 - ♦ Encapsulates the internals
 - ♦ Exposes a standard boundary

Interface

- The **interface** of an object is simply the subset of methods that other “program parts” are allowed to call
 - ♦ Stable

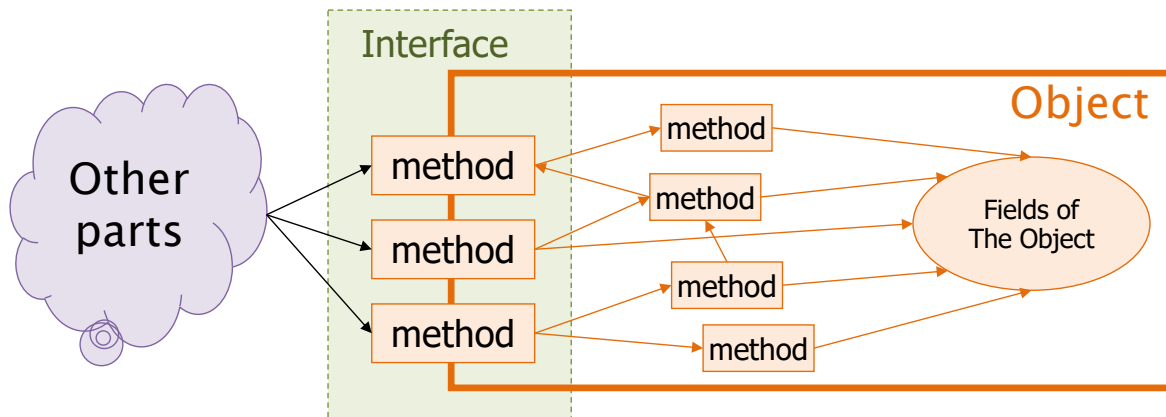

23

Encapsulation

- Simplified access
 - ♦ To use an object, the user need only comprehend the interface. No knowledge of the internals are necessary
- Self-contained.
 - ♦ Once the interface is defined, the programmer can implement the interface (write the object) without interference of others

Encapsulation

- Ease of evolution
 - ♦ Implementation can change at a later time without rewriting any other part of the program (as long as the interface doesn't change)
 - Single point of change
 - ♦ Any change in the data structure means modifying the code in one location, rather than code scattered around the program (error prone)
-

Classification of OO languages

- **Object-Based** (Ada)
 - ♦ Specific constructs to manage objects
 - **Class-Based** (CLU)
 - ♦ + each object belongs to a class
 - **Object-Oriented** (Simula, Python)
 - ♦ + classes support inheritance
 - **Strongly-Typed O-O** (C++, Java)
 - ♦ + the language is strongly typed
-

UML AND MODELING

27

UML

- Unified Modeling Language
- Standardized modeling and specification language
 - Defined by the **Object Management Group** (OMG)
- **Graphical notation** to specify, visualize, construct and document an object-oriented system
- Integrates the concepts of Booch, OMT and OOSE, and merges them into a single, common and **widely used modeling language**



UML

- Several diagrams
 - ♦ Class diagrams
 - ♦ Activity diagrams
 - ♦ Use Case diagrams
 - ♦ Sequence diagrams
 - ♦ Statecharts

29

UML Class Diagram

- Captures
 - ♦ Main (abstract) concepts
 - ♦ Characteristics of the concepts
 - Data associated to the concepts
 - ♦ Relationships between concepts
 - ♦ Behavior of classes

30

Abstraction levels

Abstract	Concept Entity Class Category Type
Concrete	Instance Item Object Example Occurrence



31

Class

- Represents a set of objects
 - ♦ Common properties
 - ♦ Autonomous existence.
 - ♦ E.g. facts, things, people
- An instance of a class is an object of the type that the class represents.
 - ♦ In an application for a commercial organization CITY, DEPARTMENT, EMPLOYEE, PURCHASE and SALE are typical classes.

32

Class – Examples



Object

- Model of a physical or logical item
 - ♦ ex.: a student, an exam, a window
 - Characterized by
 - ♦ identity
 - ♦ attributes (or data or properties or status)
 - ♦ operations it can perform (behavior)
 - ♦ messages it can receive
-

Object

DAUIN : Department

John : Employee

Class and Object


- **Class** (the description of object structure, i.e. *type*):
 - ♦ Data (**ATTRIBUTES** or **FIELDS**)
 - ♦ Functions (**METHODS** or **OPERATIONS**)
 - ♦ Creation methods (**CONSTRUCTORS**)
- **Object** (class instance)
 - ♦ State and identity

Class and object

- A class is a type definition
 - ♦ Typically no memory is allocated until an object is created from the class
- The creation of an object is called **instantiation**. The created object is often called an **instance**
- There is no limit to the number of objects that can be created from a class
- Each object is independent. Interacting with one object doesn't affect the others

37

Classes and objects

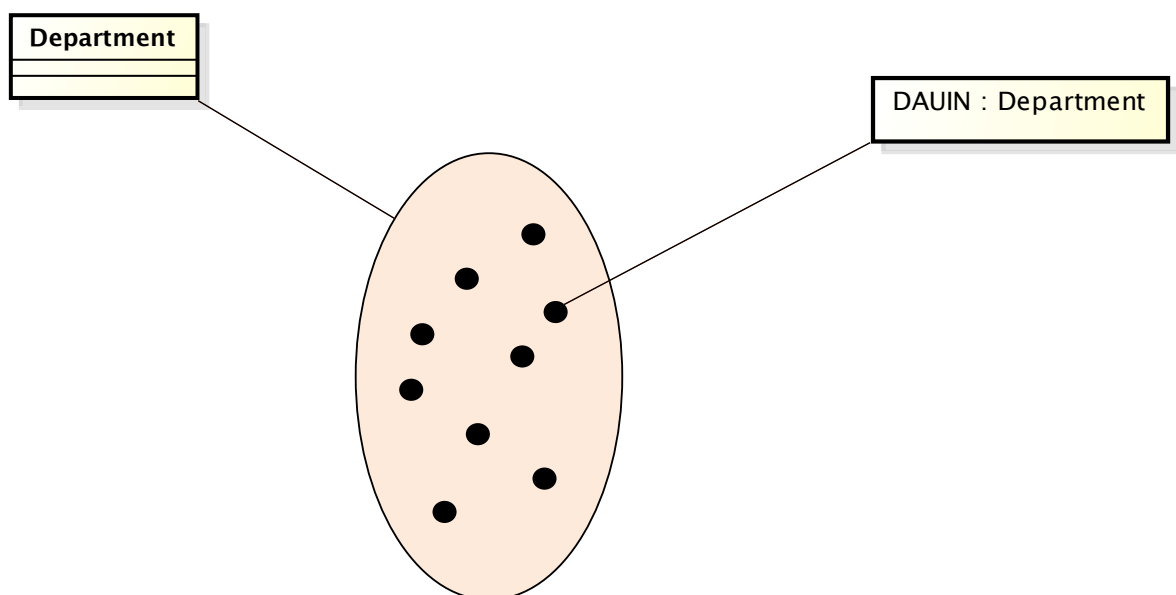


Attribute

- Elementary property of classes
 - ♦ Name
 - ♦ Type
- An attribute associates to each object (occurrence of a class) a value of the corresponding type
 - ♦ Name: String
 - ♦ ID: Numeric
 - ♦ Salary: Currency

39

Attribute – Example

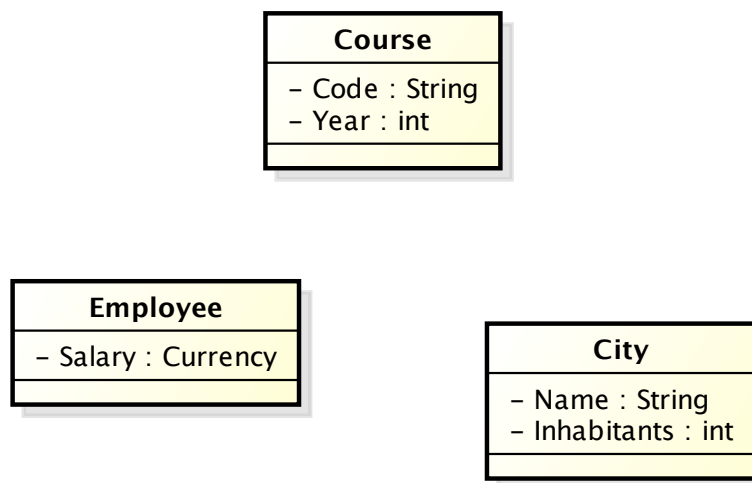

Method

- Describes an operation that can be performed on an object
 - ♦ Name
 - ♦ Parameters
- Similar to functions in procedural languages
- It represent the means to operate on or access to the attributes

41

Method – Example

Employee
- ID : int - name : String - salary : double
+ printName() : void + getSalary() : double


Message passing

- Objects communicate by message passing
 - ♦ Not by direct access to object's local data
- A message is a service request

Note: this is an abstract view that is independent from specific programming languages.

43

Messages

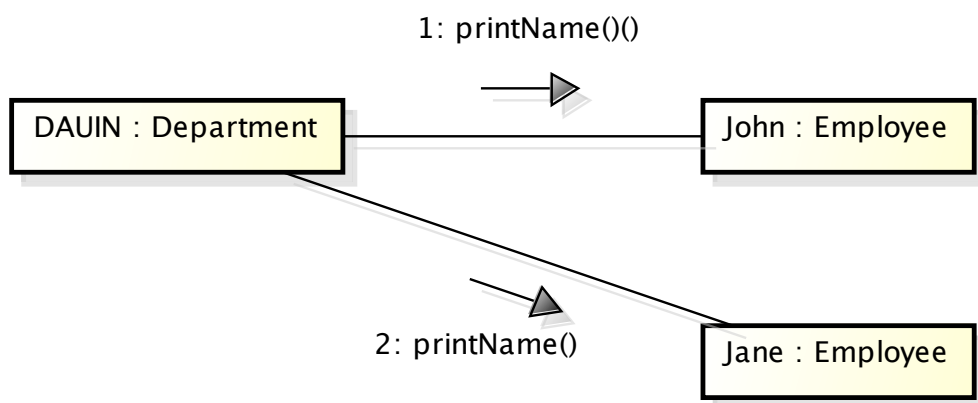


Association



- Represents a logical link between two classes.
- An occurrence of an association is a pair made up of the occurrences of the entities, one for each involved class
 - ♦ Residence is an association between the classes City and Employee;
 - ♦ Exam is an association between the classes Student and Course.

45



Associations

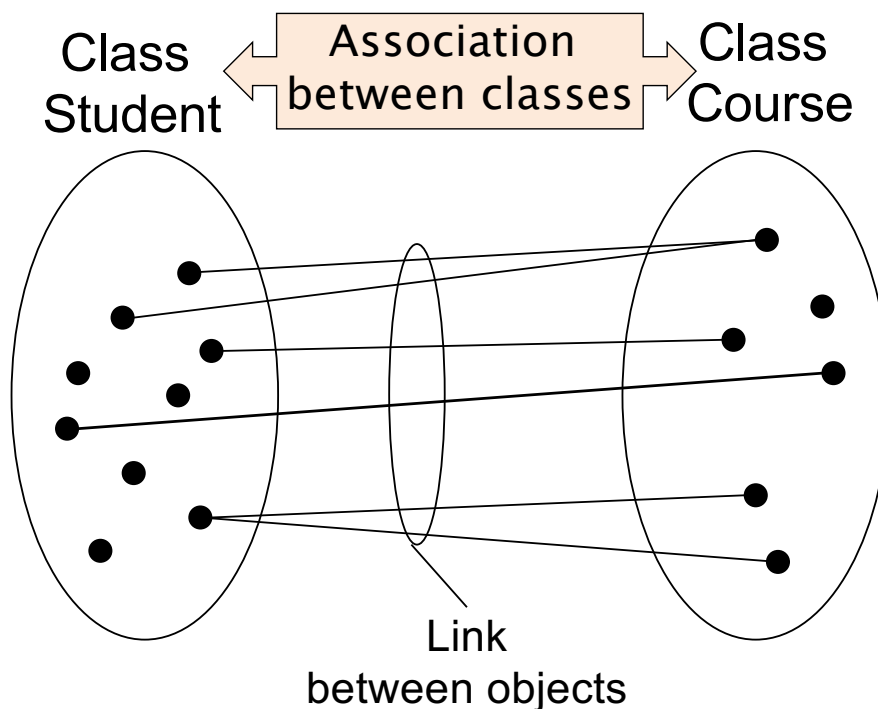

Association – Examples

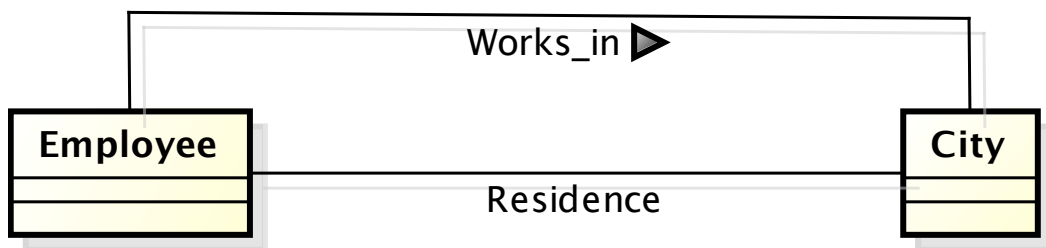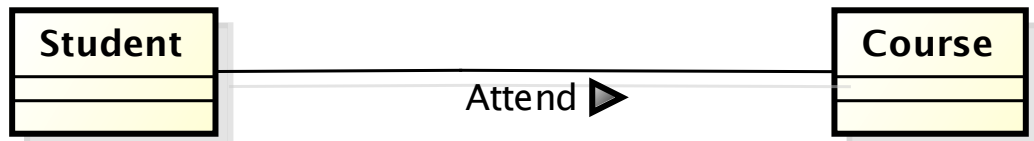


Recursive association–Samples

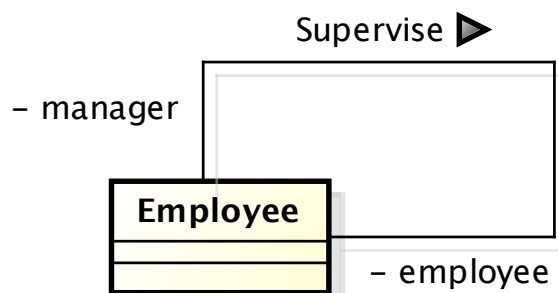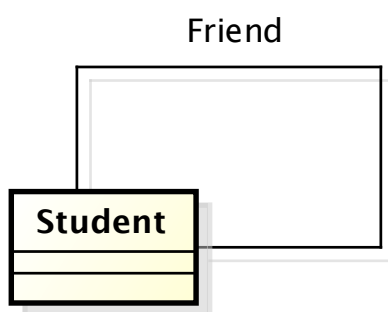

Link


- Model of association between objects

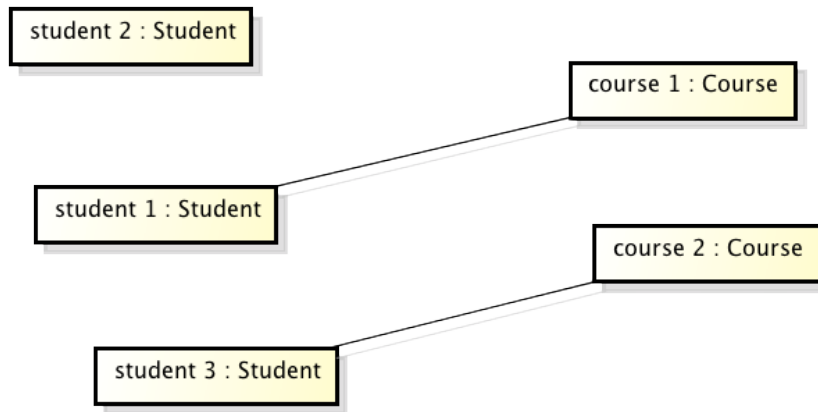


Multiplicity

- Describes the maximum and minimum number of links in which a class occurrence can participate
 - ♦ Undefined maximum expressed as *
 - Should be specified for each class participating in an association
-

Multiplicity – Example

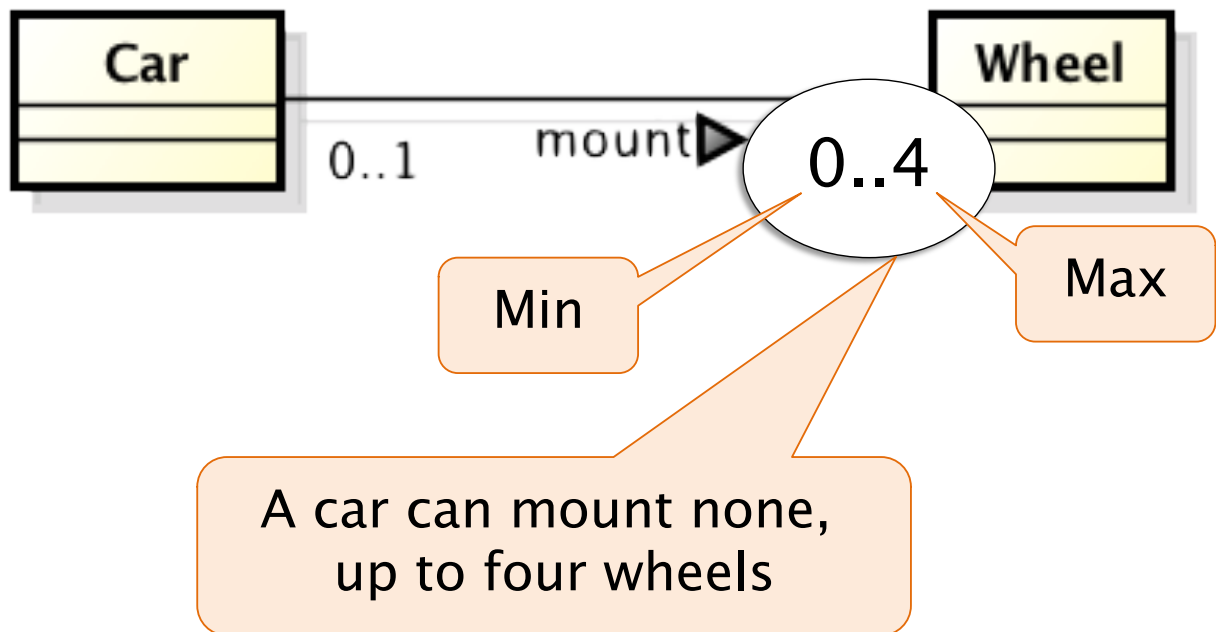

Multiplicity – Example


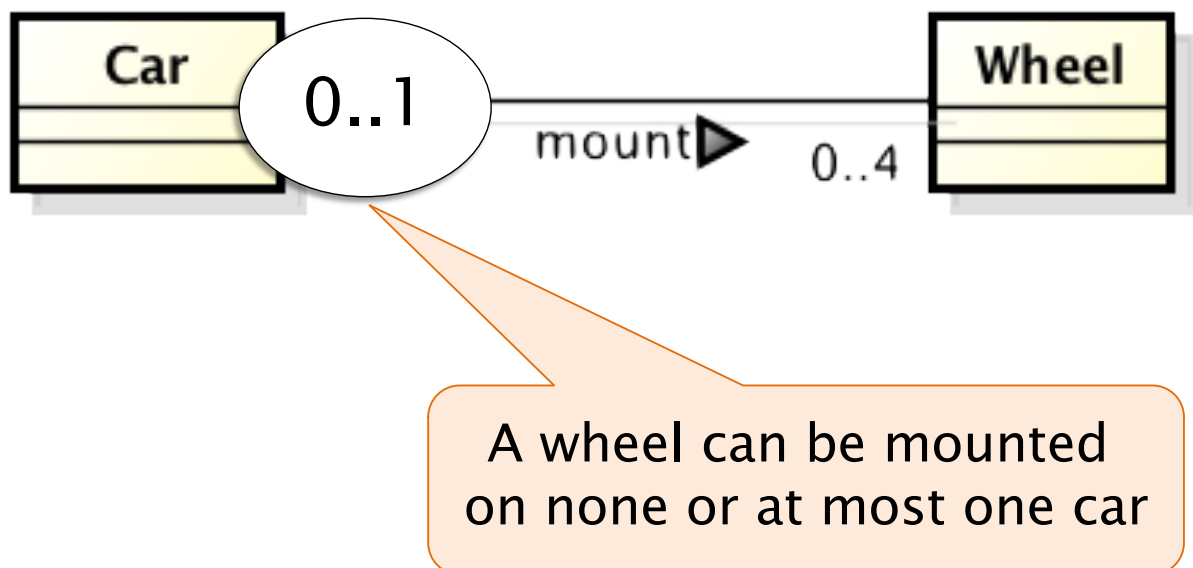


Multiplicity

- Typically, only three values are used:
0, **1** and the symbol ***** (many)
- Minimum: 0 or 1
 - ♦ 0 means the participation is *optional*,
 - ♦ 1 means the participation is *mandatory*;
- Maximum: 1 or *
 - ♦ 1: object is involved in at most one link
 - ♦ *: each object is involved in many links


53

Multiplicity



Operational interpretation


SID	Name	Surname	Birthdate	CID	Title	CFU
S2345	John	Smith	1990-4-12	C001	Information Systems	8
S1234	Jane	Brown	1991-7-11	C002	Advanced Programming	10
S5678	Mario	Rossi	1991-11-5	C003	Calculus	10

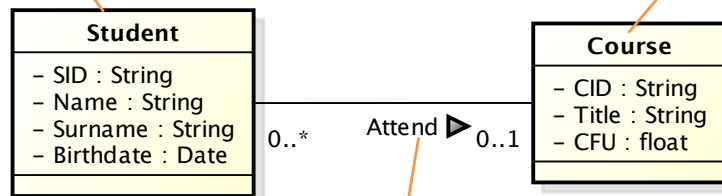


	C001	C002	C003
S2345			X
S1234	X		
S5678	X		

Aggregation

- *B is-part-of A* means that objects described by class B can be attributes of objects described by A




Example

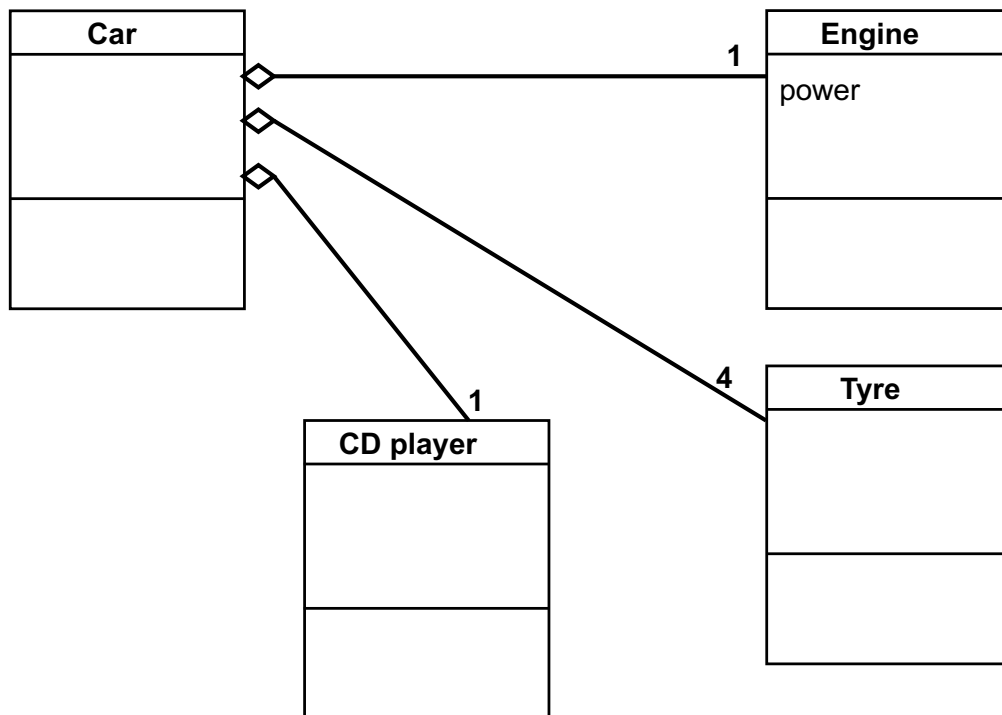


Association Class

- The association class defines the attributes related to the association
- A link between two objects includes
 - ♦ The two linked objects
 - ♦ The attributes defined by the association class

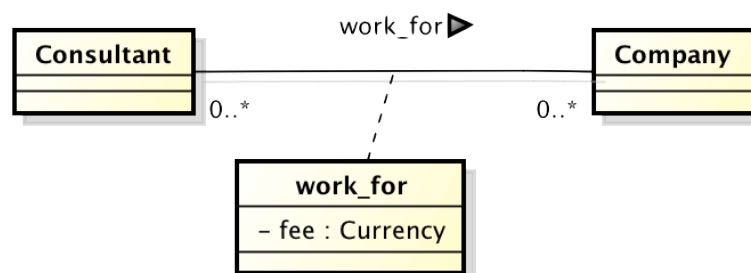

Association class – Equivalence

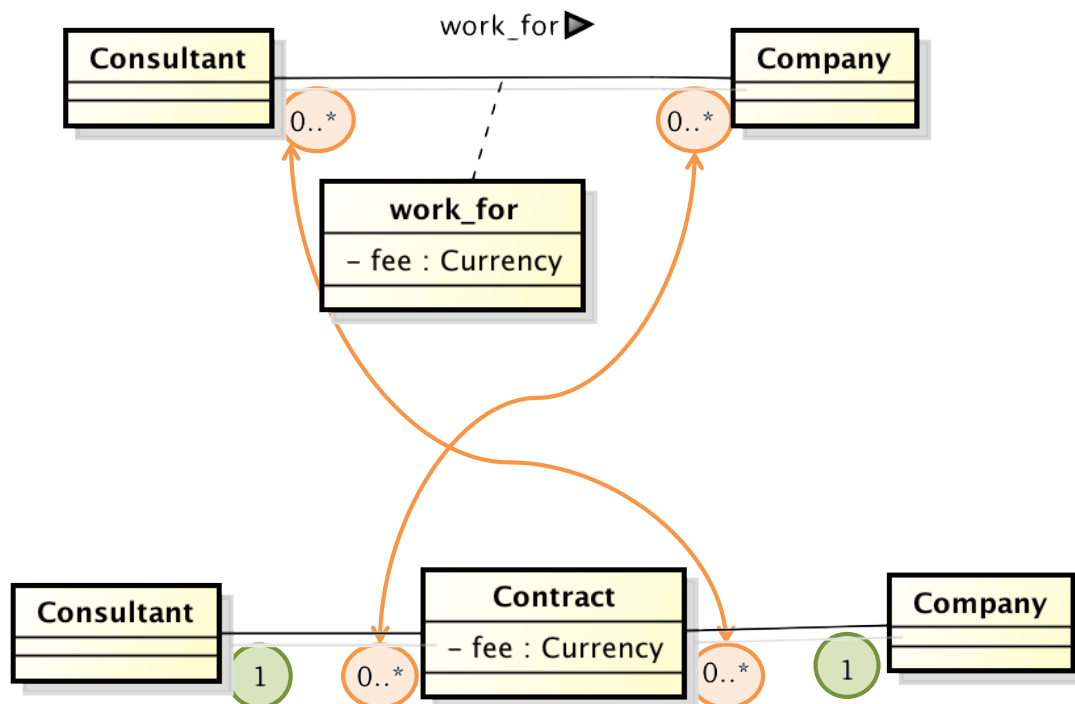

Association Class Limitations

- Association class
 - ◆ Fee is a function of consultant and company
 - ◆ $\text{fee}(\text{Consultant}, \text{Company})$
- Intermediate class
 - ◆ Fee is a function of the contract
 - ◆ $\text{fee}(\text{Contract})$

Association class limitation

- Case
 - ♦ Consultant working several time for the same Company
- Cannot be represented by association class
- Only representable through intermediate class

61

Essential guidelines




- If a concept has significant properties and/or describes types of objects with an autonomous existence, it can be represented by a **class**.
 - If a concept has a simple structure, and has no relevant properties associated with it, it is likely an **attribute** of a class.
 - If a concept provides a logical link between two (or more) entities, it is convenient to represent it by means of an **association**.
 - Any operation that implies access to the attributes of a class should be defined as a **method**.
-

Example – Receipt

- Cash registers emit purchase receipts
- A receipt is made up of items
- Every item correspond to a product that has a name and a price
- Products' info is stored in a price list
- Any time a new product code is entered the corresponding item is added to the receipt
- After the last item is entered, a list of the items (with product name and price) are printed together with the total sum.


63

Example – Classes




64

Example – Associations

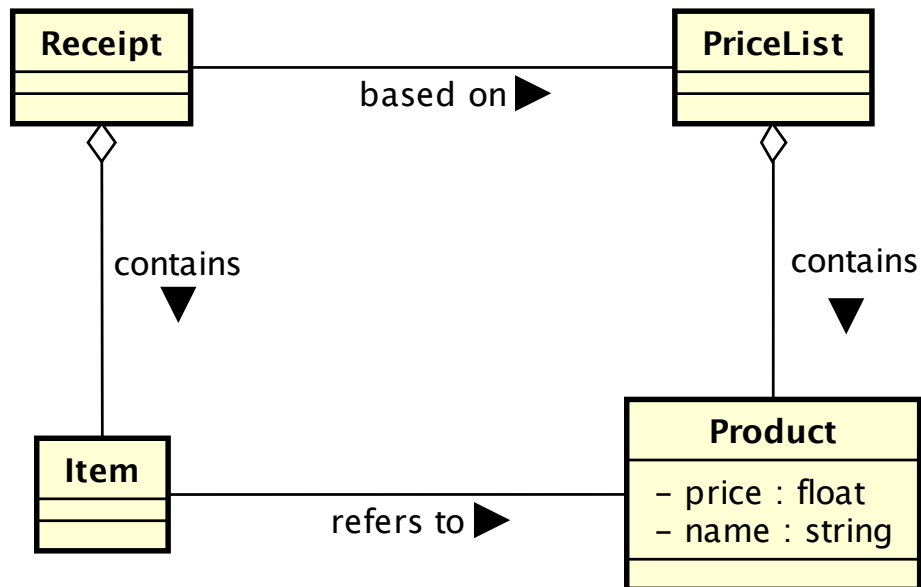


65

Example – Multiplicity

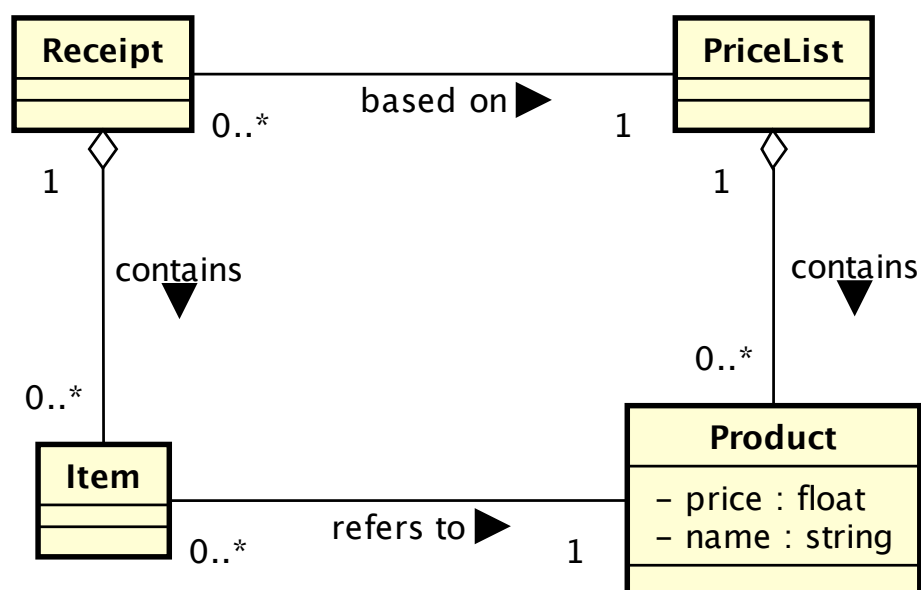


66

Example – Methods

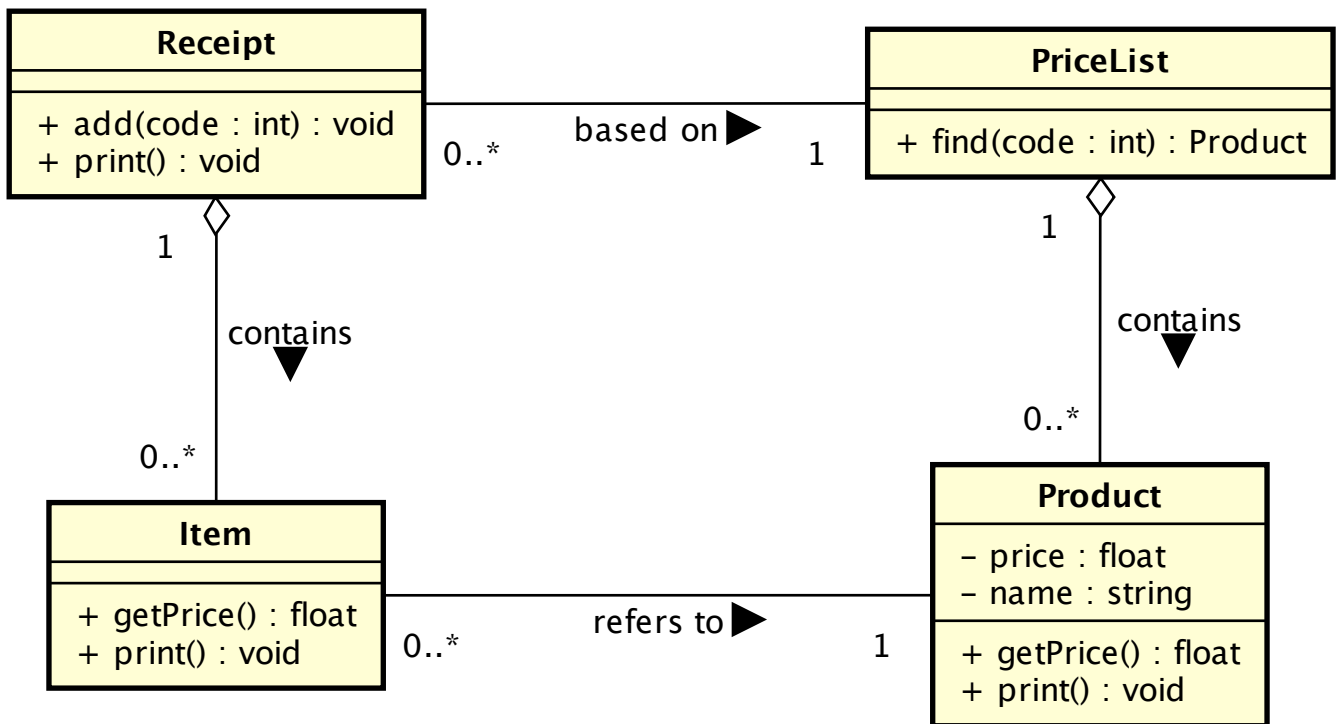


67

Example – Messages (Add)

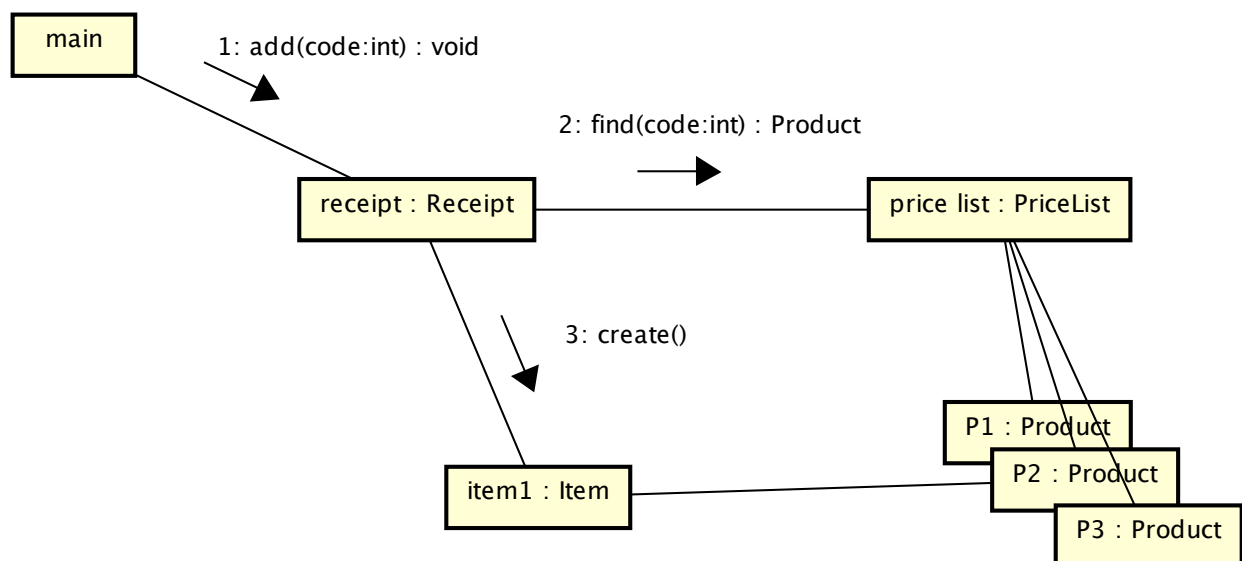

68

Example – Messages (Print)

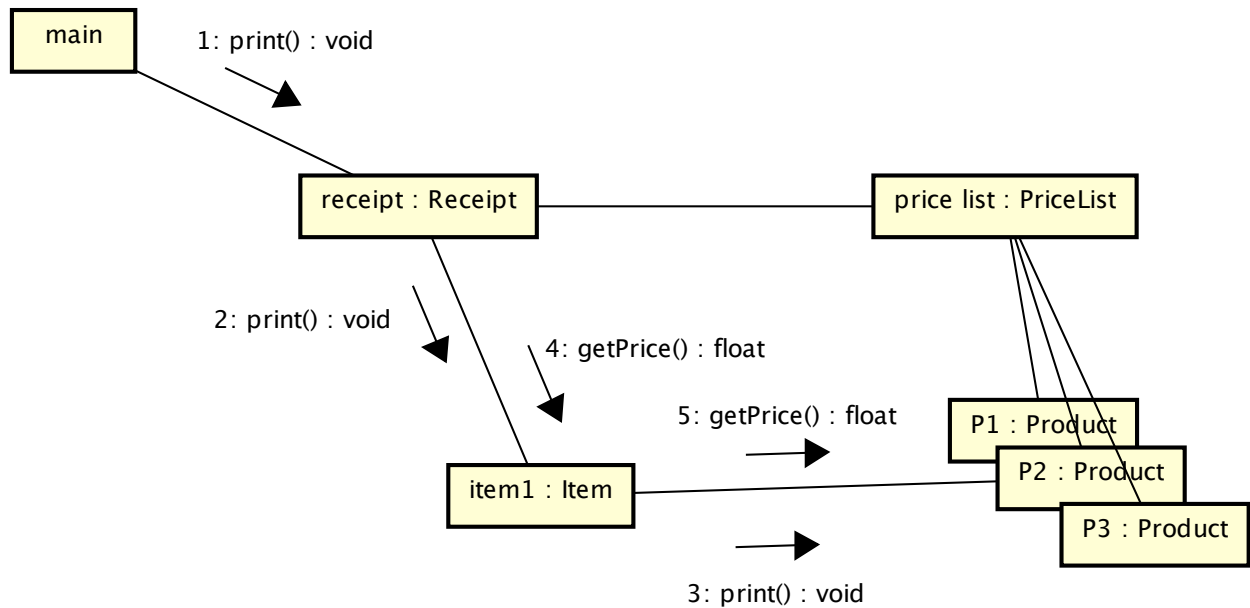

69

INHERITANCE

70


Inheritance

- A class can be a sub-type of another class
- The inheriting class contains all the methods and fields of the class it inherited from plus any methods and fields it defines
- The inheriting class can **override** the definition of existing methods by providing its own implementation
- The code of the inheriting class consists only of the changes and additions to the base class


71

Specialization / Generalization

- B *specializes* A means that
 - ♦ B has the same characteristics as A
 - Attributes
 - Participation in associations
 - ♦ B may have additional characteristics
 - ♦ B is a special case of A
 - ♦ A is a generalization of B

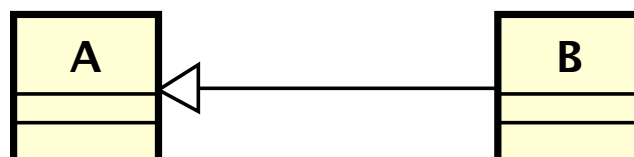


Generalization

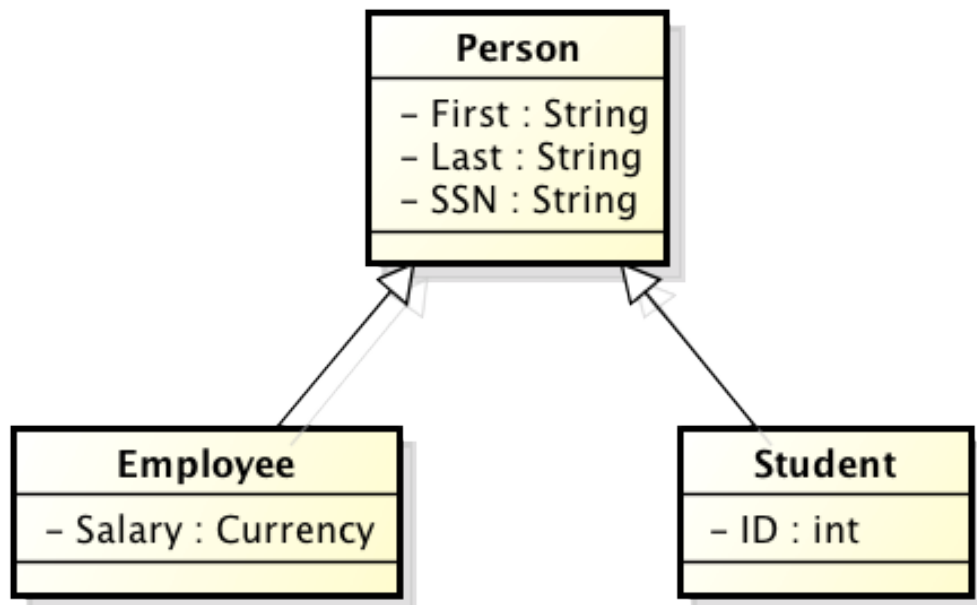

73

Set-Specialization

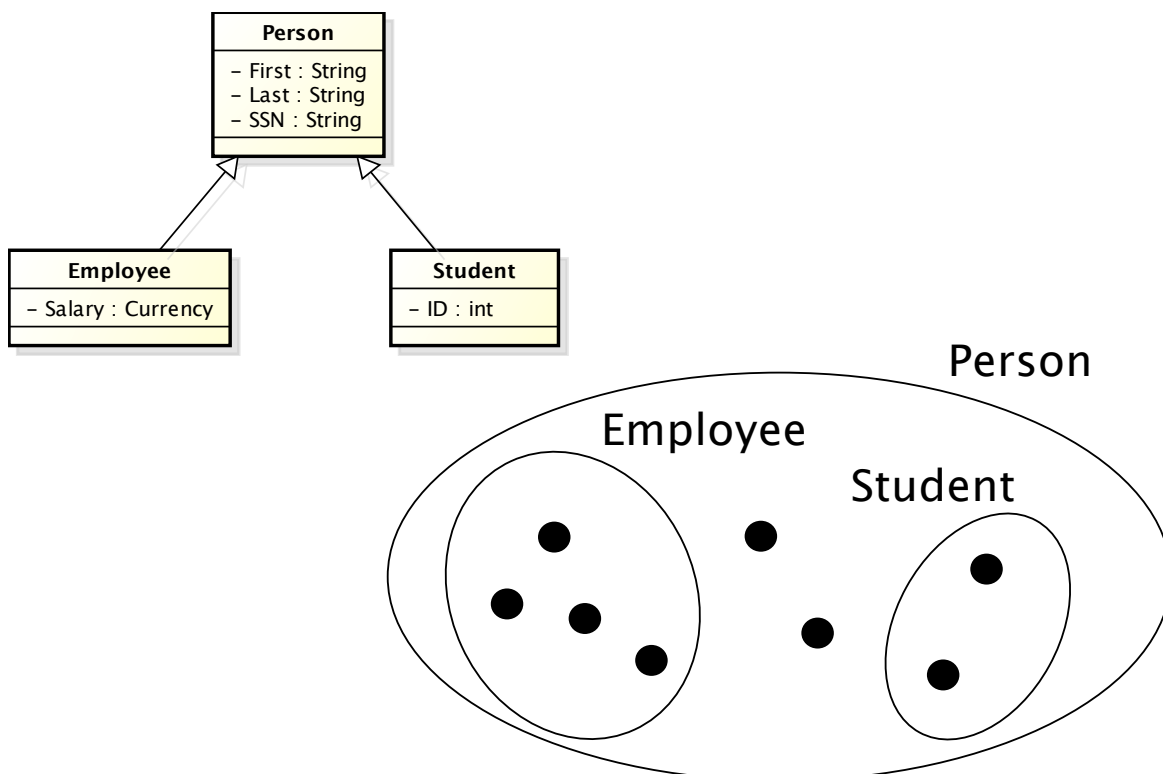

Inheritance terminology

- Class one above
 - ♦ Parent class
- Class one below
 - ♦ Child class
- Class one or more above
 - ♦ Superclass, Ancestor class, Base class
- Class one or more below
 - ♦ Subclass, Descendent class, Derived class


75

Why inheritance

- Frequently, a class is merely a modification of another class. In this way, there is minimal repetition of the same code
- Localization of code
 - ♦ Fixing a bug in the base class automatically fixes it in the subclasses
 - ♦ Adding functionality in the base class automatically adds it in the subclasses
 - ♦ Less chances of different (and inconsistent) implementations of the same operation

76

Example of inheritance tree

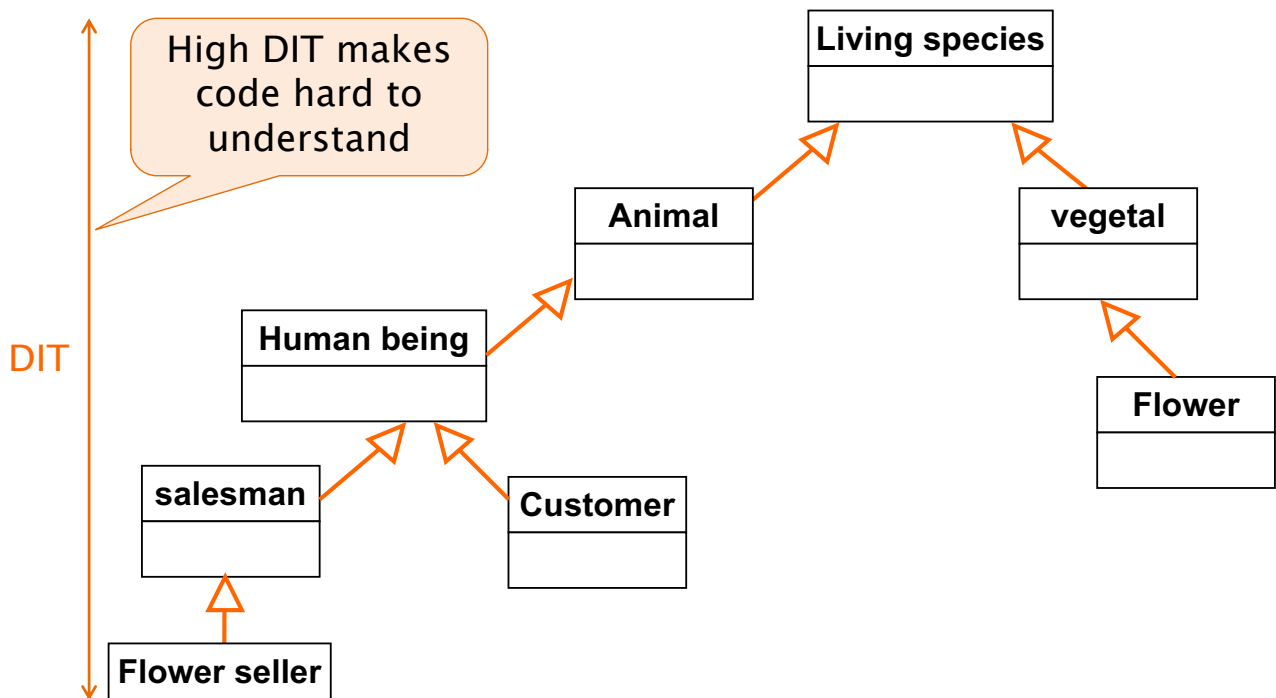


77

Twitter (simplified)


- A registered user can
 - ♦ Post a tweet
 - ♦ Follow another user
 - ♦ Reply to a tweet
 - ♦ Add a like to a tweet

78


Example

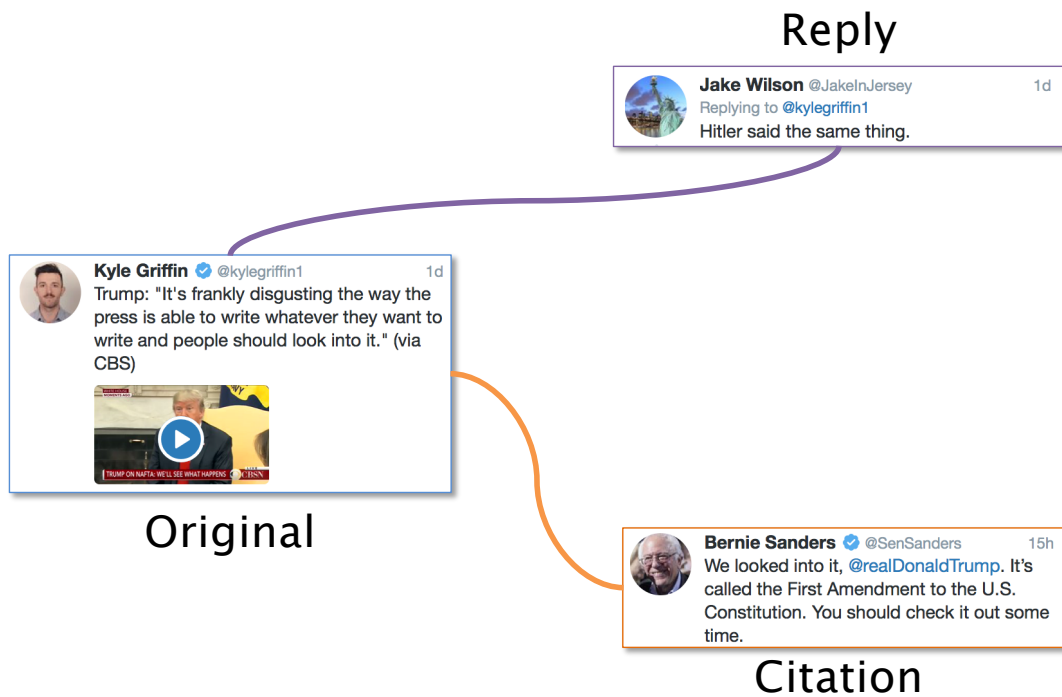


Optional Recursive Associations

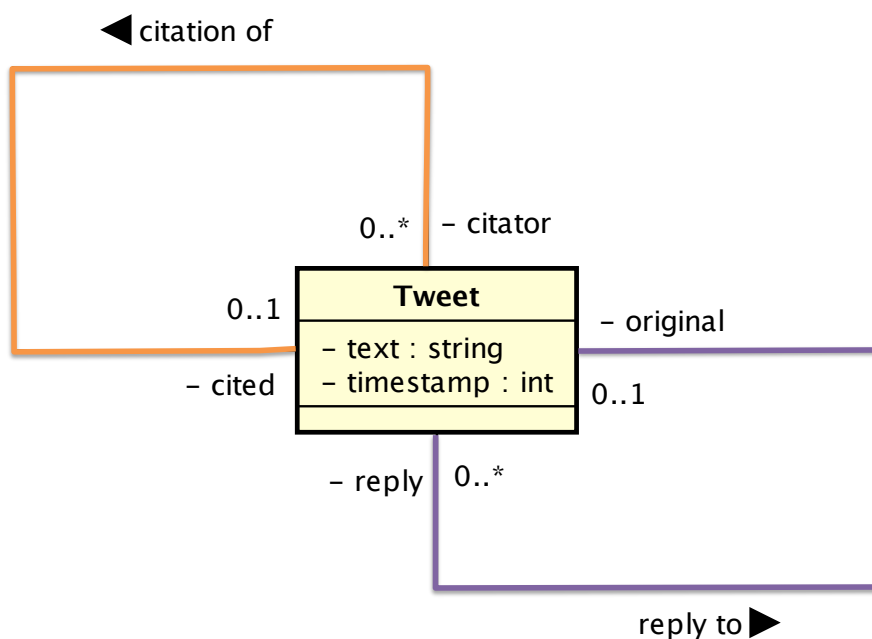


Optional Recursive Associations

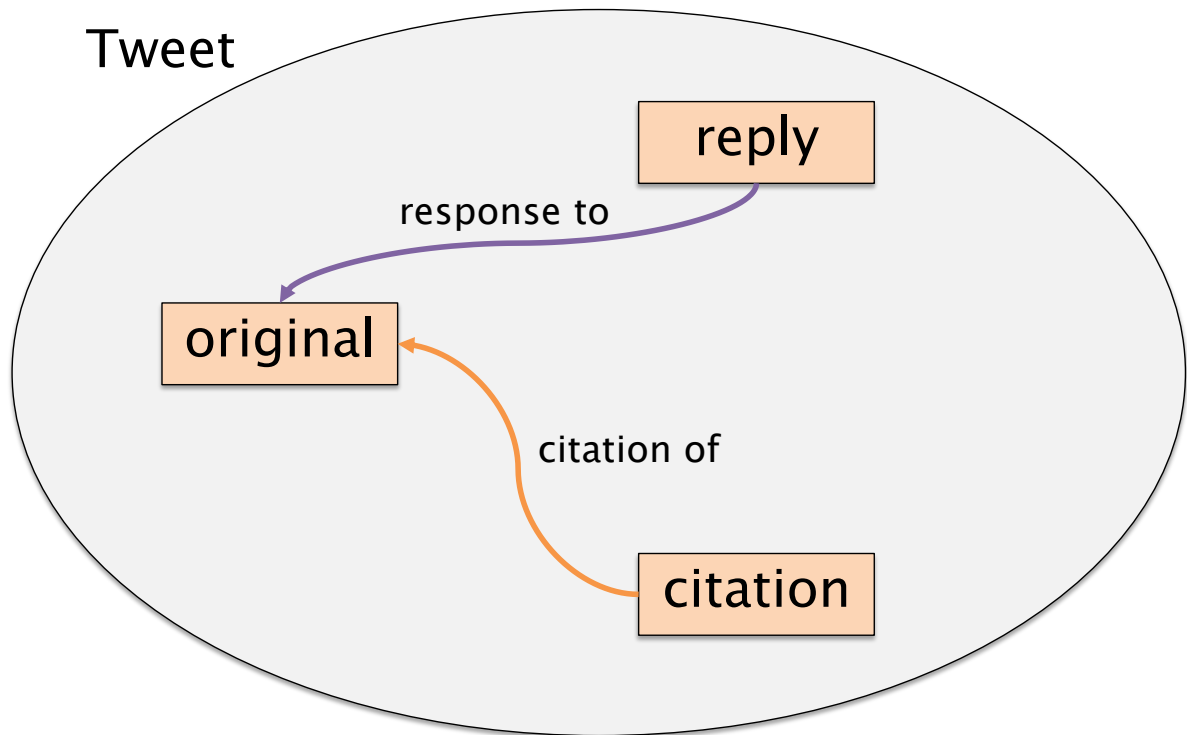


Optional Recursive Associations

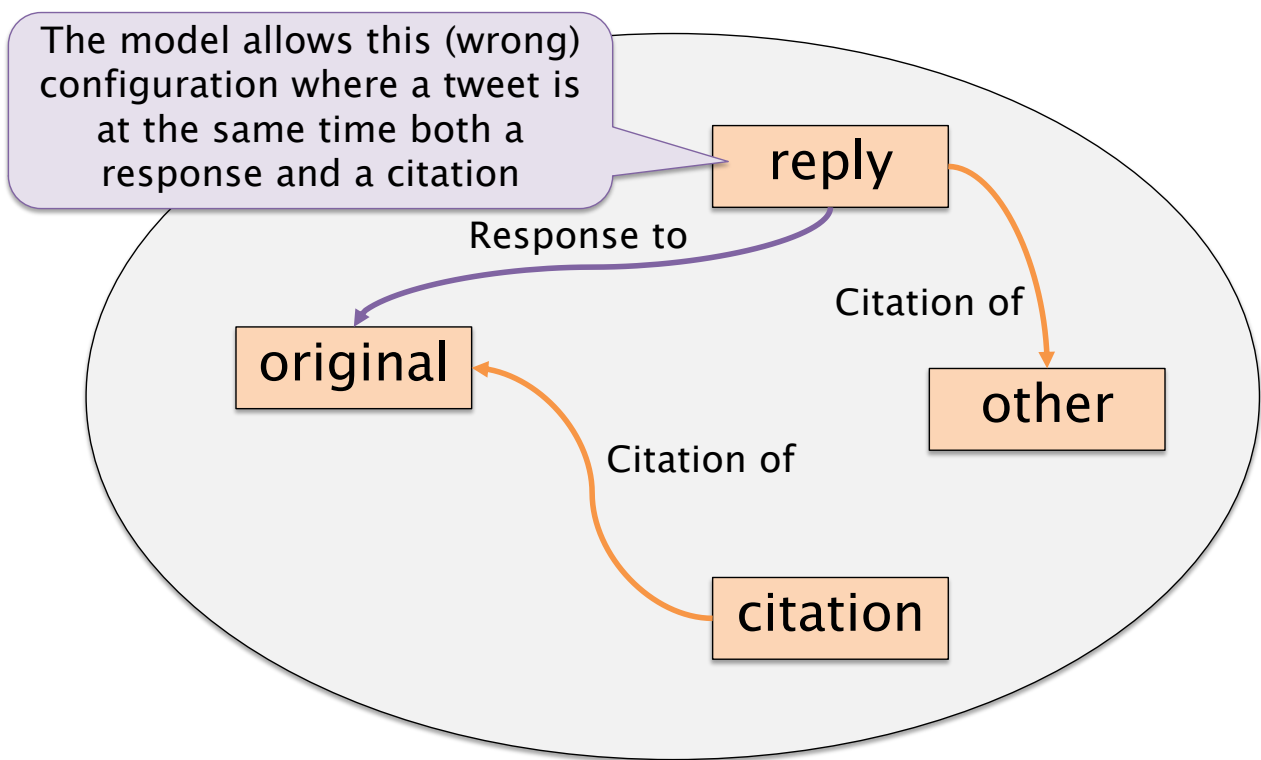


Specialization

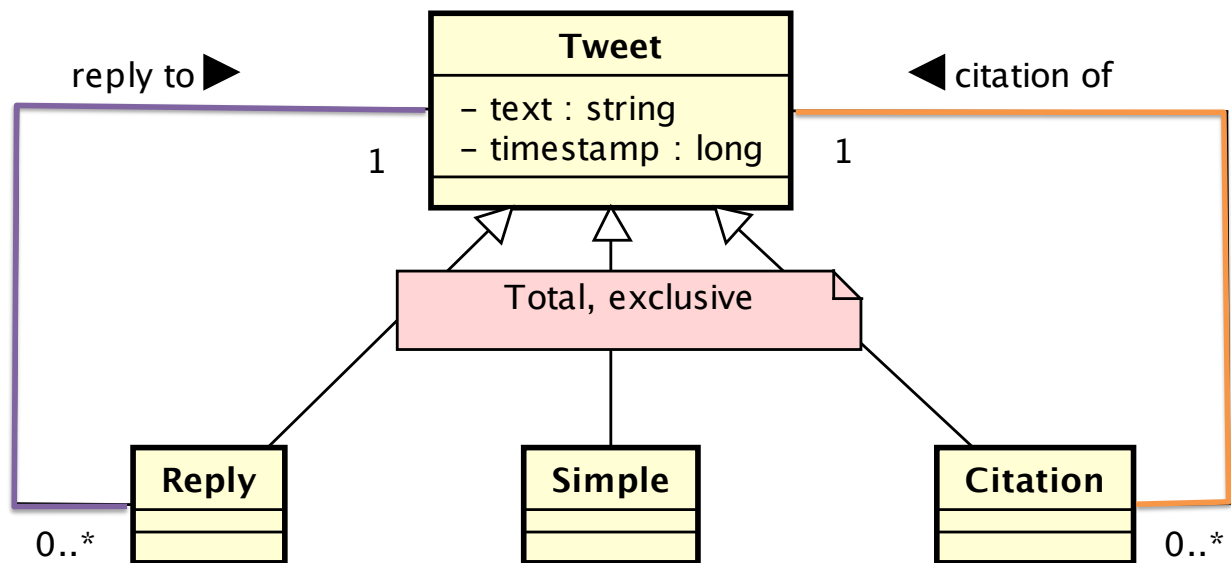


Specialization

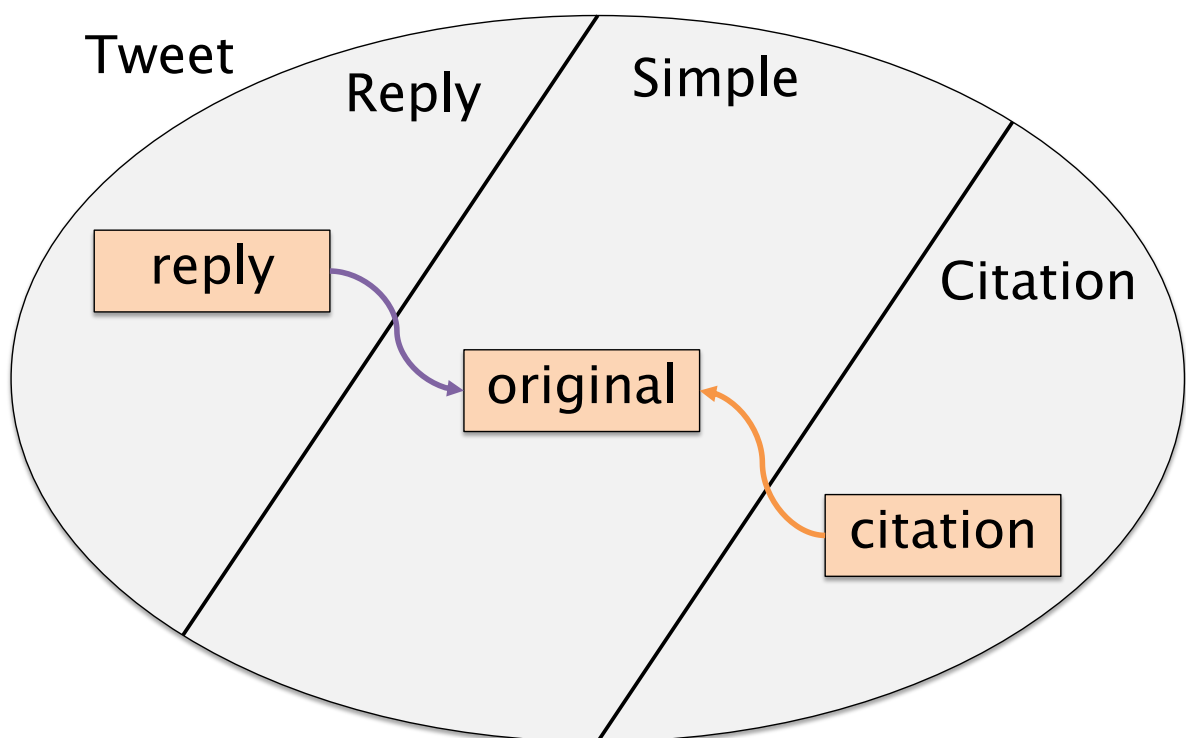

Partial Specialization

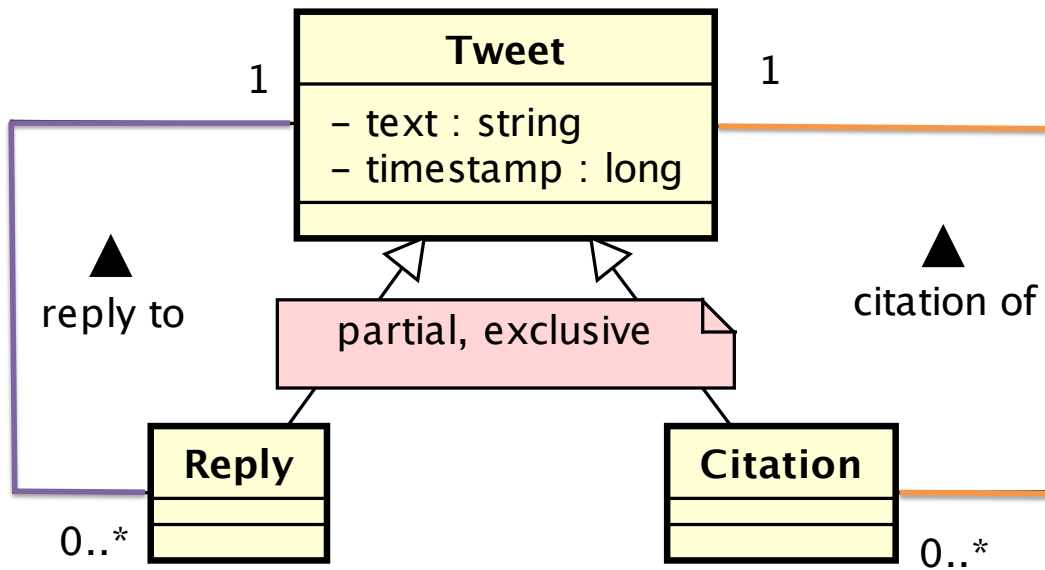

Partial Specialization

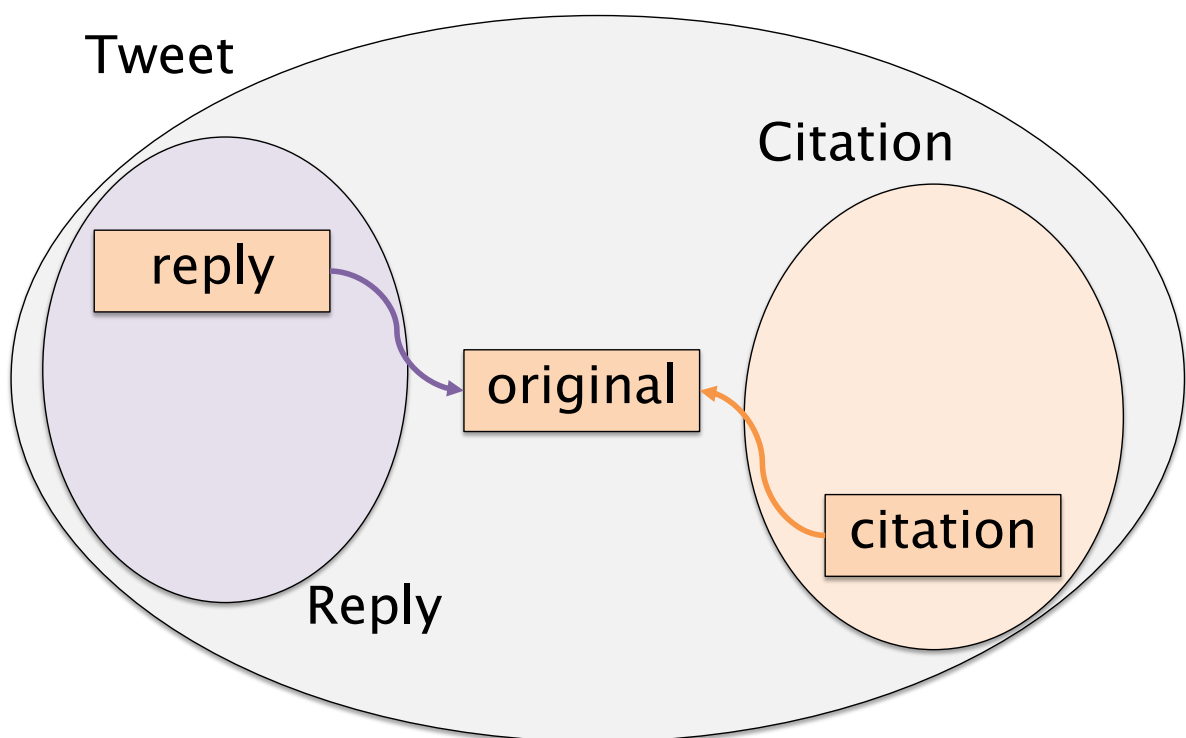

Essential guidelines (II)

- If one or more concepts are special cases of another concept, it is convenient to represent them by means of a **generalization**.
 - When distinct classes may play the same role w.r.t. an association to a given class it is common to represent this commonality by generalization
 - ♦ Inheritance includes also associations
-

Modeling strategies

- Top-down
 - ♦ Start with abstract concepts and perform successive refinements
 - Bottom-up
 - ♦ Start with detailed concepts and proceed with integrating different pieces together
 - Inside-out
 - ♦ Like bottom-up but beginning with most important concepts first
 - Hybrid
-

Model quality

- Correctness
 - ♦ No requirement is misrepresented
- Completeness
 - ♦ All requirements are represented
- Readability
 - ♦ It is easy to read and understand
- Minimality
 - ♦ There are no avoidable elements

89

References

- Fowler, M. “UML Distilled: A Brief Guide to the Standard Object Modeling Language – 3rded.”, Addison–Wesley Professional (2003)

90