

**SudoSoLVRR: A Web-based Sudoku Solver using
Multithreaded Multi-Colony Ant Optimization with Ring
and Random Communication Topologies**

CMSC 199.2 - Research in Computer Science II

John Michael E. Jabuen

2020-07618

Bachelor of Science in Computer Science

**Presented to the Faculty of the
Division of Natural Sciences and Mathematics**

**In Partial Fulfillment of the Requirements
For the Degree of
Bachelor of Science in Computer Science**

**University of the Philippines
TACLOBAN COLLEGE
Tacloban City**

May 2026

**SUDOSOLVRR: A WEB-BASED SUDOKU SOLVER
USING MULTITHREADED MULTI-COLONY ANT
OPTIMIZATION WITH RING AND RANDOM
COMMUNICATION TOPOLOGIES**

By

JOHN MICHAEL E. JABUEN

In partial fulfillment of the requirements
for the degree of
Bachelor of Science in COMPUTER SCIENCE

MAY 2026

Permission is given for the following people to have access to this research:

Available to the general public	Yes
Available only after consultation with author/adviser	No
Available only for those bound by confidentiality agreement	No

This is to certify that this research paper “**SUDOSOLVRR: A WEB-BASED SUDOKU SOLVER USING MULTITHREADED MULTI-COLONY ANT OPTIMIZATION WITH RING AND RANDOM COMMUNICATION TOPOLOGIES**”, and submitted by **JOHN MICHAEL E. JABUEN**, to fulfill the requirements for the Degree of Bachelor of Science in **COMPUTER SCIENCE** is hereby endorsed.

Research Adviser:

DR. JOHN PAUL T. YUSIONG

Panel Members:

ASST. PROF. ANNIE LYN O. YUSIONG

MR. ALLAN FRITZGERALD N. AMISTOSO

The Division of Natural Sciences and Mathematics (DNSM) accepted this research paper as partial fulfillment of the requirements for the degree of Bachelor of Science in Computer Science.

DR. ROLLY G. FUENTES
Chair, DNSM

Acknowledgements

First of all, I would like to express my gratitude to God for blessing me with strength and perseverance to complete this thesis. This would not be possible without His divine grace.

I also sincerely thank my thesis adviser, Dr. John Paul T. Yusiong, for his valuable guidance throughout this thesis journey. His expertise and standards have helped me lift the quality of my thesis and has inspired me to continue pursuing excellence in life.

To my family, thank you for understanding my ‘delay’ situation. Your constant support and encouragement are among the reasons why I was able to persevere. Special thanks to Cyramae Olojan for helping me cope up with uncertainties and giving me assistance with my application user interface.

To my swarm cluster, “swarmers”, thank you for staying even when there are times that we already felt hopeless. This would be a difficult journey if I did it alone but because of you, it became bearable.

Lastly, I want to thank myself for not giving up. I appreciate the effort to still work even when the body is already tired. This thesis will be proof of my commitment to achieve my academic goal.

Abstract

A popular logic-based combinatorial problem known as Sudoku is computationally expensive because of its interdependent constraints. From traditional solvers to heuristic approaches, although effective for smaller puzzles, face difficulties with more complex puzzles. This paper presents SudoSLVRR, a parallel multi-colony ant optimization framework as a Sudoku solver that addresses scalability limitations of the existing solvers. This framework combines constraint propagation and multi-colony ant optimization with dynamic collaborative mechanism (DCM-ACO) inside the multithreaded environment. Heterogeneous ACS and MMAS colonies are used to balance exploitation and exploration. This multi-colony ACO is executed inside each thread where threads exchange their iteration-best solution and best-so-far solution in ring and random communication topologies, respectively. The communication between threads prevents premature stagnation and promotes diversity. Experimental results on 9×9 , 16×16 , and 25×25 Sudoku puzzles show that the SudoSLVRR achieved a higher success rate (100%) and reduced runtime and iteration count by up to 93% and 97% respectively, compared to CP-ACS and CP-DCM-ACO baselines. This result shows that the communication between threads and the collaboration between colonies inside each thread allows the proposed solver to increase its solution diversity which prevents global stagnation, leading to better performance in constraint-driven problems.

Table of Contents

Acknowledgements	iv
Abstract	v
Table of Contents	vii
List of Tables	viii
List of Figures	x
1 Introduction	1
1.1 Background of the Study	3
1.2 Problem Statement	5
1.3 Aim of the Work	8
General Objective	8
Specific Objectives	8
Scope and Limitations	8
Significance of the Study	9
1.4 Theoretical and Conceptual Framework	11
2 Review of Related Literature	13
3 Methodology	18
3.1 Dataset	19
3.2 SudoSLVRR: Design and Structure	21
Constraint Propagation	21
Initialization	26
CP-DCM-ACO	27
Ring and Random Communication Topologies	46

	vii
3.3 Model Deployment Details	50
4 Results and Discussion	51
4.1 Performance Evaluation Metrics	51
4.2 Implementation Details	52
4.3 Experimental Setups	53
Experiment 1: Ablation Study	53
Experiment 2: Single-Threaded Multi-Colony ACO vs Multithreaded Multi-Colony ACO	53
Experiment 3: Without Thread Communication vs With Thread Com- munication	53
Experiment 4: Multithreaded Multi-Colony ACO vs State-of-the-Art Sudoku Solver	54
Experiment 5: Model Deployment	54
4.4 Results and Discussion	55
Experiment 1: Ablation Study	55
Experiment 2: Single-Threaded Multi-Colony ACO vs Multithreaded Multi-Colony ACO	56
Experiment 3: Without Thread Communication vs With Thread Com- munication	58
Experiment 4: Multithreaded Multi-Colony ACO vs State-of-the-Art Sudoku Solver	60
Experiment 5: Model Deployment	62
5 Conclusions and Recommendations	63
A Appendices	65
A.1 Baseline Configuration	65
A.2 Ablation Study	66
Ablation Study 1: Core ACO Parameters	66
Ablation Study 2: Multi-Colony ACO Parameters	68
Ablation Study 3: Multithread Parameters	70
Ablation Study 4: Impact of Fixed Clue Density(F%) to Solvers' Per- formance	71
Ablation Study 5: Thread Synchronization Overhead	72
References	75

List of Tables

4.1	Machine specifications	52
4.2	Best Configuration of Multithreaded Multi-colony ACO	56
4.3	Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iterations across puzzle sizes.	57
4.4	Impact of thread communication on the MT-CP-DCM-ACO performance in terms of success rate (%), average runtime (seconds), and average number of iterations across puzzle sizes.	59
4.5	Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iterations of the State-of-the-Art solver (CP-ACS) vs. CP-DCM-ACO and MT-CP-DCM-ACO across puzzle sizes.	61
A.1	Baseline Configuration	65
A.2	Summary of the impact of different values of Core ACO parameter on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.	67
A.3	Summary of the impact of Timeout values on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.	68
A.4	Summary of the impact of Multi-Colony ACO parameters on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.	68
A.5	Summary of the impact of Multithread Parameters on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.	70

A.6	Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iteration of CP-ACS, CP-DCM-ACO, and MT-CP-DCM-ACO across Fixed Percentages (F%) on 25×25 Sudoku Instances.	72
A.7	Performance comparison in terms of success rate (%), average runtime (seconds), average iteration, and average idle time of each thread per barrier entry (seconds/entry) of varying number of threads in MT-CP-DCM-ACO solver on 25×25 Sudoku instance	73

List of Figures

1.1	Backtracking Algorithm	3
1.2	Hueristic Approach	4
1.3	Swarm-Based Algorithm	5
1.4	Randomly Matched Parallel Ant Colony Optimization	5
1.5	CP-ACS of Lloyd and Amos [1]	6
1.6	Proposed Sudoku Solver	7
1.7	Theoretical and conceptual framework	11
2.1	Dynamic Collaborative Multi-colony Ant Optimization	16
3.1	General methodology overview	18
3.2	Shows different Sudoku puzzle sizes.	20
3.3	Example of a Raw Input File to its equivalent Puzzle	21
3.4	ValueSet Representation for AI Escargot	22
3.5	Before applying CP Rule 1	23
3.6	After applying CP Rule 1	23
3.7	Before applying CP Rule 2	24
3.8	After applying CP Rule 2	24
3.9	Image from left is the AI Escargot instance and the right shows the result after CP	25
3.10	Initial Pheromone Matrix for 9×9 Sudoku Puzzle	27
3.11	Ants start at random cell	28

	xi
3.12	Ants perform greedy selection 30
3.13	Ants perform roulette wheel selection when $q \geq q_0$ 30
3.14	Before applying CP Rule 1 31
3.15	After applying CP Rule 1 32
3.16	Before applying CP Rule 2 33
3.17	After applying CP Rule 2 33
3.18	Ant chooses the value 2 for cell 2 34
3.19	Finding the Best Ant 34
3.20	Ant increases the pheromone value of the value 2 for cell 2 36
3.21	BVE decreases the value of $\Delta\tau_{best}$ 37
3.22	Difference Between MMAS and ACS 38
3.23	$\Delta\tau_{max}$ and $\Delta\tau_{min}$ 39
3.24	CP-DCM-ACO Model 40
3.25	Cooperative Game Strategy 42
3.26	The Redistribution of Pheromone 43
3.27	Pheromone Fusion 44
3.28	Public Path Recommendation 46
3.29	Ring Topology and Random-matching Topology 48
3.30	Thread 0 updates pheromone levels of the values from the candidate values on cell 2 based on the received solutions from Thread 2 and 3 using equation (23) and (24). 49
3.31	Model deployment as Web-based application 50
4.1	SudoSLVRR web-based application 55
4.2	Comparison of computational efficiency (runtime in seconds and iter- ation count) between CP-DCM-ACO and MT-CP-DCM-ACO across different puzzle sizes. 58
4.3	SudoSLVRR web-based application: Experiment Mode 62
4.4	SudoSLVRR web-based application: Game Mode 62

A.1 Impact of thread count on synchronization overhead (Idle Time) . . .	73
--	----

Chapter 1

Introduction

A Sudoku puzzle is a popular logic-based game where a player should fill an $n \times n$ grid while following the rules. The rules include placing all numbers from 1 to n without repetition in each row, column, and subgrid. The size of the common puzzle used by anyone today is 9×9 which consists of a subgrid of a size 3×3 . However, there are also existing puzzles with different sizes such as 6×6 , 12×12 , 16×16 , and 25×25 . Increasing the puzzle size triggers the expansion of the search space, requiring more time in navigating through it and making exhaustive and sequential methods impractical as it suffers from exponential time increase and stagnation. The valid Sudoku solution must simultaneously satisfy multiple interdependent constraints and that is the reason why it belongs to the constraint satisfaction problem [1, 2, 3, 4].

There are already existing algorithms which efficiently solve small instances like the traditional rule-based algorithm and the backtracking algorithm. However, these algorithms often fail to find a global solution within the solution space of larger puzzles due to long execution time and premature convergence that leads to stagnation. [5]. Because of these challenges, numerous heuristic methods were introduced and developed. These new methods propose a new approach and that is guiding the process

of searching for a valid solution to promising regions of the solution space instead of trying to explore all possibilities and doing an exhaustive search. The constraint propagation is one of the methods that has gained attention from researchers because of its effectiveness. It eliminates any infeasible candidate leading to a more promising search space. [1].

As the algorithms found ways to improve in response to more complex Sudoku puzzles, metaheuristic algorithms were developed. These algorithms were designed to achieve optimal solutions through repetitive refinement. Because of this, it became powerful alternatives to existing algorithms and some researchers even combined this to existing algorithms to build a better Sudoku solver. Some examples of these algorithms are Artificial Bee Colony, Particle Swarm Optimization, Genetic Algorithm, and Ant Colony Optimization. Instead of deterministic search, their way of finding an optimal solution is through collective intelligence and feedback. The ant colony optimization algorithm is inspired from the foraging behavior of ants in the real world. It was also one of the most well-known swarm-based algorithms when it comes to solving combinatorial problems. The main feature of ACO is its pheromone-based feedback and its probabilistic exploration which makes it suitable for solving constraints-based problems like Sudoku. [6].

However, the implementation of the traditional ACO is sequential. This often raises an issue when it comes to increasing the complexity of the problem. As the complexity of the problem increases, ants are likely to have difficulty in converging to a complete solution thus leading to invalid solutions. In the context of Sudoku, increased execution time and invalid Sudoku solutions are the common performance of the ACO because of its limited exploration in the solution space. To overcome

these challenges, this research proposes a Multithreaded Multi-Colony Ant Optimization with Ring and Random Communication Topologies that adapts the constraint propagation for early removal of infeasible solutions, dynamic collaborative multi-colony and thread communication mechanism for a wider exploration in the solution space and adaptive cooperation for faster realization of a valid Sudoku solution. This proposed model is designed to be more efficient in solving large and complex Sudoku puzzles where existing Sudoku solvers often fail. This research ensures that there is balance between the exploration and exploitation mechanism through multi-level collaboration.

1.1 Background of the Study

Deterministic Approach

Historically, the deterministic approach was the first option to solve Sudoku puzzles. It mainly uses the backtracking algorithms as shown in Figure 1.1. It goes by filling cells with valid values then backtrack if it leads to invalid puzzle [7] [8] [9]. Since the search space is very large, this approach suffers from poor performance especially when it comes to hard puzzles. Since it does not know whether certain assignments leads to invalid solution, this algorithm tends to face thousands of dead-ends [3].



Figure 1.1: Backtracking Algorithm

Heuristic Approaches

To address the brute-force characteristics of the backtracking algorithm, heuristic approaches were introduced as shown in Figure 1.2. These approaches eliminate invalid values before the guessing begins such as naked and hidden singles [10] [9]. Because of this, the search space was reduced and the guessing is within the valid assignments. However when it comes to complex Sudoku, it often goes back to brute-force if there are no naked or hidden singles anymore.



Figure 1.2: Hueristic Approach

Metaheuristic Approaches

As researchers continue to address the limits of the previous algorithms, metaheuristics approaches were introduced specifically swarm-based algorithm as shown in Figure 1.3. As these approaches are designed to find a solution stochastically, they can avoid getting trapped in local optima [11]. Genetic Algorithms (GA), Simulated Annealing (SA), and Particle Swarm Optimization (PSO) are examples of these metaheuristic approaches. However, Ant Colony Optimization (ACO) gains popularity in solving constraint satisfaction problems. Dorigo [6] proposed this ACO which is inspired by foraging behaviour of real ants. The ants leave pheromone trails to paths they took. Instead of brute-force, ants, eventually, converge on a solution based on feedback [12]



Figure 1.3: Swarm-Based Algorithm

Parallel ACO

As the ACO gained popularity due to its performance, performance was being questioned because of its sequential implementation. This leads to the interest of many to explore parallelism of ACO. Pedemontal et al. [13] [14] demonstrated parallel ants where ants can construct their solution independently. In the work of Yang and Fang [15], they introduced a framework where parallel colonies of ants communicate promoting a global convergence as shown in Figure 1.4. This approach ensures that every corner of the solution space is explored.

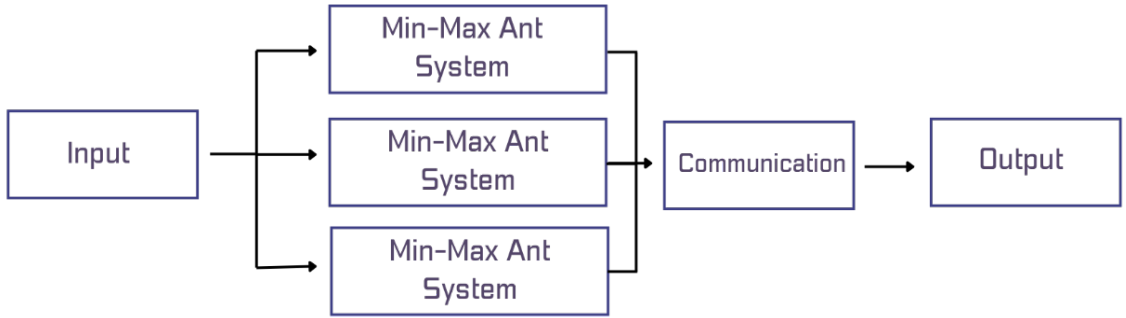


Figure 1.4: Randomly Matched Parallel Ant Colony Optimization

1.2 Problem Statement

Solving Sudoku puzzles, especially larger puzzle sizes, is very expensive when it comes to computational cost. It is because each cell must satisfy interdependent constraints.

Existing heuristic and metaheuristic algorithms face challenges such as increased runtime, premature convergence that leads to stagnation, and reduced reliability when applied to large and complex Sudoku puzzles. Figure 1.5 shows integration of CP and ACS as Sudoku solver. However, single-colony ACS implementations are efficient for smaller puzzles but struggle with larger instances due to aggressive exploitation of ants resulting in limited diversity and pheromone stagnation. It is because the pheromone intensifies often only on the selected paths leading to stagnation and making the search process stuck on a certain region of the search space [6, 1].




Figure 1.5: CP-ACS of Lloyd and Amos [1]

Some approaches use multi-colony models instead of relying to a single-colony. The Dynamic Collaborative Multi-Colony ACO (DCM-ACO) framework where colonies exchange pheromone information based on their performance [16] is applied to Travelling Salesman Problem (TSP). But the periodic communication between colonies often results in early convergence thus reducing diversity when introduced to larger and more complex Sudoku puzzles.

Similarly, to address the sequential process of the ACO, parallel implementation was developed. However, it was applied to travelling salesman problem (TSP). In the work of Randall and Lewis [14], it proposes a master-slave parallelization in which the master processor is the one responsible for collecting, sorting, and distribution of solutions from and to the slave processors. This framework gives heavy load to the master processor which in turn results in high computational time. The process of solving

Sudoku puzzles is computationally expensive because each single cell in the grid has to satisfy many simultaneous constraints. Even though heuristic and metaheuristic algorithms have successfully improved solution efficiency, the current implementations still face significant challenges regarding scalability, convergence speed, and workload balance.

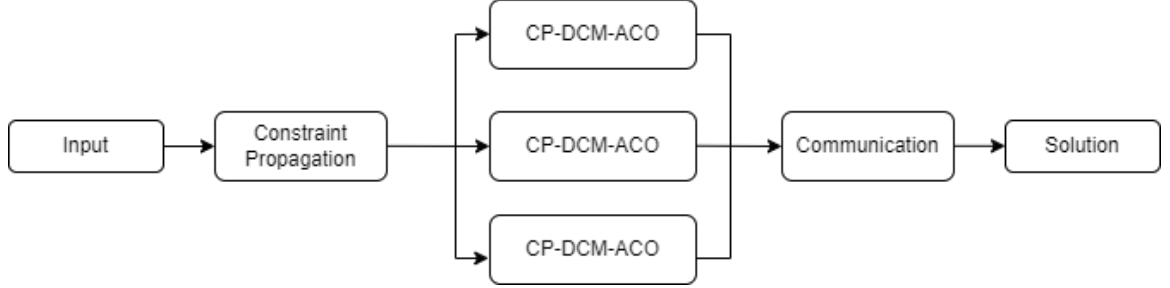


Figure 1.6: Proposed Sudoku Solver

This research develops a multi-threaded multi-colony ant optimization with ring and random communication topologies to address these challenges. Furthermore, this study fills the gap of extending the RMACO, who uses a single colony per processor, into a collaborative multi-colony ant optimization for each processor. This framework, originally applied to TSP domain, is used in the domain of constraint satisfaction problem specifically Sudoku. The model combines the constraint propagation which removes infeasible solutions, the DCM-ACO for exchanging pheromone information between colonies, and communication topologies adapted from RMACO between threads to maintain diversity as shown in Figure 1.6. The model is designed to handle even larger and more complex Sudoku puzzles.

1.3 Aim of the Work

General Objective

This study aims to develop and deploy a web-based Sudoku solver that uses a multi-threaded multi-colony ant optimization with ring and random communication topologies.

Specific Objectives

1. Implement multiple multi-colony ant optimization (CP-DCM-ACO) solvers running concurrently in separate threads with ring and random communication topologies.
2. Perform an ablation study to evaluate the impact of the different combinations of parameters on success rate, execution runtime, and convergence behavior.
3. Perform state-of-the-art comparative analysis between the proposed Sudoku solver and existing Sudoku-solving algorithms, including the baseline, CP-DCM-ACO, based on success rate, average completion time, and average number of iterations it takes to generate a solution.
4. Deploy a web-based application that will enable users to generate their own Sudoku puzzles and find solutions using the proposed multithreaded Sudoku solver.

Scope and Limitations

This research is focused on the design and performance of the proposed multi-threaded multi-colony ant optimization with ring and random communication topologies for

solving a logic-based combinatorial problem, specifically Sudoku. The base solver of the proposed model is CP-DCM-ACO which is run by multiple threads concurrently. Each thread acts like an independent solver but communicates with other threads periodically. The proposed model is compared with existing Sudoku solvers and its performance is evaluated based on solution success rate, average completion time, standard deviation, and the average number of iterations to generate a solution. Different sizes of Sudoku are used like 6×6 , 9×9 , 12×12 , 16×16 , and 25×25 to show the robustness and the scalability of the model in increasing complexity and difficulty levels. A web-based application will be deployed allowing users to input their own Sudoku puzzles which will be solved by the proposed model thus creating an interactive environment.

Although there are other combinatorial problems, this study is limited to Sudoku puzzles only. However, this proposed model might be implemented to solve other combinatorial problems but such notion is beyond the scope of this research. Furthermore, the implementation of the proposed model is within the environment of multi-core CPU and does not wish to use GPU-based architectures.

Significance of the Study

The proposed multithreaded multi-colony ant optimization with ring and random communication topologies provides a significant contribution to the field of constraint-based optimization and enhancement of metaheuristics algorithms. Theoretically, this research improves the base model which is the CP-DCM-ACO by introducing a multi-thread with inter-thread collaboration framework allowing each independent instance of a solver to exchange valuable information. This helps improve the scalability of the model as it balances the exploration and exploitation mechanism without centralized

control.

The integration of constraint propagation, dynamic collaborative multi-colony ant, and collaboration between threads contributes to a paradigm of efficient communication in shared-memory environments. This can provide deeper understanding on further optimization of swarm-based algorithms in modern multi-core processors. The current results can be a basis for future contribution to parallel metaheuristics, specifically swarm-based algorithms and also to collaborative multi-agent frameworks. In practical terms, this proposed model contributes to the need for a faster and more reliable framework for solving combinatorial problems. Sudoku, as the representative of the logic-based combinatorial problems, provides clear indication about how the proposed model handles complex and interdependent constraints.

Overall, this study carries significance on the development of metaheuristic algorithms in terms of efficiency and adaptability. The proposed framework not only provides a clear demonstration of how the cooperation between threads in a multi-threading environment can be used to solve real-world constraint-driven problems but also expands the boundaries of swarm-based optimization algorithms.

1.4 Theoretical and Conceptual Framework

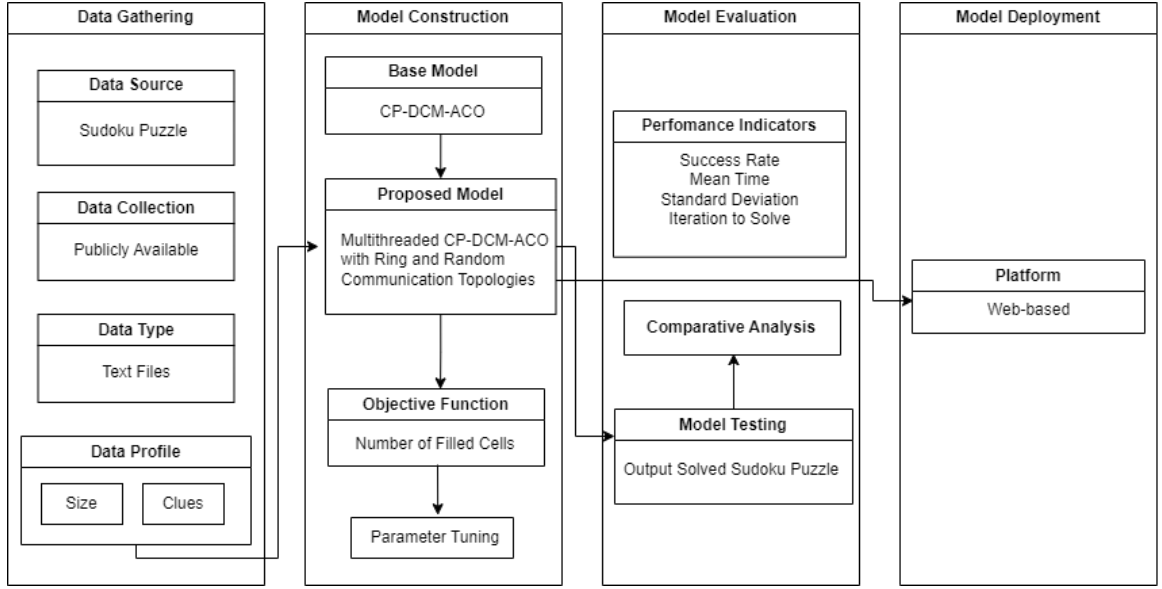


Figure 1.7: Theoretical and conceptual framework

Figure 1.7 shows the Theoretical and Conceptual Framework which follows the general approach of the study. The theoretical foundation of this study is based on the integration of the constraint propagation, dynamic collaborative multi-colony ant optimization, and the communication designed for multi-thread environments. Sudoku puzzles used in this study are publicly available and stored in text format. The Sudoku puzzles are in different sizes with different numbers of clues in it which determine its difficulty. These collected datasets will be the input for the model.

First, the constraint propagation is the first component that receives the input. It eliminates infeasible values for cells in the Sudoku puzzle in order to reduce the search space and remove invalid solutions. The base model which is the CP-DCM-ACO then receives the output from the initial pass of the constraint propagation. Different colonies here share pheromone information based on their performance.

The multithreaded framework allows multiple base models, CP-DCM-ACO, to run in multiple threads separately. The communication between threads enables sharing of valuable information between threads to prevent stagnation and increase diversity. The number of correctly filled cells is what defines the objective function in this proposed model.

To evaluate the performance of the proposed model, performance metrics are declared such as solution success rate, average completion time, standard deviation, and average number of iterations to generate a valid Sudoku solution. These performance metrics are also applied to other Sudoku solvers including the base model, CP-DCM-ACO, to have a clear comparison between the proposed model and the existing Sudoku solvers. Lastly, the study deploys the proposed model as a web application allowing user interaction and showcasing the proposed model's performance and functionality.

Chapter 2

Review of Related Literature

The Sudoku has become the most common benchmark for evaluating existing algorithms. It is mainly because the Sudoku puzzle has its logical constraints and its difficulty is proportional to its size. As mentioned earlier, traditional algorithms used in solving Sudoku puzzles are based on constraint satisfaction and backtracking. These algorithms do exhaustive search and tend to try all possible assignments to satisfy the rule of Sudoku where each number should be unique in each row, column, and subgrid. Though efficient when used to solve for smaller puzzles, these algorithms suffer from high computation time for larger Sudoku puzzles such as 16 x 16 and 25 x 25. [17]. According to Pillay [18], the early methods uses brute force which is not effective in difficult puzzles and it has high execution time.

In the work of Knuth [19], Sudoku was treated as an exact cover problem and proposed a method named Dancing Links (DLX) that utilizes linked lists in performing backtracking. Norvig [7] proposed a recursive backtracking but he added constraint propagation as complement to backtracking. This constraint propagation eliminates infeasible numbers based on row, column, and subgrid constraints. Barták [20] mentioned that constraint propagation is a system that solves problem

by satisfying constraints and it was used on operations research like optimization problems. Constraint propagation is similar to work of Crook [10] and Pillay [18] which removes invalid numbers by mimicking human intuition before the guessing starts.

Unlike exact solver, evolutionary and swarm-based algorithms moves candidate solution to global optimum. Mantere and Koljonen [11] studied the effectiveness of applying genetic crossover and mutation in satisfying the Sudoku constraints. In the work of Moraglio et al. [21], they used product geometric crossovers to derive with new geometric crossovers to improve performance than mutations alone. Moraglio et al. [22] applied geometric crossover mechanism to particle swarm optimization creating a variant (GPSO) which allows swarms to navigate solution space. Pacurib et.al [23] utilized other swarm variant and that is the Artificial Bee Colony (ABC). This algorithm simulates the foraging behaviour of honey bees [24]. However, these approaches still has limitations and still suffers from slow convergence and high execution time. Though ABC showed potential in solving smaller Sudoku puzzles by mimicking foraging behaviour [23], it struggles on larger and more complex Sudoku puzzles. On the other hand, another swarm variant (ACO), because of its search process that is guided by pheromone levels, was more adaptable thereby low execution time and fast convergence was obtained. Ant Colony Optimization, was used by Solnon [25] in solving general constraint satisfaction problem. ACO constructs a solution by keeping track and laying trails of pheromone [25, 12, 1]. In the work of Baydogmus [26], they examined the probability selection of ants and found out that Rank Based Selection provides faster results when solving Sudoku.

The development of constraint propagation and its application as supplements

to existing solvers was an advance step to efficiency in solving logic-based problems. Its performance contributes to the efficiency of the solver as it reduces the number of candidate solutions by removing infeasible solutions. From the paper of Lloyd and Amos [1], the constraint propagation (CP) was embedded into the ant colony optimization (ACO) algorithm. ACO is a swarm-based algorithm wherein each ant constructs a solution guided by the pheromone level and probabilistic exploration. In the work of Lloyd and Amos [1], CP removes infeasible assignments from certain cells in the Sudoku Puzzle making ACO focus on creating feasible solutions. This approach was able to reduce execution time and has proven to be more scalable than backtracking.

To balance exploration and exploitation of the ACO, multi-colony ant optimization emerges. In the work of Soh et al. [27], they implemented multiple independent ACS colonies and communicate through a shared global pheromone matrix. Xue et al. [28], divided their colonies into two: core-ant colony and general-ant colonies. Ants in general ants wait for the order given by core ant. These first two multi-colony ant uses a homongeneous colony and does not promote true diversity. In the work Zhao et al. [29] they utilized independent ACS and MMAS colony communicating with one another by combining the route path taken by ants in each colony. Similarly, Dynamic Collaborative Multi-colony Ant Optimization (DCM-ACO) was proposed by Mo et al. [16] utilizing ACS and MMAS colonies. This balances the exploitation and exploration as ACS is more aggressive and MMAS is known for its exploratory charateristics. Though DCM-ACO framework only runs in a single processor, the pheromone sharing of multiple colonies based on the performance of each colony still allows diversity.



Figure 2.1: Dynamic Collaborative Multi-colony Ant Optimization

As researchers try to find a way to make the performance better, the parallelization of swarm-based algorithms were introduced and developed. One of the parallelization techniques is the Parallel Independent Runs (PIR) which runs a certain number of swarm-based algorithm instances independently in parallel. There is no communication between each solver instance and so, no information is being shared, which leads to duplicate visits on a certain region of the solution space [15]. There is another parallelization technique named Partially Asynchronous Parallel Implementation (PAPI) that was used as an improvement of ACO. However, the synchronization overhead occurs which means additional execution time. In the work of Yang and Fang [15], they developed a stochastic communication between processors where each processor is a colony of the Max-Min Ant System. The colony in each processor sends and receives a solution from the best solution of their neighboring processor and randomly chosen processor. This framework allows diversity thereby avoiding premature convergence.

Manyam et al. [17] concluded, in their comparative studies, swarm-based algorithms outperforms backtracking especially when it comes to larger and complex Sudoku puzzles in terms of computation time. Existing variants of ACO still struggle when it comes to scalability and some of its parallel implementations still face challenges when it comes to efficiency in communication. This research proposes

a Collaborative Multithreaded Multi-colony Ant Optimization that integrates constraint propagation, inter-colony communication, and collaborative mechanism between threads for solving large and complex Sudoku puzzles.

Chapter 3

Methodology

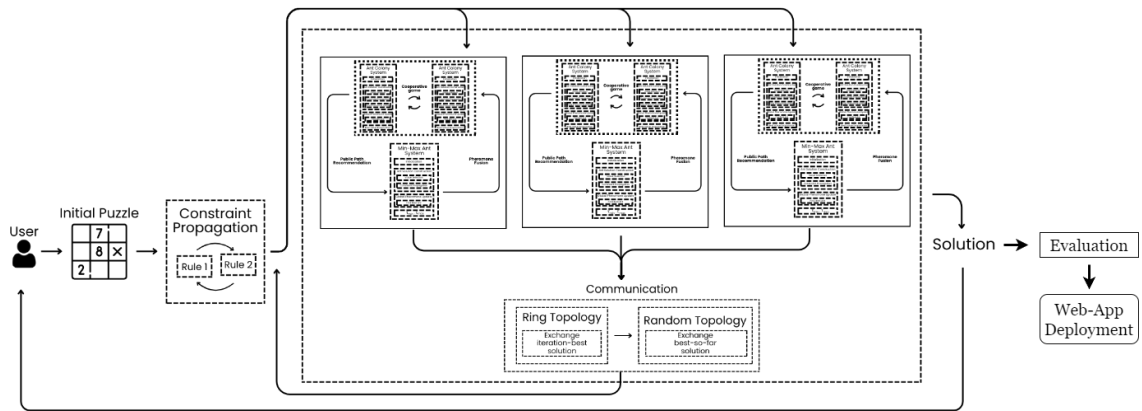


Figure 3.1: General methodology overview

Figure 3.1 shows the general overview of the methodology from data gathering to model deployment. Inputting the Sudoku puzzles retrieved from publicly available dataset with different sizes and number of clues into the constraint propagation defines the initial step of the process. Constraint propagation eliminates infeasible assignments in the puzzle, reducing the search space and improving the efficiency of the optimization phase by preventing the ants from exploring regions of the search space that contain invalid solutions. After that, the proposed model, collaborative

multithreaded multi-colony ant optimization, receives the refined puzzle. The collaborative mechanism between threads is periodically activated to enhance the search process for a valid solution. The execution is terminated when any thread successfully generates a valid Sudoku solution. The proposed model is then evaluated based on performance metrics namely solution success rate, average completion time, standard deviation, and average number of cycles.

3.1 Dataset

The study used publicly available 9×9 Sudoku puzzles retrieved from The New Sudoku Players' Forum (<http://forum.enjoysudoku.com/the-hardest-sudokus-new-thread-t6539.html>) and 16×16 Sudoku datasets from an open-source Github repository (<https://github.com/goomii17/16X16-Sudoku-Dataset>) to ensure reproducibility. For large 25×25 grids, Sudoku instances of this size were obtained from the work of Lloyd and Amos [1]. The baseline solver (CP-ACS) is then used to solve these puzzles and selected the 100 most difficult instances for the final benchmark instances. The selection was based on the computational effort and solving time of the solver. The final benchmark dataset is composed of 300 Sudoku instances which is partitioned into 100 selected hard puzzles for each puzzle size, providing diverse puzzle complexity to evaluate the solver's scalability and adaptability.

All these Sudoku puzzles are stored in a text file that includes the position of the clues. The ratio between the number of clues and the puzzle size defines the complexity

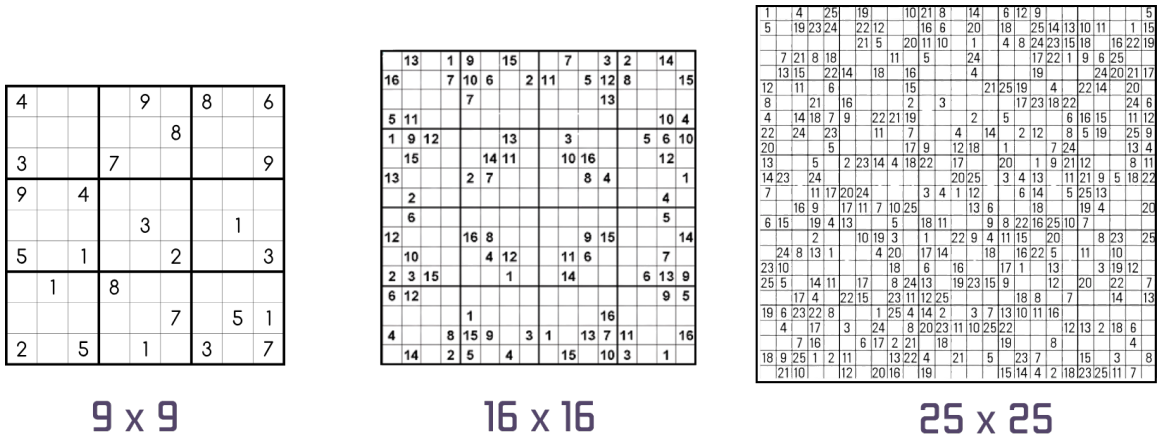


Figure 3.2: Shows different Sudoku puzzle sizes.

File Format

The Sudoku instances are stored in text file with a specific layout. The first integer found in the first line of the input text file refers to the size of the subgrid from the puzzle. It is the order of the puzzle ($N = \text{order}^2$)

- “3” - refers to a 9×9 Sudoku puzzle.
- “4” - refers to a 16×16 Sudoku puzzle.
- “5” - refers to a 25×25 Sudoku puzzle.

The second integer found in the second line of the input text file is just a placeholder. It is not utilized by the solver. Lastly, the integers found starting from the third line refers to the puzzle itself. It is a mixture of positive numbers from 0 to N and -1 as shown in Figure 3.3. Empty cells are represented by -1 .

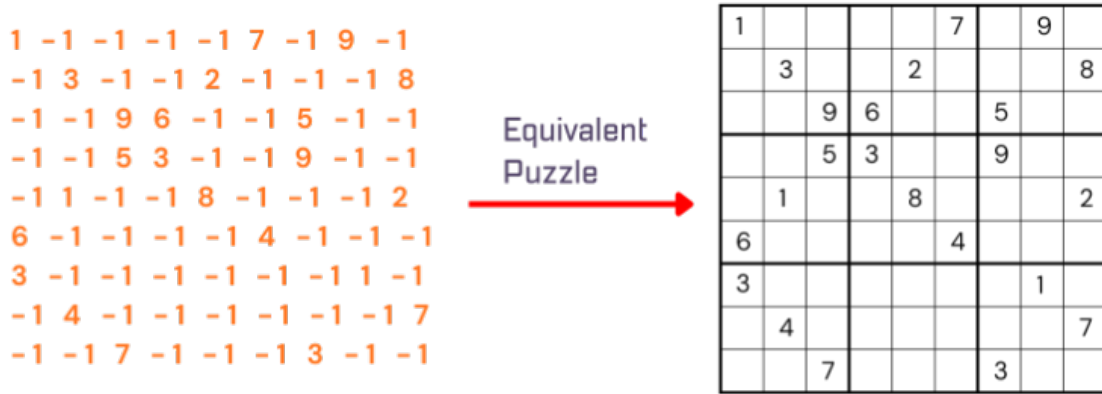


Figure 3.3: Example of a Raw Input File to its equivalent Puzzle

3.2 SudoSLVRR: Design and Structure

Constraint Propagation

The constraint propagation (CP) is the one that acts like a preprocessing step of the proposed multithreaded multi-colony ant optimization model with ring and random communication topologies. It narrows down the search space by removing infeasible cell-digit assignments, thereby creating a refined starting search space and minimizing computational effort for the optimization phase. In the context of Sudoku, rules are established and should be followed. Each cell must contain only one digit while satisfying these three simultaneous constraints:

1. **Row Constraint** - Each number from 1 to n must occur exactly once in every row.
2. **Column Constraint** - Each number from 1 to n must occur exactly once in every column.

3. **Subgrid Constraint** - Each number from 1 to n must occur exactly once within each subgrid or region.

It is the constraint propagation who makes sure that these three constraints are satisfied. Initially, CP assumes all the numbers from 1 to n are possible for every empty cell as shown in Figure 3.4. As we all know, the Sudoku puzzle has clues before it was even fed to CP. For every cell in the puzzle, it contains candidate values which is a set of values that is possible to be assigned in the cell.

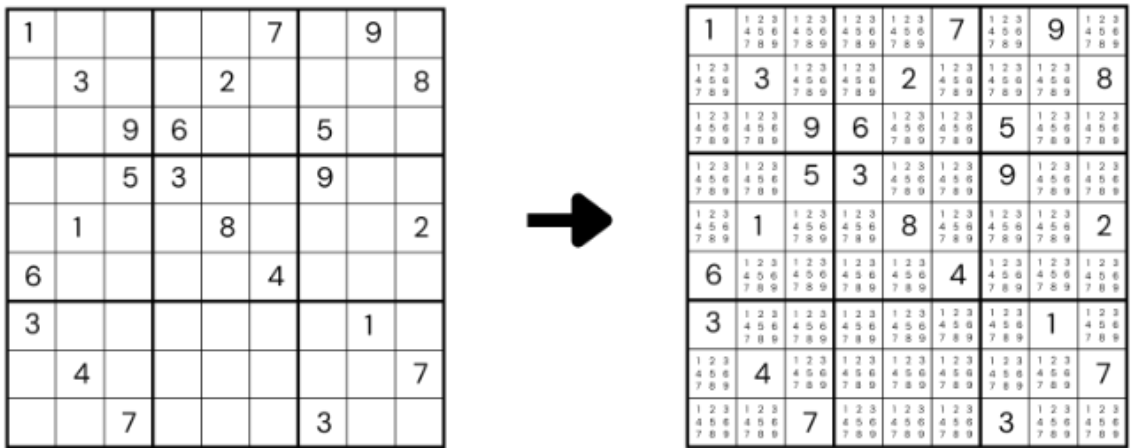


Figure 3.4: ValueSet Representation for AI Escargot

In removing invalid assignments, CP implements two rules. In rule 1, CP checks every cell and its peers (other cells that reside in the same row, column, and subgrid). CP removes the values from the candidate values that are already fixed in the cell's peers as shown in Figures 3.5 and 3.6. It is done by having two sets where one contains all the candidate values for the checked cell and the other contains the union of all the values that are already fixed in that cell's peers. Then it uses set difference to remove invalid assignments for the checked cell.

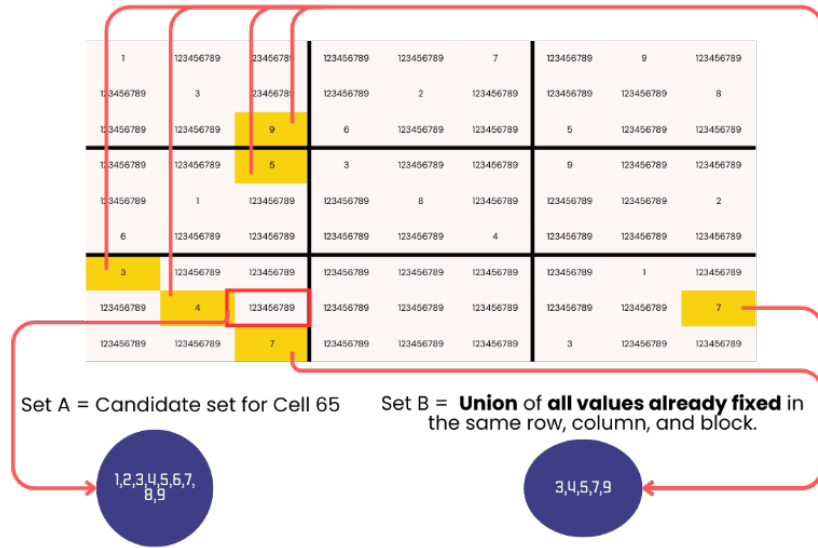


Figure 3.5: Before applying CP Rule 1

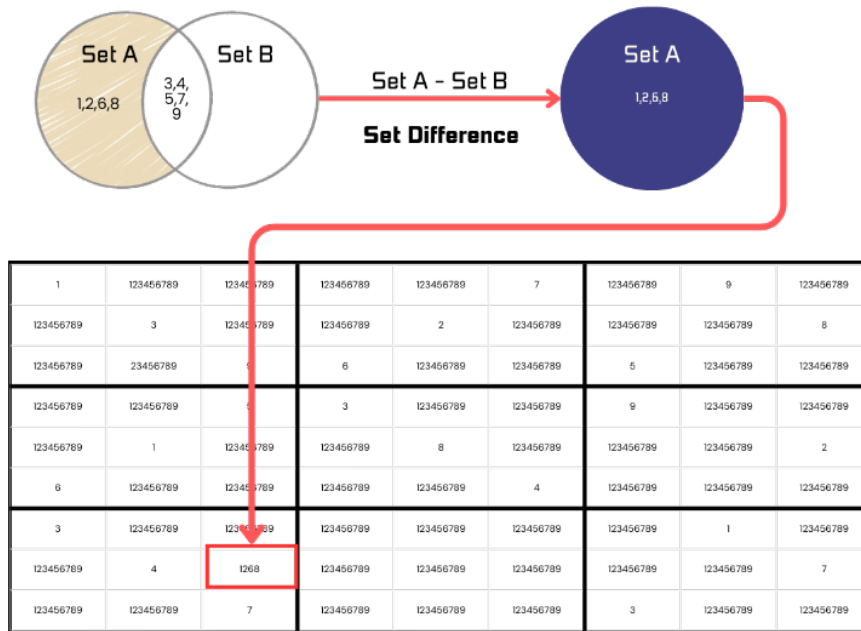


Figure 3.6: After applying CP Rule 1

The second rule being implemented by the CP is often called as **hidden single elimination**.

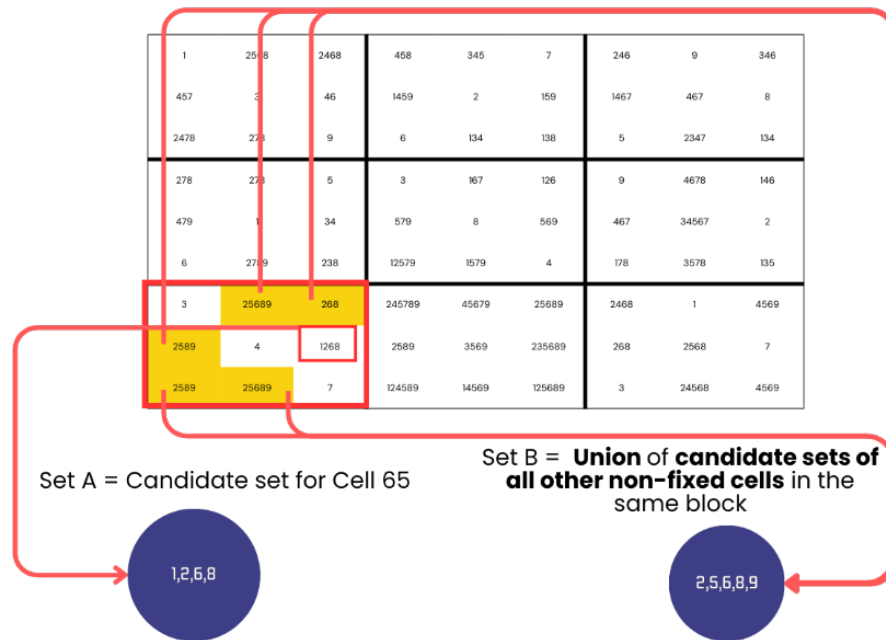


Figure 3.7: Before applying CP Rule 2

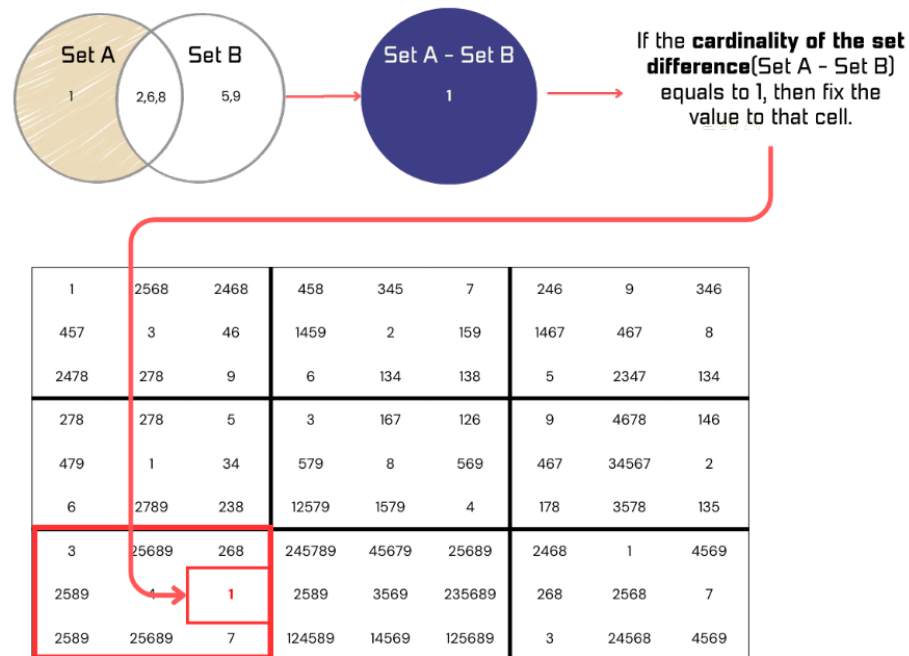


Figure 3.8: After applying CP Rule 2

When there is a candidate value that can go only to one cell after the CP applied the row, column, and subgrid constraints, then that cell is known to have a hidden single as shown in Figure 3.8. This is done by having two sets where one contains all the candidate values for the checked cells while the other one contains the union of all the candidate values found from the checked cell's peers. If the cardinality of the set difference equals to 1, then CP will immediately fix the hidden single value to that cell even though the checked cell has other candidate values.

This process of elimination of values is repeated until no further logical deductions can be made. The output from the CP is shown in Figure 3.9. The base solver of this study, CP-DCM-ACO, which will be discussed in the next section, only focuses on feasible solutions thereby avoiding any infeasible solutions. Because of this, optimization will have to focus on finding valid solutions thus reducing computational time and the number of cycles it needs.

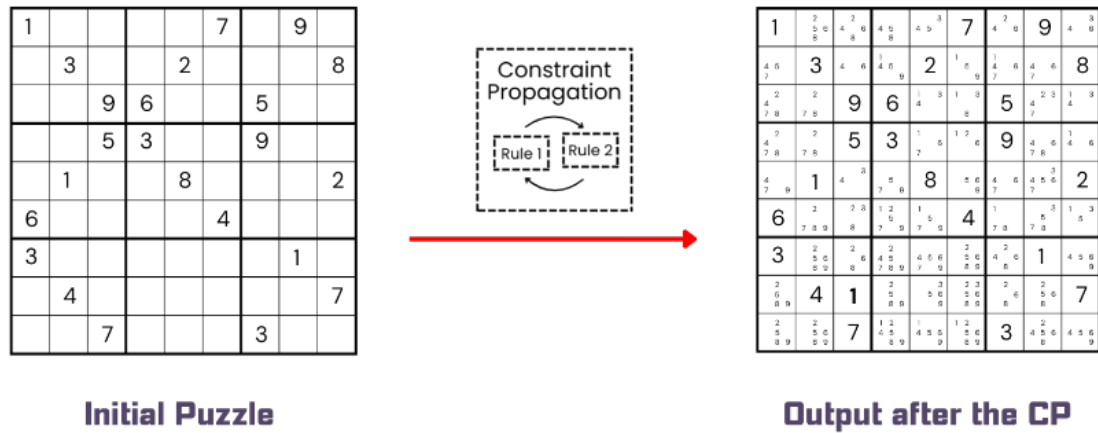


Figure 3.9: Image from left is the AI Escargot instance and the right shows the result after CP

Initialization

The proposed framework starts with the initialization phase where necessary variables should be set before any construction of solution begins. These variables are the necessary components as it affects the overall performance of the solver.

1. **Number of Threads** - This includes the threads setup and its number. Threads are the ones that hold the main solver in this framework.
2. **stopFlag** - This shared boolean flag is very important in terminating all the independent threads from working. When a solution is found from any of the threads or time limit is already exhausted, this flag will be set to true signaling all threads to stop.
3. **Communication Interval** - This is a parameter for multithreading that dictates when the threads should communicate. Adapted from [15], the interval is a non-fixed pattern as there is a long interval and a short interval.

As mentioned earlier, threads contain the main solver for the Sudoku Problem. As soon as the initialization of threads are done, the initialization of the necessary components of the main solver is executed.

1. **Colonies Initialization** - ACS and MMAS colonies are used from [16]. ACS is known for its exploitation mechanism while MMAS has its exploratory characteristic. They differ on how they select a value. Also, MMAS has pheromone value boundaries while ACS has a best value evaporation. Included in this initialization are the number of ants, q_0 , evaporation rate, best value evaporation, and the thresholds that dictate when does the communication between colonies happens.

2. **Pheromone Matrices** - Ants are pheromone-driven agents. They base their choices from the pheromone levels. The initial value of the pheromones (See Figure 3.10) is given by:

$$\tau_0 = \frac{1}{numCells} \quad (3.2.1)$$

	value 1	value 2	value 3	value 4	value 5	value 6	value 7	value 8	value 9
cell 0	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
cell 1	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
cell 2	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
cell 3	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
cell 4	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
cell 5	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234
...	...	...	...	...	...	...	...	...	...
cell 80	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234	0.01234

1	2	3	4	5	6	7	8	9
3	4	5	6	7	8	9	1	2
2	3	4	5	6	7	8	9	1
4	5	6	7	8	9	1	2	3
5	6	7	8	9	1	2	3	4
6	7	8	9	1	2	3	4	5
7	8	9	1	2	3	4	5	6
8	9	1	2	3	4	5	6	7
9	1	2	3	4	5	6	7	8

Figure 3.10: Initial Pheromone Matrix for 9×9 Sudoku Puzzle

CP-DCM-ACO

In this study, the proposed framework implements multiple threads; each thread runs an independent instance of CP-DCM-ACO. This is the main solver of this framework and it integrates the constraint propagation and the dynamic collaborative multi-colony ant optimization. As mentioned earlier, constraint propagation is adapted from Lloyd and Amos [1]. The dynamic collaborative multi-colony ant optimization (DCM-ACO) is adapted from the work of Mo et al. [16] where there is a cooperation between heterogeneous colonies of ant.

The popular problem where the ant colony system is used to solve is called Travelling Salesman Problem (TSP). Ants in this problem travel between cities and keep the path information. However in the context of Sudoku, the “path” that the ants

keep is the cells visited and the value assigned to that cell by them. But before the ants begin their tour, the CP removes first any invalid assignments of values to cells. Because of this, ants only waste their time in choosing among the valid choices of values. A local copy of the puzzle from the CP is given to each ant. Then, these ants start from a random cell and traverse the grid from left to right to ensure all decision variables are evaluated while satisfying the Sudoku constraints as shown in the Figure 3.11.

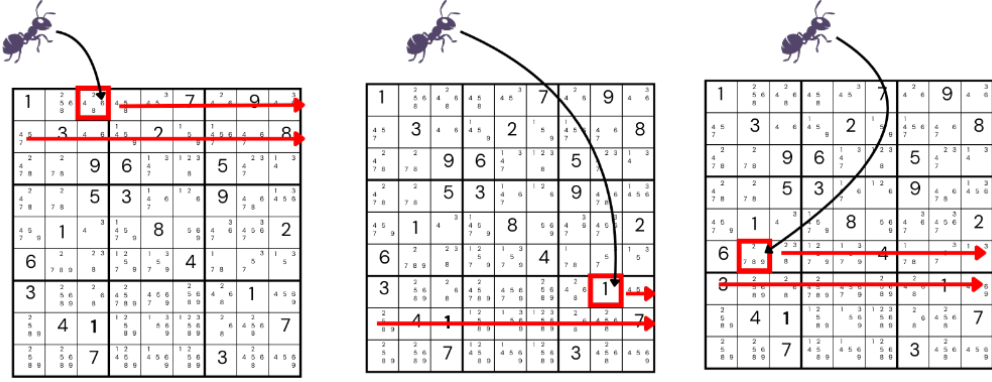


Figure 3.11: Ants start at random cell

When the initial pass to the CP is done, the ants start their tour. The ants visit cell i and check if the cell has already a fixed value assigned to it. If there is none, the ants look at the “value set” v_i , which contains all the valid candidate values for that cell. To choose a value s from this set, ant depends on a random variable q and compare this to q_0 which is a tunable parameter and whose value must be between $[0, 1]$. This random variable is critical for preventing premature convergence as it balances the solver’s exploitation of promising assignments (greedy selection) and exploration of undiscovered regions in the search space (probabilistic selection). The value selection s is defined as follows:

$$s = \begin{cases} \arg \max_{k \in v_i} \{\tau_i^k\} & \text{if } q < q_0 \quad (\text{Greedy Selection}) \\ S_{\text{roulette}} & \text{otherwise} \quad (\text{Roulette Wheel Selection}) \end{cases} \quad (3.2.2)$$

where τ_i^k is the pheromone value for assigning the value k to cell i .


Greedy and Roulette Wheel Selection

When $q \geq q_0$, the ants perform the roulette wheel selection instead of greedy selection (See Figure 3.12). As opposed to the greedy selection, ants do not assign immediately the value that has the highest pheromone value for a certain cell. Instead, it calculates the probability p_i^k of choosing the value k and assigning it to the cell i as shown in Figure 3.13. This probability favors values with higher pheromone concentration while still allowing exploration by maintaining fractional probabilities for alternative assignments. Unlike the greedy selection, the value s with low pheromone value still has a chance to be assigned to cell i . The probability distribution is given by:

$$p_i^k = \frac{\tau_i^k}{\sum_{j \in v_i} \tau_i^j} \quad (3.2.3)$$


where k is a candidate value from the value set v_i .

After the ant fixes the value for cell i , it calls the CP to propagate changes as shown in Figure 3.15 and 3.17. Because of this, every after ant's step the CP further reduces the search space. It ensures that every next step, only valid candidates are chosen. This propagation also is significant in identifying that a certain move of the ant will lead to conflict (neighboring cells will have no valid candidate values anymore). That cell is considered fail cells.

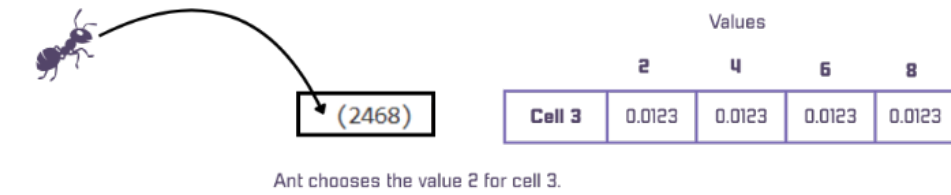

1	2568	2	458	3456	7	246	9	346
457	3	46	1459	2	159	1467	467	8
2478	278	9	6	134	138	5	2347	134
2478	278	5	3	167	126	9	4678	146
479	1	34	579	8	569	467	34567	2
6	2789	238	12579	1579	4	1578	3578	135
3	25689	268	245789	45679	25689	2468	1	4569
2589	4	1	2589	3569	235689	268	2568	7
2589	25689	7	124589	14569	125689	3	24568	4569

Figure 3.12: Ants perform greedy selection

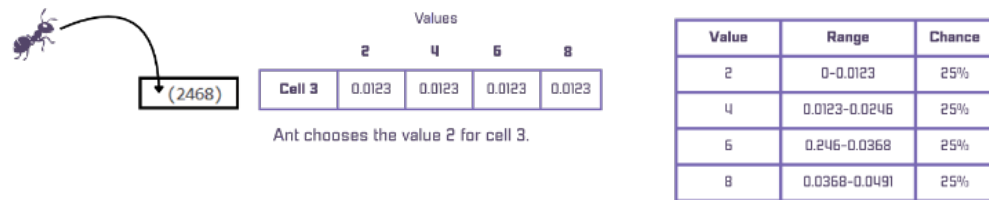

1	2568	2	458	3456	7	246	9	346
457	3	46	1459	2	159	1467	467	8
2478	278	9	6	134	138	5	2347	134
2478	278	5	3	167	126	9	4678	146
479	1	34	579	8	569	467	34567	2
6	2789	238	12579	1579	4	1578	3578	135
3	25689	268	245789	45679	25689	2468	1	4569
2589	4	1	2589	3569	235689	268	2568	7
2589	25689	7	124589	14569	125689	3	24568	4569

Figure 3.13: Ants perform roulette wheel selection when $q \geq q_0$

Local Pheromone Update

After the ants choose a value s from the value set v_i and assign it to cell i , they perform a **local pheromone update**. Then, the CP is called again to propagate the changes. The local pheromone update reduces the pheromone value of that assignment. It is done to purposely “penalize” that specific assignment as shown in Figure 3.18. Because of this, other ants have a low chance of choosing the same value for the same cell thus making the ants explore the other candidate values.

The local pheromone update given by the following equation:

$$\tau_i^s \leftarrow (1 - \xi)\tau_i^s + \xi\tau_0 \quad (3.2.4)$$

where ξ is the local pheromone evaporation coefficient, and τ_0 is the initial pheromone value.

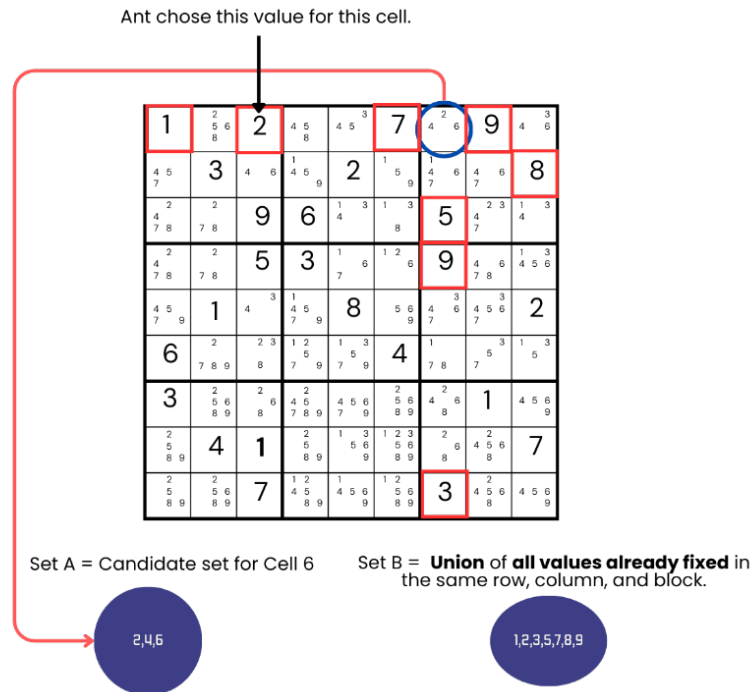


Figure 3.14: Before applying CP Rule 1

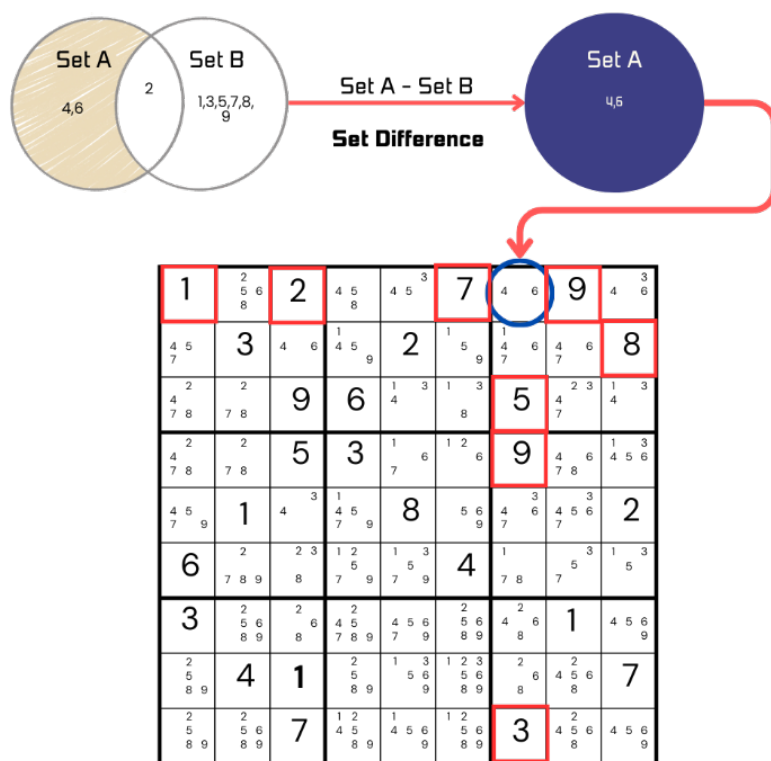


Figure 3.15: After applying CP Rule 1

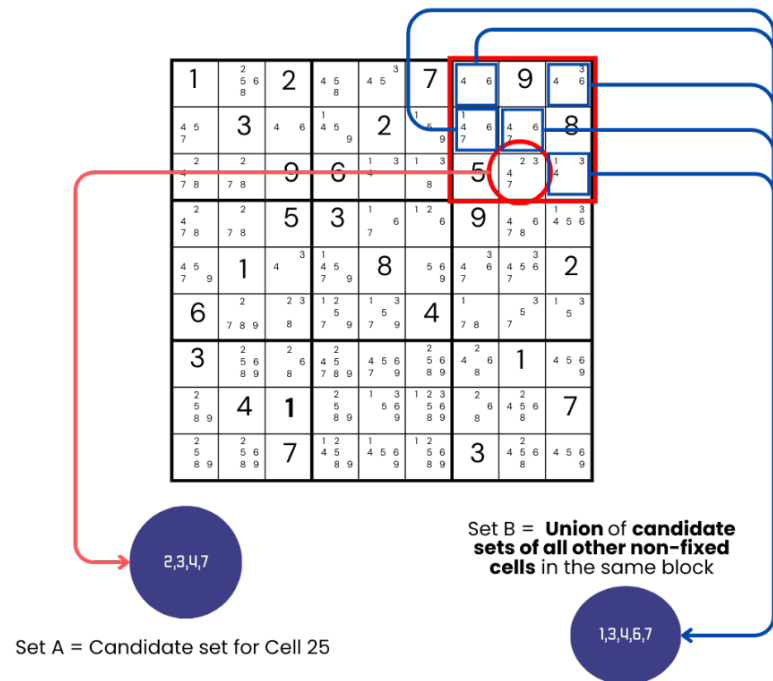


Figure 3.16: Before applying CP Rule 2

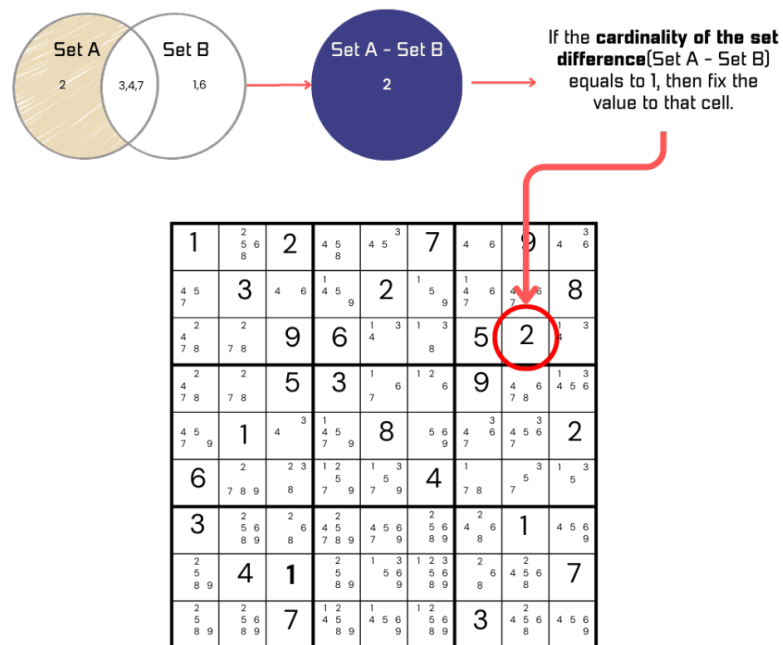


Figure 3.17: After applying CP Rule 2

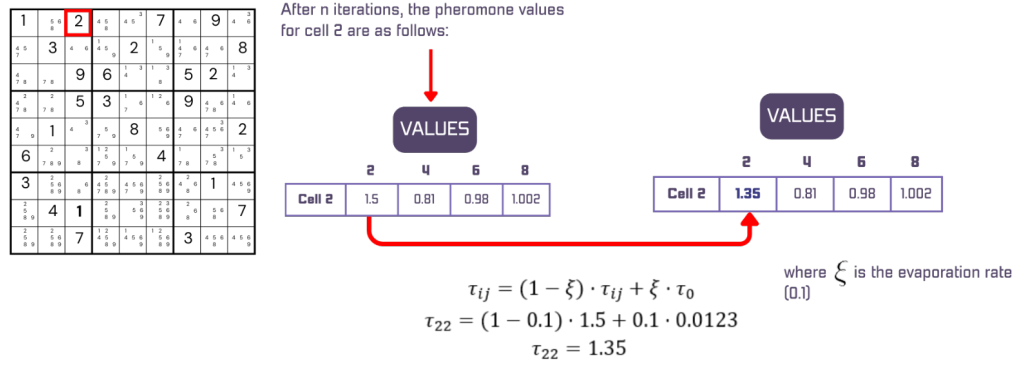


Figure 3.18: Ant chooses the value 2 for cell 2

Objective Function

In TSP, the objective of any algorithm is often to minimize the cost of the tour. However, in the context of Sudoku, some ants may fail to solve a Sudoku puzzle if they assigned a value to a certain cell that leads the subsequent cells to have no valid candidate value anymore. Therefore, a Sudoku puzzle must be complete in order to be considered solved and this should also define the objective.

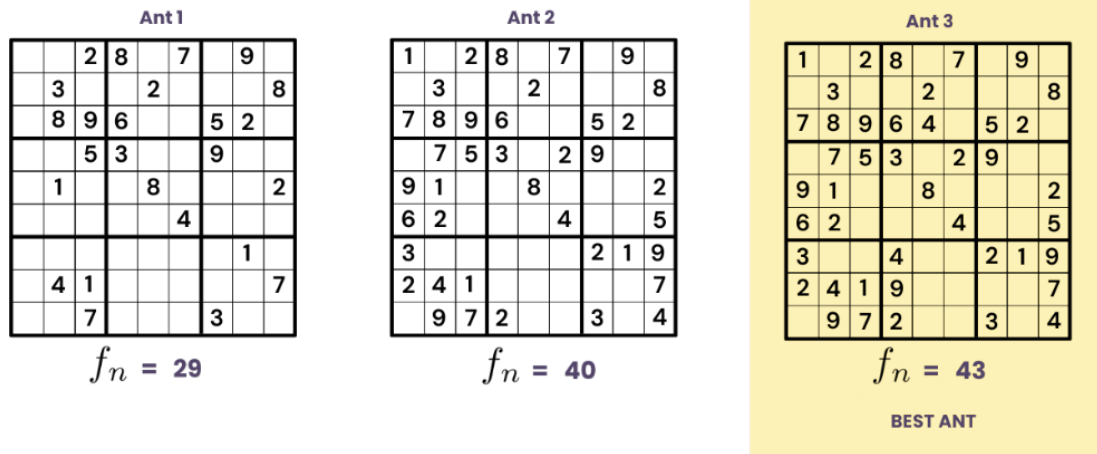


Figure 3.19: Finding the Best Ant

The number of cells filled by the ant n is denoted by f_n . The objective of this

proposed model focuses on maximizing the number of cells filled. The ant who has the highest number of filled cells is the iteration-best solution and is denoted by f_{best} (See Figure 3.19). Thus, the **objective function** of this research is given by:

$$f_{\text{best}} = \max_{n \in \{1 \dots m\}} f_n \quad (3.2.5)$$

where m is the total number of ants. The puzzle is solved only when f_{best} becomes equal to the total number of cells in the puzzle.

Global Pheromone Update

After the best ant is found, the solver does the **global pheromone update**. This is opposite from how the local pheromone update works because this global update is focused on exploitation rather than exploration. The most successful paths are given additional pheromone value computed from the global best solution. The solver does this update only after all the ants finish constructing a solution for the current iteration.

The quality of the solution is determined by how close the solution is to completion. Adapted from the work of Lloyd and Amos [1], the pheromone deposit is calculated by the following equation:

$$\Delta\tau = \frac{N}{N - f_{\text{best}}} \quad (3.2.6)$$

where N is the total number of cells in the puzzle and f_{best} is the number of filled cells in the iteration-best solution. For example as shown in Figure 3.19, the best ant was able to fill 43 cells out of 81 cell (9×9 Sudoku puzzle). Therefore, $\Delta\tau = 2.131$.

This pheromone deposit, $\Delta\tau$, is then compared to the best pheromone deposit

denoted as $\Delta\tau_{best}$ (initialized to 0). If $\Delta\tau$ is greater than the $\Delta\tau_{best}$, the solver replaces the value of the $\Delta\tau_{best}$ with the value of $\Delta\tau$ ($\Delta\tau_{best} = 2.131$). Similarly, the global-best solution is replaced with the iteration-best solution. The global pheromone update is then applied to the cell-value assignments (in our example the value 2 for cell 3) found in the global-best solution (See Figure 3.20).

$$\tau_i^s \leftarrow (1 - \rho)\tau_i^s + \rho\Delta\tau_{best} \quad (3.2.7)$$

where ρ is the standard evaporation rate and whose value is between $[0, 1]$.

This pheromone deposit $\Delta\tau_{best}$ is inversely proportional to the quality of the solution found. When the solution is nearly solved, the denominator decreases thus increasing the $\Delta\tau$. This makes the ants for the next iteration to be strongly influenced towards the paths that give an almost completed Sudoku puzzle.

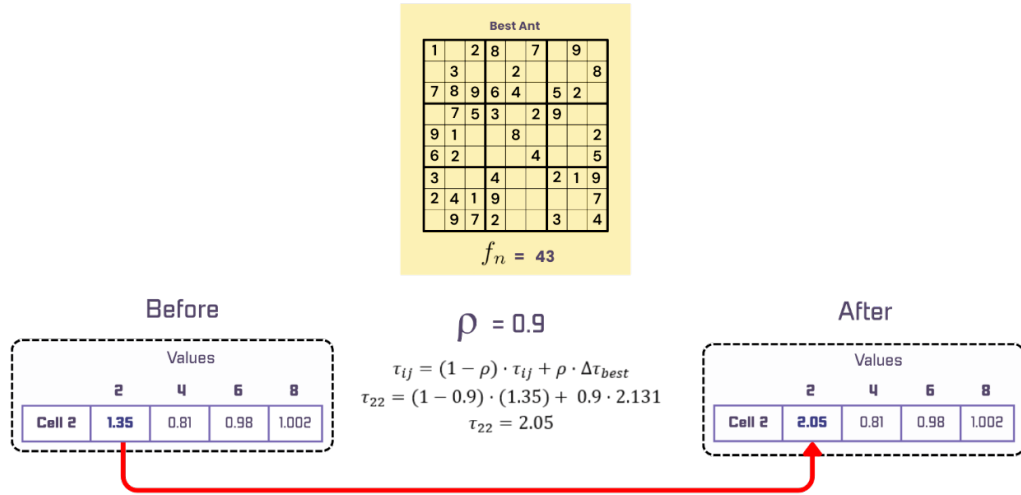


Figure 3.20: Ant increases the pheromone value of the value 2 for cell 2

Best Value Evaporation

However, this global pheromone update can make the paths from the global-best solution so strong to the point that all the ants choose the same path. Because of this, exploration rapidly decreases and results in stagnation. Lloyd and Amos [1] introduced the **best value evaporation (BVE)**. This is different from the standard evaporation rate from the global pheromone update as the BVE, shown in Figure 3.21, is applied to decrease the value of the pheromone deposit $\Delta\tau_{best}$. It helps the ants “forget” how good the global best solution was thereby encouraging the ants to explore other cell-value assignments. This is done every after the global pheromone update.

$$\Delta\tau_{best} \leftarrow \Delta\tau_{best} \times (1 - \rho_{BVE}) \quad (3.2.8)$$

where $\rho_{BVE} \in [0, 1]$ is a parameter controlling the decay rate.

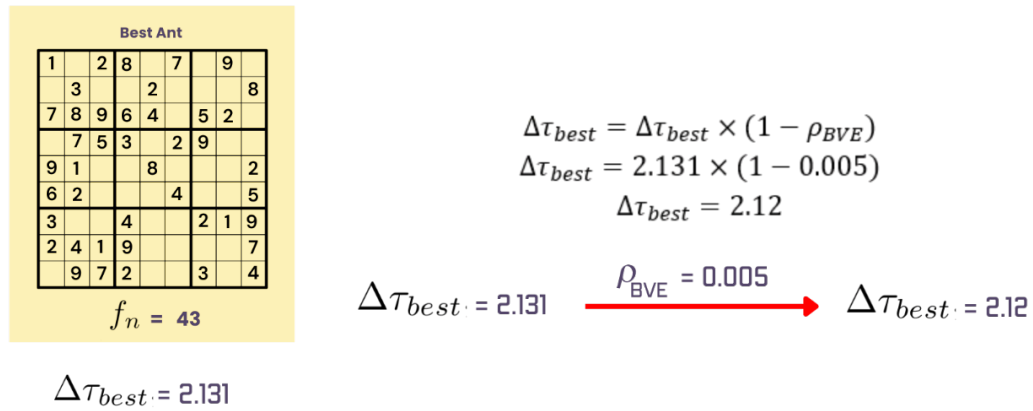


Figure 3.21: BVE decreases the value of $\Delta\tau_{best}$

Min-Max Ant System (MMAS)

As the work of the ACS colony focuses on exploiting the best-so-far solution found, the Min-Max Ant System (MMAS) focuses on exploring the search space. This is a variant of ACO that has a unique search process (See Figure 3.22). The first difference of this colony is the decision making. The ACS, as discussed above, chooses a value for a cell in two ways, either greedy selection or roulette wheel selection. MMAS colony chooses a value for a cell by roulette wheel selection only thus maintaining its exploratory characteristics. Because of this, the q_0 for this colony is always 0.

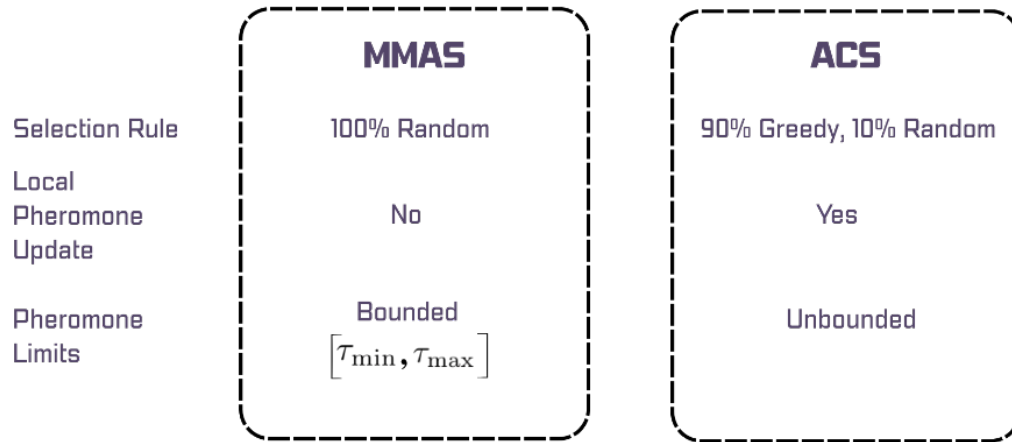


Figure 3.22: Difference Between MMAS and ACS

After it chooses a value, it doesn't have local pheromone update mechanism but it does the global pheromone update like the ACS colony. Furthermore, MMAS has no Best Value Evaporation and instead, it clamps the pheromone values to a certain range. For every cell-value (i, j) assignment, there is a pheromone value associated with this which is denoted as $\Delta\tau_{i,j}$. This pheromone value should be within the range of $[\tau_{\min}, \tau_{\max}]$ as shown in Figure 3.23 [16].

The upper bound $\tau_{\max}$ and the lower bound $\tau_{\min}$ are computed as follows:

$$\tau_{\max} = \frac{1}{\rho} \cdot (\Delta\tau) \quad (3.2.9)$$

$$\tau_{\min} = \frac{\tau_{\max}}{2 \cdot N} \quad (3.2.10)$$

where ρ is the evaporation rate and N is the puzzle size (for example in 9×9 Sudoku puzzle, $N = 9$).

Best Solution in MMAS Colony

1		2	8		7		9	
	3			2				8
7	8	9	6			5	2	
		5	3			9		
	1			8				2
6					4			
3							1	
	4	1						7
		7				3		

$$f_n = 29$$

$$\Delta\tau_{best} = 1.55$$

$$\tau_{\max} = \frac{1}{\rho} \cdot \Delta\tau_{best}$$

$$\tau_{\max} = \frac{1}{0.9} \cdot 1.55$$

$$\tau_{\max} = 1.72$$

$$\rho = 0.9$$

$$\tau_{\min} = \frac{\tau_{\max}}{2 \cdot N}$$

$$\tau_{\min} = \frac{1.72}{2 \cdot 9}$$

$$\tau_{\min} = \frac{1.72}{18}$$

$$\tau_{\min} = 0.095$$

Figure 3.23: $\Delta\tau_{\max}$ and $\Delta\tau_{\min}$

If the $\Delta\tau_{i,j}$ becomes larger than the $\tau_{\max}$, then $\Delta\tau_{i,j}$ is set to $\tau_{\max}$. Similarly, if $\Delta\tau_{i,j}$ becomes smaller than the $\tau_{\min}$, then $\Delta\tau_{i,j}$ is set to $\tau_{\min}$. This limitation does not allow a cell-value assignment to accumulate large pheromone value thereby allowing more exploration.

Dynamic Collaborative Mechanism

As single-colony ant faces early convergence when it comes to more complex constraints, this paper adapts the heterogeneous multi-colony framework of [16]. Figure 3.24 shows this framework which introduces multiple colonies running in parallel within a single thread. There will be one colony of Max-Min Ant System (MMAS) and k colonies of Ant Colony System (ACS). This multi-colony framework balances the exploitation in which the ACS is responsible for and the exploration in which MMAS is better with.

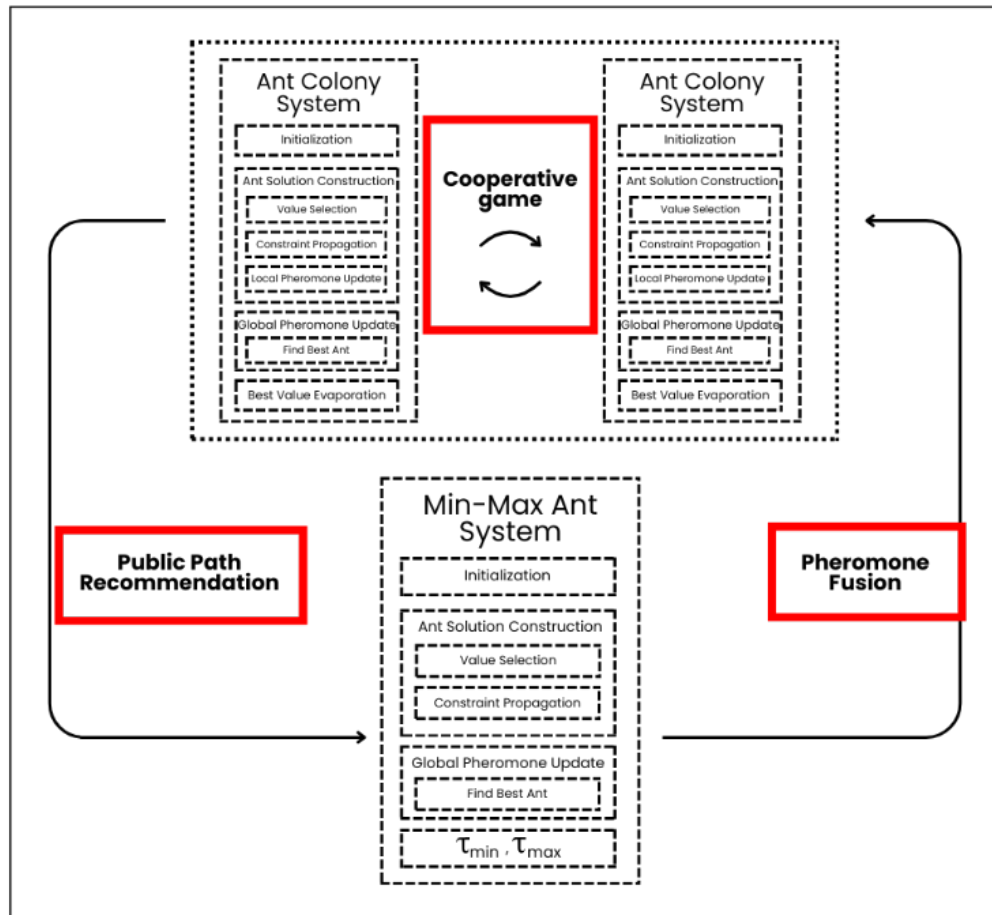


Figure 3.24: CP-DCM-ACO Model

Cooperative Game Strategy

This strategy employs redistribution of pheromone based on the performance of the colonies and only applied to the ACS colonies. There is a “payoff” computed in this technique and it is the total pheromone deposits from the colonies. This payoff or total pheromone income is then fairly redistributed among the colonies based on their contribution [16].

The redistribution calculation proceeds in four steps:

First, the pheromone deposit $\Delta\tau_{best}$ from all the ACS colonies are being added to calculate the total pheromone income denoted as b .

$$b = \sum_{i=1}^k \Delta\tau_{ACS}^i \quad (3.2.11)$$

Then, the entropy of each ACS colony is then calculated to determine their diversity using:

$$P_i = \frac{k_i}{K} \quad (3.2.12)$$

$$E(t) = - \sum_{i=1}^U P_i \log P_i \quad (3.2.13)$$

where K represents number of ants in the ACS colony, U is the number of unique solutions generated by ants, and k_i represents the number of ants that generated the i -th unique solution. To simply put, a higher entropy value shows that the colony is in the state of exploration while lower entropy value indicates that the colony is in a state of exploitation thereby converging to a specific cell-value assignment.

The contribution of the i -th colony is determined by its solution quality (sol_i) and diversity ($H(p_i)$) as shown in Figure 3.25. From the work of Mo et al. [16], the DCM-ACO was used to solve TSP. So, to adapt the concept of “tour length” to Sudoku,

this study defines the length of a solution as the number of empty cells remaining ($numCells - f_i$, where f_i is the number of filled cells and $numCells$ is the number of cells in the puzzle (81 for 9×9 puzzle)). The ratio between the global minimum length ($numCells - f_{best}$) to the colony's best length ($numCells - f_i$) defines the solution quality of the global-best solution from colony i . From this equation, colonies that is close to solving the puzzle receives higher quality score.

$$sol_i = \frac{numCells - f_{best}}{numCells - f_i} \quad (3.2.14)$$

$$H(p_i) = \frac{E(p_i)}{E(p_{max})} \quad (3.2.15)$$

where $E(p_i)$ colony's entropy and $E(p_{max})$ is the maximum entropy found among the ACS colonies.

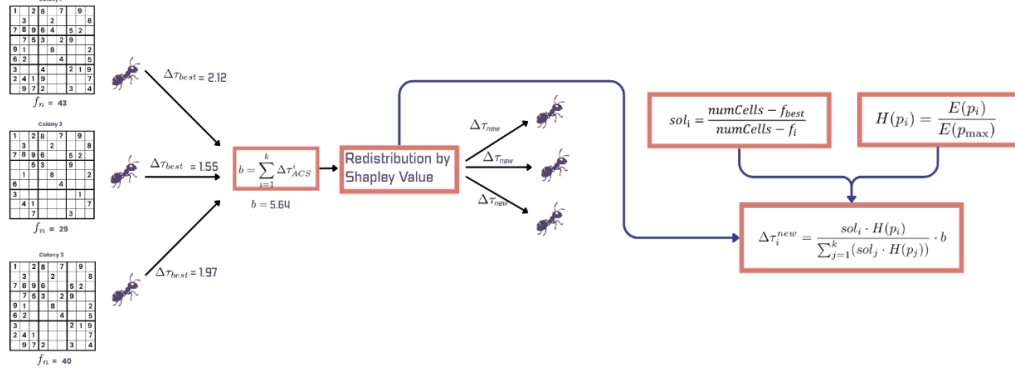


Figure 3.25: Cooperative Game Strategy

Finally, the new pheromone deposit, $\Delta\tau_i^{new}$, is calculated for each ACS colony. This redistribution ensures that the colony that is performing well who has high diversity and good solution quality is rewarded and the poor-performing colony is punished (See Figure 3.26).

$$\Delta\tau_i^{new} = \frac{sol_i \cdot H(p_i)}{\sum_{j=1}^k (sol_j \cdot H(p_j))} \cdot b \quad (3.2.16)$$

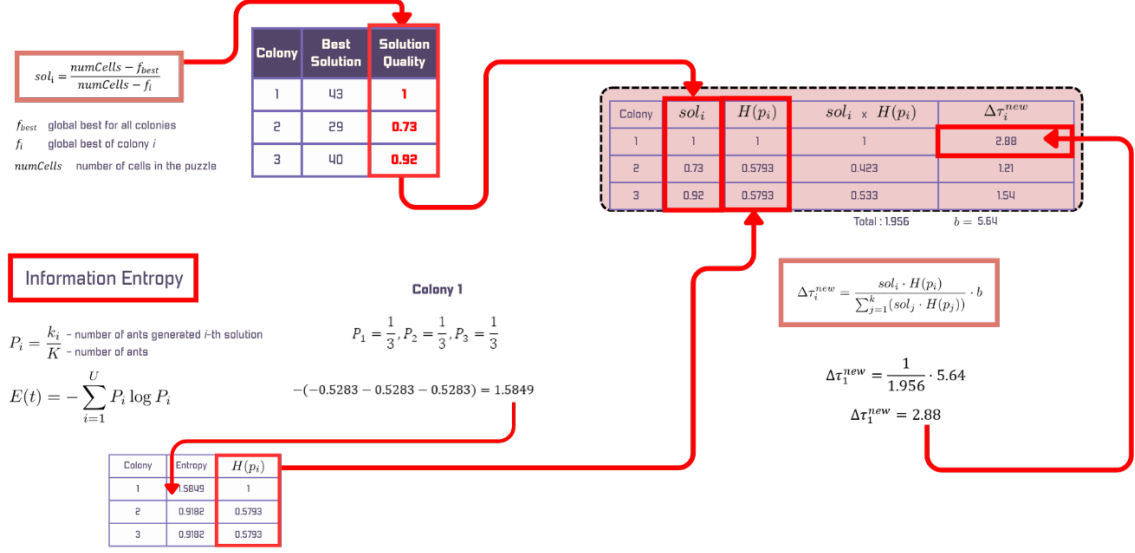


Figure 3.26: The Redistribution of Pheromone

Pheromone Fusion Mechanism

As mentioned earlier, ACS colonies are responsible for exploitation to maximize the number of filled cells. However, this process may lead the colony to stagnation. To resolve this, Mo et al. [16] introduces the Pheromone Fusion Mechanism. This mechanism only triggers when the entropy $E(p_i)$ of the i -th ACS colony goes below the predefined threshold parameter, denoted as $E(p_i) < E^*(P)$.

Since information entropy indicates the diversity of the colony, going below the entropy threshold means the colony is in the state of stagnation. In this state, the ants are repeating the same cell-value assignments that lead to incomplete solutions. The algorithm must continuously monitor the entropy of each ACS colony to detect

stagnation. When stagnation is detected, a weight factor ω_i is calculated to determine how strong the pheromone fusion is.

$$\omega_i = \frac{E(P)_{ACS}^i}{E(P)_{ACS}^i + E(P)_{MMAS}} \quad (3.2.17)$$

The fusion is done by updating the entire pheromone matrix of the ACS colony that was detected to be stagnant. Figure 3.27 shows that this update helps the stagnating ACS colony to explore other cell-value assignment as this update injects exploratory information from the MMAS colony to that ACS colony.

$$ph_{ACS}^i \leftarrow (1 - \omega_i) \cdot ph_{ACS}^i + \omega_i \cdot ph_{MMAS} \quad (3.2.18)$$

where ph_{ACS}^i represents the pheromone matrix of the i -th ACS colony and ph_{MMAS} represents the pheromone matrix of the MMAS colony.

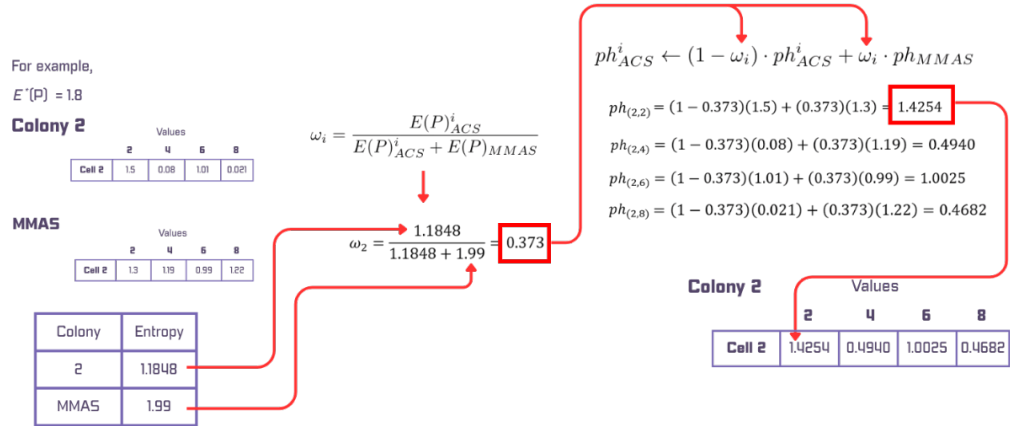


Figure 3.27: Pheromone Fusion

Public Path Recommendation Strategy

While the MMAS colony is strong for exploration, it is not easy for this colony to converge as it will take longer time to lock onto a viable solution. This is the limitation

that is being addressed by the public path recommendation strategy. In this strategy, ACS colonies “recommend” promising cell-value assignments to MMAS. However, in order to trigger this, a convergence rate (con_t) of the MMAS colony should be calculated and continuously be monitored [16]. This rate is given by the ratio of the iteration number where the current optimal solution was found ($iter_{opt}$) to the current iteration number ($iter_t$).

$$con_t = \frac{iter_{opt}}{iter_t} \quad (3.2.19)$$

This strategy is triggered when the algorithm detects that the convergence rate falls below the predefined convergence threshold denoted as ($con_t < con^*$). If this happens, it means the MMAS colony is struggling in solving the puzzle. A “Public Path” is then identified from the ACS colonies. This public path is a common cell-value assignment found from the best solution of the ACS colonies. For example, if all the ACS colonies have a cell-value assignment of (3, 4), then the algorithm will recommend this assignment to the MMAS colony by adding a pheromone value to this assignment in the MMAS pheromone matrix (See Figure 3.28).

The amount of this pheromone value to be added (τ_{public}) is calculated based on the current iteration ($iter$). Because of this, the recommendation fades over time sustaining its natural exploratory characteristics. The formula, adapted from [16], for computing the pheromone value to be added is given by:

$$\tau_{public} = \frac{1}{N} \cdot e^{-iter} \quad (3.2.20)$$

where N is the puzzle size (for example in 9×9 Sudoku puzzle, $N = 9$).

This calculated pheromone value is then added to the current pheromone value

of recommended cell-value assignments (i, j) in the MMAS pheromone matrix. This guides the MMAS colony to explore in this region of the solution space.

$$\tau_{i,j}^{public} \leftarrow \tau_{i,j}^{public} + \tau_{public} \quad (3.2.21)$$

where $\tau_{i,j}^{public}$ represents the pheromone value of the cell-value assignments (i, j) in the MMAS pheromone matrix.

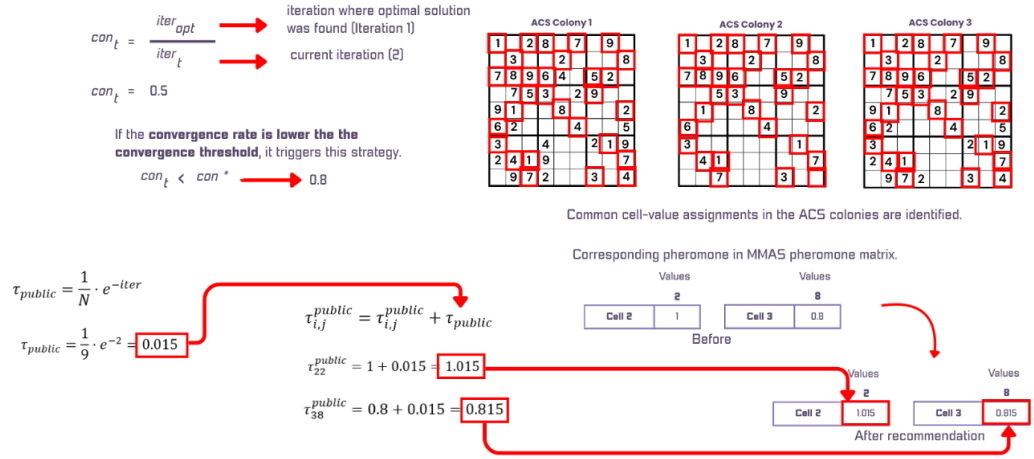


Figure 3.28: Public Path Recommendation

Ring and Random Communication Topologies

The proposed model of this study, multithreaded multi-colony ant optimization with ring and random communication topologies, builds up from the base model, CP-DCM-ACO. It introduces a parallel framework where there are multiple instances of the base model running separately in threads. These threads are going to terminate their process if one of them has already solved the puzzle by the common termination flag that is shared among all of them.

The communication between the threads are adapted from how the processors

communicate in the work of Yang and Fang [15]. They introduced two ways of communication topologies namely ring topology and random-matching topology. In this framework, the master thread is not going to collect and organize the solutions from the slave threads. Instead, it has equal status with the slave threads in terms of searching the solution space. However, an additional task is given to the master thread and that is to create a random sequence of all the thread IDs and broadcast it to all the slave threads.

When the collaboration between threads are triggered, each thread prepares their iteration-best solution and global best solution. Since the base model used in this study is the multi-colony ant optimization and there are multiple colonies within each thread, the iteration-best solution of each colony is compared and the best one is the one that will be used for collaboration between threads. Similarly, the best among the best-so-far solutions from all the colonies within the single threads is used for this inter-thread communication. Each thread follows the following pattern for collaboration:

1. **Ring Topology** — Thread i sends its iteration-best solution to thread $(i + 1) \bmod n$, and receives an iteration-best solution from the previous thread $(i - 1 + n) \bmod n$.
2. **Random-Matching Topology** — After each thread found its own ID in the broadcasted permutation of the thread IDs by the master thread, then it:
 - sends its best-so-far solution to the thread whose ID is found in array $[(i + n + 1) \bmod n]$, and
 - receives a best-so-far solution from the thread whose ID is found in array $[(i -$

$$n + 1) \bmod n].$$

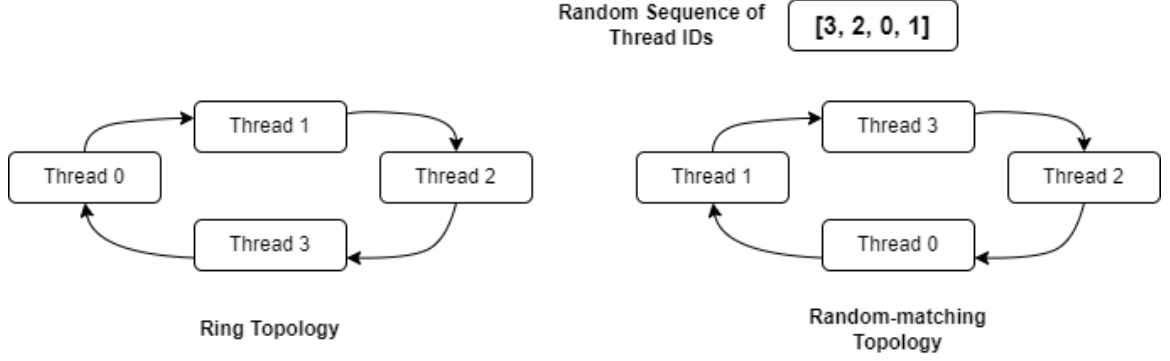


Figure 3.29: Ring Topology and Random-matching Topology

Figure 3.29 illustrates the ring and random-matching topologies used in the proposed model. Instead of exchanging the entire pheromone matrix between threads, only the path information or the cell-value assignments are being sent. Yang and Fang [15] stated that by doing this, communication overhead between threads is reduced while maintaining cooperation. After each thread receives two best solutions from other threads, they use this information to update the pheromone matrix of the MMAS colony only. External pheromone reinforcement to the ACS colonies may disrupt the cooperative game strategy. This external pheromone update may alter the original diversity of the ACS colonies when the information entropy is quantified. The update on the pheromone matrix of the MMAS colony for each thread is given by:

$$\Delta\tau_{ij} = \Delta\tau_{ij}^{(1)} + \Delta\tau_{ij}^{(2)} + \Delta\tau_{ij}^{(3)} \quad (3.2.22)$$

$$\tau_{ij} = (1 - \rho)\tau_{ij} + \rho\Delta\tau_{ij} \quad (3.2.23)$$

where ρ is the pheromone evaporation rate, and τ_{ij} is the pheromone value of the value j to cell i . The total pheromone deposit $\Delta\tau_{ij}$ consists of three components:

1. $\Delta\tau_{ij}^{(1)}$ — reinforcement from the thread's own iteration-best solution;
2. $\Delta\tau_{ij}^{(2)}$ — reinforcement from the iteration-best solution received from its ring neighbor; and
3. $\Delta\tau_{ij}^{(3)}$ — reinforcement from the best-so-far solution received from a randomly-matched neighbor.

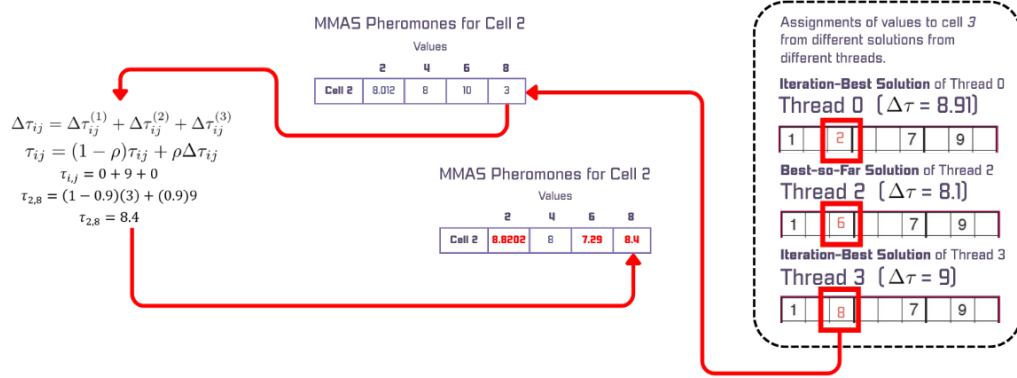


Figure 3.30: Thread 0 updates pheromone levels of the values from the candidate values on cell 2 based on the received solutions from Thread 2 and 3 using equation (23) and (24).

This pheromone influence from other threads, as shown in Figure 3.30, allows the MMAS to accept external information about the other region of the solution space. Although the ACS colonies are not using this information, they are still indirectly influenced by this when the pheromone fusion mechanism is triggered. Because of this, the exploration to the solution space has greatly increased making this framework effective for solving complex Sudoku puzzles.

Stopping Criteria

The algorithm stops its execution once there is a thread that has already solved the Sudoku puzzle. If any of the threads had constructed a complete and valid Sudoku solution, it triggers the stopFlag to true, sending the signal to other concurrent threads to stop. A predefined time is also set in case threads are struggling to find a solution. If the execution time exceeds the predefined time, the algorithm is forced to terminate.

3.3 Model Deployment Details

The model is deployed as a web-based application using Flask and C++. The application allows the user to manually input numbers to the Sudoku puzzle or remove numbers from a solved puzzle. There is also a list of instances a user can choose instead of creating their own puzzle. The application also allows the user to change the values of the parameter used by the solver in the back-end. Upon solving, the application allows the visualization of how the solver updates the values in the puzzle. This allows the user to observe how the solver converges to a final valid solution real-time (See Figure 3.31).

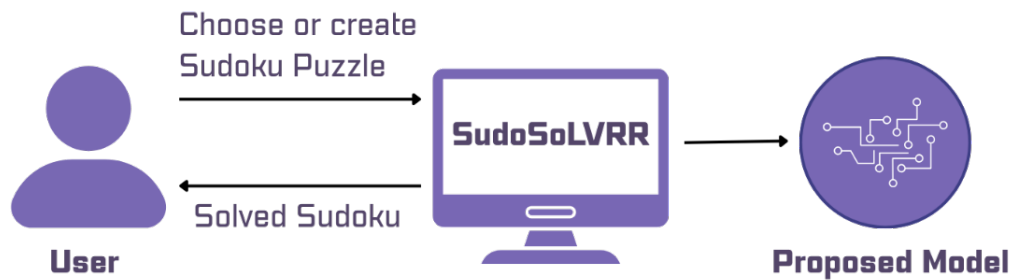


Figure 3.31: Model deployment as Web-based application

Chapter 4

Results and Discussion

4.1 Performance Evaluation Metrics

This section outlines the performance metrics used to evaluate the proposed framework. This evaluation is designed to verify that the proposed model gives a result that is better than the base model and other existing Sudoku solvers. The mentioned performance indicators are the following:

Success Rate (SR)

$$SR = \left(\frac{N_{success}}{N_{total}} \right) \times 100\% \quad (4.1.1)$$

where N_{total} is 100 unique general puzzles. A higher success rate indicates improved exploration as multi-colony collaboration and inter-thread communication preserves diversity, effectively reducing stagnation.

Mean Time to Solution (MTTS)

The average time to generate a solution is an essential performance metric to determine the computational efficiency of the solver.

$$MTTS = \frac{1}{N_{success}} \sum_{i=1}^{N_{success}} T_i \quad (4.1.2)$$

where T_i is the runtime of the i -th successful trial.

Standard Deviation (Std)

As the ACO is stochastic, it may solve the puzzles in different runtime. This metric is used to determine how stable the solver is.

$$Std = \sqrt{\frac{1}{N_{success}} \sum_{i=1}^{N_{success}} (T_i - MTTs)^2} \quad (4.1.3)$$

A lower Standard Deviation show that the solver is able to solve the puzzle in similar timeframe.

Iterations to Solve

This metric is used to count the number of iterations the solver took to generate a valid solution(f_{best} = Total Cells). A lower value of this metric shows that the solver has the best balance between exploration and exploitation.

4.2 Implementation Details

Table 4.1: Machine specifications

Component	Specification
Processor	AMD Ryzen 5 7530U (6 Cores, 12 Threads) @ 2.00 GHz
RAM	16.0 GB

As shown in Table 4.1, the multi-threaded multi-colony ACO was implemented on a machine that is equipped with an AMD Ryzen 5 7530U processor which contains 6 physical cores and 12 threads. SudoSLVRR was able to execute the experiments as the machine is supported with 12 logical processors that allows the concurrent

execution of multiple threads. The implementation of the solver is written in C++ which is known for its performance when it comes to multithreading capabilities.

4.3 Experimental Setups

The experimental setup contains different sequence of experiments targeting specific objectives of this study.

Experiment 1: Ablation Study

This experiment evaluates the impact of individual parameters to the model’s performance. This experiment addresses the second objective of this study allowing the proposed model to be fine-tuned.

Experiment 2: Single-Threaded Multi-Colony ACO vs Multi-threaded Multi-Colony ACO

This experiment compares the performance of between single-threaded and multi-threaded solvers. This highlights the impact of parallelization on the solver’s performance when solving Sudoku puzzles. It is important to note that parallelization in this experiment involves collaboration with other threads.

Experiment 3: Without Thread Communication vs With Thread Communication

This experiment evaluates the necessity of information exchange between parallel threads. This, also, compares the performance of parallel independent runs against topology-aware and communicating threads. Communication topologies used in this experiment are ring and random communication topologies.

Experiment 4: Multithreaded Multi-Colony ACO vs State-of-the-Art Sudoku Solver

This experiment compares the performance of the proposed multithreaded multi-colony ACO solver against state-of-the-art Sudoku solvers. This shows the robustness of the solver especially for high-order Sudoku puzzle like 25×25 .

Experiment 5: Model Deployment

This experiment addresses the last objective of this study which is to deploy the proposed solver as a functional web-based application. The deployment was implemented using Python Flask framework to manage both backend and frontend services and C++ for the implementation of the proposed solver. The user of the web-based application should be able to choose a puzzle instance from a predefined list, create their own, or upload a text file given that it follows a specific format. Furthermore, the user should be able to adjust parameters before solving the puzzle. The application solves the inputted puzzle and displays the output puzzle in the interface as shown in Figure 4.1.

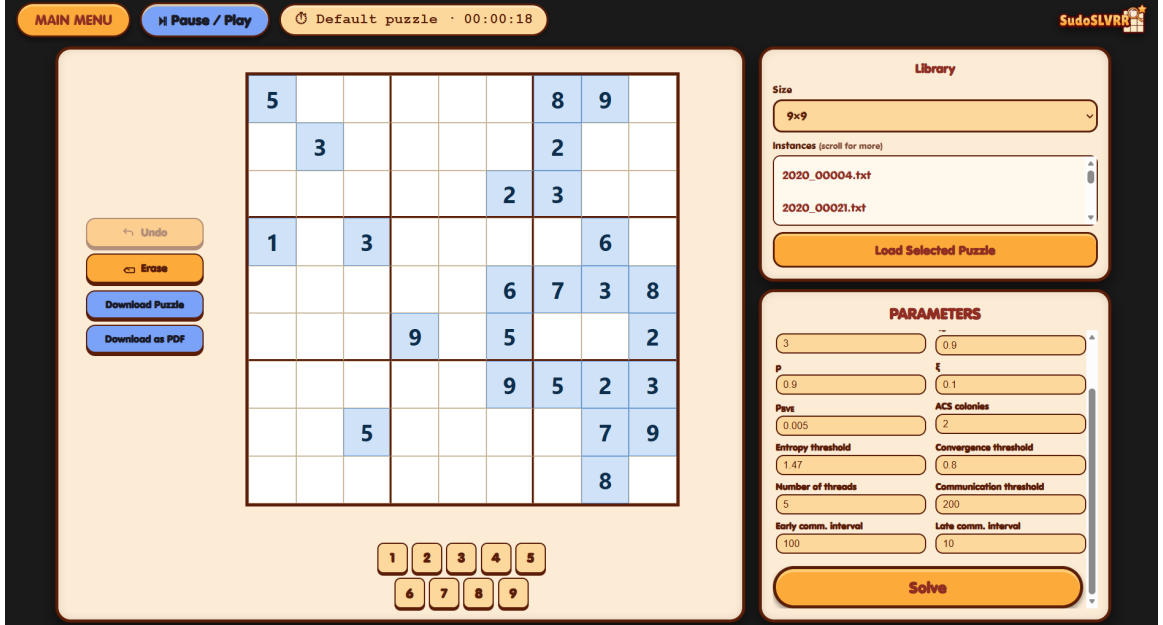


Figure 4.1: SudoSLVRR web-based application

4.4 Results and Discussion

Experiment 1: Ablation Study

The final configuration for the proposed model, Multithreaded Multi-colony ACO Solver, was obtained through a series of experiment. Five different values for each 13 parameters are tried and observed its impact to the solver’s performance. This was done by adjusting only one parameter at a time while holding other parameters constant at their baseline configuration (See Table A.1). This experiment gave the best value for each parameter allowing the solver to maximize its potential in navigating a very complex solution space, especially of a large-scale 25×25 Sudoku. Table 4.2 shows the summary of the best configuration of parameters for the proposed model.

Table 4.2: Best Configuration of Multithreaded Multi-colony ACO

Parameter	Best Value
q_0 (Exploitation Factor)	0.9
ξ (Local Pheromone Update)	0.1
ρ_0 (Pheromone Persistence)	0.99
ρ_{BVE} (Best Pheromone Evaporation)	0.0125
Number of ACS colonies	6
Number of Ants (Per Colony)	3
Entropy Threshold	87.875% of the Max Entropy (1.39)
Convergence Threshold	0.4
Thread Count	5
Communication Threshold	200 iterations
Early Communication Interval	120 iterations
Late Communication Interval	5 iterations
Timeouts	
9×9 Sudoku	9 seconds
16×16 Sudoku	30 seconds
25×25 Sudoku	180 seconds

Tables A.2, A.3, A.4, and A.5 show the detailed results from the conducted ablation study. This contains the results of each parameter value across three different puzzle sizes.

Experiment 2: Single-Threaded Multi-Colony ACO vs Multithreaded Multi-Colony ACO

This experiment shows the difference of the performance of single-threaded multi-colony ACO and multithreaded multi-colony ACO. Furthermore, conducting this experiment shows the advantage of using concurrent exploration when solving combinatorial search space. Table 4.3 shows the results of running the single-threaded

multi-colony ACO (CP-DCM-ACO) and the multithreaded multi-colony ACO (MT-CP-DCM-ACO). The solvers processed the same set of instances consisting of 100 puzzles each grid size (9×9 , 16×16 , and 25×25) 5 times. We can see from the table that multithreading does not improve the speed of the solver but also offers greater scalability. It is clear that by leveraging parallel processing, the solver can guarantee finding a solution even in extreme solution space.

Table 4.3: Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iterations across puzzle sizes.

Solver	Metric	Best	Worst	Average
9×9 Sudoku				
CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0667 ± 0.0683	0.1037 ± 0.1064	0.0830 ± 0.0835
	Iteration	39.54	61.98	50.07
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0279 ± 0.0258	0.0315 ± 0.0304	0.0295 ± 0.0290
	Iteration	11.23	12.29	11.68
16×16 Sudoku				
CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0549 ± 0.0900	0.1294 ± 0.3873	0.0835 ± 0.1928
	Iteration	6.23	14.48	9.33
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0397 ± 0.0230	0.0535 ± 0.1346	0.0459 ± 0.0617
	Iteration	3.03	3.93	3.46
25×25 Sudoku				
CP-DCM-ACO	Success Rate (%)	100	98	99
	Time (s)	5.3496 ± 6.5340	7.5980 ± 18.7057	6.3411 ± 10.4774
	Iteration	124.67	178.43	149.13
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	3.9575 ± 5.4078	6.1483 ± 10.0960	5.4813 ± 7.4532
	Iteration	42.29	53.17	49.24

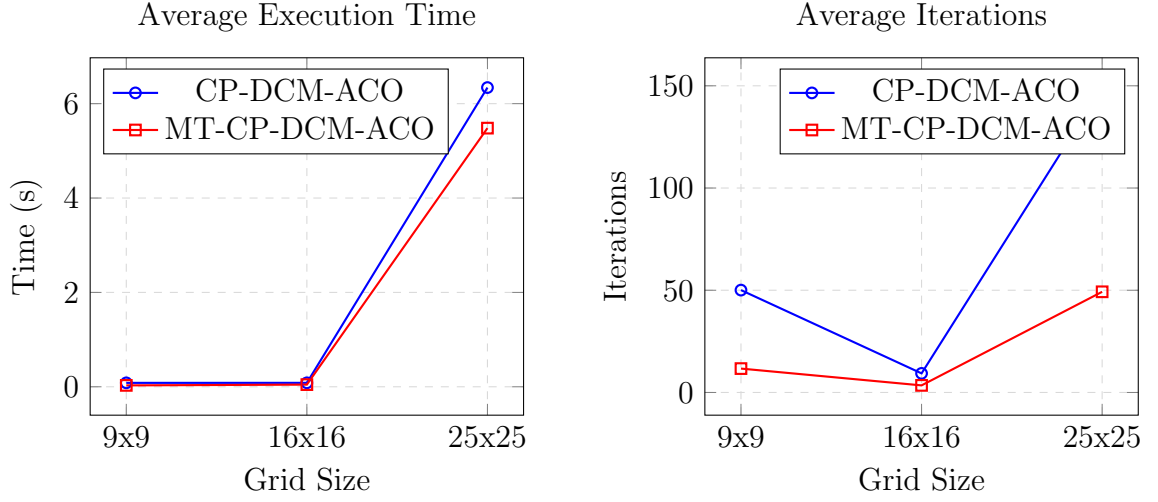


Figure 4.2: Comparison of computational efficiency (runtime in seconds and iteration count) between CP-DCM-ACO and MT-CP-DCM-ACO across different puzzle sizes.

Furthermore, Figure 4.2 shows that the computational costs of the MT-CP-DCM-ACO are still less than that of the CP-DCM-ACO even though additional overhead due to thread communication is introduced in the multithreaded solver. This result shows that multithreaded solver explores more regions of the solutions space thus speeding up the search for a solution.

Experiment 3: Without Thread Communication vs With Thread Communication

This experiment shows the necessity of the thread communication in searching a solution in a very complex solution space. Table 4.4 shows that the setup that does not accomodate thread communication had less computational cost in 9×9 and 16×16 puzzles than with thread communication. It is because thread communication for this grid sizes is rarely triggered. The slight difference in computational cost between the two setups are due to the initial overhead of the threads' communication. However

when the grid sizes becomes larger like 25×25 , colonies inside each threads requires more iterations to converge. Topology-aware setup allows the threads to exchange pheromone information thereby increasing the diversity of each thread. Uncommu-
nicative setup suffers from stagnation as it get trapped to local optima thus failing to converge to a solution.

Table 4.4: Impact of thread communication on the MT-CP-DCM-ACO performance in terms of success rate (%), average runtime (seconds), and average number of iterations across puzzle sizes.

Solver Configuration	Metric	Best	Worst	Average
9 × 9 Sudoku				
Without Comm.	Success Rate (%)	100	100	100
	Time (s)	0.0268 ± 0.0208	0.0360 ± 0.0382	0.0307 ± 0.0291
	Iteration	10.30	13.57	11.75
With Comm.	Success Rate (%)	100	100	100
	Time (s)	0.0279 ± 0.0258	0.0315 ± 0.0304	0.0295 ± 0.0290
	Iteration	11.23	12.29	11.68
16 × 16 Sudoku				
Without Comm.	Success Rate (%)	100	100	100
	Time (s)	0.0426 ± 0.0296	0.0520 ± 0.0630	0.0481 ± 0.0451
	Iteration	3.14	3.57	3.37
With Comm.	Success Rate (%)	100	100	100
	Time (s)	0.0397 ± 0.0230	0.0535 ± 0.1346	0.0459 ± 0.0617
	Iteration	3.03	3.93	3.46
25 × 25 Sudoku				
Without Comm.	Success Rate (%)	100	99	99.6
	Time (s)	3.1261 ± 3.32797	2.9235 ± 3.3239	3.1213 ± 3.5223
	Iteration	41.80	49.11	45.46
With Comm.	Success Rate (%)	100	100	100
	Time (s)	3.9575 ± 5.4078	6.1483 ± 10.0960	5.4813 ± 7.4532
	Iteration	42.29	53.17	49.24

Experiment 4: Multithreaded Multi-Colony ACO vs State-of-the-Art Sudoku Solver

In table 4.5, we can see that in all puzzle size the proposed model, MT-CP-DCM-ACO, outperforms all the other algorithms. For puzzle sizes 9×9 and 16×16 , there is a clear reduction in execution times and number of iteration from the CP-ACS to CP-DCM-ACO, then to MT-CP-DCM-ACO. Then, it was magnified to 25×25 Sudoku puzzle as baseline algorithms struggles to achieved a 100% solution success rate. The multithreaded solver achieved 100% success rate even in large-scale 25×25 Sudoku because of its structured multi-level collaboration.

It is also clear in the table that multi-colony outperforms the single-colony solver across all grid sizes. The multi-colony solver already addresses the premature convergence of the single colony solvers by utilizing heterogeneous colonies that balances exploration and exploitation. By periodically triggering the collaboration between colonies, the improvement from the solver’s performance can already be observed.

However the multi-colony ACO, though enforces collaboration between heterogeneous ACS and MMAS colonies, still suffered from stagnation. This solver only covers few regions of a combinatorial search space when solving large-scale Sudoku. By utilizing parallel processing and by placing the entropy-aware colonies inside each communicating threads, diversity increases thus overcoming premature convergence. The communication between threads also prevents redundant visits of the same region in the solution space. This is the reason why the multithreaded multi-colony ACO solver showed the best performance and results.

Table 4.5: Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iterations of the State-of-the-Art solver (CP-ACS) vs. CP-DCM-ACO and MT-CP-DCM-ACO across puzzle sizes.

Solver	Metric	Best	Worst	Average
9 × 9 Sudoku				
CP-ACS	Success Rate (%)	100	100	100
	Time (s)	0.0852 ± 0.0841	0.1050 ± 0.0988	0.0945 ± 0.0922
	Iteration	111.60	137.12	123.25
CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0667 ± 0.0683	0.1037 ± 0.1064	0.0830 ± 0.0835
	Iteration	39.54	61.98	50.07
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0279 ± 0.0258	0.0315 ± 0.0304	0.0295 ± 0.0290
	Iteration	11.23	12.29	11.68
16 × 16 Sudoku				
CP-ACS	Success Rate (%)	96	93	94.2
	Time (s)	0.3810 ± 1.0603	0.9794 ± 2.8231	0.7273 ± 1.9593
	Iteration	61.12	166.41	120.71
CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0549 ± 0.0900	0.1294 ± 0.3873	0.0835 ± 0.1928
	Iteration	6.23	14.48	9.33
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	0.0397 ± 0.0230	0.0535 ± 0.1346	0.0459 ± 0.0617
	Iteration	3.03	3.93	3.46
25 × 25 Sudoku				
CP-ACS	Success Rate (%)	77	72	75
	Time (s)	7.2533 ± 12.3451	12.8507 ± 23.6261	10.3381 ± 18.5021
	Iteration	246.72	465.43	377.11
CP-DCM-ACO	Success Rate (%)	100	98	99
	Time (s)	5.3496 ± 6.5340	7.5980 ± 18.7057	6.3411 ± 10.4774
	Iteration	124.67	178.43	149.13
MT-CP-DCM-ACO	Success Rate (%)	100	100	100
	Time (s)	3.9575 ± 5.4078	6.1483 ± 10.0960	5.4813 ± 7.4532
	Iteration	42.29	53.17	49.24

This experiment translates the multithreaded multi-colony ACO Sudoku solver into a functional web-based application. Just like any Sudoku game, user must follow the rules of Sudoku in order to solve the puzzle. Upon accessing the application, user can choose either to play in experiment mode or game mode.

User can choose what values of the parameters he/she wants to try in experiment mode (See Figure 4.3). In game mode (See Figure 4.4), user can ask the application to solve the puzzle but automatically the multithreaded multi-colony ACO solver is called with its best configuration. User can see the real progress of the solver when it starts solving the puzzle because the application has a feature of real-time visualization of the puzzle.


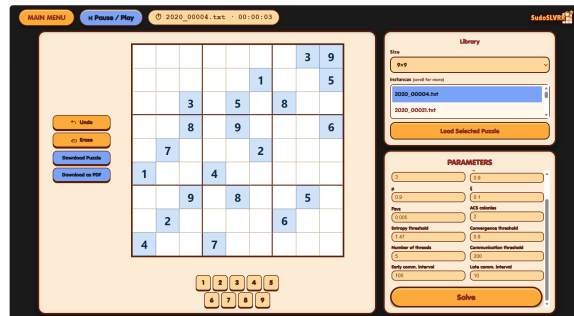


Figure 4.3: SudoSLVRR web-based application: Experiment Mode

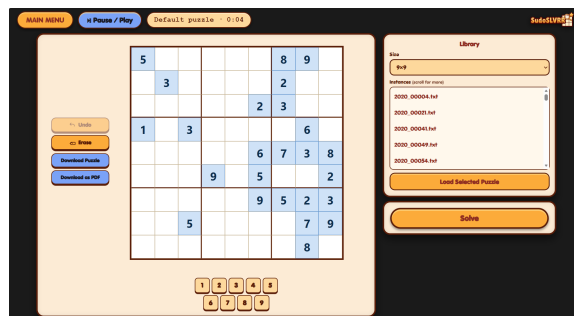

Chapter 5

Conclusions and Recommendations

This study addresses the limitation of sequential solvers in terms of their computational costs and success rate especially when being applied to very complex combinatorial solution spaces. The results from a series of structured experiments showed that the multithreaded multi-colony ant optimization with ring and random communication topologies framework successfully outperforms the state-of-the-art solvers in terms of speed, reliability, and scalability. Although heterogenous ACS and MMAS colonies of the single-threaded multi-colony ACO solver help improve the diversity and convergence speed of the solver for smaller Sudoku puzzles. With its entropy-aware colonies, the CP-DCM-ACO solver was able to overcome the stagnation and exponential time increase suffered by the single colony ACO solver. The implementation of injecting the MMAS diversity to the ACS colony that is already stagnating and recommending paths to the MMAS colony when it converges too slowly successfully balances the exploration and exploitation of the ants.

However, the solution space grows combinatorially as the grid size becomes larger. The collaboration between multiple colonies is still not enough to navigate a complex search space from high-order Sudoku puzzles like 25×25 . By utilizing multiple

threads running in parallel and placing this multi-colony ACO inside each thread, more regions of a very complex solution space are explored. But threads running in parallel without information sharing could lead to redundant visits to a certain region of the solution space. By allowing the threads to communicate in SudoSLVRR, the solver was able to prevent premature convergence by sending locally promising solutions from one thread to its neighbor. Also, the random communication topology allows the threads to receive promising solutions from the threads that explored the other region of the solution space thereby increasing the diversity. This shows that multi-level collaboration becomes necessary when the solution space expands exponentially. Overall, this research shows that the proposed approach effectively balances exploration and exploitation through multi-level collaboration, leading to a better performance across evaluated Sudoku instances.

While this study establishes a new benchmark for solving high-order Sudoku, future study may explore other communication topologies other than ring and random communication topologies. SudoSLVRR executes the multi-colony ACO sequentially inside each thread and therefore accommodates further exploration in executing it in parallel. As GPU gains recognition when it comes to execution time, future study might explore implementing the multithreaded Sudoku solvers using GPU. Another promising area to explore for future work is the incorporation of negative learning in the ACO framework like in [30, 31, 32, 33] to discourage exploration of dead-end solutions, thereby improving the solver’s performance. Lastly, SudoSLVRR was applied to a Sudoku puzzle with standard constraints. Future researchers may explore applying the multithreaded solver to puzzles with improved constraints like 3D Sudoku and Diagonal Sudoku.

Appendix A

Appendices

A.1 Baseline Configuration

Table A.1: Baseline Configuration

Parameter	Baseline Value
q_0 (Exploitation Factor)	0.9
ξ (Local Pheromone Update)	0.1
ρ_0 (Pheromone Persistence)	0.9
ρ_{BVE} (Best Pheromone Evaporation)	0.005
Number of ACS colonies	2
Number of Ants (Per Colony)	3
Entropy Threshold	92.5% of the Max Entropy (1.47)
Convergence Threshold	0.8
Thread Count	3
Communication Threshold	200 iterations
Early Communication Interval	100 iterations
Late Communication Interval	10 iterations
Timeouts	
9×9 Sudoku	5 seconds
16×16 Sudoku	20 seconds
25×25 Sudoku	120 seconds

Table A.1 shows the baseline configuration of parameters which are adopted from the prior ACO, DCM-ACO, and Parallel ACO studies. Utilizing this uniform setting across all Sudoku instances, SudoSLVRR was able to show improvement in runtime and scalability because of the multithreaded multi-colony ACO framework.

The following section contains the different ablation studies performed to get the optimal values for the proposed multithreaded multi-colony ACO solver. These studies not only determine the optimal parameter values but also provide empirical trends how changes in parameter values affects the performance of the solver.

A.2 Ablation Study

Ablation Study 1: Core ACO Parameters

In table A.2, we can see that the lower the number of ants the better the performance of the model. Since the greediness of ants is set to 90%, then sub-optimal solutions are over-reinforced as more ants choose cell-value pairs with higher pheromone concentration.

Regarding the parameter, q_0 , that controls the greediness of the ants, we can see that setting this parameter to its maximum value restricts the ACS to be flexible and tends to choose paths with the highest pheromone value all the time. Note that setting this parameter higher means that ants choose the cell-value pairs with highest pheromone concentration. On the other hand, as ACS colony is known for its aggressive exploitation, setting this parameter down results in poor performance. Setting this parameter to 0.9 leaves room for randomness preventing premature convergence.

Table A.2: Summary of the impact of different values of Core ACO parameter on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.

Parameter		9 x 9			16 x 16			25 x 25		
Type	Value	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.
Ants	3	100	0.0595 $\pm$ 0.0562	69.25	100	0.0717 $\pm$ 0.0946	15.71	79	25.7751 $\pm$ 23.8274	1288.80
	5	100	0.0661 $\pm$ 0.0571	35.18	100	0.0784 $\pm$ 0.1096	10.08	67	27.2181 $\pm$ 25.4636	825.49
	7	100	0.0696 $\pm$ 0.0595	29.60	100	0.1171 $\pm$ 0.2042	10.87	63	30.3828 $\pm$ 25.3579	642.86
	9	100	0.0606 $\pm$ 0.0569	22.23	100	0.1345 $\pm$ 0.3323	9.34	61	28.2931 $\pm$ 25.8455	472.85
	11	100	0.0694 $\pm$ 0.0632	20.33	100	0.1227 $\pm$ 0.1774	7.09	60	39.3569 $\pm$ 32.0693	475.31
q₀	0.3	100	0.0519 $\pm$ 0.0504	57.35	100	0.1021 $\pm$ 0.1254	22.16	17	40.6258 $\pm$ 32.6026	1734.47
	0.5	100	0.0533 $\pm$ 0.0680	58.04	100	0.0922 $\pm$ 0.1230	19.81	39	49.1222 $\pm$ 30.4985	2001.21
	0.7	100	0.0650 $\pm$ 0.0660	71.48	100	0.0919 $\pm$ 0.1115	19.40	65	35.2837 $\pm$ 24.6907	1376.74
	0.9	100	0.0679 $\pm$ 0.0642	74.31	100	0.0992 $\pm$ 0.1596	20.88	75	32.1106 $\pm$ 28.2252	1287.23
	0.99	100	0.0530 $\pm$ 0.0464	57.79	100	0.1100 $\pm$ 0.2029	23.00	43	30.33108 $\pm$ 31.6785	1135.88
ξ	0.01	100	0.0653 $\pm$ 0.0665	70.36	100	0.1081 $\pm$ 0.1830	21.58	65	30.1843 $\pm$ 27.0352	1208.51
	0.1	100	0.0584 $\pm$ 0.0550	61.39	100	0.1465 $\pm$ 0.2813	27.96	79	30.1868 $\pm$ 28.7080	1208.46
	0.3	100	0.0709 $\pm$ 0.0645	74.26	100	0.1633 $\pm$ 0.4119	30.94	78	30.2608 $\pm$ 26.7856	1201.76
	0.5	100	0.0665 $\pm$ 0.0690	62.18	100	0.1437 $\pm$ 0.2587	27.37	75	40.5462 $\pm$ 33.8534	1652.87
	0.7	100	0.0631 $\pm$ 0.0613	64.70	100	0.1606 $\pm$ 0.3161	30.50	73	31.6859 $\pm$ 29.7302	1377.26
ρ	0.3	100	0.0641 $\pm$ 0.0585	69.78	100	0.1831 $\pm$ 0.5829	38.91	62	29.4750 $\pm$ 23.5596	958.39
	0.5	100	0.0745 $\pm$ 0.0689	80.85	100	0.0851 $\pm$ 0.1285	17.91	68	32.7818 $\pm$ 28.8518	1309.47
	0.7	100	0.0556 $\pm$ 0.0531	60.01	100	0.1348 $\pm$ 0.2677	28.37	74	31.5863 $\pm$ 28.3308	1086.62
	0.9	100	0.0585 $\pm$ 0.0617	63.88	100	0.0831 $\pm$ 0.1330	17.56	76	25.9854 $\pm$ 24.9172	1012.89
	0.99	100	0.0627 $\pm$ 0.0525	66.80	100	0.2234 $\pm$ 1.2599	46.80	77	37.1860 $\pm$ 32.7398	1490.71
ρ_{evap}	0.0025	100	0.0609 $\pm$ 0.0583	66.52	100	0.1201 $\pm$ 0.1954	25.36	69	31.5318 $\pm$ 29.3949	1270.20
	0.005	100	0.0572 $\pm$ 0.0636	62.20	100	0.0874 $\pm$ 0.1069	18.56	81	35.5527 $\pm$ 29.0657	1434.05
	0.0075	100	0.0656 $\pm$ 0.0751	71.11	100	0.0932 $\pm$ 0.1573	19.71	76	29.9986 $\pm$ 28.4149	1091.39
	0.01	100	0.0571 $\pm$ 0.0734	62.31	100	0.1003 $\pm$ 0.1569	21.20	76	32.0954 $\pm$ 27.2439	1167.88
	0.0125	100	0.0628 $\pm$ 0.0744	68.90	100	0.1058 $\pm$ 0.1888	22.33	87	35.0022 $\pm$ 32.6329	1478.68

The parameter ξ dictates how fast the pheromone evaporates right after the ants move. This makes a cell-value pair less attractive to subsequent ants. Setting this parameter to its minimum value promotes premature convergence. On the other hand, higher values like 0.5 and 0.7 removes large amounts of pheromone making the ants lose promising solutions.

We can also observe from the table that setting ρ parameter to its maximum value provides the best performance. When this parameter is set to its maximum value, ants deposit large pheromones to the current best solution. This works in the multi-colony framework as ACS is expected to be aggressive when it comes to exploitation as it can receive diversity from the MMAS colony.

The parameter ρ_{BVE} controls the evaporation of the best path’s pheromone from the most successful path so far. Over time, the pheromone of this path reduces allowing the ants to accept a new successful path. Setting this parameter to a higher value allows the ants to forget how good the path was faster thus improving diversity.

Table A.3: Summary of the impact of Timeout values on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.

Parameter		9 x 9			16 x 16			25 x 25		
Type	Value	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.
Timeout	1 / 10 / 60	100	0.0660 ± 0.0636	67.69	100	0.0552 ± 0.0782	11.71	75	36.2075 ± 32.7370	1324.25
	3 / 15 / 90	100	0.0621 ± 0.0680	64.47	100	0.1472 ± 0.4896	31.46	71	32.8835 ± 28.5193	1274.79
	5 / 20 / 120	100	0.0605 ± 0.0519	65.10	100	0.0970 ± 0.1891	20.70	77	31.9318 ± 29.3837	1238.49
	7 / 25 / 150	100	0.0648 ± 0.0657	68.12	100	0.0981 ± 0.1560	21.05	75	28.7912 ± 28.2169	1127.69
	9 / 30 / 180	100	0.0731 ± 0.0724	79.34	100	0.1156 ± 0.1884	24.68	78	33.6038 ± 29.5668	1312.29

For the timeout parameter, the table A.3 shows that giving the solver more time increases its solution success rate. In a high-order sudoku like 25×25 grid, the solver was able to cover more area of the search space by setting the timeout to 180 seconds. Setting this parameter to a low value prematurely terminates the solver.

Ablation Study 2: Multi-Colony ACO Parameters

Table A.4: Summary of the impact of Multi-Colony ACO parameters on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.

Parameter		9 x 9			16 x 16			25 x 25		
Type	Value	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.
numacs	2	100	0.0728 ± 0.0713	72.66	100	0.0949 ± 0.1401	17.06	70	30.3826 ± 29.1306	1323.73
	3	100	0.0700 ± 0.0725	50.98	100	0.0865 ± 0.1521	11.56	88	30.3379 ± 31.5852	1147.38
	4	100	0.0717 ± 0.0661	39.96	100	0.0799 ± 0.1675	8.29	90	29.2983 ± 28.2633	879.39
	5	100	0.0749 ± 0.0912	32.82	100	0.0591 ± 0.0642	5.24	88	32.6556 ± 28.7553	813.34
	6	100	0.0713 ± 0.0647	29.95	100	0.0563 ± 0.0765	5.14	97	33.1706 ± 27.1861	621.20
convThreshold	0.2	100	0.0594 ± 0.0574	64.65	100	0.1481 ± 0.4298	31.76	77	33.1252 ± 30.4278	1602.31
	0.4	100	0.0540 ± 0.0485	58.86	100	0.0801 ± 0.1024	16.42	78	38.5062 ± 32.4213	1349.08
	0.6	100	0.0594 ± 0.0538	64.55	100	0.0961 ± 0.1604	20.52	76	33.4068 ± 31.6571	1169.70
	0.8	100	0.0585 ± 0.0640	63.79	100	0.0985 ± 0.1432	21.09	76	30.8589 ± 25.7877	1241.83
	1	100	0.0591 ± 0.0504	64.21	100	0.0841 ± 0.1078	17.82	59	32.6644 ± 29.1400	1296.58
entropyThreshold	1.25	100	0.0592 ± 0.0618	65.47	100	0.0947 ± 0.1289	20.30	74	27.9569 ± 30.9323	1088.70
	1.32	100	0.0567 ± 0.0568	62.15	100	0.1095 ± 0.1785	21.11	75	28.3375 ± 27.5673	936.63
	1.39	100	0.0595 ± 0.0646	65.13	100	0.1096 ± 0.2051	23.11	82	33.1949 ± 27.1036	1374.43
	1.47	100	0.0620 ± 0.0617	68.22	100	0.2245 ± 0.2332	47.01	78	27.1581 ± 23.0610	1081.74
	1.54	100	0.0661 ± 0.0615	72.92	100	0.2039 ± 0.7198	42.77	76	36.8694 ± 31.4284	1368.78

Table A.4 shows that the more number of ACS colonies, the higher the success rate. This shows that more regions of the solution space are explored. Furthermore, setting the parameter (con^*) to 1 or to the smallest value makes the MMAS never receive any pheromone information from the ACS colonies, thus focusing only on exploration forever. By setting this parameter to 0.4, MMAS colony is given enough time to refine its distribution of pheromone to cell-value pairs. Lastly, entropy mathematically represents the diversity of the colony. Higher entropy means higher diversity, otherwise the colony is stagnating. By setting this parameter ($E^*(P)$) to 87.875% of the Max entropy, ACS colonies are enabled to continue performing their strong exploitation behaviour. Setting this parameter to its maximum value triggers pheromone fusion thus making an excessive exploration. On the other hand, setting this parameter to a lower value delays the help of MMAS to ACS as it makes the ACS deeply stagnates before receiving pheromone information from the MMAS colony.

Ablation Study 3: Multithread Parameters

Table A.5: Summary of the impact of Multithread Parameters on model performance across 9×9 , 16×16 , and 25×25 Sudoku Instances.

Parameter		9×9			16×16			25×25		
Type	Value	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.	Succ.	Time $\pm$ Std. (s)	Iter.
Threads	1	100	0.1478 ± 0.1477	190.05	100	0.6944 ± 1.2084	154.58	40	33.9656 ± 34.3852	1891.55
	2	100	0.0804 ± 0.0875	95.44	100	0.5068 ± 2.0686	115.02	58	28.6843 ± 30.6527	1228.16
	3	100	0.0640 ± 0.0692	70.23	100	0.0769 ± 0.1034	16.13	83	29.5694 ± 30.4272	1468.30
	4	100	0.0402 ± 0.0426	41.37	100	0.0750 ± 0.1135	14.77	82	30.9202 ± 28.3030	1214.59
	5	100	0.0378 ± 0.0366	36.47	100	0.0447 ± 0.0470	8.26	92	25.7953 ± 26.4490	971.28
Comm-thresh	100	100	0.0570 ± 0.0518	62.45	100	0.1074 ± 0.1816	22.84	74	25.3917 ± 20.8789	1095.61
	150	100	0.0610 ± 0.0527	66.97	100	0.0961 ± 0.1935	20.36	75	31.3976 ± 28.1724	1154.23
	200	100	0.0571 ± 0.0613	62.71	100	0.1044 ± 0.1795	18.35	83	31.5694 ± 30.5167	1472.30
	250	100	0.0621 ± 0.0725	68.51	100	0.1454 ± 0.2489	30.97	77	33.0179 ± 30.2680	1219.95
	300	100	0.0684 ± 0.0645	75.05	100	0.2357 ± 1.3089	50.18	74	29.0587 ± 27.1208	1066.81
Comm-early	40	100	0.0608 ± 0.0661	64.82	100	0.2117 ± 0.8743	44.73	65	33.5497 ± 28.0459	1234.45
	60	100	0.0622 ± 0.0587	66.36	100	0.1431 ± 0.2668	30.57	68	33.9577 ± 30.5894	1249.56
	80	100	0.0643 ± 0.0639	68.24	100	0.1095 ± 0.1760	22.35	69	34.7104 ± 30.7084	1271.75
	100	100	0.0452 ± 0.0440	47.65	100	0.1938 ± 0.9708	41.57	72	36.7683 ± 34.0736	1323.88
	120	100	0.0634 ± 0.0719	67.22	100	0.1300 ± 0.4330	27.62	74	38.8456 ± 32.4935	1385.09
Comm-late	5	100	0.0616 ± 0.0634	66.36	100	0.1007 ± 0.1874	21.70	79	28.6750 ± 25.6114	1050.25
	10	100	0.0645 ± 0.0734	68.27	100	0.1053 ± 0.1840	22.61	78	38.3769 ± 29.1049	1407.37
	15	100	0.0548 ± 0.0521	57.97	100	0.0912 ± 0.1652	19.52	74	33.2315 ± 31.8913	1327.71
	20	100	0.0670 ± 0.0651	70.27	100	0.0853 ± 0.1228	18.42	76	33.8551 ± 27.4173	1142.03
	25	100	0.0683 ± 0.0651	72.73	100	0.1258 ± 0.2639	27.08	67	35.2145 ± 31.6265	1282.29

For the multithread parameters, table A.5 that maximizing CPU cores allows faster execution time. The parameter ‘threads’ controls the number of independent threads each running a multi-colony solver in parallel. Thus, more threads means more regions of the solution space are explored.

The communication threshold parameter, ‘Comm-thresh’, controls when to change the frequency of the communication between the threads. If the current iteration is less than the value of this parameter, the threads communicate at longer intervals. Otherwise, threads communicate at short intervals. By setting this to 200, threads have enough time to build their own solution without any external information. The parameter, ‘Comm-early’ tells when does the thread communicate if the current iteration is still less than the communication threshold. Setting this to a lower value

makes the thread receive and share information without enough time to refine its own solution. From this table, we can see that the value 120 gives the best performance because it gives threads enough time to build its promising solution before sharing it. Lastly, the parameter that controls when the thread communicates if the current iteration is more than the communication threshold is the ‘comm-early’. Take note that in late iteration, there are only a few empty cells and it is very constrained. Thus, frequent communication between threads is necessary to prevent redundant tries of the same cell-value pairs.

Ablation Study 4: Impact of Fixed Clue Density(F%) to Solvers’ Performance

As shown in the Table A.6, the performance of the three algorithms for puzzles with fixed clue percentages less than 40% and greater than 50% has small differences in terms of average time and iteration. However, we can see a big difference from the performance of the three algorithms in the puzzles with fixed clues of 40%, 45%, and 50%. As shown in the same table, puzzles with 45% fixed clue percentage are the most difficult puzzles but the proposed model maintains a 100% success rate with reduced runtime and iteration.

This indicates that the puzzles with 40%, 45%, and 50% fixed clue percentages are overly constrained making its solution space very complex. This was the empirical justification of the final dataset consisting of 300 selected hardest puzzles to obtain a reliable evaluation and comparison between the performance of the proposed model and the baseline solvers. We can also see from the table that the multi-level collaboration of the proposed model successfully found a solution within this very complex solution space by preserving diversity through the inter-thread communication

and preventing premature convergence through collaboration between heterogeneous colonies.

Table A.6: Performance comparison in terms of success rate (%), average runtime (seconds), and average number of iteration of CP-ACS, CP-DCM-ACO, and MT-CP-DCM-ACO across Fixed Percentages (F%) on 25×25 Sudoku Instances.

F%	CP-ACS			CP-DCM-ACO			MT-CP-DCM-ACO		
	Succ. (%)	Time $\pm$ Std. (s)	Iter.	Succ. (%)	Time $\pm$ Std. (s)	Iter.	Succ. (%)	Time $\pm$ Std. (s)	Iter.
0	100	0.2496 ± 0.2852	5.15	100	1.0932 ± 0.5457	5.80	100	0.9137 ± 0.1566	4.98
5	100	0.3438 ± 0.4370	7.88	100	0.7981 ± 0.2390	5.19	100	0.7753 ± 0.1457	4.43
10	100	0.3879 ± 0.4762	9.92	100	0.8059 ± 0.3053	5.43	100	0.6987 ± 0.1584	4.23
15	100	0.4932 ± 0.6602	14.18	100	0.8404 ± 0.3189	5.86	100	0.6326 ± 0.1439	4.15
20	100	0.7411 ± 0.7547	24.17	100	0.9026 ± 0.4427	6.90	100	0.6867 ± 0.1816	4.86
25	100	0.8786 ± 0.7554	33.30	100	1.3655 ± 0.8281	11.55	100	0.7511 ± 0.3289	5.89
30	100	1.3417 ± 1.2498	59.37	100	1.9148 ± 1.3696	17.74	100	0.9389 ± 0.4029	8.28
35	99	1.7683 ± 1.4215	93.44	100	3.5162 ± 2.3417	39.36	100	1.5575 ± 0.8004	15.69
40	95	2.4043 ± 1.8626	158.26	100	6.1691 ± 2.3417	82.62	100	2.4274 ± 1.8093	30.46
45	72	2.6050 ± 2.3898	233.63	99	10.9498 ± 19.8062	198.40	100	2.8918 ± 3.7444	51.21
50	90	0.3616 ± 0.9902	49.60	99	3.7922 ± 2.8855	42.62	100	0.2107 ± 0.2998	6.74
55	100	0.0007 ± 0.0022	1.05	100	0.0093 ± 0.0028	1.01	100	0.0089 ± 0.0037	1.02
60	100	0.0003 ± 0.0001	1.00	100	0.0083 ± 0.0007	1.00	100	0.0079 ± 0.0004	1.00
65	100	0.0003 ± 0.0001	1.00	100	0.0081 ± 0.0005	1.00	100	0.0077 ± 0.0007	1.00
70	100	0.0002 ± 0.0001	1.00	100	0.0077 ± 0.0005	1.00	100	0.0075 ± 0.0005	1.00
75	100	0.0002 ± 0.0000	1.00	100	0.0075 ± 0.0004	1.00	100	0.0073 ± 0.0003	1.00
80	100	0.0002 ± 0.0000	1.00	100	0.0074 ± 0.0004	1.00	100	0.0072 ± 0.0006	1.00
85	100	0.0002 ± 0.0001	1.00	100	0.0092 ± 0.0017	1.01	100	0.0072 ± 0.0006	1.00
90	100	0.0002 ± 0.0001	1.00	100	0.0074 ± 0.0007	1.00	100	0.0070 ± 0.0003	1.00
95	100	0.0002 ± 0.0000	1.00	100	0.0071 ± 0.0005	1.00	100	0.0071 ± 0.0008	1.00
100	100	0.0002 ± 0.0000	1.00	100	0.0071 ± 0.0006	1.00	100	0.0069 ± 0.0004	1.00

Ablation Study 5: Thread Synchronization Overhead

Table A.7 shows the performance of the multithreaded multi-colony ACO solver with a different number of threads together with the waiting (idle) times of each thread. The calculation of the average idle time of each thread per communication barrier entry begins by adding all the waiting times of all threads. This total system idle time is then divided by the number of communication barrier entries to get the average waiting time of the system per barrier entry. Lastly, the obtained result is divided by the number of threads to get the average idle time of each thread per barrier entry. Here is the mathematical equation for this component:

$$\text{Average Idle Time of Each Thread per Barrier Entry} = \frac{T_{idle}}{C \times N} \quad (\text{A.2.1})$$

Where:

- T_{idle} is the Total System Idle Time obtained by adding the idle times of all threads.
- C is the total number of threads communication events (synchronization barrier entries).
- N is the total number of threads.

Table A.7: Performance comparison in terms of success rate (%), average runtime (seconds), average iteration, and average idle time of each thread per barrier entry (seconds/entry) of varying number of threads in MT-CP-DCM-ACO solver on 25×25 Sudoku instance

Threads	Instance	Success Rate (%)	Average Time (s)	Std Dev (s)	Avg Iteration	Avg Idle (s/entry)
2	inst25x25_45_97	79.00	52.79491	41.57971	557.90	0.01261
3	inst25x25_45_97	95.00	47.79661	39.37079	483.52	0.02845
4	inst25x25_45_97	100.00	23.25137	21.56190	453.33	0.01519
5	inst25x25_45_97	100.00	20.56218	19.96278	370.32	0.02348

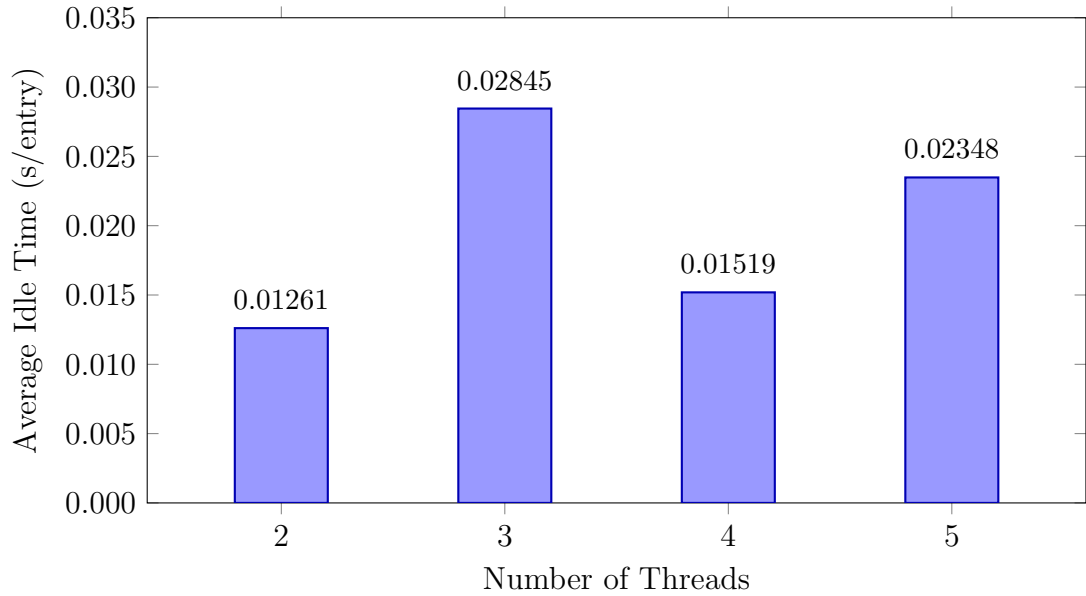


Figure A.1: Impact of thread count on synchronization overhead (Idle Time)

We can see from the Figure A.1 that the idle time of each thread per barrier entry with respect to the number of threads does not follow a linear trend unlike the success rate, average time and iteration as shown in Table A.7. The idle time spikes up when there are 3 threads, drops for 4 threads, and spikes up again for 5 threads. This indicates that having 4 threads in the solver guarantees the smallest idle time for each thread. However, it does not mean that having 4 threads is better than having 5 threads as the performance metrics include success rate, average time, standard deviation and average iteration. Despite the spiking up and down of the idle time of each thread, the synchronization overhead is remarkably small compared to the average time to solve the puzzle. The average waiting time of each thread for all synchronization events is just less than 5% of the average time to solve the puzzle. Therefore, the dynamic inter-thread communication phase successfully balances cross-region exploration and threads synchronization overhead by following a structured communication interval.

References

- [1] H. Lloyd and M. Amos, “Solving sudoku with ant colony optimization,” *IEEE Transactions on Games*, vol. 12, no. 3, pp. 302–313, 2020.
- [2] H. Simonis, “Sudoku as a constraint problem,” in *CP Workshop on modeling and reformulating Constraint Satisfaction Problems*, vol. 12. Citeseer Sitges, Spain, 2005, pp. 13–27.
- [3] D. Eppstein, “Computational complexity of games and puzzles,” in *Proceedings of the International Conference on Fun with Algorithms*. Elba Island, Italy, 2006, pp. 1–12.
- [4] T. Yato and T. Seta, “Complexity and completeness of finding another solution and its application to puzzles,” in *IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences*, vol. 86, no. 5, 2003, pp. 1052–1060.
- [5] E. C. C. is Post-Doctoral, “Techniques for solving sudoku puzzles,” *arXiv preprint arXiv:1203.2295*, 2012.
- [6] M. Dorigo, “Optimization, learning and natural algorithms,” *Ph.D. Dissertation, Politecnico di Milano*, 1992.
- [7] P. Norvig, “Solving every sudoku puzzle,” 2006, accessed: 2025-12-11. [Online]. Available: <http://norvig.com/sudoku.html>

- [8] M. Schottlender, “The effect of guess choices on the efficiency of a backtracking algorithm in a sudoku solver,” in *IEEE Long Island Systems, Applications and Technology (LISAT) Conference 2014*, 2014, pp. 1–6.
- [9] A. Bhattarai, D. Uprety, P. Pathak, S. N. Shrestha, S. Narkarmi, and S. Sigdel, “A study of sudoku solving algorithms: Backtracking and heuristic,” *arXiv preprint arXiv:2507.09708*, 2025.
- [10] J. F. Crook, “A pencil-and-paper algorithm for solving sudoku puzzles,” *Notices of the AMS*, vol. 56, no. 4, pp. 460–468, 2009.
- [11] T. Mantere and J. Koljonen, “Solving, rating and generating sudoku puzzles with ga,” in *2007 IEEE Congress on Evolutionary Computation*. IEEE, 2007, pp. 1382–1389.
- [12] M. Dorigo and T. Stützle, *Ant Colony Optimization*. MIT press, 2004.
- [13] M. Pedemonte, E. Alba, and F. Luna, “Bit-parallel aco for the traveling salesman problem,” *Applied Intelligence*, vol. 35, no. 3, pp. 346–357, 2011.
- [14] M. Randall and A. Lewis, “A parallel implementation of ant colony optimization,” *Journal of Parallel and Distributed Computing*, vol. 62, no. 9, pp. 1421–1432, 2002.
- [15] Q. Yang and L. Fang, “Rmaco: A randomly matched parallel ant colony optimization,” *World Wide Web*, vol. 19, no. 6, pp. 1009–1022, 2015.
- [16] Y. Mo, Z. Tang, and L. Zhao, “Multi-colony ant optimization with dynamic collaborative mechanism and cooperative game,” *Information Sciences*, vol. 608, pp. 892–908, 2022.
- [17] Y. Manyam, S. Sundaram, and A. Sahay, “Sudoku solver algorithms: A comparative analysis,” in *2024 First International Conference for Women in Computing (InCoWoCo)*. IEEE, 2024, pp. 1–9.

- [18] N. Pillay, “Finding solutions to sudoku puzzles using human intuitive heuristics,” *South African Computer Journal*, vol. 49, no. 1, pp. 25–34, 2012.
- [19] D. E. Knuth, *The Art of Computer Programming, Volume 4B: Combinatorial Algorithms, Part 2*. Reading, Massachusetts: Addison-Wesley Professional, 2022.
- [20] R. Barták, “Constraint propagation and backtracking search,” *Proceedings of the CP Workshop on Constraint Propagation*, 2005.
- [21] A. Moraglio, J. Togelius, and S. Lucas, “Product geometric crossover for the sudoku puzzle,” in *2006 IEEE International Conference on Evolutionary Computation*. IEEE, 2006, pp. 470–476.
- [22] A. Moraglio and J. Togelius, “Geometric particle swarm optimization for the sudoku puzzle,” in *Proceedings of the 9th Annual Conference on Genetic and Evolutionary Computation*, ser. GECCO '07. New York, NY, USA: Association for Computing Machinery, 2007, p. 118–125. [Online]. Available: <https://doi.org/10.1145/1276958.1276975>
- [23] J. A. Pacurib, G. M. M. Seno, and J. P. T. Yusiong, “Solving sudoku puzzles using improved artificial bee colony algorithm,” in *2009 Fourth International Conference on Innovative Computing, Information and Control (ICICIC)*, 2009, pp. 885–888.
- [24] A. Kaur and S. Goyal, “A survey on the applications of bee colony optimization techniques,” *International Journal on Computer Science and Engineering*, vol. 3, 08 2011.
- [25] C. Solnon, “Ant colony optimization for real-world constraint satisfaction problems,” *Applied Intelligence*, vol. 17, no. 1, pp. 33–40, 2002.

- [26] G. Karatas Baydogmus, “Probability selection for solving sudoku with ant colony optimization algorithm,” 07 2022, pp. 161–165.
- [27] M. Soh, B. N. Tsofack, and C. T. Djamegni, “Multi-ant colony heuristic approach to solving the traveling salesman problem,” *ARIMA*, vol. 34, 2021.
- [28] H. Xue, P. Zhang, and L. Yang, “A multiple ant colonies optimization algorithm based on immunity for solving tsp,” in *2010 International Conference on Computer and Computational Intelligence (ICCCI)*. IEEE, 2010, pp. 289–293.
- [29] J. Zhao, X. You, Q. Duan, and S. Liu, “Multiple ant colony algorithm combining community relationship network,” *Arabian Journal for Science and Engineering*, vol. 47, 02 2022.
- [30] T. Masukane, K. Mizuno, and H. Shinohara, “Ant colony optimization with negative feedback for solving constraint satisfaction problems,” in *2018 Conference on Technologies and Applications of Artificial Intelligence (TAAI)*, 2018, pp. 156–159.
- [31] T. Nurcahyadi, C. Blum, and F. Manyà, “Negative learning ant colony optimization for maxsat,” *International Journal of Computational Intelligence Systems*, vol. 15, p. 71, 2022. [Online]. Available: <https://doi.org/10.1007/s44196-022-00120-6>
- [32] D. D. Haynes and S. M. Corns, “Algorithm for a tabu — ant colony optimizer,” in *2015 IEEE Congress on Evolutionary Computation (CEC)*, 2015, pp. 529–535.
- [33] J. Montgomery and M. Randall, “Anti-pheromone as a tool for better exploration of search space,” 09 2002, pp. 100–110.