OBRIVE LEADS ENGINE


Autonomous AI SDR & Outbox Approval Desk • Hostinger VPS Deployment

Subdomain: obleads.obrive.com

Version: 2.1 • Oct 2026

> **Deployment Summary:** This guide walks you through deploying the Obrive Leads Engine 24/7 on your Hostinger Linux VPS under the canonical subdomain **`https://obleads.obrive.com`**, secured behind Nginx SSL (Let's Encrypt) and password-protected HTTP Basic Auth.

1. System Architecture

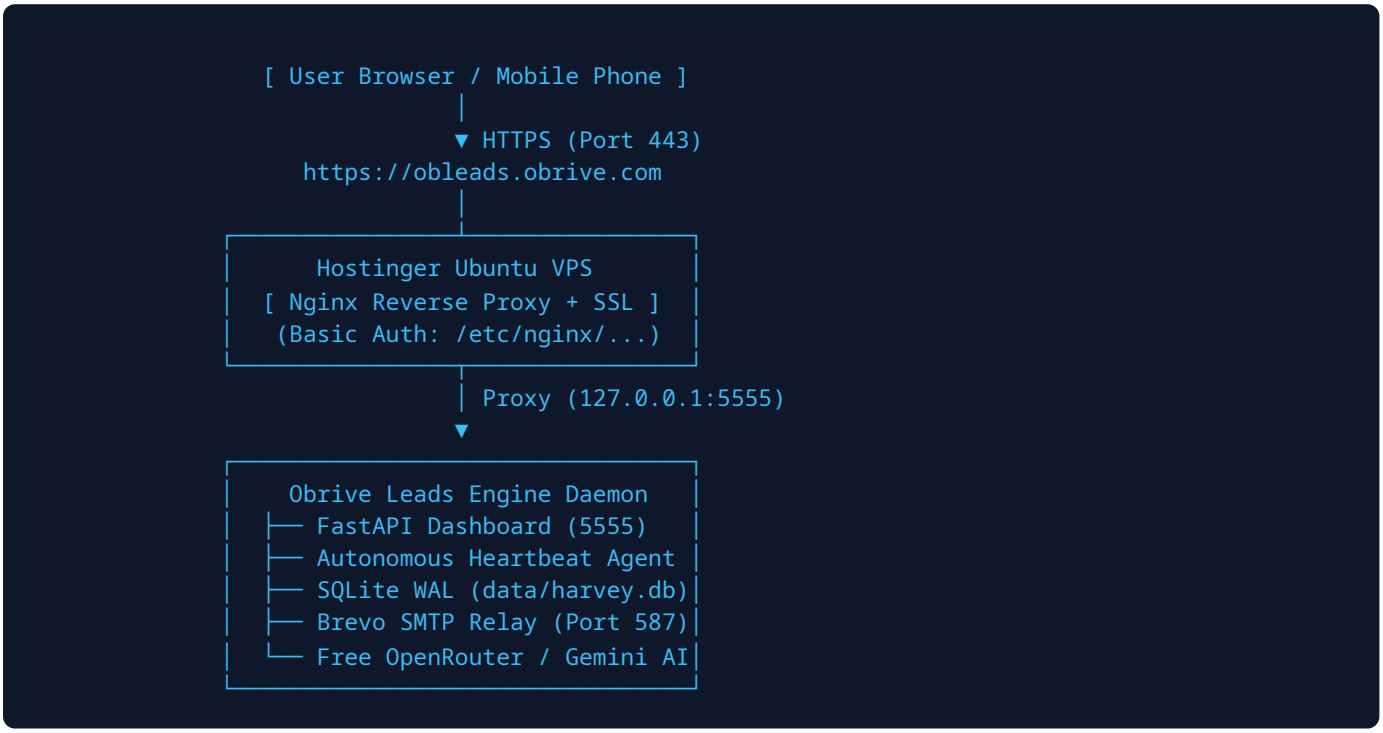

2. DNS Configuration on Hostinger

Log in to your **Hostinger hPanel** → **Domains** → **DNS / Nameservers**:

Record Type	Host / Name	Points to (Value)	TTL
A Record	**obleads**	`YOUR_HOSTINGER_VPS_IP` (e.g. `185.xxx.xxx.xxx`)	300 (or Default)

Note: DNS propagation typically takes 5–15 minutes. Verify via terminal with `dig obleads.obrive.com +short` or `ping obleads.obrive.com`.

3. VPS Server Setup & Dependencies

SSH into your Hostinger VPS as `root` (or your sudo administrative user):

```
ssh root@YOUR_HOSTINGER_VPS_IP
```

Step 3.1: Install System Packages

```
sudo apt update && sudo apt upgrade -y
sudo apt install -y python3 python3-pip python3-venv git nginx certbot python3-certbot-nginx apache2-utils curl
```

Step 3.2: Clone Repository

```
mkdir -p /var/www
cd /var/www
git clone https://github.com/shivansh-006/ob-leads.git leads
cd /var/www/leads
```

Step 3.3: Set Up Python Virtual Environment

```
python3 -m venv .venv
source .venv/bin/activate
pip install --upgrade pip
pip install -e .
```

4. Environment Secrets Configuration

Create the production `.env` file at `/var/www/leads/.env`:

```
nano /var/www/leads/.env
```

Paste the following production credentials:

```
# Brevo SMTP Relay (Outbound Sending)
SMTP_HOST=smtp-relay.brevo.com
SMTP_PORT=587
SMTP_USERNAME=bea186001@smtp-brevo.com
SMTP_PASSWORD=YOUR_BREVO_SMTP_MASTER_KEY

# IMAP Settings (Inbound Reply Detection - Optional)
# If using Hostinger Business Email to receive replies:
IMAP_HOST=imap.hostinger.com
IMAP_PORT=993
IMAP_USERNAME=info@obrive.com
IMAP_PASSWORD=YOUR_HOSTINGER_EMAIL_PASSWORD
# (Note: If IMAP is blank, reply checking is safely skipped and outbound sending continues normally)

# Free AI Cloud Brains
OPENROUTER_API_KEY=YOUR_OPENROUTER_API_KEY
GEMINI_API_KEY=YOUR_GEMINI_API_KEY
GROQ_API_KEY=

# Lead Finder & Verification
REOON_API_KEY=YOUR_REOON_API_KEY
SERPER_API_KEY=
```

Lock down file permissions so only root can read credentials:

```
chmod 600 /var/www/leads/.env
```

5. 24/7 Background Systemd Services

Create two dedicated systemd services so the dashboard and AI heartbeat runner start automatically on boot and restart if any failure occurs.

Service 1: Harvey Dashboard (`/etc/systemd/system/harvey-dashboard.service`)

```
[Unit]
Description=Obrive Leads Web Dashboard & Outbox API
After=network.target

[Service]
Type=simple
User=root
WorkingDirectory=/var/www/leads
EnvironmentFile=/var/www/leads/.env
ExecStart=/var/www/leads/.venv/bin/python3 -m harvey dashboard
Restart=always
RestartSec=5

[Install]
WantedBy=multi-user.target
```

Service 2: Harvey Heartbeat Runner (`/etc/systemd/system/harvey-runner.service`)

```
[Unit]
Description=Obrive Leads Autonomous Heartbeat Runner
After=network.target harvey-dashboard.service

[Service]
Type=simple
User=root
WorkingDirectory=/var/www/leads
EnvironmentFile=/var/www/leads/.env
ExecStart=/var/www/leads/.venv/bin/python3 -m harvey run
Restart=always
RestartSec=10

[Install]
WantedBy=multi-user.target
```

Enable and Launch Both Services:

```
sudo systemctl daemon-reload
sudo systemctl enable --now harvey-dashboard
sudo systemctl enable --now harvey-runner
```

6. Nginx Reverse Proxy, Basic Auth & SSL

Step 6.1: Create Password Protection for Dashboard

Create credentials for accessing `https://obleads.obrive.com`:

```
sudo htpasswd -c /etc/nginx/.ob_leads_passwd admin
# Enter your desired secure password when prompted
```

Step 6.2: Configure Nginx Site

Create `/etc/nginx/sites-available/obleads.conf`:

```
sudo nano /etc/nginx/sites-available/obleads.conf
```

Add the following configuration:

```
server {
    listen 80;
    server_name obleads.obrive.com;

    # Protect the entire dashboard with HTTP Basic Auth
    auth_basic "Obrive Leads Executive Portal";
    auth_basic_user_file /etc/nginx/.ob_leads_passwd;

    # Reverse proxy to local Harvey Dashboard port 5555
    location / {
        proxy_pass http://127.0.0.1:5555;
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection 'upgrade';
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_read_timeout 120;
    }

    access_log /var/log/nginx/obleads_access.log;
    error_log /var/log/nginx/obleads_error.log;
}
```

Step 6.3: Activate Site & Verify Nginx

```
sudo ln -s /etc/nginx/sites-available/obleads.conf /etc/nginx/sites-enabled/
sudo nginx -t
sudo systemctl reload nginx
```

Step 6.4: Install Free Let's Encrypt SSL Certificate

Run Certbot to automatically configure HTTPS and auto-redirect HTTP:

```
sudo certbot --nginx -d obleads.obrive.com --non-interactive --agree-tos -m info@obrive.com
```

7. Verification & Daily Operations

1. Open **`https://obleads.obrive.com`** in your browser.
2. Enter `admin` and your password.
3. You will see the **Obrive Leads Outbox Desk**:
   - Review target emails drafted by Dr. Malakh Jibrail (CEO).
   - Click **"View Email"** on any row to preview full HTML typography and links.
   - Click **"⚡ Send Approved Now"** to immediately dispatch queued emails via Brevo.

Quick CLI Management Reference

Action	Command
View Dashboard Logs	`journalctl -u harvey-dashboard -f`
View AI Heartbeat Logs	`journalctl -u harvey-runner -f`
Restart All Services	`sudo systemctl restart harvey-dashboard harvey-runner`
Deploy Updates from Git	`cd /var/www/leads && git pull && sudo systemctl restart harvey-dashboard harvey-runner`